


0.5 mm LGA/BGA Sockets

DESCRIPTION

Tyco Electronics' polymer interconnect technology optimizes socketing of 0.5 mm pitch LGA or BGA devices. This highly conductive polymer contact provides electrically transparent signal transfer.

APPLICATIONS

- Silicon validation
- Customer reference designs
- System test and bring up
- Wafer test

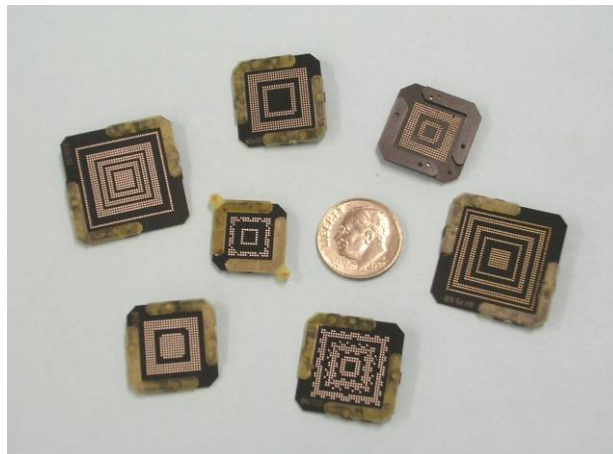

KEY FEATURES

- Solderless contact polymer contact allows for easy socket replacement
- Light compression load of 25 grams/contact limits stress on the substrate
- Flexible manufacturing process allows for asymmetrical contact patterns
- Standard array sizes available up to 40 x 40 contacts (1600 I/O)
- Compact design minimizes real estate required
- BGA sockets accommodate multiple ball sizes
- RoHS compliant

FOR MORE INFORMATION

Technical Support

Internet: <http://www.tycoelectronics.com>

USA: 1-800-522-6752

Canada: 1-905-470-4425

UK: 44-141-810-8967

Japan: 81-44-844-8013

Jeff Mason, Business Development Manager

Phone: 1-508-699-9818

Fax: 1-508-695-8111

E-mail: jeff_mason@tycoelectronics.com

Allison Bobrowski, Sr. Product Specialist

Phone: 1-508-699-9851

Fax: 1-508-695-8111

E-mail: allison_bobrowski@tycoelectronics.com



0.5mm LGA/BGA Sockets

Page 2

PRODUCT CHARACTERISTICS

The innovative polymer material system provides a highly conductive interconnect. This proprietary material consists of a high temperature polymer compound that has been embedded with metallized particles. The material is formed into contacts. The contacts are held in place by a thin polyimide substrate. When mechanically compressed, the contacts' electrical characteristics are optimized.



LGA Contact Compressed

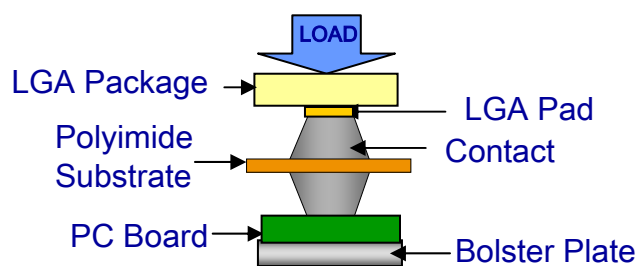

Close up of LGA corner frame and contacts

The unique design of the BGA socket uses an anti-overstress feature which protects the contact and also provides a "well" for the ball to rest in. This "well" acts as an alignment feature which centers the BGA ball to the MPI column. Corner frames provide for gross alignment of the package to the socket.

Contact to Solder Ball Interface

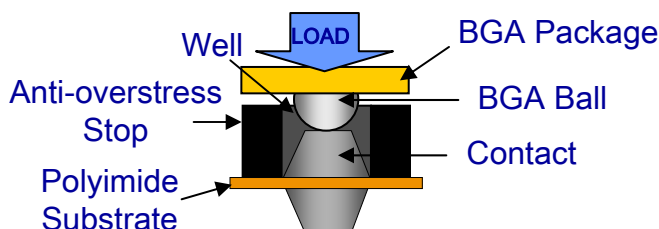

Close up of BGA corner frame and contacts


The Matrix series sockets are available as fully arrayed sockets up to 40 x 40 contacts, 1600 I/O. Consult Tyco Electronics for custom socket and hardware solutions.

0.5mm LGA/BGA Sockets


Page 3

PRODUCT CHARACTERISTICS

All sockets are compression mount and require a hardware system to generate the necessary forces. Tyco Electronics offers a complete hardware solution for each socket size. Below is a typical socket and hardware stack-up. The spring plate assembly provides a universal compression load and the bolster plate eliminates PCB bow.

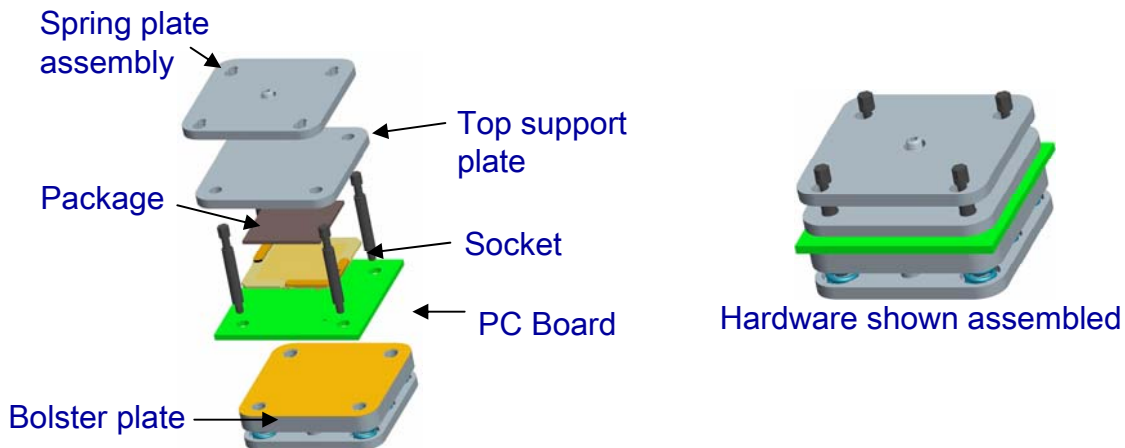


Each hardware kit contains enough hardware for one socket - a spring plate, a top plate, and a bolster plate with insulator.

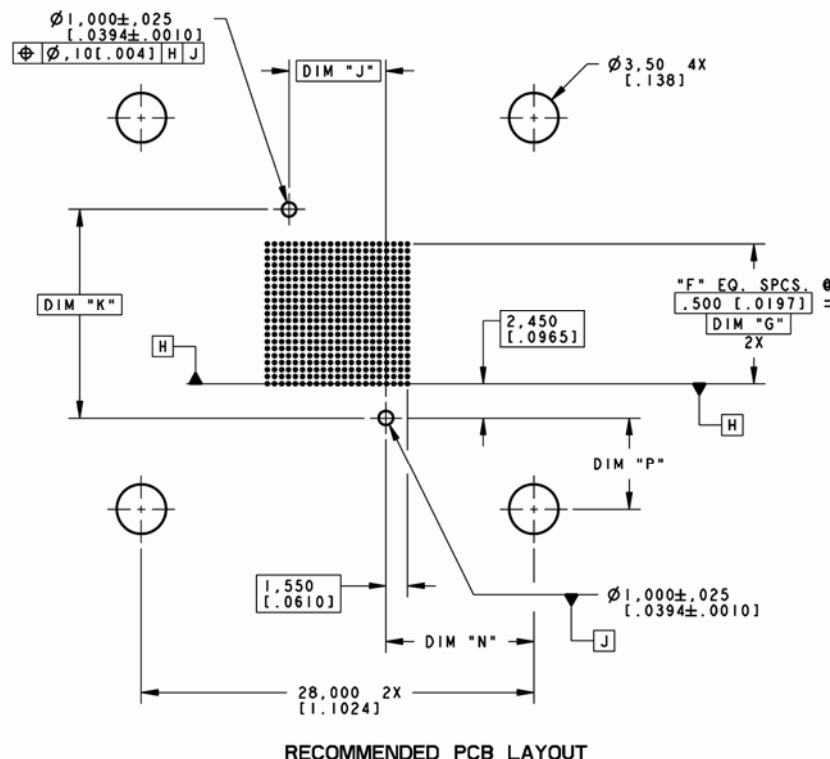

0.5mm LGA/BGA Sockets

Page 4

PRODUCT DIMENSIONS

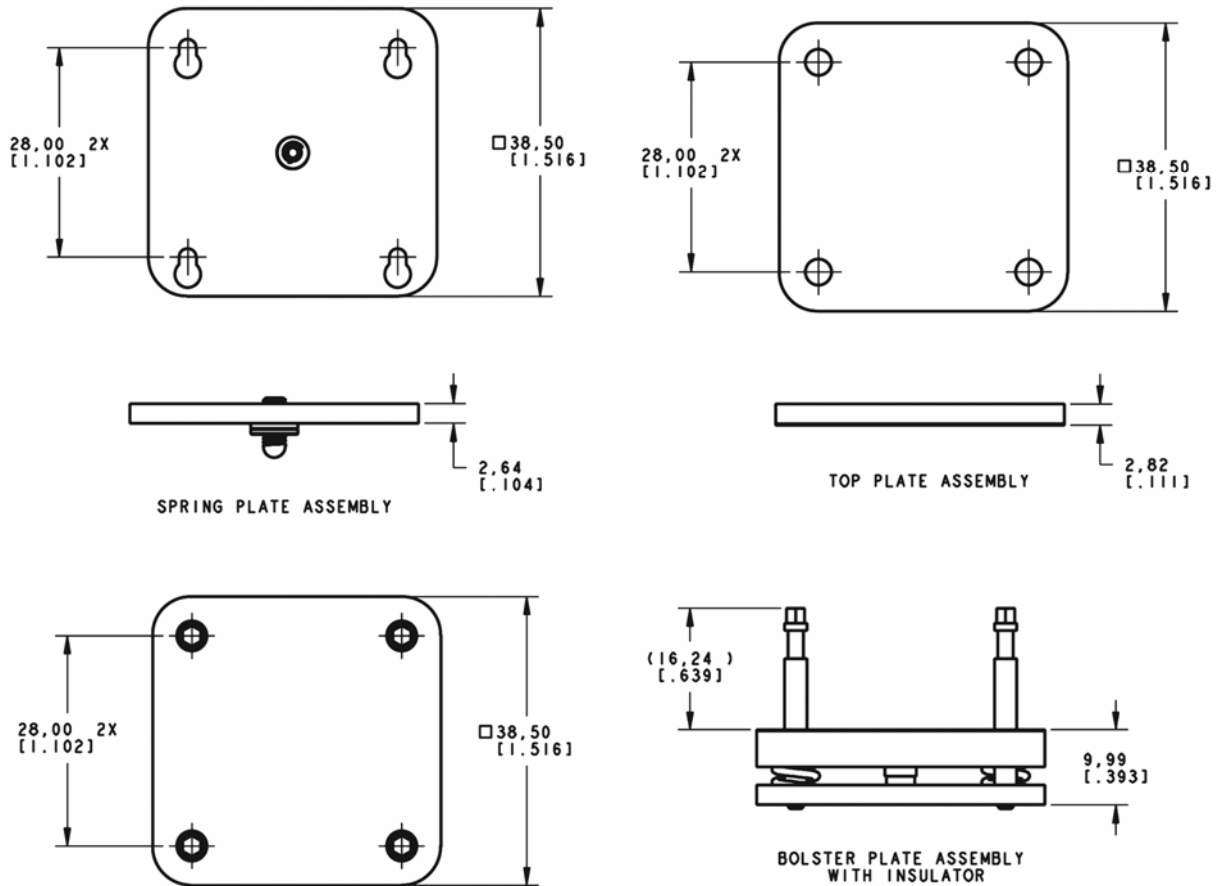

MATRIX BGA HARDWARE


HARDWARE KIT PART NO.	SOCKET PART NO.
1921223-1	1921125-1
1921223-2	1921125-2, 1921125-3, 1921125-4, 1921125-5
1921223-3	1921125-6, 1921125-7, 1921125-8, 1921125-9
1921223-4	1-1921125-0, 1-1921125-1, 1-1921125-2, 1-1921125-3
1921223-5	1-1921125-4, 1-1921125-5, 1-1921125-6
1921223-6	1-1921125-7, 1-1921125-8, 1-1921125-9, 2-1921125-0

Note: All part numbers are RoHS compliant.

0.5mm LGA/BGA Sockets

PRODUCT DIMENSIONS

Page 5

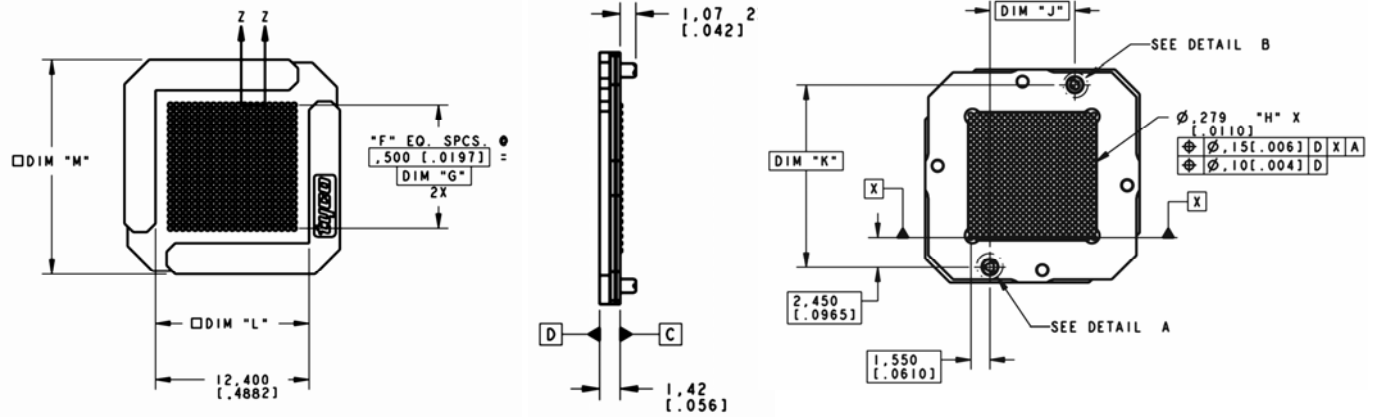

PART NO.	GRID	"F" NO. OF SPACES	"H" NO. OF CONTACTS	DIM G	DIM J	DIM K	DIM L	DIM M	DIM N	DIM P	LOAD
1921125-1	21 X 21	20	441	10,000 [.3937]	6,900 [.2717]	14,900 [.5866]	12,40 [.488]	17,4 [.69]	10,550 [.4154]	6,550 [.2579]	24.3 ±6 LBS
1921125-2	22 X 22	21	484	10,500 [.4134]	7,400 [.2913]	15,400 [.6063]	12,90 [.508]	17,9 [.70]	10,300 [.4055]	6,300 [.2480]	26.7 ±7 LBS
1921125-3	23 X 23	22	529	11,000 [.4331]	7,900 [.3110]	15,900 [.6260]	13,40 [.528]	18,4 [.72]	10,050 [.3957]	6,050 [.2382]	29.2 ±7 LBS
1921125-4	24 X 24	23	576	11,500 [.4528]	8,400 [.3307]	16,400 [.6457]	13,90 [.547]	18,9 [.74]	9,800 [.3858]	5,800 [.2283]	31.7 ±8 LBS
1921125-5	25 X 25	24	625	12,000 [.4724]	8,900 [.3504]	16,900 [.6654]	14,40 [.567]	19,4 [.76]	9,550 [.3760]	5,550 [.2185]	34.5 ±9 LBS
1921125-6	26 X 26	25	676	12,500 [.4921]	9,400 [.3701]	17,400 [.6850]	14,90 [.587]	19,9 [.78]	9,300 [.3661]	5,300 [.2087]	37.3 ±9 LBS
1921125-7	27 X 27	26	729	13,000 [.5118]	9,900 [.3898]	17,900 [.7047]	15,40 [.606]	20,4 [.80]	9,050 [.3563]	5,050 [.1988]	40.2 ±10 LBS
1921125-8	28 X 28	27	784	13,500 [.5315]	10,400 [.4094]	18,400 [.7244]	15,90 [.626]	20,9 [.82]	8,800 [.3465]	4,800 [.1890]	43.2 ±11 LBS
1921125-9	29 X 29	28	841	14,000 [.5512]	10,900 [.4291]	18,900 [.7441]	16,40 [.646]	21,4 [.84]	8,550 [.3366]	4,550 [.1791]	46.4 ±11 LBS
1-1921125-0	30 X 30	29	900	14,500 [.5709]	11,400 [.4488]	19,400 [.7638]	16,90 [.665]	21,9 [.86]	8,300 [.3268]	4,300 [.1693]	49.6 ±12 LBS
1-1921125-1	31 X 31	30	961	15,000 [.5906]	11,900 [.4685]	19,900 [.7835]	17,40 [.685]	22,4 [.88]	8,050 [.3169]	4,050 [.1594]	53.0 ±13 LBS
1-1921125-2	32 X 32	31	1024	15,500 [.6102]	12,400 [.4882]	20,400 [.8032]	17,90 [.705]	22,9 [.90]	7,800 [.3071]	3,800 [.1496]	56.4 ±14 LBS
1-1921125-3	33 X 33	32	1089	16,000 [.6299]	12,900 [.5079]	20,900 [.8228]	18,40 [.724]	23,4 [.92]	7,550 [.2972]	3,550 [.1398]	60 ±15 LBS
1-1921125-4	34 X 34	33	1156	16,500 [.6496]	13,400 [.5276]	21,400 [.8425]	18,90 [.744]	23,9 [.94]	7,300 [.2874]	3,300 [.1299]	63.7 ±16 LBS
1-1921125-5	35 X 35	34	1225	17,000 [.6693]	13,900 [.5472]	21,900 [.8622]	19,40 [.764]	24,4 [.96]	7,050 [.2776]	3,050 [.1201]	67.5 ±17 LBS
1-1921125-6	36 X 36	35	1296	17,500 [.6890]	14,400 [.5669]	22,400 [.8819]	19,90 [.783]	24,9 [.98]	6,800 [.2677]	2,800 [.1102]	71.4 ±18 LBS
1-1921125-7	37 X 37	36	1369	18,000 [.7087]	14,900 [.5866]	22,900 [.9016]	20,40 [.803]	25,4 [1.00]	6,550 [.2579]	2,550 [.1004]	75.5 ±19 LBS
1-1921125-8	38 X 38	37	1444	18,500 [.7283]	15,400 [.6063]	23,400 [.9213]	20,90 [.823]	25,9 [1.02]	6,300 [.2480]	2,300 [.0906]	79.6 ±20 LBS
1-1921125-9	39 X 39	38	1521	19,000 [.7480]	15,900 [.6260]	23,900 [.9409]	21,40 [.843]	26,4 [1.04]	6,050 [.2382]	2,050 [.0807]	83.8 ±21 LBS
2-1921125-0	40 X 40	39	1600	19,500 [.7677]	16,400 [.6457]	24,400 [.9606]	21,90 [.862]	26,9 [1.06]	5,800 [.2283]	1,800 [.0709]	88.2 ±22 LBS

Note: All part numbers are RoHS compliant.

0.5mm LGA/BGA Sockets

Page 6

PRODUCT SPECIFICATIONS

Material:

Contact: Proprietary compound of Polymer and Silver

Insulator: Polyimide

Frame: Thermoplastic, 94V-O or Polyimide

Insulator to Frame Adhesive: Acrylic

Mechanical:

Compression Force: 25 grams per contact average

Durability: 40 cycles

PCB Thickness Range: .062" to .125"

Electrical:

Contact Resistance: 50 milliohms max

Capacitance: <0.01pF and 1 MHz

Inductance: <0.40 nH at 1.0 KHz

Power Rating: 2 amps per contact max.

Insulation Resistance: 500 megohms
at 250 VDC

Dielectric Withstanding Voltage: 250 VAC

Environmental:

Operating Temperature: 0°C to 105°C

Maximum Temperature: 105°C

Mixed Flowing Gas: EIA-364-65A

Thermal Shock: EIA-364-32

-55°C to 85°C, 10 cycles

Accelerated Temperature Cycling:

EIA-540

0°C to 100°C, 1000 cycles

Humidity: EIA-364-31

25°C to 85°C, 85% RH

Shock: EIA-364-27, 5g, 1/2 sine

Vibration: EIA-364-28

7.3g rms, 50 to 2000 Hz

Temperature Life: EIA-364-17, 125°C,
1000 hours

Note: All tests performed with gold plated surfaces.

0.5mm LGA/BGA Sockets

Page 7

Restriction on the use of Hazardous Substances (RoHS)

At Tyco Electronics, we're ready to support your RoHS requirements. We've assessed more than 1.5 million end items/components for RoHS compliance, and issued new part numbers where any change was required to eliminate the restricted materials. **Compliant – Part numbers in this catalog are RoHS Compliant, unless marked otherwise.** These products comply with European Union Directive. Part numbers in this catalog are identified as:

RoHS 2002/95/EC as amended 1 January 2006 restricts the use of lead, mercury, cadmium, hexavalent chromium, PBB, and PBDE in certain electrical and electronic products sold into the EU as of 1 July 2006.

For purposes of this Datasheet, included within the definition of RoHS Compliant are products that are clearly "Out of Scope" of the RoHS Directive such as hand tools and other non-electrical accessories.

Non-RoHS Compliant – These part numbers are identified with a "◆" symbol. **These products do not** comply with the material restrictions of the European Union Directive 2002/95/EC.

"5 of 6 Compliant" – A "●" symbol identifies these part numbers. These products do not fully comply with the European Union Directive 2002/95/EC because they contain lead in solderable interfaces (they do not contain any of the other five restricted substances above allowable limits). However, these products may be suitable for use in RoHS applications where there is an application-based exception for lead in solders, such as the server, storage, or networking infrastructure exemption.

Note - Information regarding RoHS compliance is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information provided by our suppliers. This information is subject to change. For latest compliance status, refer to our website referenced below.

Getting the Information You Need

Our comprehensive on-line RoHS Customer Support Center provides a forum to answer your questions and support your RoHS needs. A RoHS FAQ (Frequently Asked Questions) is available with links to more detailed information. You can also submit RoHS questions and receive a response within 24 hours during a normal work week. The Support Center also provides:

Cross-Reference from Non-compliant to Compliant Products
Ability to browse RoHS Compliant Products in our on-line catalog
Downloadable Technical Data
Customer Information Presentation
More detailed information regarding the definitions used above



So whatever your questions when it comes to RoHS, we've got the answers at www.tycoelectronics.com/leadfree.

Disclaimer

While Tyco Electronics Corporation and its affiliates referenced herein ("Tyco Electronics") have made every reasonable effort to ensure the accuracy of the information in this catalog, Tyco Electronics does not guarantee that it is error free, nor does Tyco Electronics make any other representation, warranty or guarantee that the information is accurate, correct reliable or current.

Tyco Electronics reserves the right to make any adjustments to the information contained herein at any time without notice. Tyco Electronics expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. Tyco Electronics' only obligations are those in the Tyco Electronics Standard Terms and Conditions of Sale, and in no case will Tyco Electronics be responsible for any incidental, indirect, or consequential damages arising from the sale, resale, or misuse of its products. Users should independently evaluate the suitability of, and test each product for, their application.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9