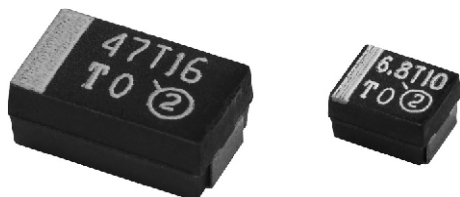


Solid Tantalum Surface Mount Chip Capacitors TANTAMOUNT[®], Molded Case, Hi-Rel COTS



PERFORMANCE/ELECTRICAL CHARACTERISTICS

www.vishay.com/doc?40088

Operating Temperature: - 55 °C to + 125 °C
(above 85 °C, voltage derating is required)

Capacitance Range: 0.1 µF to 470 µF

Capacitance Tolerance: ± 10 %, ± 20 %

Voltage Rating: 4 V_{DC} to 63 V_{DC}

FEATURES

- Standard and low ESR options
- Weibull grading and surge current test options
- Terminations: 100 % matte tin and tin/lead
- Standard EIA 535BAAC case sizes (A through E)
- Moisture sensitivity level 1
- Compliant terminations
- High reliability
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912



RoHS*
COMPLIANT

Note

* Lead (Pb)-containing terminations are not RoHS-compliant. Exemptions may apply.

APPLICATIONS




- Industrial
- Medical
- Military/aerospace
- Telecom

ORDERING INFORMATION

T83	D	107	K	010	E	A	A	S
TYPE	CASE CODE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	TERMINATION AND PACKAGING	RELIABILITY LEVEL	SURGE CURRENT	ESR
	See Ratings and Case Codes table.	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	K = ± 10 % M = ± 20 % J = ± 5 % (special order)	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V).	See table Termination and Packaging Codes	A = 1.0 % B = 0.1 % C = 0.01 % S = Hi-Rel standard Z = Non-ER	A = 10 cycles at + 25 °C B = 10 cycles at - 55 °C/+ 85 °C C = 10 cycles at - 55 °C/+ 85 °C (before Weibull grading) Z = None S = 3 cycles at + 25 °C	S = Std L = Low

TERMINATION AND PACKAGING CODES

CODE	TERMINATION	PACKAGING
C	Matte tin	7" (178 mm) reels
H	Matte tin	7" (178 mm) reels, ½ reel
U	Matte tin	7" (178 mm) reels, partial reel
E	Solder plated, tin/lead	7" (178 mm) reels
L	Solder plated, tin/lead	7" (178 mm) reels, ½ reel
R	Solder plated, tin/lead	7" (178 mm) reels, partial reel
K	Solder fused, tin/lead	7" (178 mm) reels
M	Solder fused, tin/lead	7" (178 mm) reels, ½ reel
N	Solder fused, tin/lead	7" (178 mm) reels, partial reel

DIMENSIONS in inches (millimeters)


CASE CODE	EIA SIZE	L	W	H	P	T _W	T _H (MIN.)
A	3216-18	0.126 ± 0.008 [3.2 ± 0.20]	0.063 ± 0.008 [1.6 ± 0.20]	0.063 ± 0.008 [1.6 ± 0.20]	0.031 ± 0.012 [0.80 ± 0.30]	0.047 ± 0.004 [1.2 ± 0.10]	0.028 [0.70]
B	3528-21	0.138 ± 0.008 [3.5 ± 0.20]	0.110 ± 0.008 [2.8 ± 0.20]	0.075 ± 0.008 [1.9 ± 0.20]	0.031 ± 0.012 [0.80 ± 0.30]	0.087 ± 0.004 [2.2 ± 0.10]	0.028 [0.70]
C	6032-28	0.236 ± 0.012 [6.0 ± 0.30]	0.126 ± 0.012 [3.2 ± 0.30]	0.098 ± 0.012 [2.5 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.087 ± 0.004 [2.2 ± 0.10]	0.039 [1.0]
D	7343-31	0.287 ± 0.012 [7.3 ± 0.30]	0.169 ± 0.012 [4.3 ± 0.30]	0.110 ± 0.012 [2.8 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.094 ± 0.004 [2.4 ± 0.10]	0.039 [1.0]
E	7343-43	0.287 ± 0.012 [7.3 ± 0.30]	0.169 ± 0.012 [4.3 ± 0.30]	0.157 ± 0.012 [4.0 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.094 ± 0.004 [2.4 ± 0.10]	0.039 [1.0]

RATINGS AND CASE CODES

μF	4 V	6.3 V	10 V	16 V	20 V	25 V	35 V	50 V	63 V
0.10							A	A	
0.15							A	A/B	
0.22							A	B	
0.33						A	A	B	
0.47					A	A	A/B	B/C	
0.68				A	A	B	B	C	
1.0			A	A	A	A/B	A/B	B/C	
1.5		A	A	A	B	B	B/C	C/D	
2.2	A	A		B	A/B	A/B/C	B/C	C/D	
3.3	A	A	B	B	B	B/C	B/C	D	
4.7	A	A/B	A/B	A/B	A/B/C	B/C	C/D	D	D
6.8	B	B	B	C	C	C/D	C/D	E	
10	B	B	A/C	A/B/C	B/C	B/C/D	C/D	E	E
15	B	C	A/C	B	D	C/D	D	E	
22		A/C	A	B/C/D	C/D	D	D/E		
33	A/C	B/C	B/C/D	B/C/D	D	D/E			
47	B/C	B/C/D	B/C/D	C/D	D/E	D/E			
68	D	D	D	D	D/E				
100	B/D	B/D	C/D	D/E	E				
150	D	D/E	D	E					
220		C/D/E	D/E						
330	E	E	E						
470			E						

MARKING

Indicates Hi-Rel COTS Capacitance Code, pF V 104T Indicates Hi-Rel COTS Polarity Band (+) Voltage Code A Case	"A" CASE VOLTAGE CODE		Indicates Hi-Rel COTS Capacitance μF Voltage 22 T10 Indicates Hi-Rel COTS Polarity Band (+) Date Code Vishay Sprague Logo B, C, D, E Cases
	VOLTS	CODE	
	4.0	G	
	6.3	J	
	10	A	
	16	C	
	20	D	
	25	E	
	35	V	
	50	T	

Marking

Capacitor marking includes an anode (+) polarity band, capacitance in microfarads and the voltage rating. "A" case capacitors use a letter code for the voltage and EIA capacitance code.

The Vishay Sprague® trademark is included if space permits. Capacitors rated at 6.3 V are marked 6 V.

A manufacturing date code is marked on all capacitors.

Call the factory for further explanation.

STANDARD RATINGS

CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DCL AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	STD. (S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)	AVAILABLE RELIABILITY LEVELS
4 V_{DC} AT + 85 °C; 2.7 V_{DC} AT + 125 °C							
2.2	A	T83A225(1)004(2)(6)(4)(5)	0.50	6	7.600	6.000	A, B, C, S, Z
3.3	A	T83A335(1)004(2)(3)(4)(5)	0.50	6	7.600	4.000	A, B, S, Z
4.7	A	T83A475(1)004(2)(6)(4)(5)	0.50	6	6.300	3.500	A, B, C, S, Z
6.8	B	T83B685(1)004(2)(6)(4)(5)	0.50	6	4.500	2.000	A, B, C, S, Z
10	B	T83B106(1)004(2)(6)(4)(5)	0.50	6	3.500	1.200	A, B, C, S, Z
15	B	T83B156(1)004(2)(6)(4)(5)	0.60	6	2.900	1.200	A, B, C, S, Z
33	A	T83A336(1)004(2)(3)(4)(5)	1.3	6	2.900	1.500	A, B, S, Z
33	C	T83C336(1)004(2)(6)(4)(5)	1.3	6	1.800	0.500	A, B, C, S, Z
47	B	T83B476(1)004(2)(3)(4)(5)	1.9	6	2.500	0.600	A, B, S, Z
47	C	T83C476(1)004(2)(3)(4)(5)	1.9	6	1.800	0.400	A, B, S, Z
68	D	T83D686(1)004(2)(6)(4)(5)	2.7	6	0.800	0.175	A, B, C, S, Z
100	B	T83B107(1)004(2)(3)(4)(5)	4.0	6	1.800	0.450	A, B, S, Z
100	D	T83D107(1)004(2)(6)(4)(5)	4.0	6	0.700	0.175	A, B, C, S, Z
150	D	T83D157(1)004(2)(3)(4)(5)	6.0	8	0.600	0.150	A, B, S, Z
330	E	T83E337(1)004(2)(3)(4)(5)	13.2	8	0.500	0.100	A, B, S, Z
6 V_{DC} AT + 85 °C; 4 V_{DC} AT + 125 °C							
1.5	A	T83A155(1)6R3(2)(6)(4)(5)	0.50	6	8.000	6.000	A, B, C, S, Z
2.2	A	T83A225(1)6R3(2)(6)(4)(5)	0.50	6	7.600	6.000	A, B, C, S, Z
3.3	A	T83A335(1)6R3(2)(6)(4)(5)	0.50	6	6.300	5.000	A, B, C, S, Z
4.7	A	T83A475(1)6R3(2)(3)(4)(5)	0.50	6	5.500	3.500	A, B, S, Z
4.7	B	T83B475(1)6R3(2)(6)(4)(5)	0.50	6	3.400	1.800	A, B, C, S, Z
6.8	B	T83B685(1)6R3(2)(6)(4)(5)	0.50	6	3.400	1.200	A, B, C, S, Z

Note

- Part number definitions:
 - Capacitance tolerance: K, M
 - Termination and packaging: C, E, K, H, L, M, U, R, N
 - Reliability level: A, B, S, Z
 - Surge current: A, B, C, Z, S
 - ESR: L, S
 - Reliability level: A, B, C, S, Z
 - Reliability level: A, S, Z



STANDARD RATINGS							
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DCL AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	STD. (S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)	AVAILABLE RELIABILITY LEVELS
6 V _{DC} AT + 85 °C; 4 V _{DC} AT + 125 °C							
10	B	T83B106(1)6R3(2)(6)(4)(5)	0.60	6	2.900	1.000	A, B, C, S, Z
15	C	T83C156(1)6R3(2)(6)(4)(5)	0.90	6	1.800	0.600	A, B, C, S, Z
22	A	T83A226(1)6R3(2)(3)(4)(5)	1.3	6	2.900	2.000	A, B, S, Z
22	C	T83C226(1)6R3(2)(6)(4)(5)	1.3	6	1.800	0.500	A, B, C, S, Z
33	B	T83B336(1)6R3(2)(3)(4)(5)	2.0	6	1.900	0.600	A, B, S, Z
33	C	T83C336(1)6R3(2)(3)(4)(5)	2.0	6	1.500	0.400	A, B, S, Z
47	B	T83B476(1)6R3(2)(3)(4)(5)	2.8	6	1.900	0.550	A, B, S, Z
47	C	T83C476(1)6R3(2)(3)(4)(5)	2.8	6	1.400	0.300	A, B, S, Z
47	D	T83D476(1)6R3(2)(6)(4)(5)	2.8	6	0.800	0.200	A, B, C, S, Z
68	D	T83D686(1)6R3(2)(6)(4)(5)	4.1	6	0.700	0.200	A, B, C, S, Z
100	B	T83B107(1)6R3(2)(3)(4)(5)	6.0	15	1.700	0.500	A, B, S, Z
100	D	T83D107(1)6R3(2)(3)(4)(5)	6.0	6	0.700	0.140	A, B, S, Z
150	D	T83D157(1)6R3(2)(3)(4)(5)	9.0	8	0.600	0.125	A, B, S, Z
150	E	T83E157(1)6R3(2)(3)(4)(5)	9.0	8	0.500	0.100	A, B, S, Z
220	C	T83C227(1)6R3(2)(3)(4)(5)	13.2	14	0.700	0.300	A, B, S, Z
220	D	T83D227(1)6R3(2)(3)(4)(5)	13.2	8	0.600	0.100	A, B, S, Z
220	E	T83E227(1)6R3(2)(3)(4)(5)	13.2	8	0.500	0.100	A, B, S, Z
330	E	T83E337(1)6R3(2)(3)(4)(5)	19.8	8	0.500	0.100	A, B, S, Z
10 V _{DC} AT + 85 °C; 7 V _{DC} AT + 125 °C							
1.0	A	T83A105(1)010(2)(6)(4)(5)	0.50	4	9.300	6.000	A, B, C, S, Z
1.5	A	T83A155(1)010(2)(6)(4)(5)	0.50	6	8.000	6.000	A, B, C, S, Z
3.3	B	T83B335(1)010(2)(6)(4)(5)	0.50	6	3.500	2.500	A, B, C, S, Z
4.7	A	T83A475(1)010(2)(3)(4)(5)	0.50	6	5.000	3.000	A, B, S, Z
4.7	B	T83B475(1)010(2)(6)(4)(5)	0.50	6	3.400	1.500	A, B, C, S, Z
6.8	B	T83B685(1)010(2)(6)(4)(5)	0.70	6	2.900	1.200	A, B, C, S, Z
10	A	T83A106(1)010(2)(3)(4)(5)	1.0	6	3.400	1.800	A, B, C, S, Z
10	C	T83C106(1)010(2)(3)(4)(5)	1.0	6	1.800	0.550	A, B, S, Z
15	A	T83A156(1)010(2)(3)(4)(5)	1.5	6	2.900	2.000	A, B, S, Z
15	C	T83C156(1)010(2)(6)(4)(5)	1.5	6	1.800	0.500	A, B, C, S, Z
22	A	T83A226(1)010(2)(3)(4)(5)	2.2	8	2.500	1.500	A, B, S, Z
33	B	T83B336(1)010(2)(3)(4)(5)	3.3	6	1.900	0.600	A, B, S, Z
33	C	T83C336(1)010(2)(3)(4)(5)	3.3	6	1.400	0.350	A, B, S, Z
33	D	T83D336(1)010(2)(6)(4)(5)	3.3	6	0.800	0.250	A, B, S, Z
47	B	T83B476(1)010(2)(3)(4)(5)	4.7	6	1.800	0.600	A, B, S, Z
47	C	T83C476(1)010(2)(3)(4)(5)	4.7	6	1.100	0.300	A, B, S, Z
47	D	T83D476(1)010(2)(6)(4)(5)	4.7	6	0.700	0.200	A, B, C, S, Z
68	D	T83D686(1)010(2)(3)(4)(5)	6.8	6	0.700	0.150	A, B, S, Z
100	C	T83C107(1)010(2)(6)(4)(5)	10.0	8	0.900	0.200	A, B, C, S, Z
100	D	T83D107(1)010(2)(6)(4)(5)	10.0	8	0.600	0.100	A, B, C, S, Z
150	D	T83D157(1)010(2)(3)(4)(5)	15.0	8	0.600	0.100	A, B, S, Z
220	D	T83D227(1)010(2)(6)(4)(5)	22.0	8	0.600	0.360	A, B, C, S, Z
220	E	T83E227(1)010(2)(3)(4)(5)	22.0	8	0.500	0.100	A, B, C, S, Z
330	E	T83E337(1)010(2)(3)(4)(5)	33.0	10	0.500	0.100	A, B, S, Z
470	E	T83E477(1)010(2)(3)(4)(5)	47.0	15	0.500	0.100	A, B, S, Z

Note

- Part number definitions:
 - Capacitance tolerance: K, M
 - Termination and packaging: C, E, K, H, L, M, U, R, N
 - Reliability level: A, B, S, Z
 - Surge current: A, B, C, Z, S
 - ESR: L, S
 - Reliability level: A, B, C, S, Z
 - Reliability level: A, S, Z



STANDARD RATINGS							
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DCL AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	STD. (S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)	AVAILABLE RELIABILITY LEVELS
16 V _{DC} AT + 85 °C; 10 V _{DC} AT + 125 °C							
0.68	A	T83A684(1)016(2)(3)(4)(5)	0.50	4	11.000	8.000	A, B, S, Z
1.0	A	T83A105(1)016(2)(3)(4)(5)	0.50	4	9.300	6.000	A, B, S, Z
1.5	A	T83A155(1)016(2)(3)(4)(5)	0.50	6	6.700	6.000	A, B, S, Z
2.2	B	T83B225(1)016(2)(3)(4)(5)	0.50	6	4.600	2.500	A, B, S, Z
3.3	B	T83B335(1)016(2)(3)(4)(5)	0.50	6	3.500	2.000	A, B, S, Z
4.7	A	T83A475(1)016(2)(3)(4)(5)	0.80	6	5.000	2.500	A, B, S, Z
4.7	B	T83B475(1)016(2)(3)(4)(5)	0.80	6	2.900	1.500	A, B, S, Z
6.8	C	T83C685(1)016(2)(3)(4)(5)	1.1	6	1.900	0.600	A, B, S, Z
10	A	T83A106(1)016(2)(6)(4)(5)	1.6	6	3.000	1.700	A, B, C, S, Z
10	B	T83B106(1)016(2)(3)(4)(5)	1.6	6	2.800	0.500	A, B, C, S, Z
10	C	T83C106(1)016(2)(3)(4)(5)	1.6	6	1.800	0.450	A, B, S, Z
15	B	T83B156(1)016(2)(6)(4)(5)	2.4	6	2.000	0.800	A, B, C, S, Z
22	B	T83B226(1)016(2)(6)(4)(5)	3.5	6	1.900	1.000	A, B, C, S, Z
22	C	T83C226(1)016(2)(6)(4)(5)	3.5	6	1.100	0.375	A, B, C, S, Z
22	D	T83D226(1)016(2)(3)(4)(5)	3.5	6	0.800	0.250	A, B, S, Z
33	B	T83B336(1)016(2)(3)(4)(5)	5.3	6	1.800	0.500	A, B, S, Z
33	C	T83C336(1)016(2)(3)(4)(5)	5.3	6	1.100	0.300	A, B, S, Z
33	D	T83D336(1)016(2)(3)(4)(5)	5.3	6	0.700	0.225	A, B, S, Z
47	C	T83C476(1)016(2)(3)(4)(5)	7.5	6	1.000	0.300	A, B, S, Z
47	D	T83D476(1)016(2)(6)(4)(5)	7.5	6	0.700	0.150	A, B, C, S, Z
68	D	T83D686(1)016(2)(3)(4)(5)	10.9	6	0.600	0.150	A, B, S, Z
100	D	T83D107(1)016(2)(6)(4)(5)	16.0	8	0.600	0.125	A, B, C, S, Z
100	E	T83E107(1)016(2)(3)(4)(5)	16.0	8	0.600	0.100	A, B, C, S, Z
150	E	T83E157(1)016(2)(3)(4)(5)	24.0	8	0.500	0.150	A, B, S, Z
20 V _{DC} AT + 85 °C; 13 V _{DC} AT + 125 °C							
0.47	A	T83A474(1)020(2)(3)(4)(5)	0.50	4	12.000	9.000	A, B, S, Z
0.68	A	T83A684(1)020(2)(6)(4)(5)	0.50	4	10.000	8.000	A, B, C, S, Z
1.0	A	T83A105(1)020(2)(6)(4)(5)	0.50	4	8.400	5.500	A, B, C, S, Z
1.5	B	T83B155(1)020(2)(3)(4)(5)	0.50	6	4.600	2.500	A, B, S, Z
2.2	A	T83A225(1)020(2)(3)(4)(5)	0.50	6	5.900	4.000	A, B, S, Z
2.2	B	T83B225(1)020(2)(6)(4)(5)	0.50	6	3.500	1.500	A, B, C, S, Z
3.3	B	T83B335(1)020(2)(6)(4)(5)	0.70	6	3.000	1.300	A, B, C, S, Z
4.7	A	T83A475(1)020(2)(3)(4)(5)	0.90	6	5.000	3.500	A, B, S, Z
4.7	B	T83B475(1)020(2)(3)(4)(5)	0.90	6	2.900	1.000	A, B, S, Z
4.7	C	T83C475(1)020(2)(3)(4)(5)	0.90	6	2.300	0.600	A, B, S, Z
6.8	C	T83C685(1)020(2)(6)(4)(5)	1.4	6	1.900	0.550	A, B, C, S, Z
10	B	T83B106(1)020(2)(3)(4)(5)	2.0	6	2.500	1.000	A, B, S, Z
10	C	T83C106(1)020(2)(3)(4)(5)	2.0	6	1.700	0.450	A, B, S, Z
15	D	T83D156(1)020(2)(6)(4)(5)	3.0	6	0.900	0.300	A, B, C, S, Z
22	C	T83C226(1)020(2)(6)(4)(5)	4.4	6	1.100	0.375	A, B, C, S, Z
22	D	T83D226(1)020(2)(6)(4)(5)	4.4	6	0.700	0.225	A, B, C, S, Z
33	D	T83D336(1)020(2)(3)(4)(5)	6.6	6	0.700	0.200	A, B, S, Z
47	D	T83D476(1)020(2)(3)(4)(5)	9.4	6	0.700	0.200	A, B, S, Z
47	E	T83E476(1)020(2)(3)(4)(5)	9.4	6	0.600	0.150	A, B, S, Z
68	D	T83D686(1)020(2)(3)(4)(5)	13.6	6	0.700	0.175	A, B, S, Z
68	E	T83E686(1)020(2)(6)(4)(5)	13.6	6	0.600	0.150	A, B, C, S, Z
100	E	T83E107(1)020(2)(3)(4)(5)	20.0	8	0.500	0.150	A, B, S, Z

Note

- Part number definitions:
 - Capacitance tolerance: K, M
 - Termination and packaging: C, E, K, H, L, M, U, R, N
 - Reliability level: A, B, S, Z
 - Surge current: A, B, C, Z, S
 - ESR: L, S
 - Reliability level: A, B, C, S, Z
 - Reliability level: A, S, Z



STANDARD RATINGS							
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DCL AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	STD. (S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)	AVAILABLE RELIABILITY LEVELS
25 V _{DC} AT + 85 °C; 17 V _{DC} AT + 125 °C							
0.33	A	T83A334(1)025(2)(6)(4)(5)	0.50	4	14.000	10.000	A, B, C, S, Z
0.47	A	T83A474(1)025(2)(3)(4)(5)	0.50	4	12.000	9.000	A, B, S, Z
0.68	B	T83B684(1)025(2)(3)(4)(5)	0.50	4	7.000	5.000	A, B, S, Z
1.0	A	T83A105(1)025(2)(6)(4)(5)	0.50	4	7.600	4.000	A, B, C, S, Z
1.0	B	T83B105(1)025(2)(6)(4)(5)	0.50	4	5.000	2.000	A, B, C, S, Z
1.5	B	T83B155(1)025(2)(6)(4)(5)	0.50	6	4.600	2.000	A, B, C, S, Z
2.2	A	T83A225(1)025(2)(3)(4)(5)	0.60	6	6.300	4.000	A, B, S, Z
2.2	B	T83B225(1)025(2)(3)(4)(5)	0.60	6	3.800	2.300	A, B, S, Z
2.2	C	T83C225(1)025(2)(6)(4)(5)	0.60	6	2.900	1.000	A, B, C, S, Z
3.3	B	T83B335(1)025(2)(3)(4)(5)	0.80	6	3.100	1.500	A, B, S, Z
3.3	C	T83C335(1)025(2)(3)(4)(5)	0.80	6	2.300	1.000	A, B, S, Z
4.7	B	T83B475(1)025(2)(3)(4)(5)	1.2	6	2.800	1.500	A, B, S, Z
4.7	C	T83C475(1)025(2)(6)(4)(5)	1.2	6	2.000	0.525	A, B, C, S, Z
6.8	C	T83C685(1)025(2)(3)(4)(5)	1.7	6	1.700	0.500	A, B, S, Z
6.8	D	T83D685(1)025(2)(6)(4)(5)	1.7	6	1.200	0.350	A, B, C, S, Z
10	B	T83B106(1)025(2)(3)(4)(5)	2.5	6	2.300	1.300	A, B, S, Z
10	C	T83C106(1)025(2)(6)(4)(5)	2.5	6	1.500	0.350	A, B, C, S, Z
10	D	T83D106(1)025(2)(6)(4)(5)	2.5	6	1.000	0.300	A, B, C, S, Z
15	C	T83C156(1)025(2)(3)(4)(5)	3.8	6	1.200	0.425	A, B, S, Z
15	D	T83D156(1)025(2)(6)(4)(5)	3.8	6	0.800	0.250	A, B, C, S, Z
22	D	T83D226(1)025(2)(6)(4)(5)	5.5	6	0.700	0.200	A, B, C, S, Z
33	D	T83D336(1)025(2)(6)(4)(5)	8.3	6	0.700	0.300	A, B, C, S, Z
33	E	T83E336(1)025(2)(3)(4)(5)	8.3	6	0.600	0.200	A, B, S, Z
47	D	T83D476(1)025(2)(6)(4)(5)	11.8	8	0.700	0.175	A, B, C, S, Z
47	E	T83E476(1)025(2)(3)(4)(5)	11.8	6	0.600	0.300	A, B, S, Z
35 V _{DC} AT + 85 °C; 23 V _{DC} AT + 125 °C							
0.10	A	T83A104(1)035(2)(6)(4)(5)	0.50	4	20.000	10.000	A, B, C, S, Z
0.15	A	T83A154(1)035(2)(6)(4)(5)	0.50	4	18.000	6.000	A, B, C, S, Z
0.22	A	T83A224(1)035(2)(6)(4)(5)	0.50	4	15.000	6.000	A, B, C, S, Z
0.33	A	T83A334(1)035(2)(6)(4)(5)	0.50	4	13.000	6.000	A, B, C, S, Z
0.47	A	T83A474(1)035(2)(3)(4)(5)	0.50	4	10.000	4.000	A, B, S, Z
0.47	B	T83B474(1)035(2)(6)(4)(5)	0.50	4	8.000	2.500	A, B, C, S, Z
0.68	B	T83B684(1)035(2)(6)(4)(5)	0.50	4	6.500	2.500	A, B, C, S, Z
1.0	A	T83A105(1)035(2)(3)(4)(5)	0.50	4	7.500	6.000	A, B, S, Z
1.0	B	T83B105(1)035(2)(6)(4)(5)	0.50	4	5.000	2.000	A, B, C, S, Z
1.5	B	T83B155(1)035(2)(3)(4)(5)	0.50	6	4.200	2.000	A, B, S, Z
1.5	C	T83C155(1)035(2)(3)(4)(5)	0.50	6	3.800	1.500	A, B, S, Z
2.2	B	T83B225(1)035(2)(3)(4)(5)	0.80	6	3.800	2.300	A, B, S, Z
2.2	C	T83C225(1)035(2)(6)(4)(5)	0.80	6	2.900	0.900	A, B, C, S, Z

Note

- Part number definitions:
 - Capacitance tolerance: K, M
 - Termination and packaging: C, E, K, H, L, M, U, R, N
 - Reliability level: A, B, S, Z
 - Surge current: A, B, C, Z, S
 - ESR: L, S
 - Reliability level: A, B, C, S, Z
 - Reliability level: A, S, Z



STANDARD RATINGS							
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DCL AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	STD. (S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)	AVAILABLE RELIABILITY LEVELS
35 V _{DC} AT + 85 °C; 23 V _{DC} AT + 125 °C							
3.3	B	T83B335(1)035(2)(3)(4)(5)	1.2	6	3.500	1.500	A, B, S, Z
3.3	C	T83C335(1)035(2)(6)(4)(5)	1.2	6	2.100	0.700	A, B, C, S, Z
4.7	C	T83C475(1)035(2)(6)(4)(5)	1.6	6	1.900	0.600	A, B, C, S, Z
4.7	D	T83D475(1)035(2)(3)(4)(5)	1.6	6	1.300	0.600	A, B, S, Z
6.8	C	T83C685(1)035(2)(3)(4)(5)	2.4	6	1.800	0.900	A, B, S, Z
6.8	D	T83D685(1)035(2)(6)(4)(5)	2.4	6	1.100	0.300	A, B, C, S, Z
10	C	T83C106(1)035(2)(3)(4)(5)	3.5	6	1.600	0.450	A, B, S, Z
10	D	T83D106(1)035(2)(3)(4)(5)	3.5	6	0.800	0.250	A, B, C, S, Z
15	D	T83D156(1)035(2)(3)(4)(5)	5.3	6	0.700	0.300	A, B, S, Z
22	D	T83D226(1)035(2)(3)(4)(5)	7.7	6	0.600	0.400	A, B, S, Z
22	E	T83E226(1)035(2)(3)(4)(5)	7.7	6	0.600	0.300	A, B, S, Z
50 V _{DC} AT + 85 °C; 33 V _{DC} AT + 125 °C							
0.10	A	T83A104(1)050(2)(6)(4)(5)	0.50	4	19.000	10.000	A, B, C, S, Z
0.15	A	T83A154(1)050(2)(3)(4)(5)	0.50	4	17.000	10.000	A, B, S, Z
0.15	B	T83B154(1)050(2)(3)(4)(5)	0.50	4	14.000	9.000	A, B, S, Z
0.22	B	T83B224(1)050(2)(6)(4)(5)	0.50	4	12.000	8.500	A, B, C, S, Z
0.33	B	T83B334(1)050(2)(6)(4)(5)	0.50	4	10.000	4.500	A, B, C, S, Z
0.47	B	T83B474(1)050(2)(3)(4)(5)	0.50	4	8.400	4.000	A, B, S, Z
0.47	C	T83C474(1)050(2)(3)(4)(5)	0.50	4	6.700	1.800	A, B, S, Z
0.68	C	T83C684(1)050(2)(6)(4)(5)	0.50	4	5.900	1.600	A, B, C, S, Z
1.0	B	T83B105(1)050(2)(3)(4)(5)	0.50	4	6.700	2.000	A, B, S, Z
1.0	C	T83C105(1)050(2)(6)(4)(5)	0.50	4	4.600	1.600	A, B, C, S, Z
1.5	C	T83C155(1)050(2)(3)(4)(5)	0.80	6	3.400	1.500	A, B, S, Z
1.5	D	T83D155(1)050(2)(6)(4)(5)	0.80	6	2.900	1.000	A, B, C, S, Z
2.2	C	T83C225(1)050(2)(3)(4)(5)	1.1	6	2.900	1.500	A, B, S, Z
2.2	D	T83D225(1)050(2)(6)(4)(5)	1.1	6	2.100	0.800	A, B, C, S, Z
3.3	D	T83D335(1)050(2)(6)(4)(5)	1.7	6	1.700	0.800	A, B, C, S, Z
4.7	D	T83D475(1)050(2)(6)(4)(5)	2.4	6	1.200	0.300	A, B, C, S, Z
6.8	E	T83E685(1)050(2)(3)(4)(5)	3.4	6	0.900	0.540	A, B, S, Z
10	E	T83E106(1)050(2)(3)(4)(5)	5.0	6	0.800	0.550	A, B, S, Z
15	E	T83E156(1)050(2)(3)(4)(5)	7.5	6	0.800	0.350	A, B, C, S, Z
63 V _{DC} AT + 85 °C; 41.6 V _{DC} AT + 125 °C							
4.7	D	T83D475(1)063(2)(7)(4)(5)	3.0	6	1.100	0.700	A, S, Z
10	E	T83E106(1)063(2)(7)(4)(5)	6.3	6	1.000	0.600	A, S, Z

Note

- Part number definitions:
 - Capacitance tolerance: K, M
 - Termination and packaging: C, E, K, H, L, M, U, R, N
 - Reliability level: A, B, S, Z
 - Surge current: A, B, C, Z, S
 - ESR: L, S
 - Reliability level: A, B, C, S, Z
 - Reliability level: A, S, Z

**RECOMMENDED VOLTAGE DERATING GUIDELINES** (for temperatures below + 85 °C)**STANDARD CONDITIONS. FOR EXAMPLE: OUTPUT FILTERS**

Capacitor Voltage Rating	Operating Voltage
4.0	2.5
6.3	3.3
10	5.0
16	8.0
20	10
25	12
35	15
50	24
63	32

SEVERE CONDITIONS. FOR EXAMPLE: INPUT FILTERS

Capacitor Voltage Rating	Operating Voltage
4.0	2.5
6.3	3.6
10	6.0
16	10
20	12
25	15
35	24
50	28
63	38

POWER DISSIPATION

CASE CODE	MAXIMUM PERMISSIBLE POWER DISSIPATION AT + 25 °C (W) IN FREE AIR
A	0.075
B	0.085
C	0.110
D	0.150
E	0.165

STANDARD PACKAGING QUANTITY

CASE CODE	UNITS PER REEL		
	7" FULL REEL	7" HALF REEL	7" PARTIAL REEL
A	2000	1000	100
B	2000	1000	100
C	500	250	100
D	500	250	100
E	400	200	100

PRODUCT INFORMATION

COTS Guide for Tantalum Capacitors	www.vishay.com/doc?40083
Pad Dimensions	
Packaging Dimensions	
Moisture Sensitivity	www.vishay.com/doc?40135
SELECTOR GUIDES	
Solid Tantalum Selector Guide	www.vishay.com/doc?49053
FAQ	
Frequently Asked Questions	www.vishay.com/doc?40110



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9