

THIS DRAWING IS UNPUBLISHED.										RELEASED FOR PUBLICATION										REVISONS									
COPYRIGHT - By -										ALL RIGHTS RESERVED.																			
LOC										DIST										P LTR DESCRIPTION DATE DWN APVD									
																				H2 REVISED PER ECO-11-004587 11MAR11 RK HMR									
										</																			

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		—	SEE SHEET 1	—	—	—

- PHYSICAL PROPERTIES:
HOUSING MATERIAL: THERMOPLASTIC, PC
FLAMMABILITY: UL94V-0 COLOR: BLACK
MAX BOW/WARP: .0056 IN/IN.

TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32, STEEL, NICKEL PLATED

MECHANICAL:
PITCH (TERMINAL SPACING): 9.50mm(.374")
WIRE RANGE: 12-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 20A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: -40°C TO +120°C.
- 1 SEE FIGURE.

2 MARKED WITH WHITE INK.

3 PRELIMINARY PART NUMBER.

4 SCREWS AND TERMINALS ARE NICKEL PLATED BRASS.

5 STAINLESS STEEL SCREWS.

6 SCREWS ARE NICKEL PLATED BRASS.

7 WIRE CLAMP SCREWS TO BE USED ONLY ON SIDE OPPOSITE QC TABS.

8 TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

-- SELECT LOAD CHART --

—	—	4-5,5-6	—	—	—	—	ALL	—	—	—	—	11	3-1546306-4
—	—	—	—	—	—	ALL	1-3	—	—	—	—	10	6-1546306-0
—	—	1,2	—	—	ALL	—	—	—	—	—	—	7	5-1546306-0
—	—	—	—	1	ALL	—	—	—	—	—	—	6	4-1546306-9
⑫ QC TAB .187 SS FLAT	⑪ QC TAB .187 SS 90°	⑩ JUMPER	⑨ QC TAB DBL SIDE 90° .250	⑧ QC TAB DBL SIDE 45° .250	⑦ QC TAB DBL SIDE FLAT .250	⑥ QC TAB DBL SIDE 90° .187	⑤ QC TAB DBL SIDE 45° .187	④ QC TAB DBL SIDE FLAT .187	③ QC TAB SGL SIDE 90° .250	② QC TAB SGL SIDE 45° .250	① QC TAB SGL SIDE FLAT .250	NO. OF POS.	PART NUMBER
POSITIONS LOADED													

—	—	—	—	—	—	—	—	—	—	—	—	—	—	294.7	302.2	30	3-1546306-0
—	—	—	—	—	—	—	—	—	—	—	—	—	—	285.2	292.7	29	2-1546306-9
—	—	—	—	—	—	—	—	—	—	—	—	—	—	275.7	283.2	28	2-1546306-8
—	—	—	—	—	—	—	—	—	—	—	—	—	—	266.2	273.7	27	2-1546306-7
—	—	—	—	—	—	—	—	—	—	—	—	—	—	256.7	264.2	26	2-1546306-6
—	—	—	—	—	—	—	—	—	—	—	—	—	—	247.2	254.7	25	2-1546306-5
—	—	—	—	—	—	—	—	—	—	—	—	—	—	237.7	245.2	24	2-1546306-4
—	—	—	—	—	—	—	—	—	—	—	—	—	—	228.2	235.7	23	2-1546306-3
—	—	—	—	—	—	—	—	—	—	—	—	—	—	218.7	226.2	22	2-1546306-2
1 2 SPL MARKING	—	—	—	—	—	—	—	—	—	—	—	—	—	209.2	216.7	21	2-1546306-1
—	—	—	—	—	—	—	—	—	—	—	—	—	—	199.7	207.2	20	3-1546306-2
—	—	—	—	—	—	—	—	—	—	—	—	—	—	199.7	207.2	20	2-1546306-0
—	—	—	—	—	—	—	—	—	—	—	—	—	—	190.2	197.7	19	1-1546306-9

NOTES

13 QC TAB .187 SS FLAT

12 QC TAB .187 SS FLAT

11 QC TAB .187 SS 90°

10 JUMPER

9 QC TAB DBL SIDE 90° .250

8 QC TAB DBL SIDE 45° .250

7 QC TAB DBL SIDE FLAT .250

6 QC TAB DBL SIDE 90° .187

5 QC TAB DBL SIDE 45° .187

4 QC TAB DBL SIDE FLAT .187

3 QC TAB SGL SIDE 90° .250

2 QC TAB SGL SIDE 45° .250

1 QC TAB SGL SIDE FLAT .250

DIM B

DIM A

NO. OF POS.

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± 0.3
2 PLC ± 0.25
3 PLC ± —
4 PLC ± —
ANGLES ± 2°
FINISH
—

DWN
S SCHLEGEL
CHK
C RICHARD
APVD
C RICHARD
PRODUCT SPEC
—
APPLICATION SPEC
—
WEIGHT
—
CUSTOMER DRAWING

20AUG2002
8/20/02
8/20/02
—
—
—
—
—

TE Connectivity

NAME
9.50MM (.374) DBL ROW BARRIER STRIP
W/O WASHER
—

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=1546306

RESTRICTED TO
—




SCALE
NTS

SHEET
2 OF 3



REV
H2

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		—	SEE SHEET 1	—	—	—



D

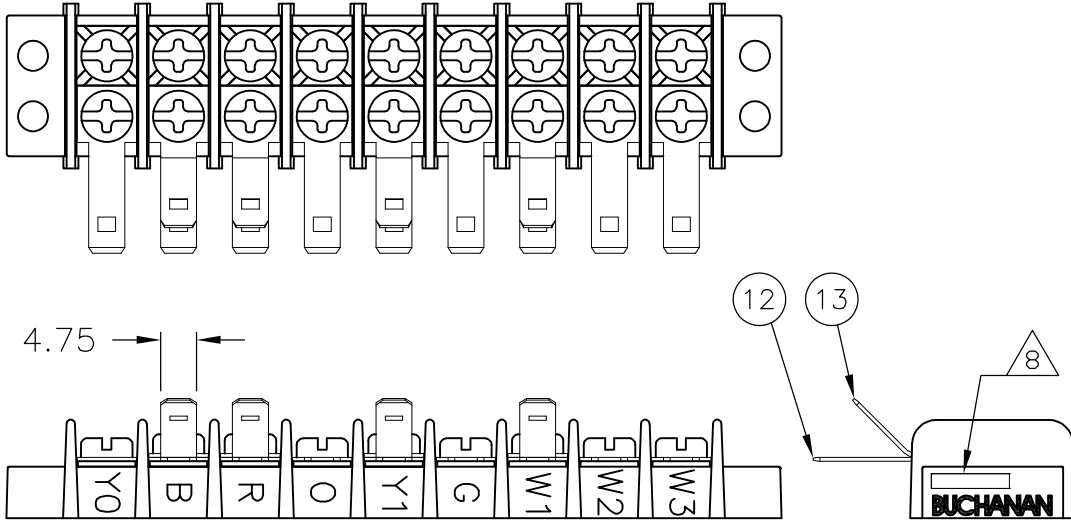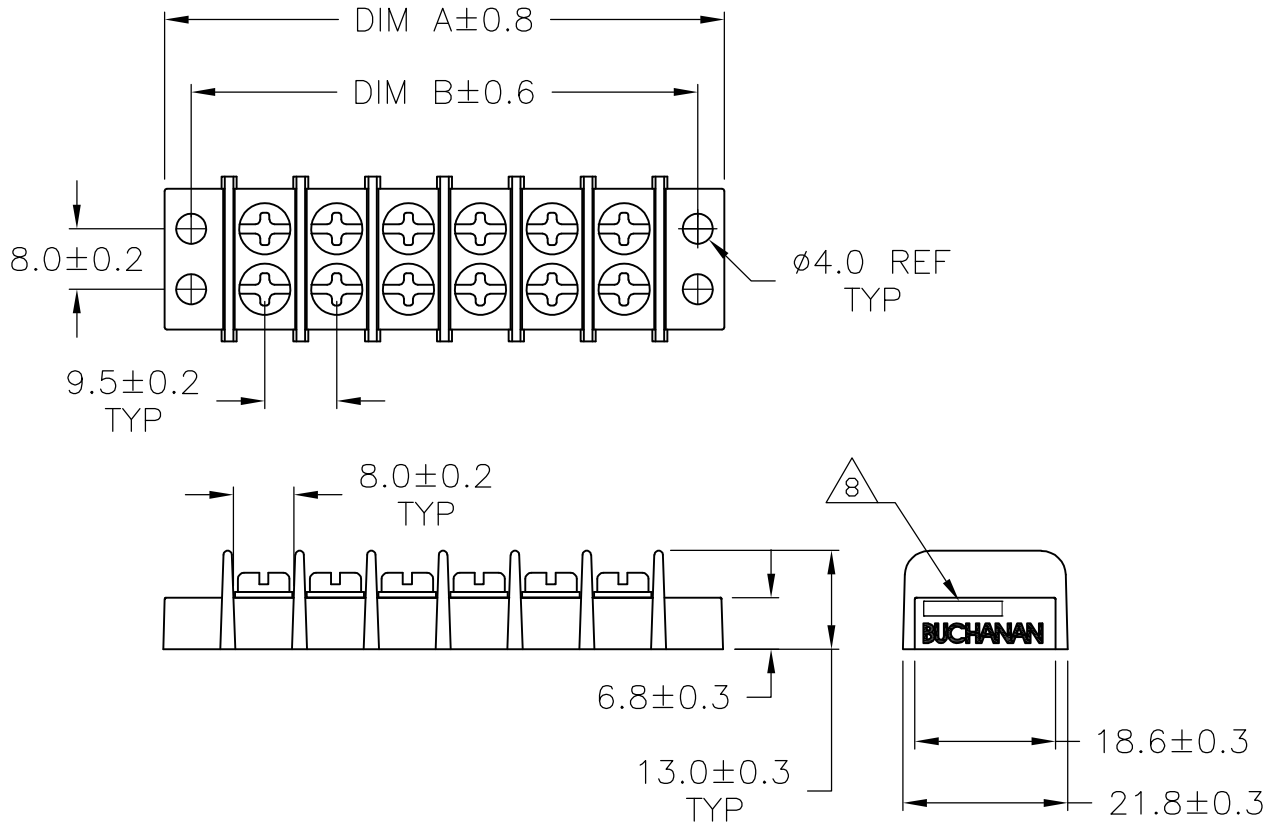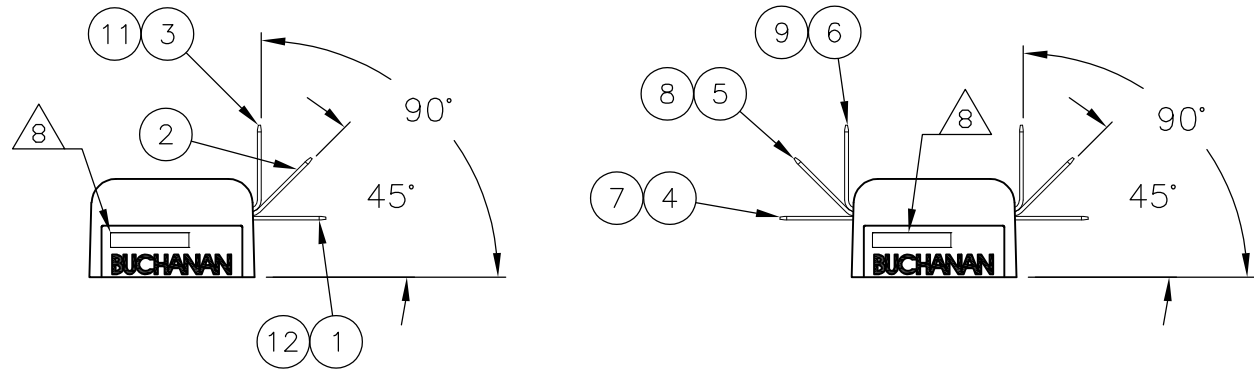



C

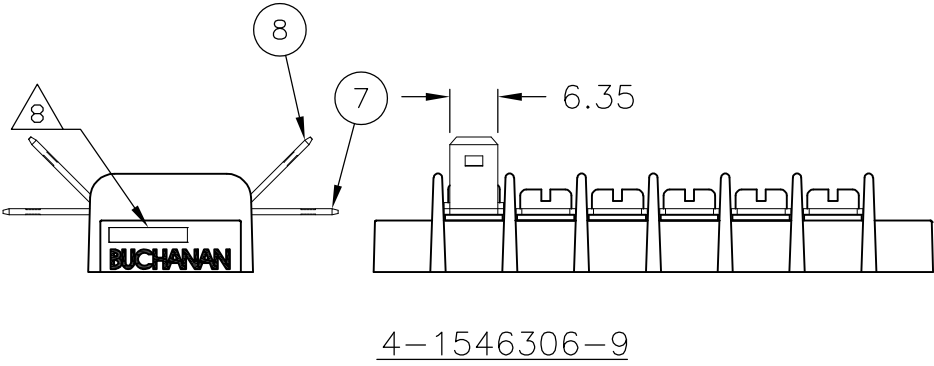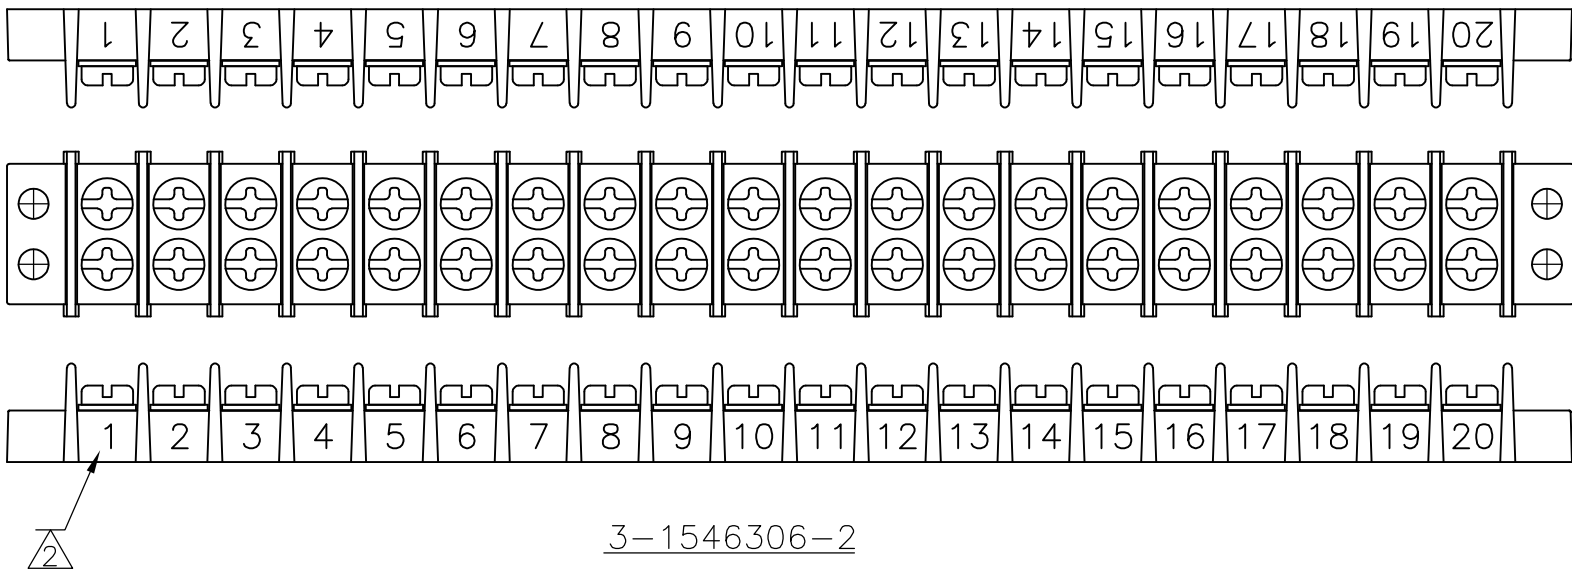

B

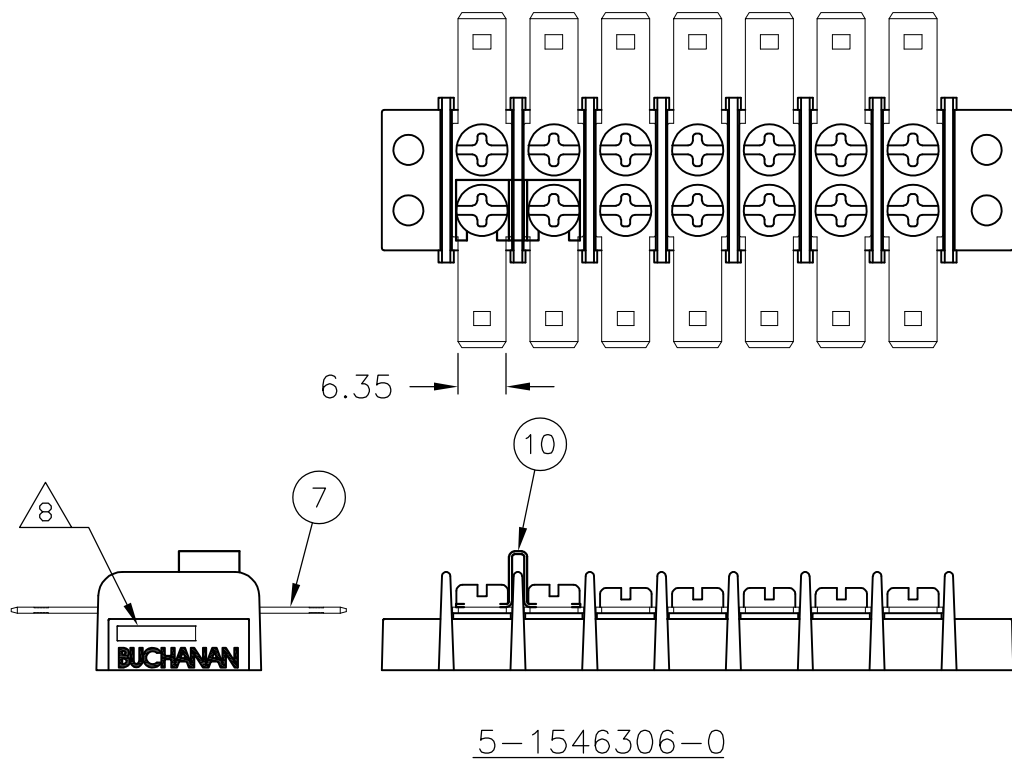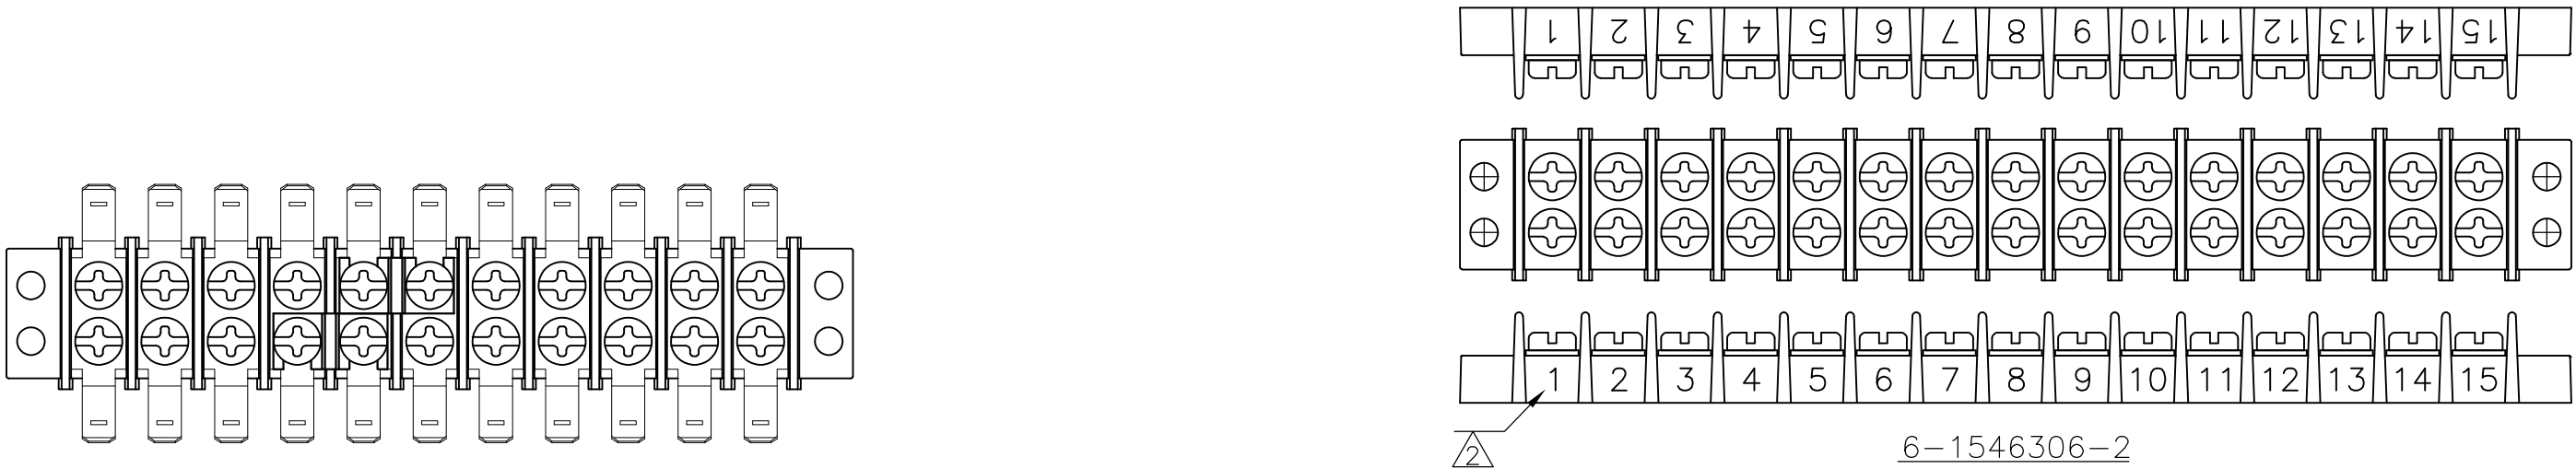

A

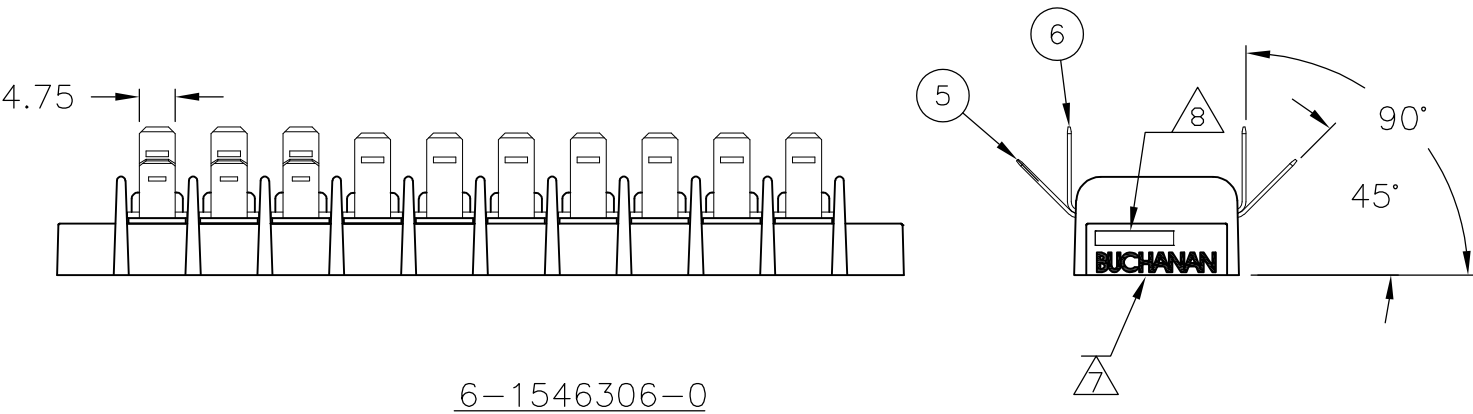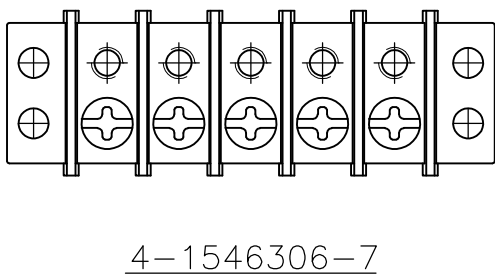

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	20AUG2002	TE Connectivity			
DIMENSIONS: MM		S	SCHLEGEL				
		CHK	8/20/02	NAME			
		C	RICHARD				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	8/20/02	9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER			
		C	RICHARD				
0 PLC ± -		PRODUCT SPEC		SIZE		DRAWING NO	
1 PLC ± 0.3		APPLICATION SPEC		CAGE CODE		RESTRICTED TO	
2 PLC ± 0.25		WEIGHT		A2		REV	
3 PLC ± -		CUSTOMER DRAWING		C=1546306		H2	
4 PLC ± -		SCALE		NTS		SHEET	
ANGLES ± 2°		SHEET		3 OF 3		REV	
FINISH		H2					

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9