

Surge protection device - D-LAN-CAT.5E-U - 2859084

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



DATATRAB adapter, protective adapter to be inserted into the data line for the protection of the LAN interfaces, without RJ45 cable. The adapter is equipped with a universal foot, for mounting on the DIN rail NS 35/7.5.



Key commercial data

Packing unit	1
Minimum order quantity	1
Catalog page	Page 97 (TT-2005)
GTIN	 4 017918 920470
Custom tariff number	85363010
Country of origin	GERMANY

Technical data

General

Housing material	Aluminum, anodized
Color	black
Standards for air and creepage distances	DIN VDE 0110-1
Standards for air and creepage distances	IEC 60664-1
Surge voltage category	II
Pollution degree	2
Ambient temperature (operation)	-40 °C ... 80 °C
Mounting type	DIN rail/G-profile rail
Design	Attachment plug for DIN rail mounting
Degree of protection	IP20
Direction of action	Line-Line & Line-Shield & Shield-Earth Ground
Width	25.4 mm
Height	94 mm
Depth	45.4 mm

Protective circuit

IEC category	C1
IEC category	C2

Surge protection device - D-LAN-CAT.5E-U - 2859084

Technical data

Protective circuit

IEC category	C3
IEC category	B2
IEC category	B3
VDE requirement class	C1
VDE requirement class	C2
VDE requirement class	C3
VDE requirement class	B2
VDE requirement class	B3
Maximum continuous voltage UC (wire-wire)	± 7 V DC
Maximum continuous voltage UC (wire-ground)	± 7 V DC
Nominal current I _N	1.5 A (25 °C)
Operating effective current I _C at UC	≤ 100 μ A
Ground conductor current I _{PE}	≤ 100 μ A
Nominal discharge surge current I _n (8/20) μ s (Core-Core)	350 A
Nominal discharge surge current I _n (8/20) μ s (Core-Earth)	2.5 kA
Max. discharge surge current I _{max} (8/20) μ s maximum (Core-Earth)	2.5 kA (in total)
Nominal pulse current I _{an} (10/700) μ s (Core-Core)	160 A
Nominal pulse current I _{an} (10/700) μ s (Core-Earth)	160 A
Output voltage limitation at 1 kV/ μ s (Core-Core) spike	≤ 22 V
Output voltage limitation at 1 kV/ μ s (Core-Earth) spike	≤ 80 V (equipotential bonding lead: 1 m)
Output voltage limitation at 1 kV/ μ s (Shield-Earth) spike	≤ 700 V (equipotential bonding lead: 1 m)
Residual voltage at I _n , (conductor-conductor)	≤ 45 V
Residual voltage at I _n , (conductor-ground)	≤ 45 V
Residual voltage at I _n , (shield-ground)	≤ 700 V
Protection level UP (Core-Core)	≤ 50 V (C1, 500 V/250 A)
Protection level UP (Core-Core)	≤ 20 V (B3, 2 kV/25 A)
Protection level UP (Core-Earth)	≤ 65 V (C1, 500 V/250 A - PA-Ltg: 1 m)
Protection level UP (Core-Earth)	≤ 25 V (B3, 2 kV/25 A - PA-Ltg: 1 m)
Protection level UP (Core-Earth)	≤ 60 V (C3, 7 kV/90 A - PA-Ltg: 1 m)
Protection level UP (Shield-Earth)	≤ 850 V (C2, 4 kV/2 kA - PA-Ltg: 1 m)
Response time t _A (Core-Core)	≤ 500 ns
Response time t _A (Core-Earth)	≤ 100 ns
Input attenuation a _E , sym.	1 dB (up to 100 MHz, 100 Ω system)
Near-end crosstalk attenuation	36 dB (pair 3-6 against pair 4-5 in 100 Ω system / 100 MHz)
Near-end crosstalk attenuation	40 dB (all other pair combinations in 100 Ω system/100 MHz)
Cut-off frequency f _g (3 dB), sym. in 100 Ohm system	≤ 100 MHz
Capacity (Core-Core)	20 pF (typical)
Capacity (Core-Earth)	1 pF (typical)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	B2 (4 kV / 100 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	B3 (2 kV/25 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C1 (500 V / 250 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	B2 (4 kV / 100 A)

Surge protection device - D-LAN-CAT.5E-U - 2859084

Technical data

Protective circuit

Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C1 (500 V/250 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (4 kV / 2 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	B3 (2 kV/25 A)

Connection data

Connection method	RJ45
Connection type IN	RJ45 female connector
Connection type OUT	RJ45 female connector
Connection method	Network interfaces (e.g. Ethernet, Token Ring and CDDI/FDDI)

Connection, equipotential bonding

Connection method	Cable connection
-------------------	------------------

Connection, protective circuit

Standards/regulations	IEC 61643-21
Standards/regulations	E VDE 0845-3-1
Standards/regulations	DIN EN 50173-1

Classifications

eclass

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807

etim

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943

unspsc

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Surge protection device - D-LAN-CAT.5E-U - 2859084

Approvals

Approvals

UL Listed / GOST / GOST

Ex Approvals

Approvals submitted

Approval details


UL Listed 

GOST 


GOST 

Drawings

Dimensioned drawing

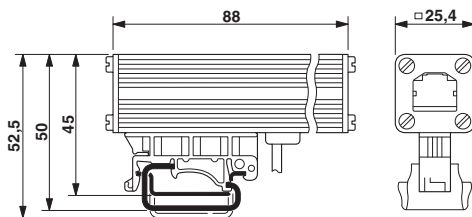

Circuit diagram

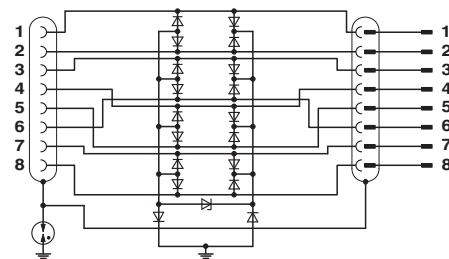

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9