

# LED Driver

## LDU Series



- Constant Current Output
- LED Drive Current up to 1000 mA
- LED Strings from 2 V to 57 V
- PWM & Analog Dimming Control
- High Efficiency – up to 95%
- Open or Short Circuit LED Protection
- 3 Year Warranty

## Specification

### Input

|               |   |
|---------------|---|
| Input Voltage | • LDU08 & 24: 7-30 VDC<br>LDU48: 7-60 VDC                 |
| Input Filter  | • Capacitor   |
| Input Surge   | • LDU08 & 24: 40 VDC for 0.5 s<br>LDU48: 65 VDC for 0.5 s |

### Output

|                              |  |
|------------------------------|--|
| Output Voltage               | • See tables<br>( $V_{in}$ must be at least 2 V greater than $V_{out}$ )   |
| Output Current               | • See tables   |
| Output Current Trim          | • 25-100%  |
| Output Current Accuracy      | • LDU08: $\pm 6.0\%$ max<br>LDU24: $\pm 8.0\%$ max<br>LDU48: $\pm 8.0\%$ max   |
| Ripple & Noise               | • LDU08: 200 mV pk-pk max<br>LDU24: 250 mV pk-pk max<br>(except 1000 mA units: 300 mV pk-pk max)<br>LDU48: See tables<br>measured with 20 MHz bandwidth  |
| Short Circuit Protection     | • Current is limited to the rated output   |
| Temperature Coefficient      | • LDU08: $\pm 0.03\%/^{\circ}\text{C}$ max<br>LDU24: $\pm 0.08\%/^{\circ}\text{C}$ max<br>LDU48: $\pm 0.03\%/^{\circ}\text{C}$ max   |
| Remote On/Off                | • On = 0.3-1.25 V or open circuit<br>Off = $\leq 0.15$ V (applied to control pin)<br>LDU08 & 24: Quiescent input current is 25 $\mu\text{A}$ max,<br>LDU48: Quiescent input current is 100 $\mu\text{A}$ max |
| Remote On/Off Signal Current | • 1 mA max   |

### Dimming

|                      |               |
|----------------------|---------------|
| <b>PWM</b>           |               |
| Output Current Range | • 25% to 100% |
| Operating Frequency  | • 1 kHz max   |
| On Time              | • 200 ns min  |
| Off Time             | • 200 ns min  |
| Amplitude            | • 1.25 V max  |

### DC Voltage Control

|                      |                     |
|----------------------|---------------------|
| Output Current Range | • 25% to 100%       |
| Control Input        | • 0.3 to 1.25 V max |

### Variable Resistor

|                      |               |
|----------------------|---------------|
| Output Current Range | • 25% to 100% |
|----------------------|---------------|

### General

|                     |  |
|---------------------|--|
| Efficiency          | • See tables   |
| Switching Frequency | • LDU08: 40-380 kHz variable<br>LDU24: 50-330 kHz variable<br>LDU48: 20-500 kHz variable                     |
| MTBF                | • LDU08: >1.6 Mhrs<br>LDU24: >1.6 Mhrs<br>LDU48: >950 KHrs<br>to MIL-HDBK-217F at 25 $^{\circ}\text{C}$ , GB |

### Environmental

|                           |  |
|---------------------------|--|
| Operating Temperature     | • LDU08: $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ ,<br>LDU24: $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ ,<br>LDU24 1000 mA unit: $-40^{\circ}\text{C}$ to $+70^{\circ}\text{C}$ ,<br>LDU48: See derating curves |
| Case Temperature          | • LDU08 & 24: $+100^{\circ}\text{C}$ max<br>LDU48: $+110^{\circ}\text{C}$ max  |
| Storage Temperature       | • $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$  |
| Humidity                  | • Up to 95%, non-condensing  |
| Thermal Impedance         | • 35-50 $^{\circ}\text{C}/\text{W}$ model dependant  |
| Ingress Protection Rating | • IP67 (wired versions)  |

### EMC

|                    |   |
|--------------------|---|
| Emissions          | • EN55022 class B conducted & radiated with external components - see application notes |
| ESD Immunity       | • EN61000-4-2, level 2 Perf Criteria A  |
| Radiated Immunity  | • EN61000-4-3, level 2 Perf Criteria A  |
| EFT/Burst          | • EN61000-4-4, level 2 Perf Criteria A  |
| Surge              | • EN61000-4-5, level 2 Perf Criteria A  |
| Conducted Immunity | • EN61000-4-6, level 2 Perf Criteria A  |

# Models and Ratings

**LDU08/24 XP**

## With Dimming Control

| Output Power | Input Voltage Range | Output Voltage | Output Current | Efficiency | Model Number |
|--------------|---------------------|----------------|----------------|------------|--------------|
| 8.0 W        | 7 - 30 V            | 2 - 28 V       | 300 mA         | 95%        | LDU0830S300  |
| 8.0 W        | 7 - 30 V            | 2 - 28 V       | 350 mA         | 95%        | LDU0830S350  |
| 14.0 W       | 7 - 30 V            | 2 - 28 V       | 500 mA         | 95%        | LDU2430S500  |
| 17.0 W       | 7 - 30 V            | 2 - 28 V       | 600 mA         | 95%        | LDU2430S600  |
| 20.0 W       | 7 - 30 V            | 2 - 28 V       | 700 mA         | 95%        | LDU2430S700  |
| 24.0 W       | 7 - 30 V            | 2 - 28 V       | 1000 mA        | 95%        | LDU2430S1000 |

## Wired Versions (No Dimming Control)

| Output Power | Input Voltage Range | Output Voltage | Output Current | Efficiency | Model Number   |
|--------------|---------------------|----------------|----------------|------------|----------------|
| 8.0 W        | 7 - 30 V            | 2 - 28 V       | 350 mA         | 95%        | LDU0830S350-W  |
| 14.0 W       | 7 - 30 V            | 2 - 28 V       | 500 mA         | 95%        | LDU2430S500-W  |
| 20.0 W       | 7 - 30 V            | 2 - 28 V       | 700 mA         | 95%        | LDU2430S700-W  |
| 24.0 W       | 7 - 30 V            | 2 - 28 V       | 1000 mA        | 95%        | LDU2430S1000-W |

## Wired Version with Dimming Control

| Output Power | Input Voltage Range | Output Voltage | Output Current | Efficiency | Model Number    |
|--------------|---------------------|----------------|----------------|------------|-----------------|
| 8.0 W        | 7 - 30 V            | 2 - 28 V       | 350 mA         | 95%        | LDU0830S350-WD  |
| 14.0 W       | 7 - 30 V            | 2 - 28 V       | 500 mA         | 95%        | LDU2430S500-WD  |
| 20.0 W       | 7 - 30 V            | 2 - 28 V       | 700 mA         | 95%        | LDU2430S700-WD  |
| 24.0 W       | 7 - 30 V            | 2 - 28 V       | 1000 mA        | 95%        | LDU2430S1000-WD |

## Mechanical Details

### LDU08: 14 Pin DIL



### LDU08 - Wired Versions



### LDU24- 16 Pin DIL



### LDU24 - Wired Versions



## Notes

- All dimensions are in inches (mm)
- Weight: LDU08 - 0.006 lbs (2.6 g) approx.  
LDU08 (wired version) - 0.02 lbs (11.1 g) approx.  
LDU24 - 0.014 lbs (6.2 g) approx.  
LDU24 (wired version) - 0.02 lbs (11.1 g) approx.
- Pin diameter: 0.02±0.002 (0.5±0.05)
- Pin pitch tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)

| LDU Connections |            |            |         |            |            |                               |
|-----------------|------------|------------|---------|------------|------------|-------------------------------|
| LDU08           | LDU08-W    | LDU08-WD   | LDU24   | LDU24-W    | LDU24-WD   | Function                      |
| 1               | 1 (Black)  | 1 (Black)  | 1 & 2   | 1 (Black)  | 1 (Black)  | -Vin: -DC supply              |
| 2               | No Wire    | 2 (White)  | 3       | No Wire    | 2 (White)  | Control                       |
| 7               | 8 (Blue)   | 8 (Blue)   | 7 & 8   | 8 (Blue)   | 8 (Blue)   | -Vout: LED cathode connection |
| 8               | 9 (Yellow) | 9 (Yellow) | 9 & 10  | 9 (Yellow) | 9 (Yellow) | +Vout: LED anode connection   |
| 14              | 16 (Red)   | 16 (Red)   | 15 & 16 | 16 (Red)   | 16 (Red)   | +Vin: +DC supply              |

Note: LDU08: Do not connect Pin 1 (-Vin) to Pin 7 (-Vout).  
LDU24: Do not connect Pins 1 & 2 (-Vin) to Pins 7 & 8 (-Vout).



# Models and Ratings

## With Dimming Control

| Output Power | Input Voltage Range | Output Voltage | Output Current | Ripple & Noise (pk-pk) | Efficiency | Model Number |
|--------------|---------------------|----------------|----------------|------------------------|------------|--------------|
| 9.0 W        | 7 - 60 V            | 2 - 57 V       | 150 mA         | 150 mV                 | 97%        | LDU4860S150  |
| 14.0 W       | 7 - 60 V            | 2 - 57 V       | 250 mA         | 200 mV                 | 97%        | LDU4860S250  |
| 17.0 W       | 7 - 60 V            | 2 - 57 V       | 300 mA         | 250 mV                 | 97%        | LDU4860S300  |
| 20.0 W       | 7 - 60 V            | 2 - 57 V       | 350 mA         | 300 mV                 | 97%        | LDU4860S350  |
| 29.0 W       | 7 - 60 V            | 2 - 57 V       | 500 mA         | 400 mV                 | 97%        | LDU4860S500  |
| 34.0 W       | 7 - 60 V            | 2 - 57 V       | 600 mA         | 450 mV                 | 97%        | LDU4860S600  |
| 40.0 W       | 7 - 60 V            | 2 - 57 V       | 700 mA         | 500 mV                 | 97%        | LDU4860S700  |
| 48.0 W       | 7 - 60 V            | 2 - 48 V       | 1000 mA        | 800 mV                 | 97%        | LDU4860S1000 |

## Wired Versions (No Dimming Control)

| Output Power | Input Voltage Range | Output Voltage | Output Current | Ripple & Noise (pk-pk) | Efficiency | Model Number   |
|--------------|---------------------|----------------|----------------|------------------------|------------|----------------|
| 9.0 W        | 7 - 60 V            | 2 - 57 V       | 150 mA         | 150 mV                 | 97%        | LDU4860S150-W  |
| 14.0 W       | 7 - 60 V            | 2 - 57 V       | 250 mA         | 200 mV                 | 97%        | LDU4860S250-W  |
| 17.0 W       | 7 - 60 V            | 2 - 57 V       | 300 mA         | 250 mV                 | 97%        | LDU4860S300-W  |
| 20.0 W       | 7 - 60 V            | 2 - 57 V       | 350 mA         | 300 mV                 | 97%        | LDU4860S350-W  |
| 29.0 W       | 7 - 60 V            | 2 - 57 V       | 500 mA         | 400 mV                 | 97%        | LDU4860S500-W  |
| 34.0 W       | 7 - 60 V            | 2 - 57 V       | 600 mA         | 450 mV                 | 97%        | LDU4860S600-W  |
| 40.0 W       | 7 - 60 V            | 2 - 57 V       | 700 mA         | 500 mV                 | 97%        | LDU4860S700-W  |
| 48.0 W       | 7 - 60 V            | 2 - 48 V       | 1000 mA        | 800 mV                 | 97%        | LDU4860S1000-W |

## Wired Version with Dimming Control


| Output Power | Input Voltage Range | Output Voltage | Output Current | Ripple & Noise (pk-pk) | Efficiency | Model Number    |
|--------------|---------------------|----------------|----------------|------------------------|------------|-----------------|
| 9.0 W        | 7 - 60 V            | 2 - 57 V       | 150 mA         | 150 mV                 | 97%        | LDU4860S150-WD  |
| 14.0 W       | 7 - 60 V            | 2 - 57 V       | 250 mA         | 200 mV                 | 97%        | LDU4860S250-WD  |
| 17.0 W       | 7 - 60 V            | 2 - 57 V       | 300 mA         | 250 mV                 | 97%        | LDU4860S300-WD  |
| 20.0 W       | 7 - 60 V            | 2 - 57 V       | 350 mA         | 300 mV                 | 97%        | LDU4860S350-WD  |
| 29.0 W       | 7 - 60 V            | 2 - 57 V       | 500 mA         | 400 mV                 | 97%        | LDU4860S500-WD  |
| 34.0 W       | 7 - 60 V            | 2 - 57 V       | 600 mA         | 450 mV                 | 97%        | LDU4860S600-WD  |
| 40.0 W       | 7 - 60 V            | 2 - 57 V       | 700 mA         | 500 mV                 | 97%        | LDU4860S700-WD  |
| 48.0 W       | 7 - 60 V            | 2 - 48 V       | 1000 mA        | 800 mV                 | 97%        | LDU4860S1000-WD |

## Mechanical Details

### LDU48 - 24 Pin DIL



### LDU48 - Wired Versions

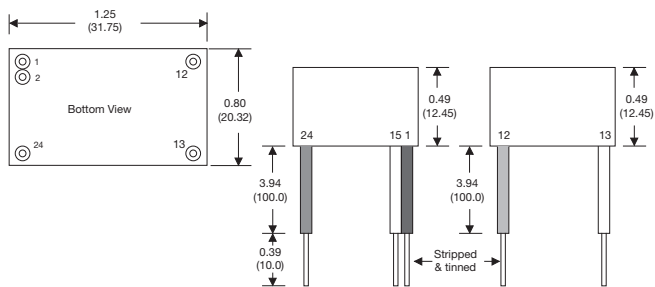


| LDU48 Connections |             |             |                               |
|-------------------|-------------|-------------|-------------------------------|
| LDU48             | LDU48-W     | LDU48-WD    | Function                      |
| 2 & 3             | 1 (Black)   | 1 (Black)   | -Vin: -DC supply              |
| 4                 | No Wire     | 15 (White)  | Control                       |
| 9 & 11            | 12 (Blue)   | 12 (Blue)   | -Vout: LED cathode connection |
| 14 & 16           | 13 (Yellow) | 13 (Yellow) | +Vout: LED anode connection   |
| 22 & 23           | 24 (Red)    | 24 (Red)    | +Vin: +DC supply              |

### Notes

- All dimensions are in inches (mm)
- Weight: LDU48 - 0.04 lbs (17.7 g) approx.  
LDU48 (wired version) - 0.04 lbs (18.0 g) approx.
- Pin diameter: 0.02±0.002 (0.5±0.05)
- Pin pitch tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)

## Derating Curve for LDU48

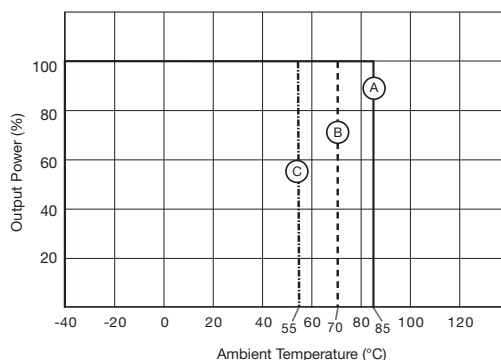

### LDU48 Models

- Ⓐ 150 mA, 250 mA, 300 mA, 350 mA
- Ⓑ 500 mA, 600 mA, 700 mA
- Ⓒ 1000 mA

### Notes

For LDU08 & LDU24 please see Operating Temperature Spec.

**Output Current Adjustment by Variable Resistor**

By connecting a variable resistor between control and GND, simple dimming can be achieved. Capacitor is optional for HF noise rejection. Recommended value is 0.22  $\mu$ F.



The output current can be determined using the equation:

For LDU08-24  $I_{out} = \frac{I_{out\ nom} \times R}{(R + 200\ k)}$  For LDU48  $I_{out} = \frac{I_{out\ nom} \times R}{(R + 50\ k)}$

Where the value of R is between 0 and 2 M $\Omega$ , the maximum adjustment range of output current is 25% to 90% (For Vin-Vout, LDU08 & 24: <20 VDC, LDU48: <30 VDC)

**Output Current Adjustment by DC Voltage**

Control Voltage Range: 0.3 V to 1.25 VDC



The output current is given by:

$$I_{out} = \frac{I_{out\ nom} \times Control}{1.25}$$

**Output Current Adjustment by PWM**

Directly driving control input

A Pulse Width Modulated (PWM) signal with duty cycle DPWM can be applied to the control pin, as shown:

$$I_{out} = I_{out\ nom} \times D_{pwm} \text{ (} D_{pwm} = \text{PWM duty cycle)}$$



**Input Filter to meet Class B Conducted Emissions**



|    | LDU08      | LDU24      | LDU48       |
|----|------------|------------|-------------|
| C1 | 10 $\mu$ F | 10 $\mu$ F | 4.7 $\mu$ F |
| C2 | Not Fitted | Not Fitted | 4.7 $\mu$ F |
| C3 | 47 $\mu$ F | 47 $\mu$ F | Not Fitted  |
| L1 | 68 $\mu$ H | 68 $\mu$ H | 47 $\mu$ H  |

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9