

## Solid-state relay module - PLC-OPT-110DC/300DC/1 - 2900385

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PLC-INTERFACE, integrated solid-state relay, with push-in connection, for mounting on NS 35/7,5 DIN rails, input: 110 V DC, output: 12 - 300 V DC/1 A

The illustration shows the version PLC-OSC-24DC/300DC/1

### Product Features

- Wear-free switching with no contact bounce
- Resistant to vibrations and shocks
- Protective circuit in input and output
- Electronic PDT output of up to 48 V DC/500 mA
- DC voltage outputs of up to 300 V DC/1 A or up to 24 V DC/10 A
- Status indicator
- Option of bridging adjacent modules



### Key commercial data

|                                      |           |
|--------------------------------------|-----------|
| Packing unit                         | 1 pc      |
| Weight per Piece (excluding packing) | 99.99 GRM |
| Custom tariff number                 | 85364900  |
| Country of origin                    | Germany   |

### Technical data

#### Note

|                         |   |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

#### Dimensions

|        |        |
|--------|--------|
| Width  | 6.2 mm |
| Height | 80 mm  |

# Solid-state relay module - PLC-OPT-110DC/300DC/1 - 2900385

## Technical data

### Dimensions

|       |       |
|-------|-------|
| Depth | 86 mm |
|-------|-------|

### Ambient conditions

|   |                  |
|---|------------------|
| Ambient temperature (operation)         | -25 °C ... 60 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

### Input data

|  |                                      |
|--|--------------------------------------|
| Nominal input voltage $U_N$                          | 110 V DC                             |
| Input voltage range in reference to $U_N$            | 0.8 ... 1.2                          |
| Switching threshold "0" signal in reference to $U_N$ | $\leq 0.4$                           |
| Switching threshold "1" signal in reference to $U_N$ | $\geq 0.8$                           |
| Typical input current at $U_N$                       | 5 mA                                 |
| Typical response time                                | 0.4 ms                               |
| Typical turn-off time                                | 0.7 ms                               |
| Operating voltage display                            | Yellow LED                           |
| Type of protection                                   | Protection against polarity reversal |
|  | Surge protection                     |
| Protective circuit/component                         | Polarity protection diode            |
|  | Varistor                             |
| Transmission frequency                               | 50 Hz                                |

### Output data

|  |   |
|--|---|
| Designation                                      | Output data   |
| Output voltage range                             | 12 V DC ... 300 V DC (Partition plate PLC-ATP must be installed for voltages larger than 250 V (L1, L2, L3) between identical terminal points in adjacent modules. Potential bridging is then carried out with FBST 8-PLC... or ...FBST 500...) |
| Limiting continuous current                      | 1 A (see derating curve)  |
| Voltage drop at max. limiting continuous current | < 500 mV  |
| Type of protection                               | Protection against polarity reversal  |
|  | Surge protection  |
| Protective circuit/component                     | Polarity protection diode   |
|  | Varistor  |

### Connection data

|                                       |                      |
|---------------------------------------|----------------------|
| Connection method                     | Push-in connection   |
| Stripping length                      | 8 mm                 |
| Conductor cross section solid min.    | 0.14 mm <sup>2</sup> |
| Conductor cross section solid max.    | 2.5 mm <sup>2</sup>  |
| Conductor cross section stranded min. | 0.14 mm <sup>2</sup> |

## Solid-state relay module - PLC-OPT-110DC/300DC/1 - 2900385

### Technical data

#### Connection data

|  |                     |
|--|---------------------|
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min. | 26                  |
| Conductor cross section AWG/kcmil max  | 14                  |

#### General

|   |                           |
|---|---------------------------|
| Mounting position                       | any                       |
| Assembly instructions                   | In rows with zero spacing |
| Operating mode                          | 100% operating factor     |
| Inflammability class according to UL 94 | V0                        |
| Designation                             | Standards/regulations     |
| Standards/regulations                   | IEC 60664                 |
|   | EN 50178                  |
|   | IEC 62103                 |
| Rated surge voltage / insulation        | 4 kV / basic insulation   |
| Rated insulation voltage                | 300 V                     |
| Pollution degree                        | 2                         |
| Surge voltage category                  | III                       |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27371102 |
| eCl@ss 4.1 | 27371102 |
| eCl@ss 5.0 | 27371001 |
| eCl@ss 5.1 | 27371001 |
| eCl@ss 6.0 | 27371001 |
| eCl@ss 7.0 | 27371001 |
| eCl@ss 8.0 | 27371001 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001504 |
| ETIM 3.0 | EC001504 |
| ETIM 4.0 | EC000196 |
| ETIM 5.0 | EC000196 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211916 |
| UNSPSC 7.0901 | 39121542 |

# Solid-state relay module - PLC-OPT-110DC/300DC/1 - 2900385

## Classifications

### UNSPSC

|              |          |
|--------------|----------|
| UNSPSC 11    | 39121542 |
| UNSPSC 12.01 | 39121542 |
| UNSPSC 13.2  | 39121542 |

## Approvals

### Approvals

---

#### Approvals

GL / UL Listed / cUL Listed / UL Recognized / cUL Recognized / cULus Recognized / cULus Listed

---

#### Ex Approvals

---


#### Approvals submitted


---


## Approval details

GL

UL Listed 

cUL Listed 

UL Recognized 

cUL Recognized 


# Solid-state relay module - PLC-OPT-110DC/300DC/1 - 2900385

## Approvals




## Drawings

Diagram

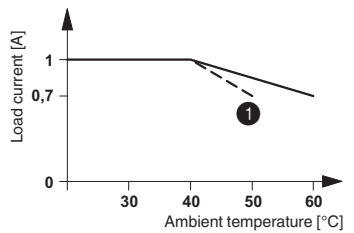

1 For input voltages of 220 V DC and 230 V DC

Circuit diagram

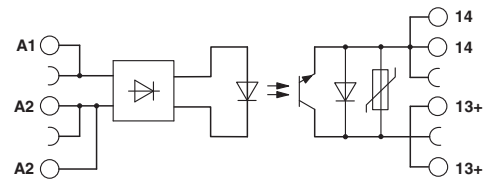

The illustration shows the derating curve for PLC-...300DC/1

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9