

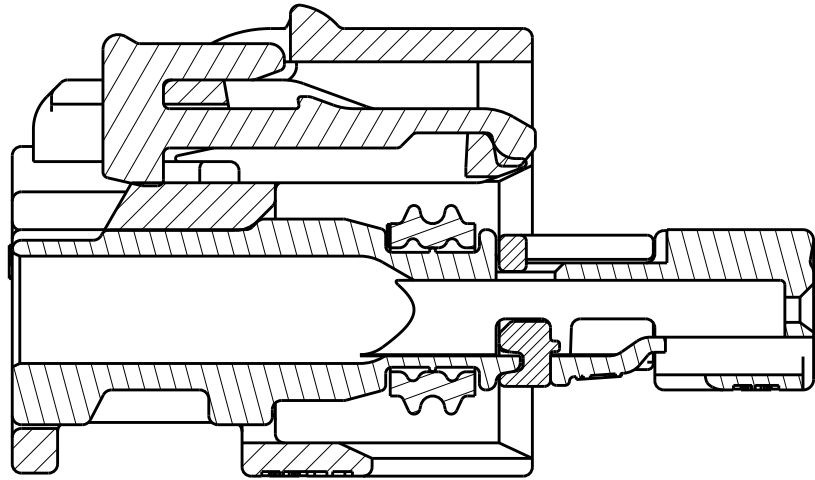



1. PART NUMBER 1488991-5 SHOWN ON DRAWING.
2. TPA AND CPA (WHEN APPLICABLE) ARE SHIPPED IN THEIR PRE-LATCHED POSITIONS. SEE INSTRUCTION SHEET 408-8928 FOR DIRECTIONS ON MOVING THE CPA AND TPA TO THE PRE-LATCHED POSITION, IF NECESSARY.
3. TERMINALS SOLD SEPARATELY. FOR USE WITH TE CONNECTIVITY MCON 1.2mm CLEAN BODY CONTACT WITH WIRE SEAL. SEE MCON 1.2-CB (CLEAN BODY) TABLE FOR APPLICABLE PART NUMBERS.
4. APPLICABLE HEADER INTERFACE DRAWING 1488738 IS AVAILABLE UPON REQUEST. A COPY OF THIS DRAWING CAN BE OBTAINED FROM THE TE CONNECTIVITY PRODUCT MANAGER, VIA YOUR TE CONNECTIVITY SALES REPRESENTATIVE OR CUSTOMER SERVICE.
5. MINIMUM FEED THROUGH CONDITION WITH 0.5mm CLEARANCE ALL AROUND.
6. A "X" IN THIS TABLE INDICATES THAT THE TERMINAL CAVITY IS BLOCKED AND WILL NOT ALLOW INSERTION OF THE MATING TERMINAL. A "O" IN THIS TABLE INDICATES THAT THE TERMINAL CAVITY IS OPEN AND WILL ALLOW INSERTION OF THE MATING TERMINAL.
7. TRACEABILITY PRINTED IN THIS LOCATION AT ASSEMBLY.
8. CONNECTOR SYSTEM MEETS THE REQUIREMENTS OF USCAR-2, REVISION 3, EXCEPT WHERE NOTED:
TPA ENGAGE AND DISENGAGE FORCES ARE 10N MIN - 30N MAX.
PRIMARY TERMINAL-CONNECTOR FORCE IS 30N MIN.
SECONDARY TERMINAL-CONNECTOR FORCE IS 75N MIN.
CPA ENGAGE AND DISENGAGE FORCES (WITH MATING CONNECTOR) ARE 30N MAX.
CPA REMOVAL FORCE FROM CONNECTOR IS 15N MIN.
9. FOR OPTIONAL TERMINAL CAVITY BLOCKING, USE TE CONNECTIVITY BLIND PLUG PART NUMBER: 967056-1.
10. TERMINAL 1670146-X REPLACES 1418847-X
11. REFERENCE ISOMETRIC VIEWS ON SHEET 2.

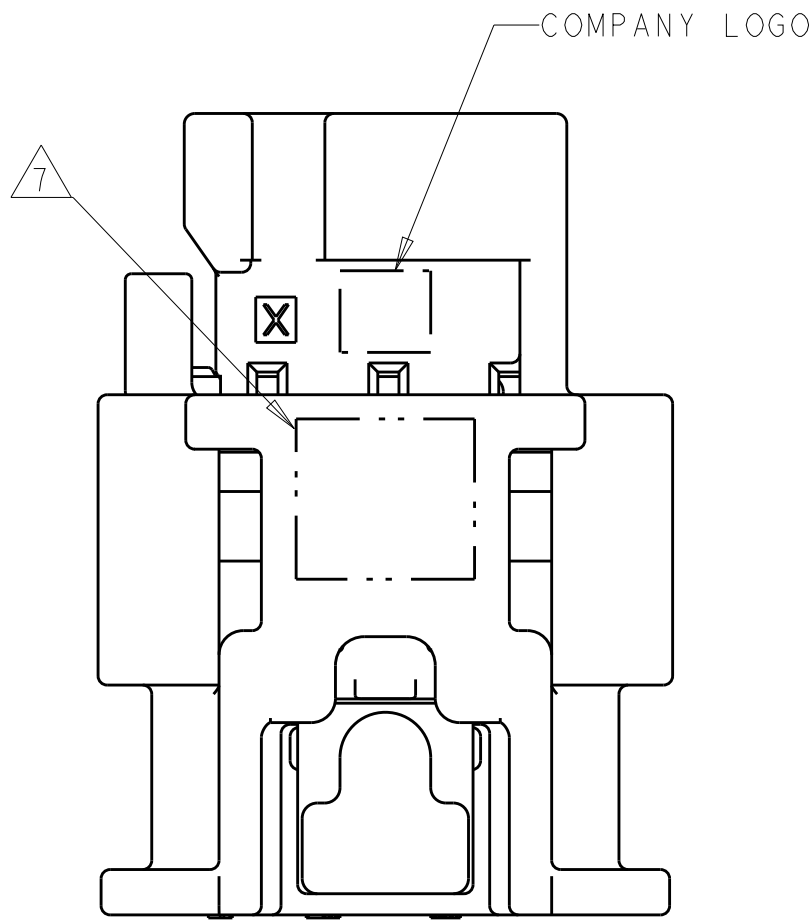


SECTION B-B
SHOWN WITH CPA (WHEN APPLICABLE)
IN IT'S LATCHED POSITION
FOR REFERENCE ONLY

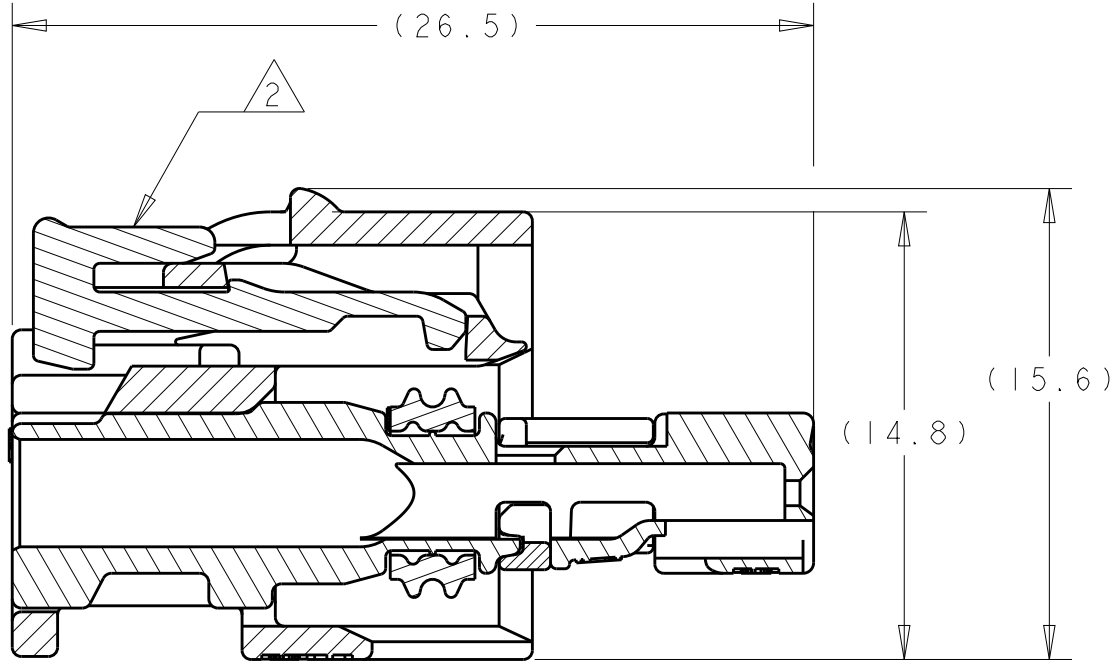

SECTION B-B



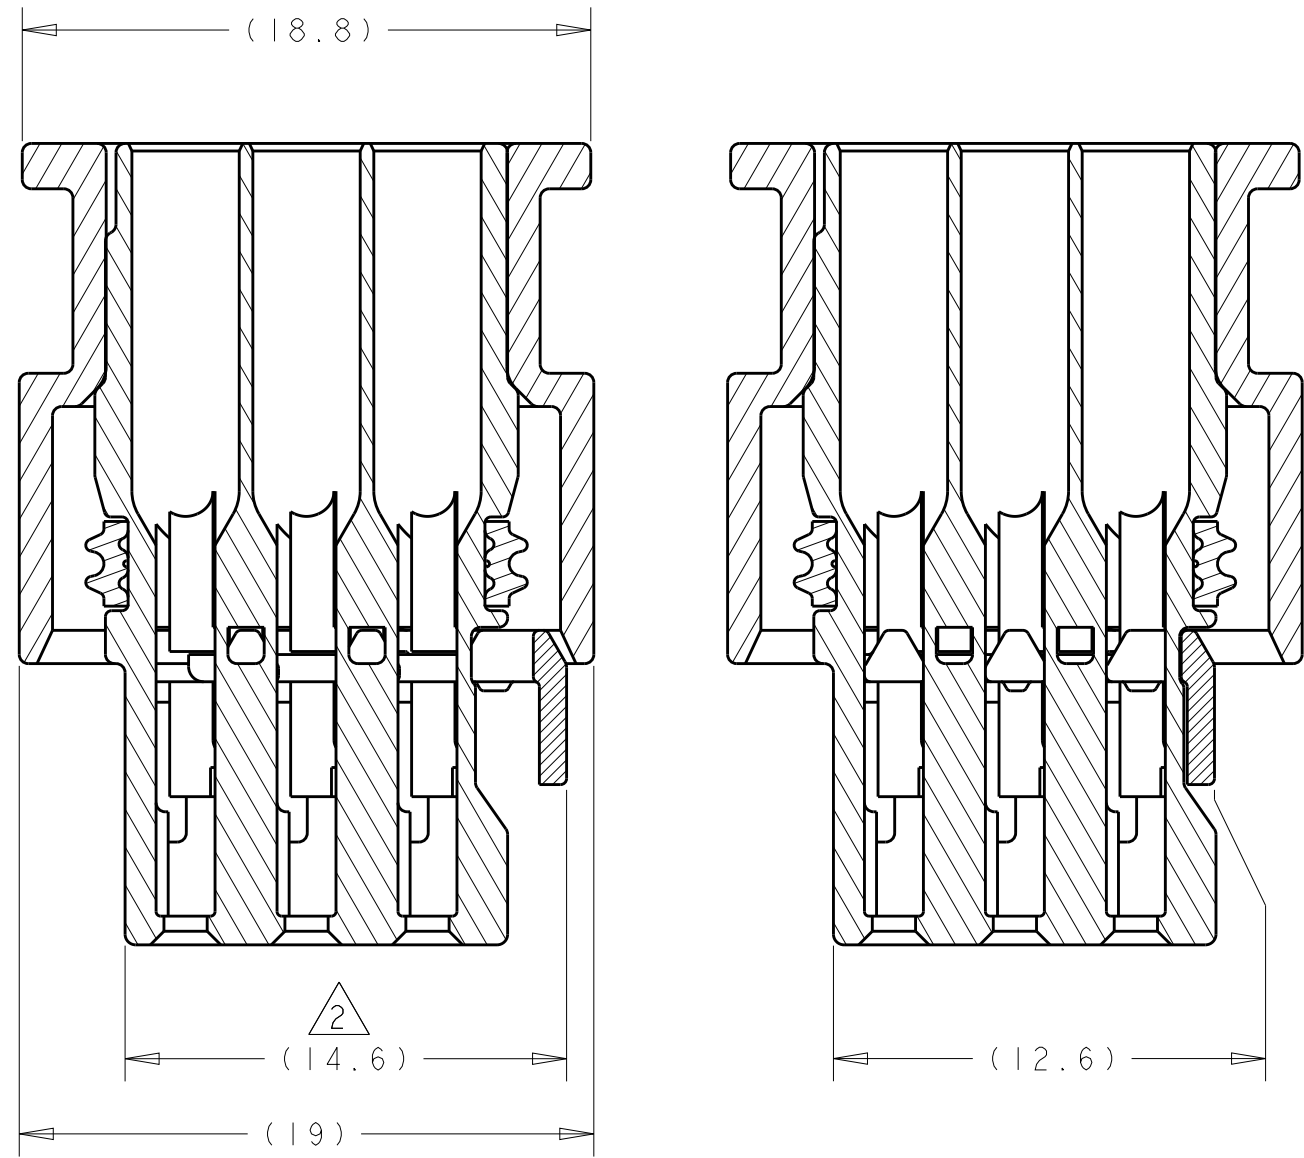


SECTION A-A

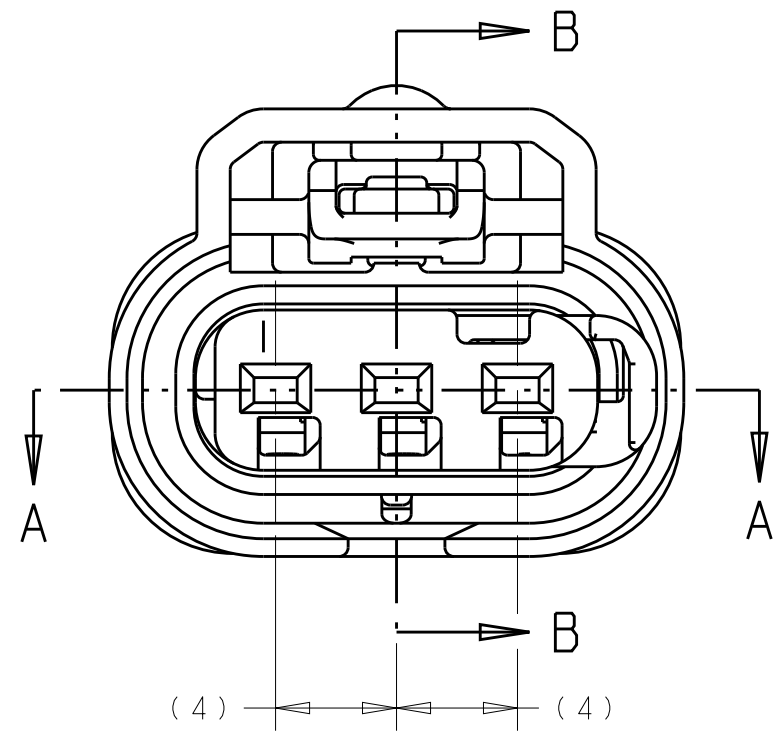

SECTION A-A
SHOWN WITH TPA
IN IT'S LATCHED POSITION
FOR REFERENCE ONLY


REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN	APVD
F8		REVISED PER ECO-13-001652	12FEB2013	DLD	SLM
F9		REVISED PER ECO-15-002909	25FEB2015	DLD	SLM
F10		REVISED PER ECO-15-011380	05AUG2015	DLD	SLM

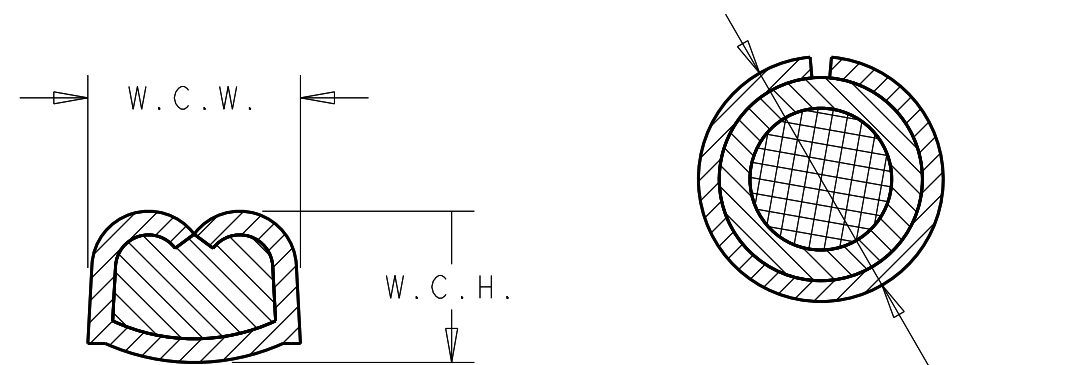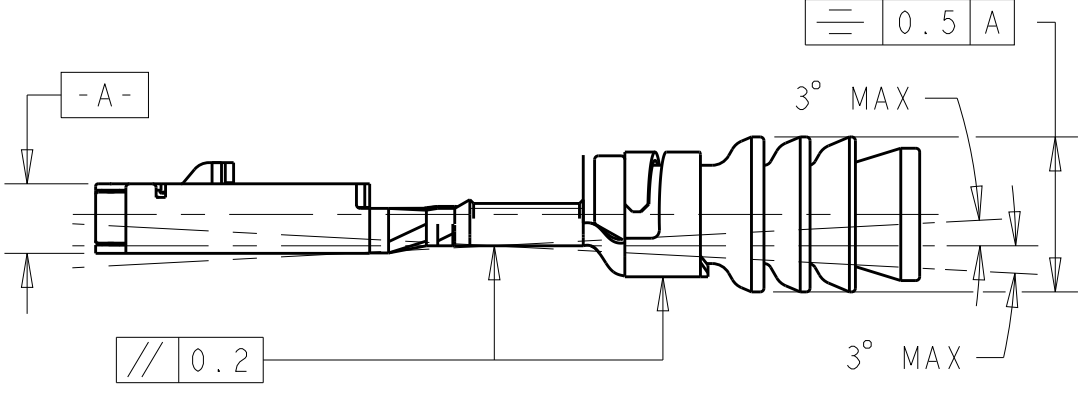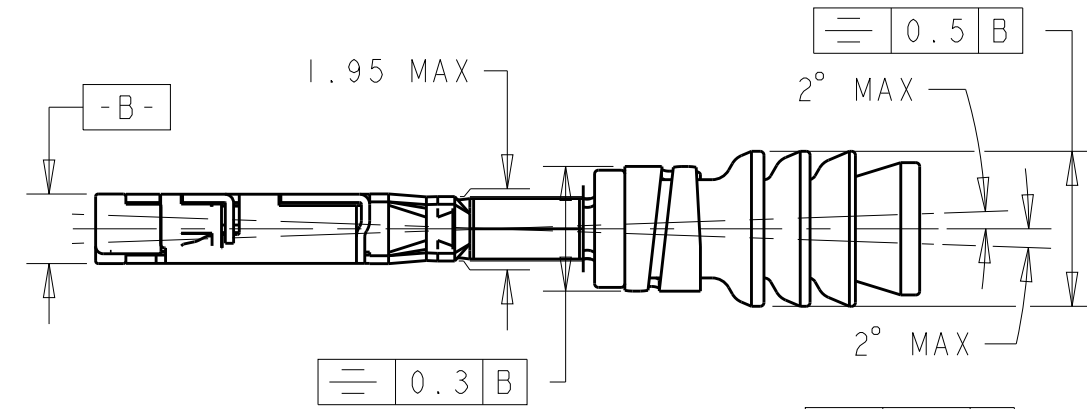

WIRE CRIMP
DIMENSIONS

INSULATION CRIMP
DIMENSIONS

KEYING CONFIGURATIONS	TERMINAL CAVITY CONFIGURATIONS
KEYING OPTION A	ALL TERMINAL CAVITIES OPEN
KEYING OPTION B	TERMINAL CAVITY #3 CLOSED
KEYING OPTION C	TERMINAL CAVITY #2 CLOSED
KEYING OPTION D	TERMINAL CAVITY #1 CLOSED

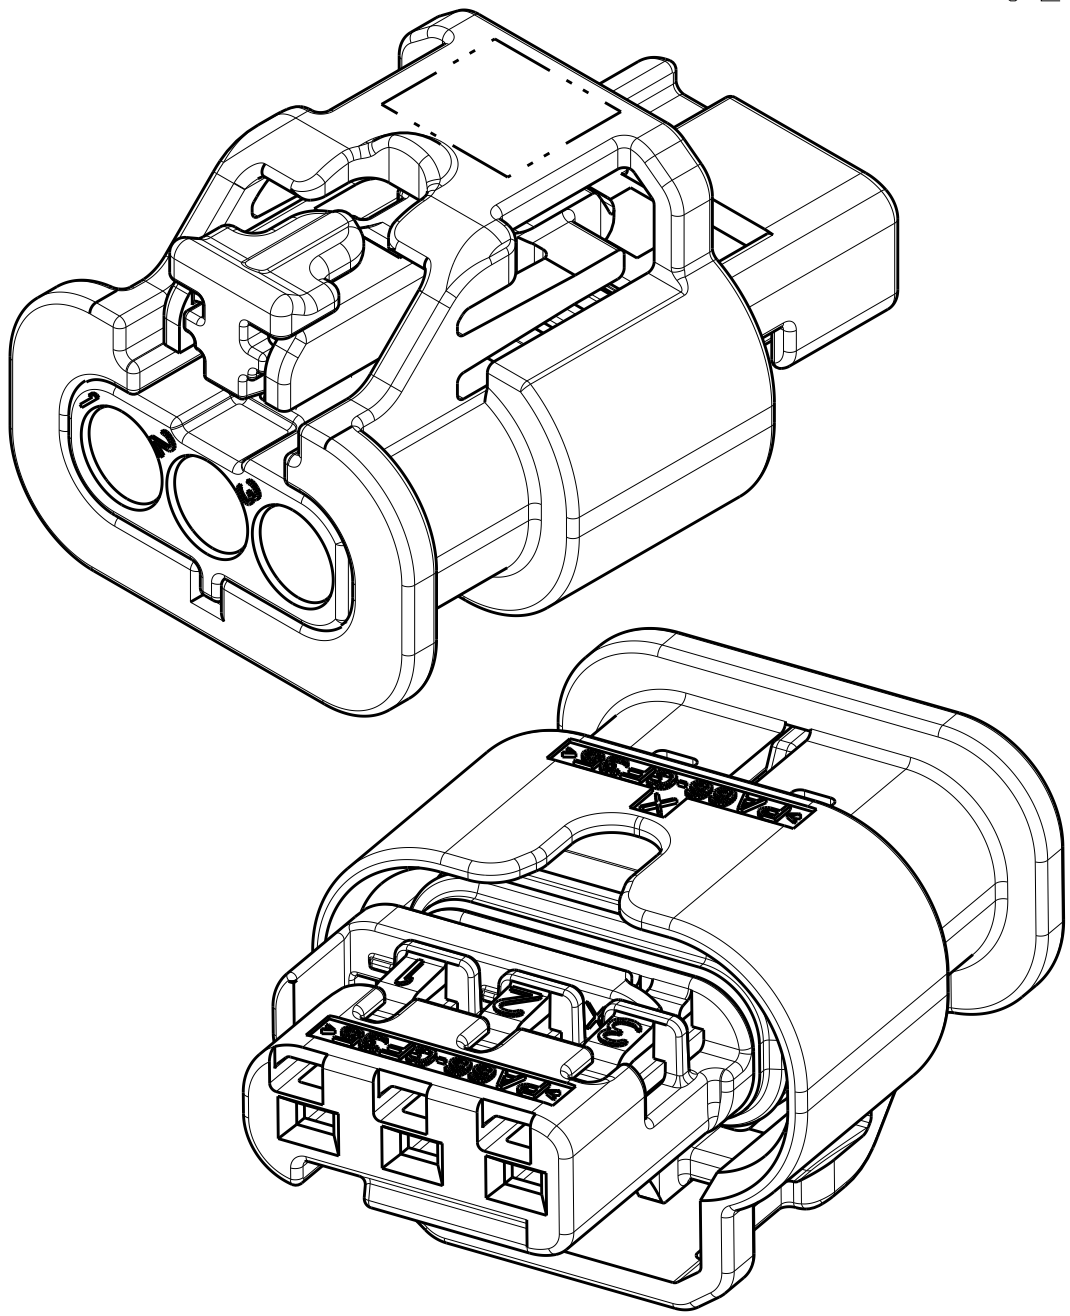

ISOMETRIC VIEWS




MCON 1.2-CB (CLEAN BODY)							
1418844-3	SILVER	3.3 ±0.3	22	1.2 TO 1.4	0.86 ±0.03	1.27 ±0.05	3.15±0.05
1418844-2	GOLD						967067-2
1418844-1	TIN						
1670146-3	SILVER	3.6 ±0.3	20	1.4 TO 1.9	0.84 ±0.03	1.57 ±0.05	3.25±0.05
1670146-2	GOLD						967067-1
1670146-1	TIN						
1418850-3	SILVER		18 TO 16	1.11 ±0.05			
1418850-2	GOLD	3.6 ±0.3	18 TO 16	1.31 ±0.05			
1418850-1	TIN		18 TO 16	1.11 ±0.05	1.78 ±0.05		3.35±0.05
			18 TO 16	1.31 ±0.05			964972-1
PART NUMBER	PLATING	WIRE STRIP LENGTH	AWG	INSL. RANGE	W.C.H.	W.C.W.	I.C.D.
							WIRE SEAL PART NUMBER

RELEASED	2138907-1	GRAY	D	O	O	O	4-1488991-4	
RELEASED	2138907-1	BLUE	C	O	O	O	4-1488991-3	
RELEASED	2138907-1	NATURAL	B	O	O	O	4-1488991-2	
RELEASED	2138907-1	BLACK	A	O	O	O	4-1488991-1	
NOT RELEASED	1488787-1	GRAY	D	X	O	O	3-1488991-2	
	1488787-1	BLUE	C				3-1488991-1	
	1488787-1	NATURAL	B				3-1488991-0	
	1488787-1	BLACK	A				2-1488991-9	
RELEASED	N/A	GRAY	D	X	O	O	2-1488991-8	
NOT RELEASED	N/A	BLUE	C				2-1488991-7	
	N/A	NATURAL	B				2-1488991-6	
RELEASED	N/A	BLACK	A				2-1488991-5	
NOT RELEASED	1488787-1	GRAY	D	O	X	O	2-1488991-4	
	1488787-1	BLUE	C				2-1488991-3	
	1488787-1	NATURAL	B				2-1488991-2	
	1488787-1	BLACK	A				2-1488991-1	
NOT RELEASED	N/A	GRAY	D	O	X	O	2-1488991-0	
	N/A	BLUE	C				1-1488991-9	
	N/A	NATURAL	B				1-1488991-8	
	N/A	BLACK	A				1-1488991-7	
NOT RELEASED	1488787-1	GRAY	D	O	O	X	1-1488991-6	
	1488787-1	BLUE	C				1-1488991-5	
	1488787-1	NATURAL	B				1-1488991-4	
	1488787-1	BLACK	A				1-1488991-3	
NOT RELEASED	N/A	GRAY	D	O	O	X	1-1488991-2	
	N/A	BLUE	C				1-1488991-1	
	N/A	NATURAL	B				1-1488991-0	
	N/A	BLACK	A				1488991-9	
RELEASED	1488787-1	GRAY	D	O	O	O	1488991-8	
RELEASED	1488787-1	BLUE	C				1488991-7	
RELEASED	1488787-1	NATURAL	B				1488991-6	
RELEASED	1488787-1	BLACK	A				1488991-5	
RELEASED	N/A	GRAY	D	O	O	O	1488991-4	
RELEASED	N/A	BLUE	C				1488991-3	
RELEASED	N/A	NATURAL	B				1488991-2	
RELEASED	N/A	BLACK	A				1488991-1	
STATUS	CPA		INNER HOUSING		TERMINAL CAVITY CONFIGURATION			PART NUMBER
								

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. FORISKA 08MAR2004	 TE Connectivity	NAME CONNECTOR ASSEMBLY, FEMALE, 3 POSITION, SEALED, 1.2mm (STANDARD LATCH VERSION)	
		CHK G. MARTIN 08MAR2004			
		APVD G. MARTIN 08MAR2004			
		PRODUCT SPEC			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	
mm		0 PLC ±.3 1 PLC ±0.10 2 PLC ±.10 3 PLC ±.10		IS 408-8928	
		ANGLES ±°		WEIGHT 3.0 GRAMS	
MATERIAL		FINISH		SIZE	CAGE CODE
SEE TABLE				DRAWING NO	RESTRICTED TO
				A100779	C1488991
				SCALE	SHEET
				4:1	1 OF 1
				CUSTOMER DRAWING	REV

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
-	-	SEE SHEET 1	-	-	-

ISOMETRIC VIEWS

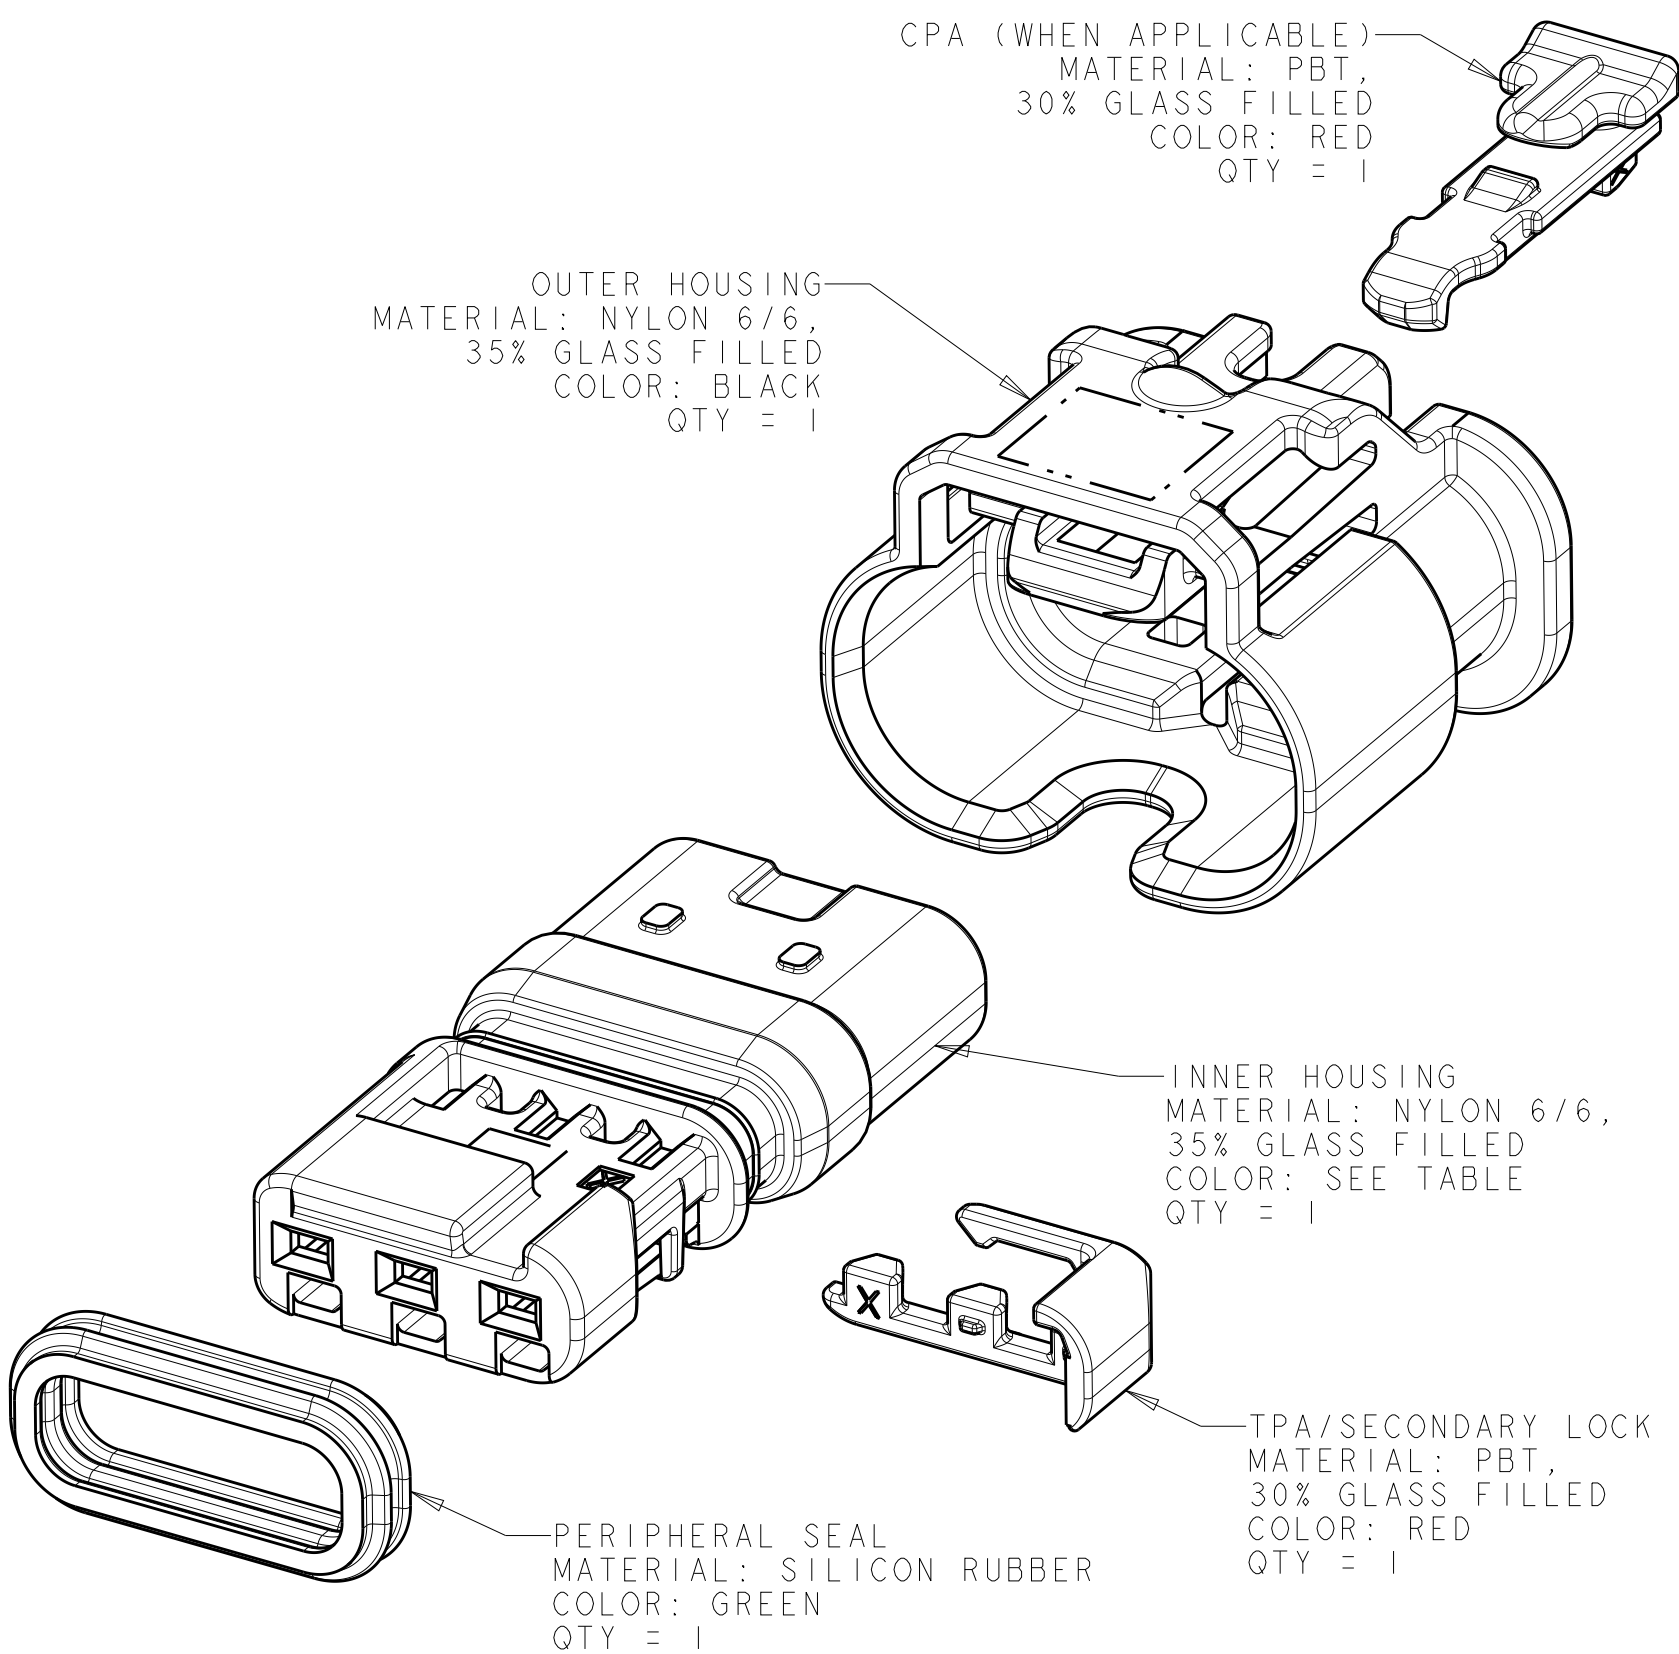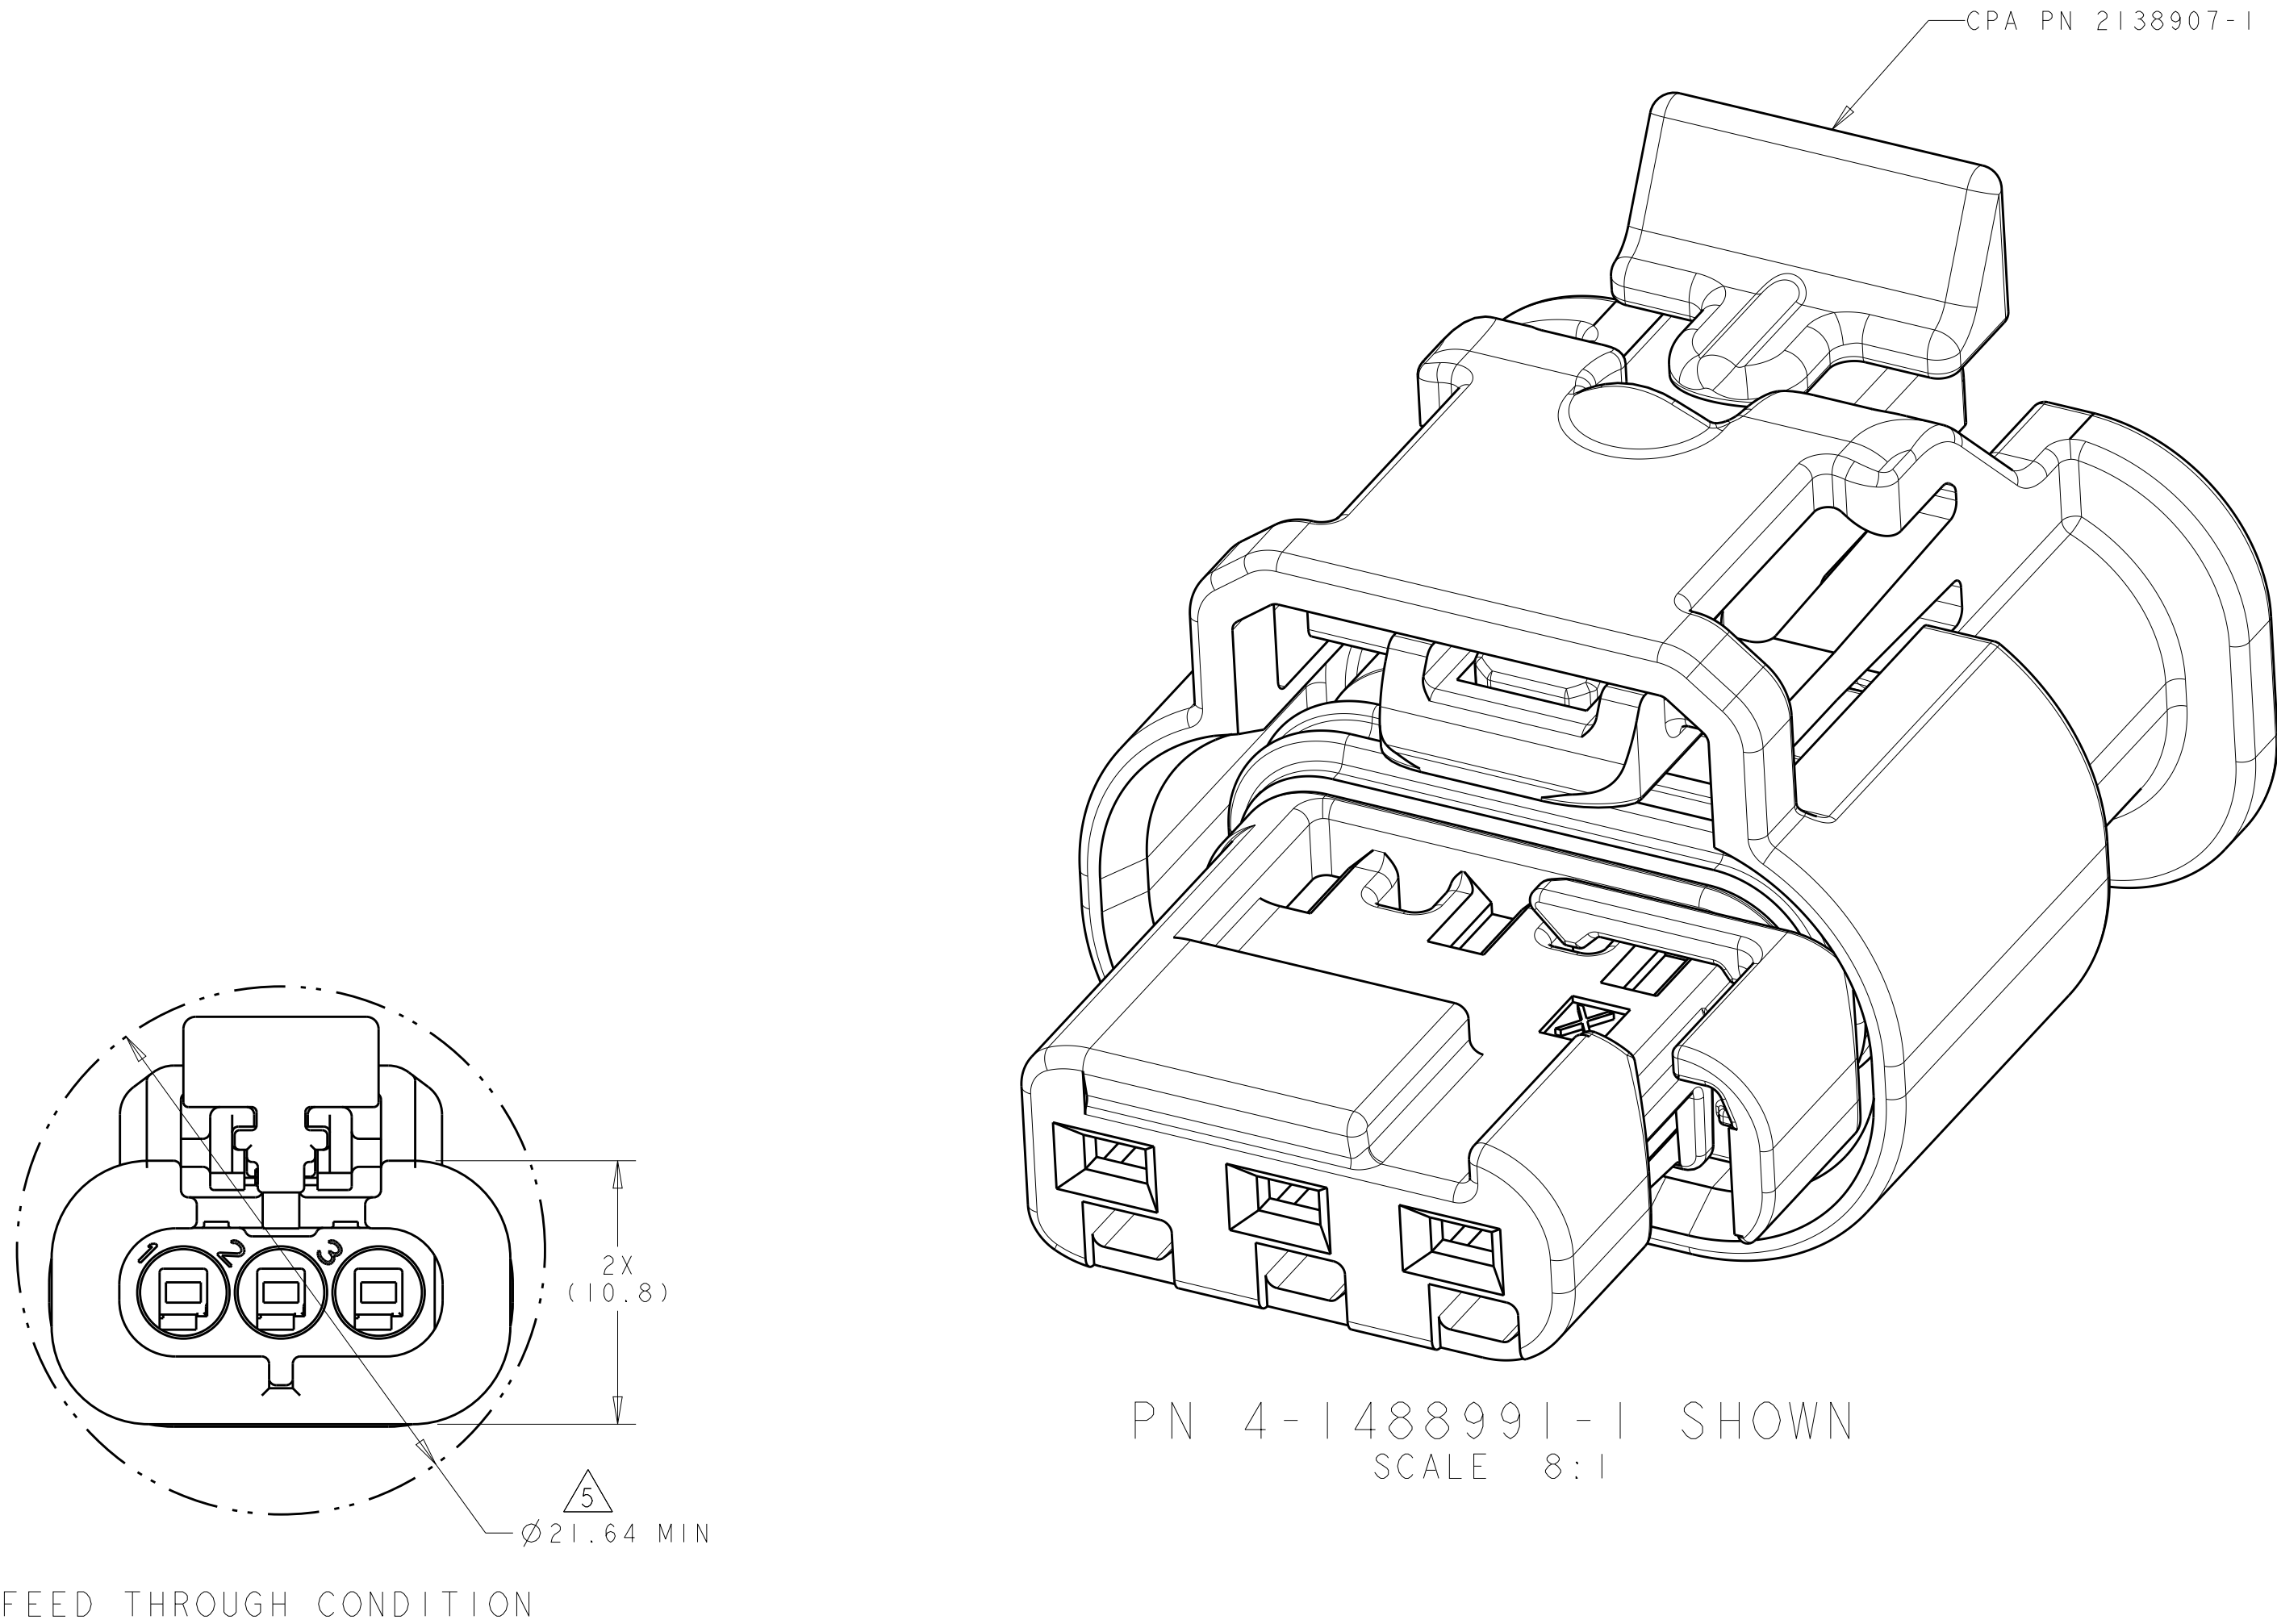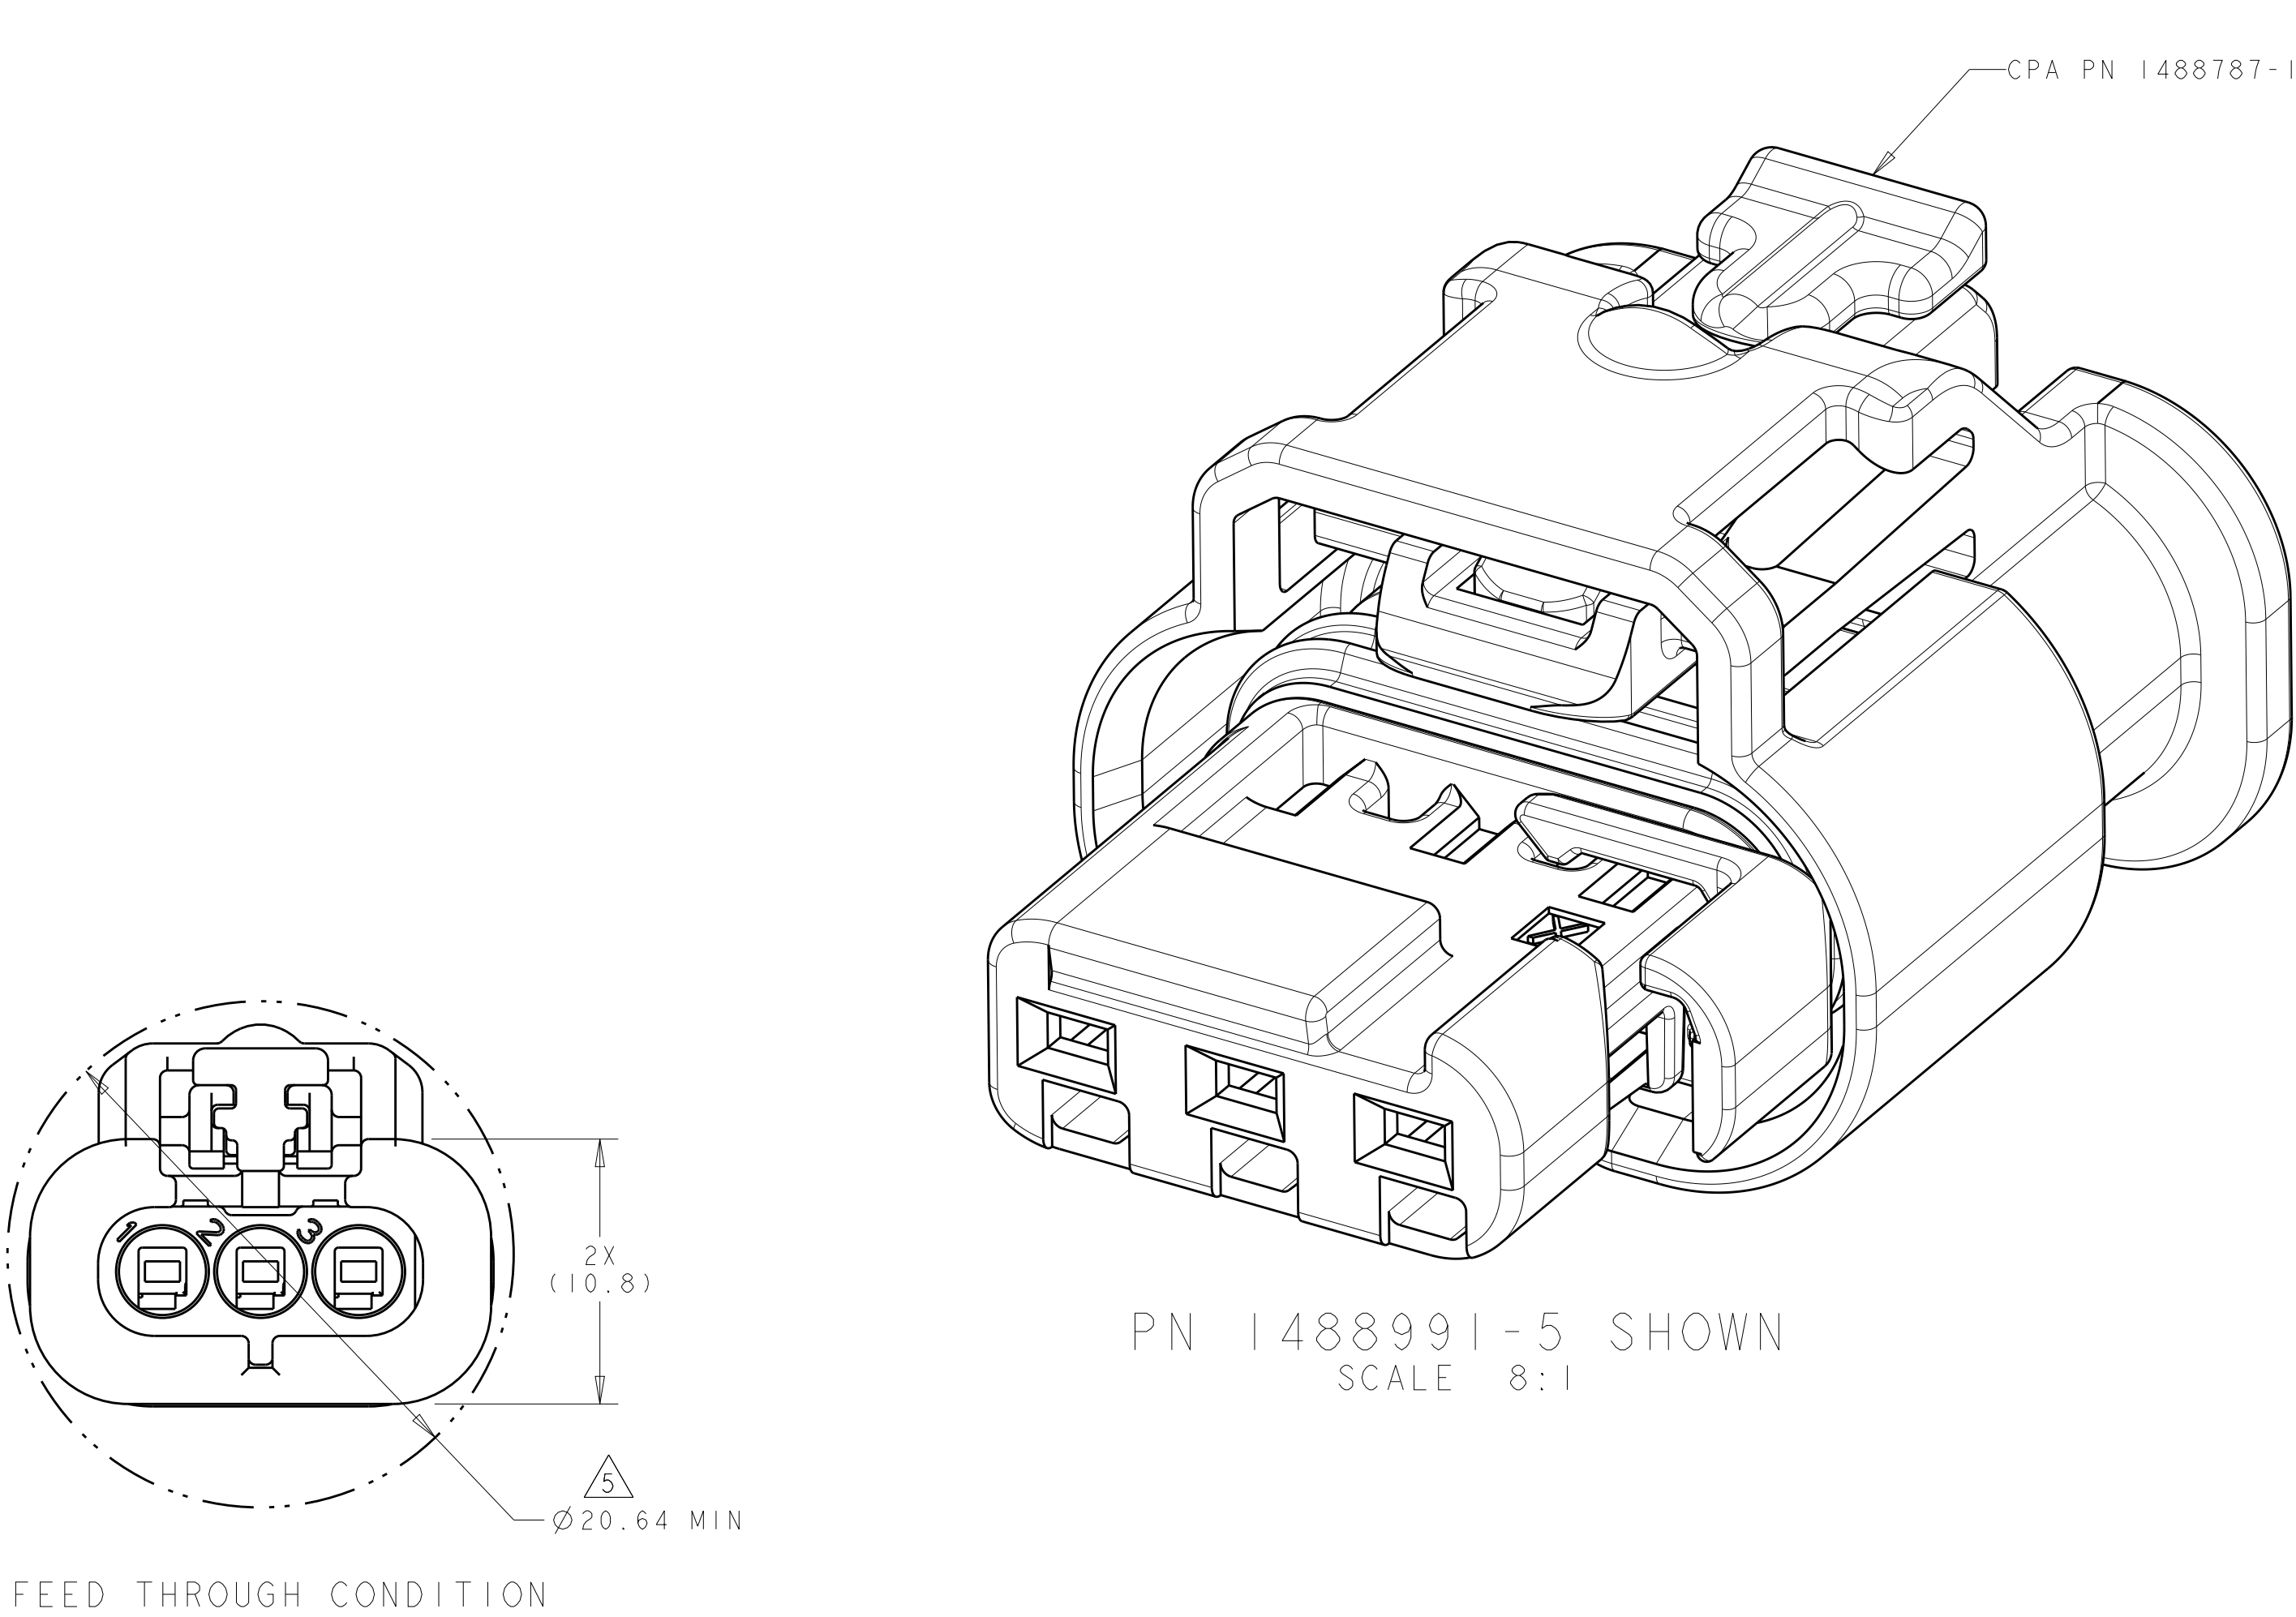

EXPLODED ISOMETRIC VIEW

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. FORISKA 08MAR2004	 TE Connectivity						
		CHK G. MARTIN 08MAR2004							
		APVD G. MARTIN 08MAR2004							
		PRODUCT SPEC							
DIMENSIONS:		APPLICATION SPEC	NAME CONNECTOR ASSEMBLY, FEMALE, 3 POSITION, SEALED, 1.2mm (STANDARD LATCH VERSION)						
mm		IS 408-8928							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT 3.0 GRAMS	SIZE A1	CAGE CODE 100779	DRAWING NO C=1488991	RESTRICTED TO -			
0 PLC ±.3			CUSTOMER DRAWING						
1 PLC ±0.10									
2 PLC ±.10									
3 PLC ±.									
4 PLC ±.		SCALE 4:1 SHEET 2 OF 2 REF 10							
ANGLES ±1°									
FINISH									
MATERIAL									
SEE TABLE									

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9