

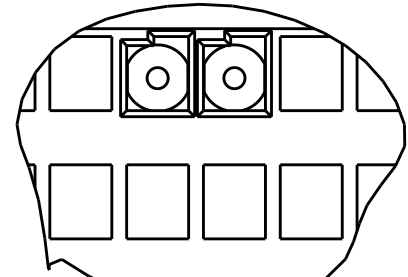
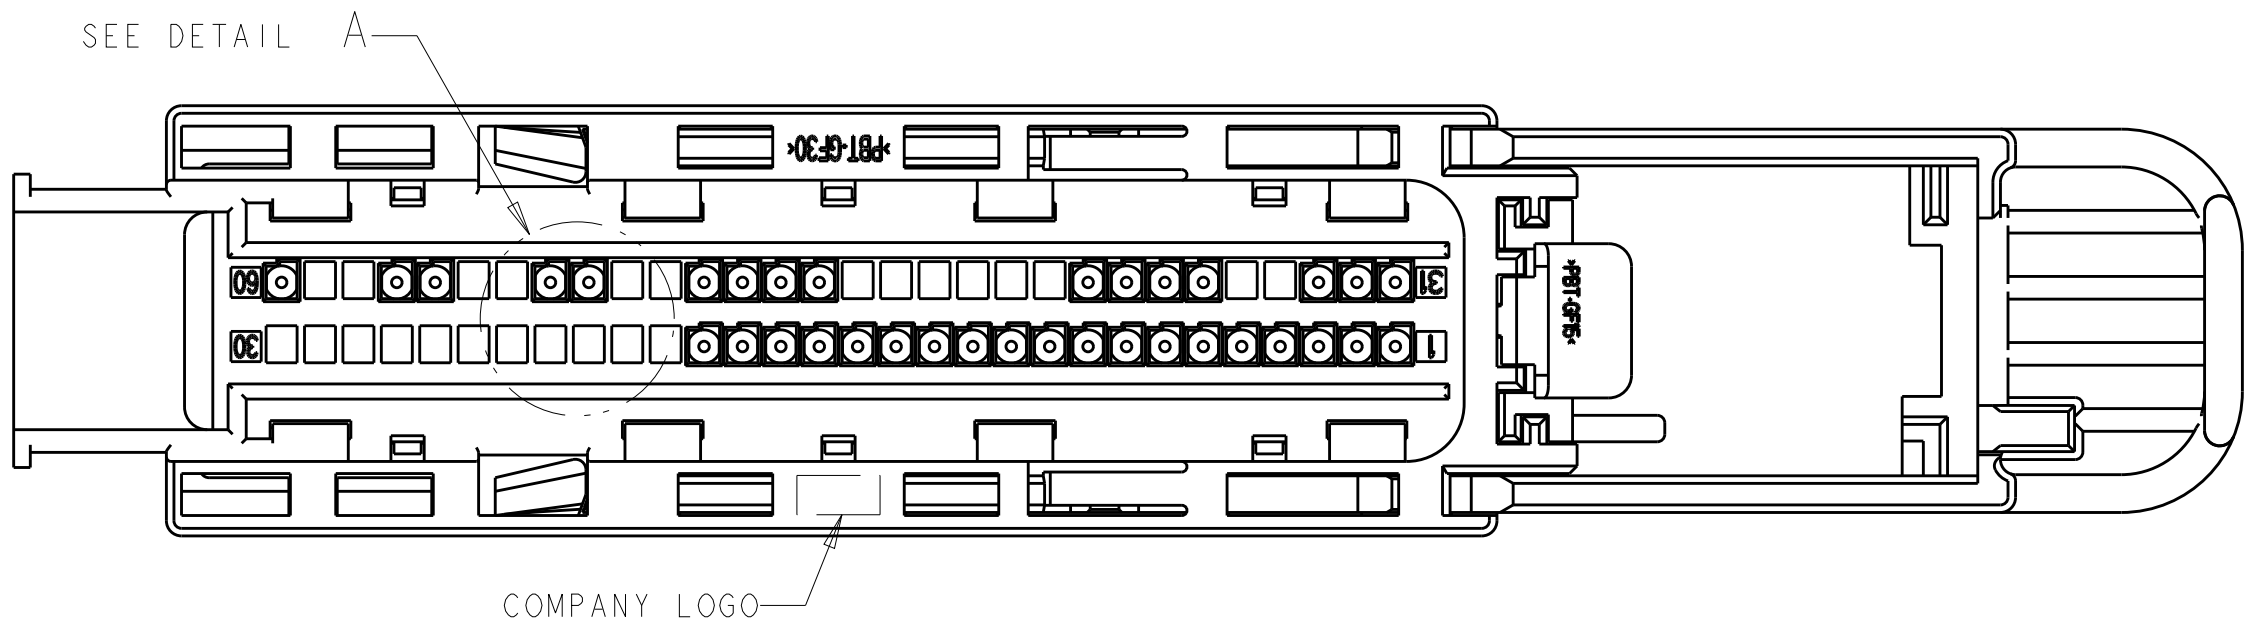


REVISIONS					
P	LYR	DESCRIPTION	DATE	DWN	APVD
	BA3	REVISED PER ECO-15-004852	21MAR2015	DLD	DLD






DETAIL A
SCALE 4:1

ALTERNATE CONSTRUCTION

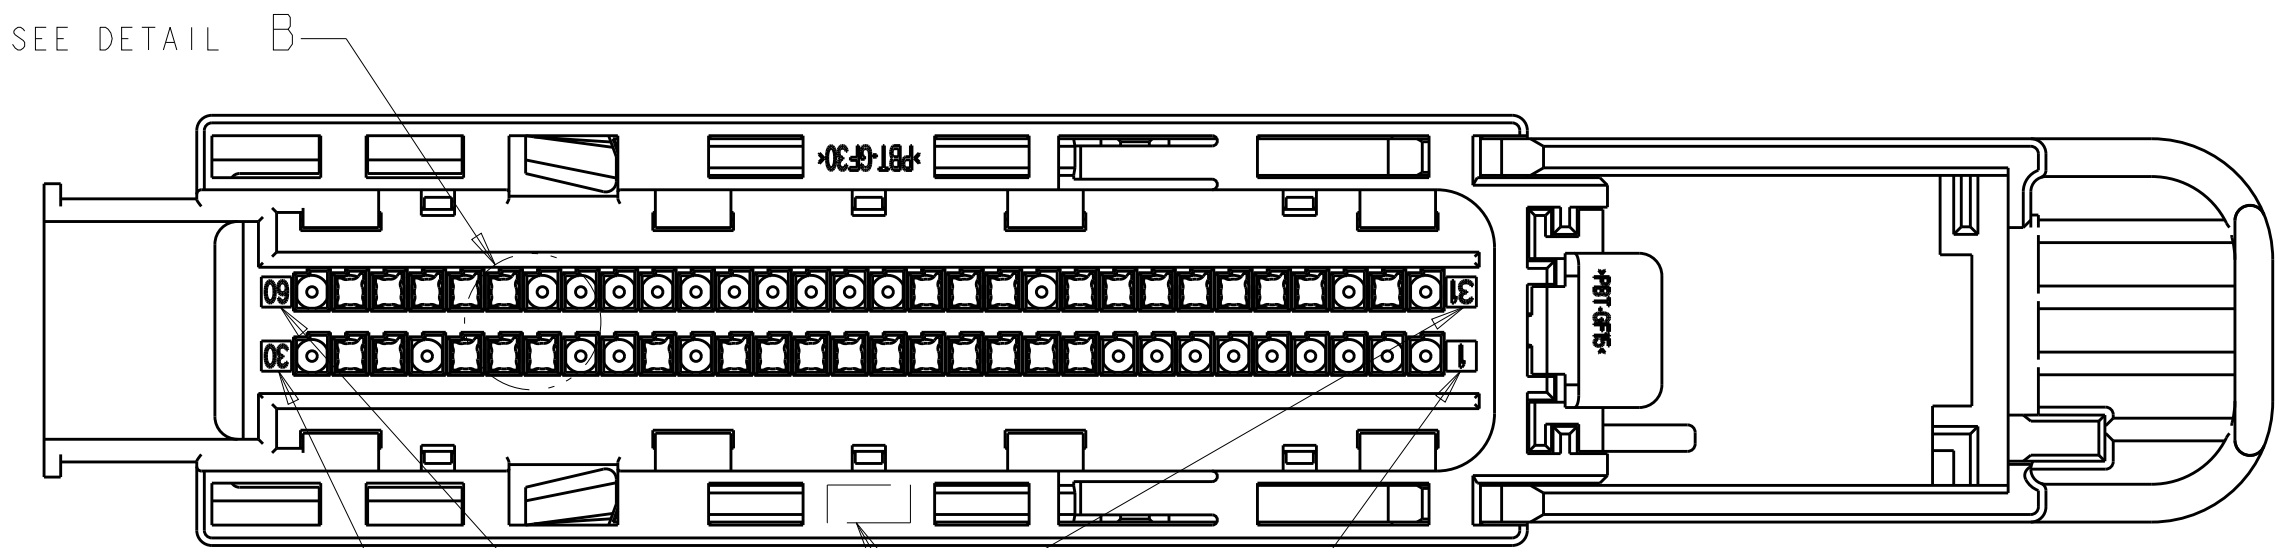

DETAIL B
SCALE 4:1

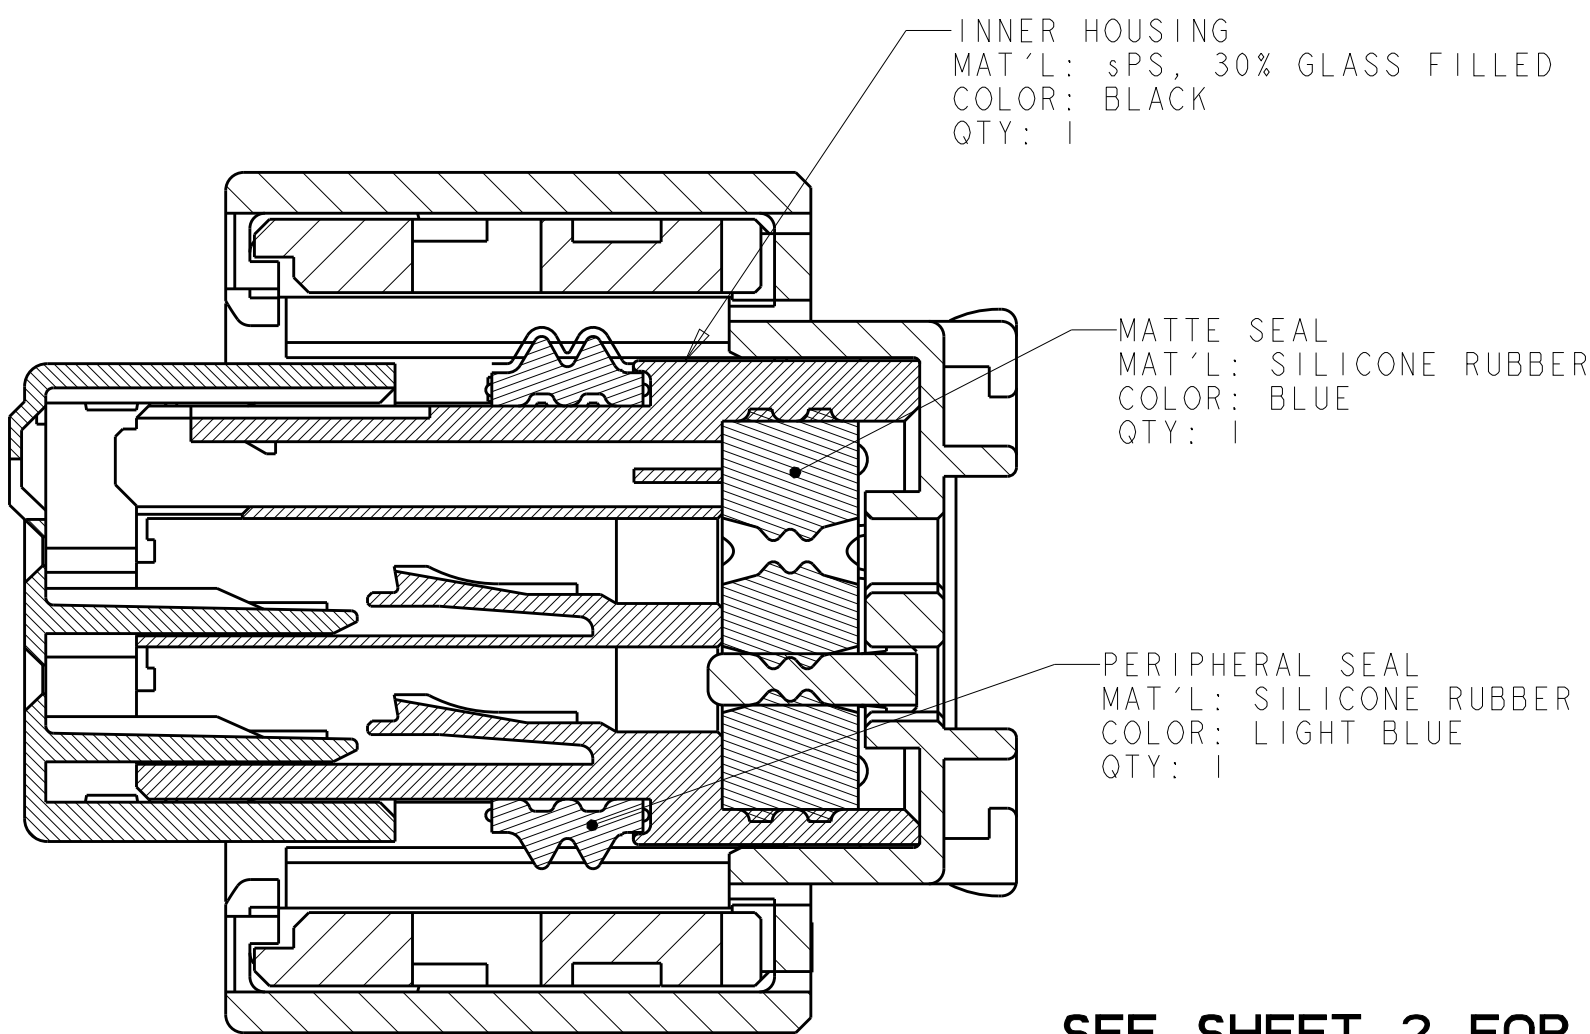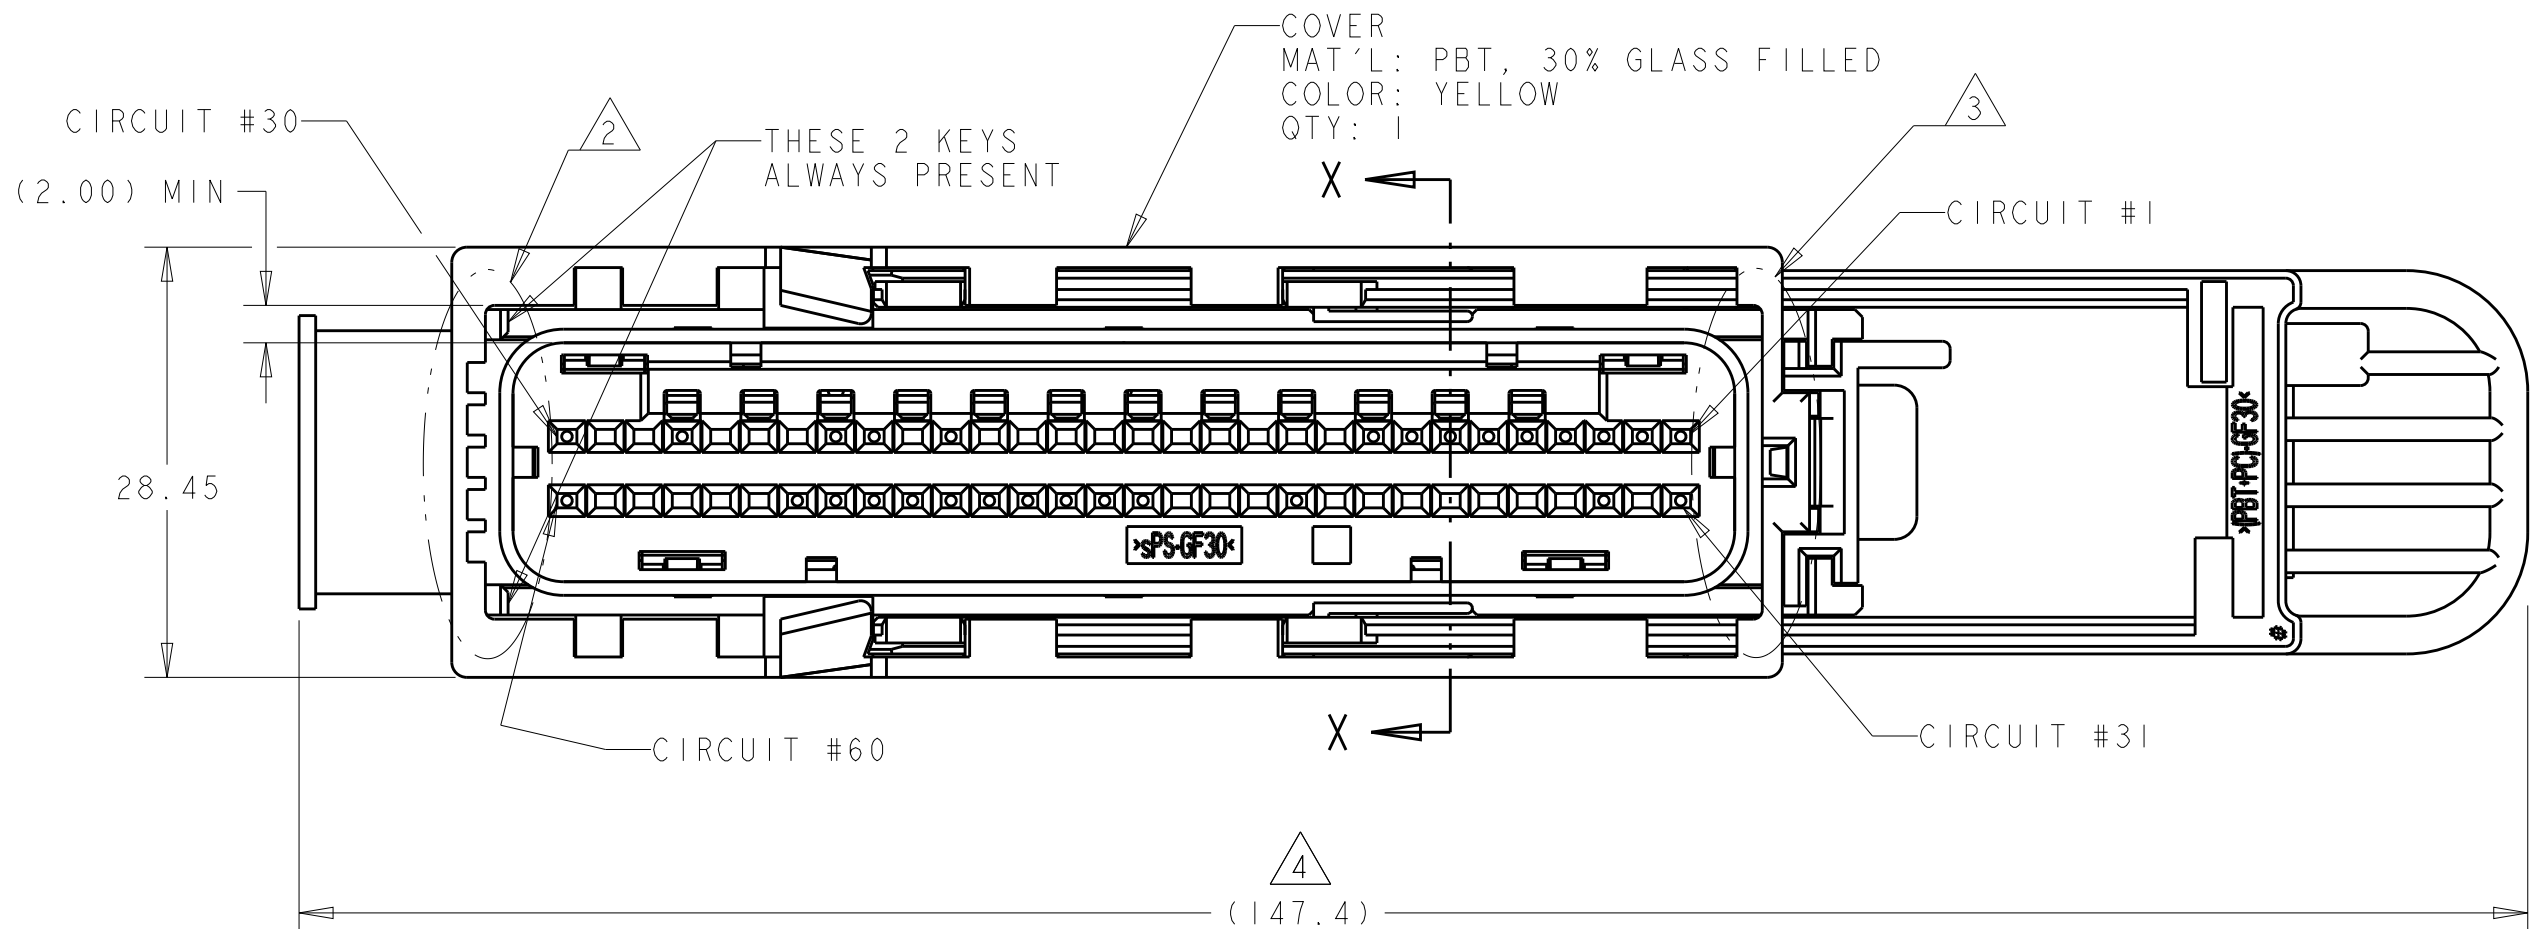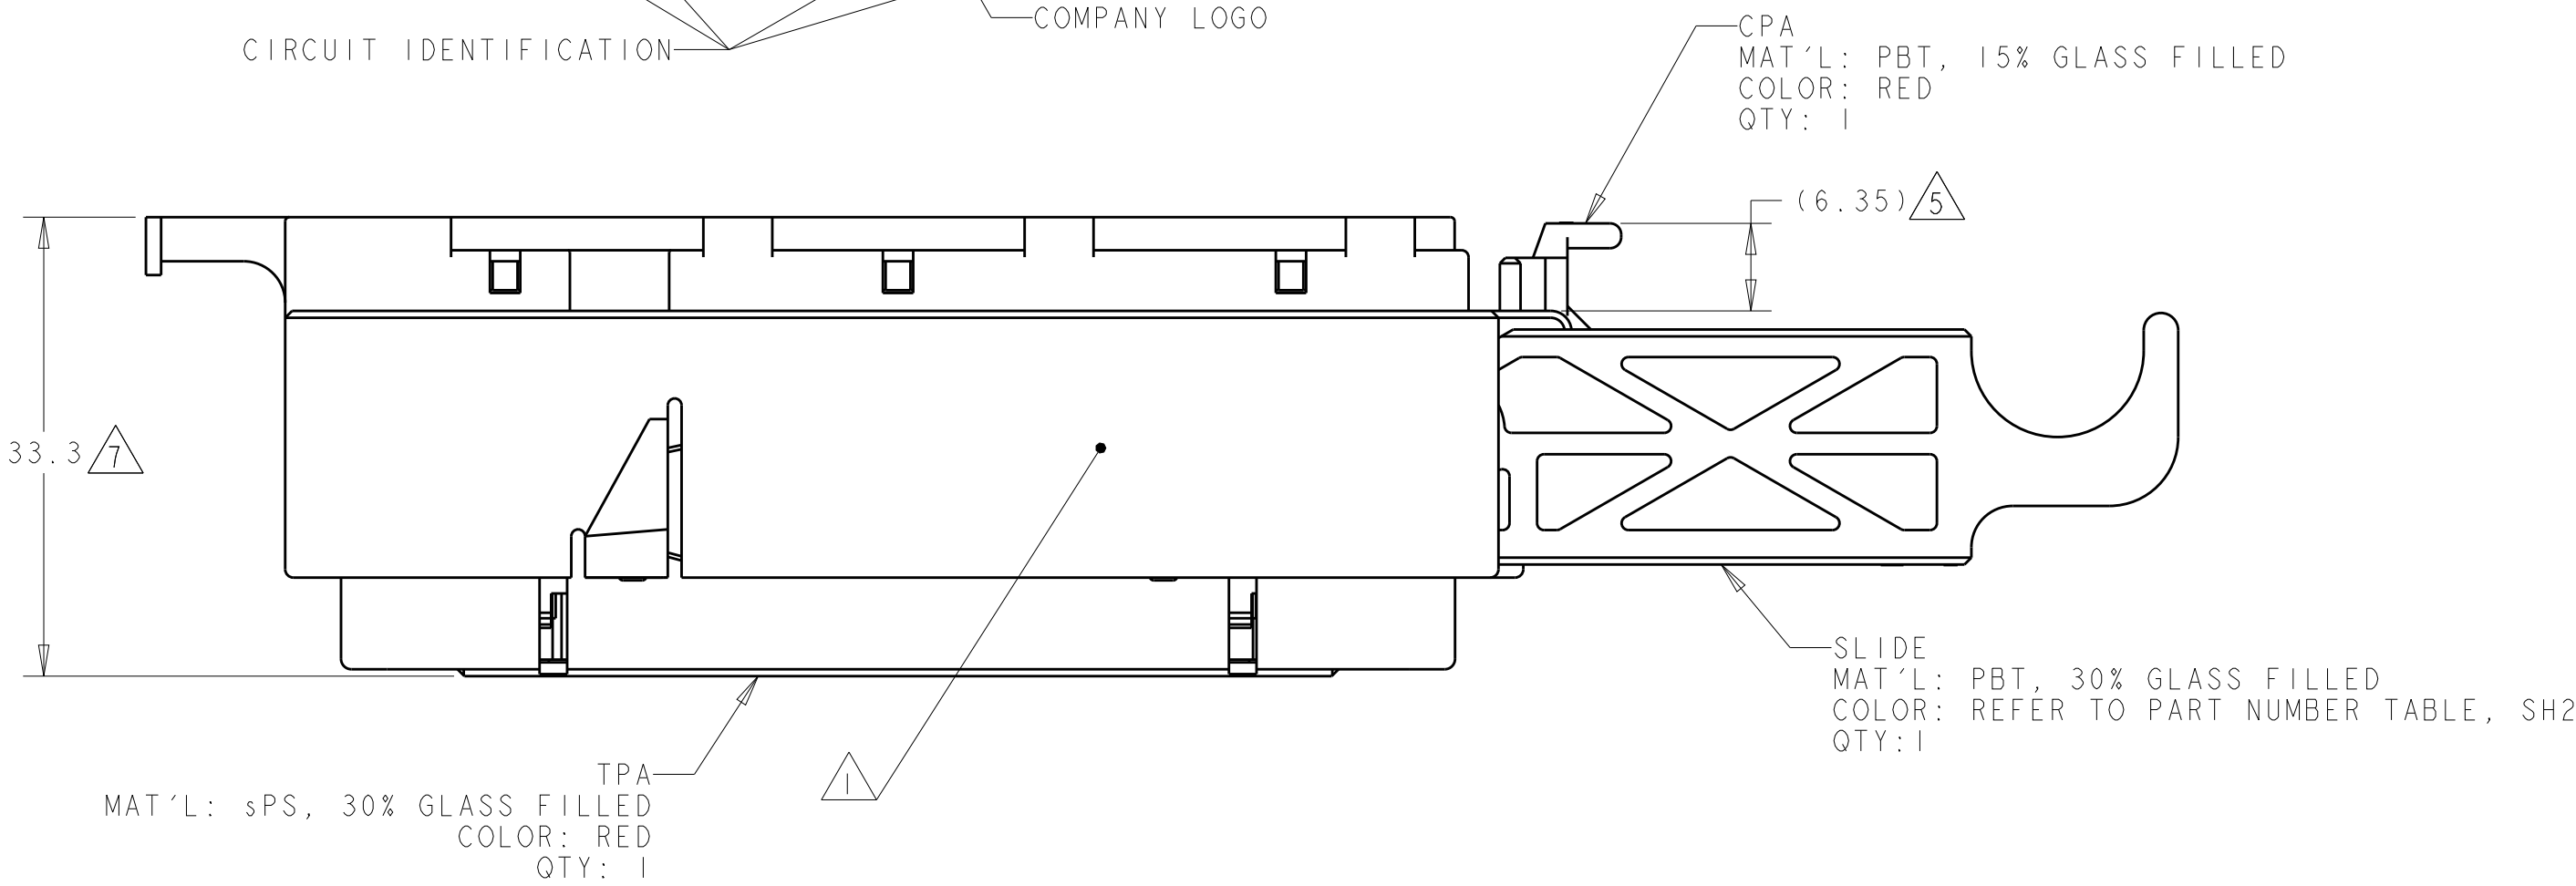

SECTION X-X
SCALE 4:1

SEE SHEET 2 FOR HEADER INTERFACE SPECIFICATION,
SHEET 6 FOR KEYING ARRANGEMENTS,
AND SHEETS 7, 8 & 9 FOR CIRCUIT ARRANGEMENTS

- △ TE CONNECTIVITY (TE) PART NUMBER AND JULIAN DATE CODE MARKED ON THIS SIDE.
- △ SEE KEYING ARRANGEMENT TABLE FOR KEYWAY LOCATIONS, SEE SHEET 6.
- △ SEE KEYING ARRANGEMENT TABLE FOR KEY LOCATIONS, SEE SHEET 6.
- △ SLIDE SHOWN IN UNLOCKED POSITION.
- △ CPA SHOWN IN UNLOCKED POSITION.
- △ NOTE DELETED.
- △ TPA SHOWN IN UNLOCKED POSITION.
- 8. REFER TO DRAWING C-638623 AND/OR C-1488143 FOR MATING CONNECTOR INFORMATION.
- △ NOT FOR PRODUCTION USE.
- 10. MISCELLANEOUS COMPONENT ENGAGE/DISENGAGE FORCE, SAE/USCAR-2, SECTION 5.4.4.4, G.M. APPROVED DEVIATION: TPA (PRE-SET TO FULL) FORCES TO BE 15 TO 55 NEWTONS.
- 11. MISCELLANEOUS COMPONENT ENGAGE/DISENGAGE FORCE, SAE/USCAR-2, SECTION 5.4.4.4, G.M. APPROVED DEVIATION: CPA (PRE-SET TO FULL) FORCES TO BE 7 TO 30 NEWTONS.
- 12. POLARIZATION FEATURE EFFECTIVENESS, SAE/USCAR-2, SECTION 4.3.4, G.M. APPROVED DEVIATION: DURING MISMATING FORCE TESTING CERTAIN CONNECTOR/HEADER COMBINATIONS MAY ALLOW ELECTRICAL CONTACT OF UP TO 26 PINS BELOW THE REQUIRED 220 NEWTON FORCE.
- 13. CONNECTOR-CONNECTOR MATING/UNMATING FORCE, SAE/USCAR-2, SECTION 5.4.2.4, G.M. APPROVED DEVIATION: MATING FORCE IS ACCEPTABLE FOR THE CONNECTOR/HEADER SYSTEM UP TO 50 TERMINALS AT ≤ 75 NEWTONS.
- 14. APPLICABLE TE GET FEMALE TERMINALS: FOR 0.22/0.35 WIRE SECTION, TERMINAL PART NUMBER 1393364-2 FOR 0.50/0.0.75 WIRE SECTION, TERMINAL PART NUMBER 1393365-2
- 15. REFER TO POGO PIN FOR GET SOCKET TERMINAL ON TE DRAWING #114-18411 FOR CONTINUITY TESTING.
- △ PRELIMINARY NOT RELEASED FOR PRODUCTION.

SEE SHEET 3

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.R. SHUEY 31MAR2000	TE Connectivity	
DIMENSIONS:		CHK V.KANE 31MAR2000		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J.M. MYER 31MAR2000	NAME	ASSEMBLY, FEMALE, 60 WAY GET-SDM CONNECTOR (SHUNTLESS VERSION)
	0 PLC ±.5	PRODUCT SPEC	SIZE	114-13060
	1 PLC ±0.5	APPLICATION SPEC	CAGE CODE	DRAWING NO
MATERIAL	2 PLC ±.20	WEIGHT	100779	638595
SEE CALLOUT	3 PLC ±.20	CUSTOMER DRAWING	SCALE	2:1
	4 PLC ±.20		SHEET	1 OF 10
	ANGLES FINISH		RESTRICTED TO	BA3

NOTE(S): UNLESS OTHERWISE SPECIFIED

1. PART MUST CONFORM TO THE LATEST LEVEL OF USCAR DATED 951010.
2. ALL PLASTIC PARTS MUST HAVE MATERIAL IDENTIFICATION SYMBOLS CLEARLY MARKED, WHEREVER PACKAGE SIZE PERMITS.
3. GENERAL TOLERANCES: ± 0.2 ALL ONE PLACE DIMENSIONS, ± 0.1 ALL TWO PLACE DIMENSIONS, $\pm 2^\circ$ ALL ANGULAR PLACE DIMENSIONS
4. ALL RADIUS ± 0.5 .
5. PIN PLATING DETAILS . . .
6. (SEALED INTERFACES ONLY) SEALING SURFACE MUST BE SMOOTH AND FREE OF PARTING LINES.
7. PARTS ARE TO BE FREE OF SCRATCHES, DISCOLORATION, SALT RESIDUE OR OTHER IMPERFECTIONS THAT MAY AFFECT FUNCTION OR FIT OF PART.
8. DRAFT ANGLE PERMISSIBLE ONLY WITHIN PRINT TOLERANCE.








9. SEALING SURFACE, NO WITNESS LINES OR DAMAGE PERMITTED.

10. VENT HOLE SIZE AND LOCATION OPTIONAL.

11. THIS AREA TO REMAIN CLEAR FOR HARNESS ASSEMBLY.

12. HOUSING MATERIAL SELECTION BASED ON PERFORMANCE REQUIRED FOR END APPLICATION AND SOLDERING PROCESS.
POLYESTER (PBT) - 30% GLASS TESTED TO USCAR2, REV 3, CLASS 2,
MAX. AMBIENT 100 DEGREE C.

13. CIRCUIT NUMBERS 1.0 HIGH CHARACTERS RAISED 0.05 - 0.1 IN A
0.10 TO 0.15 RECESSED AREA.

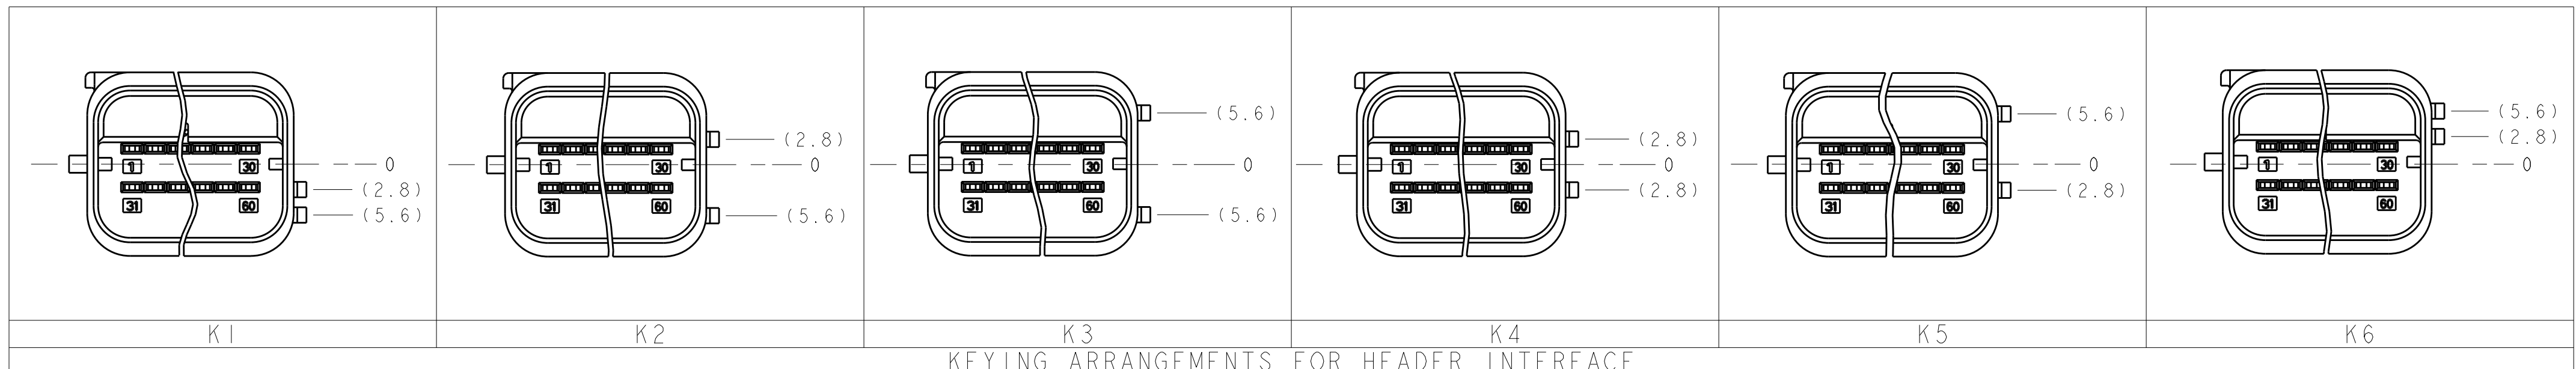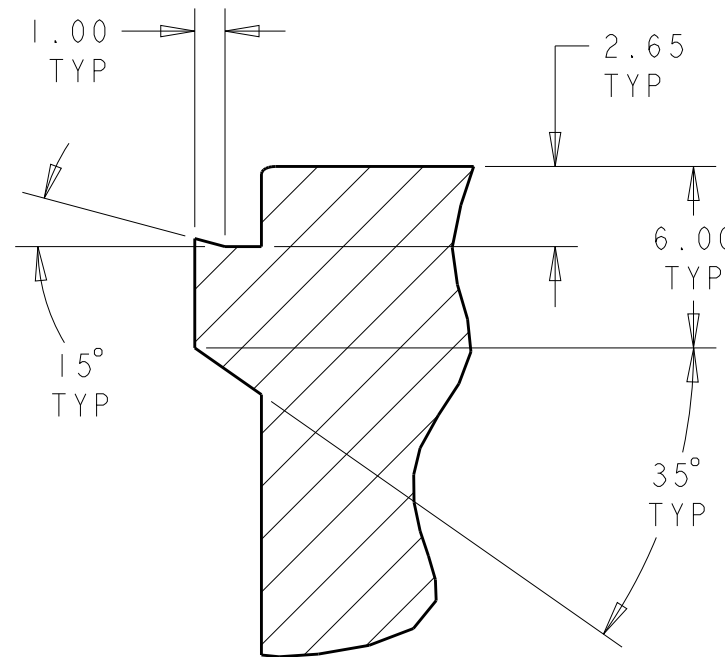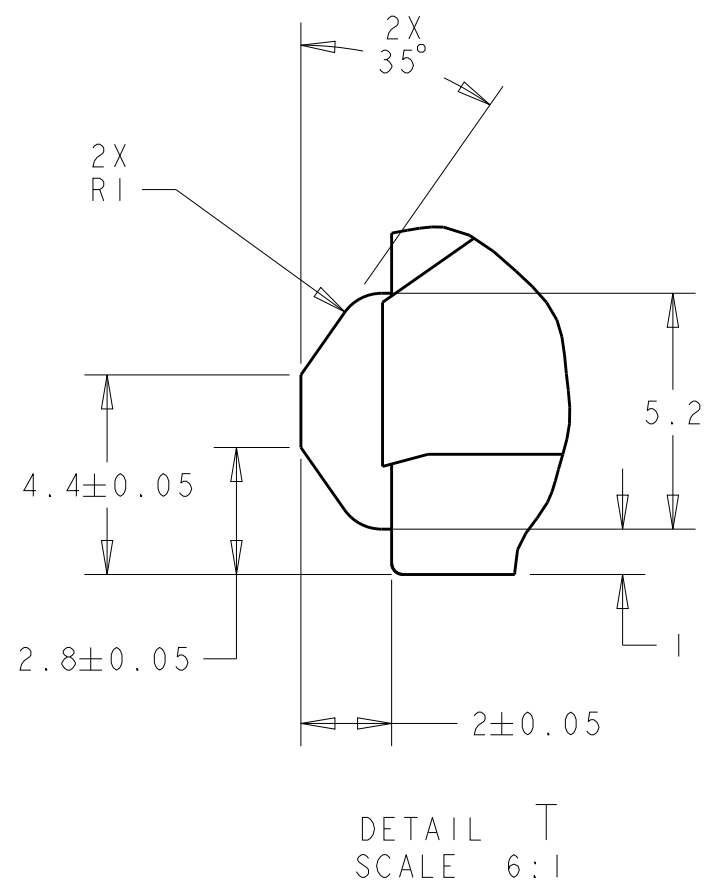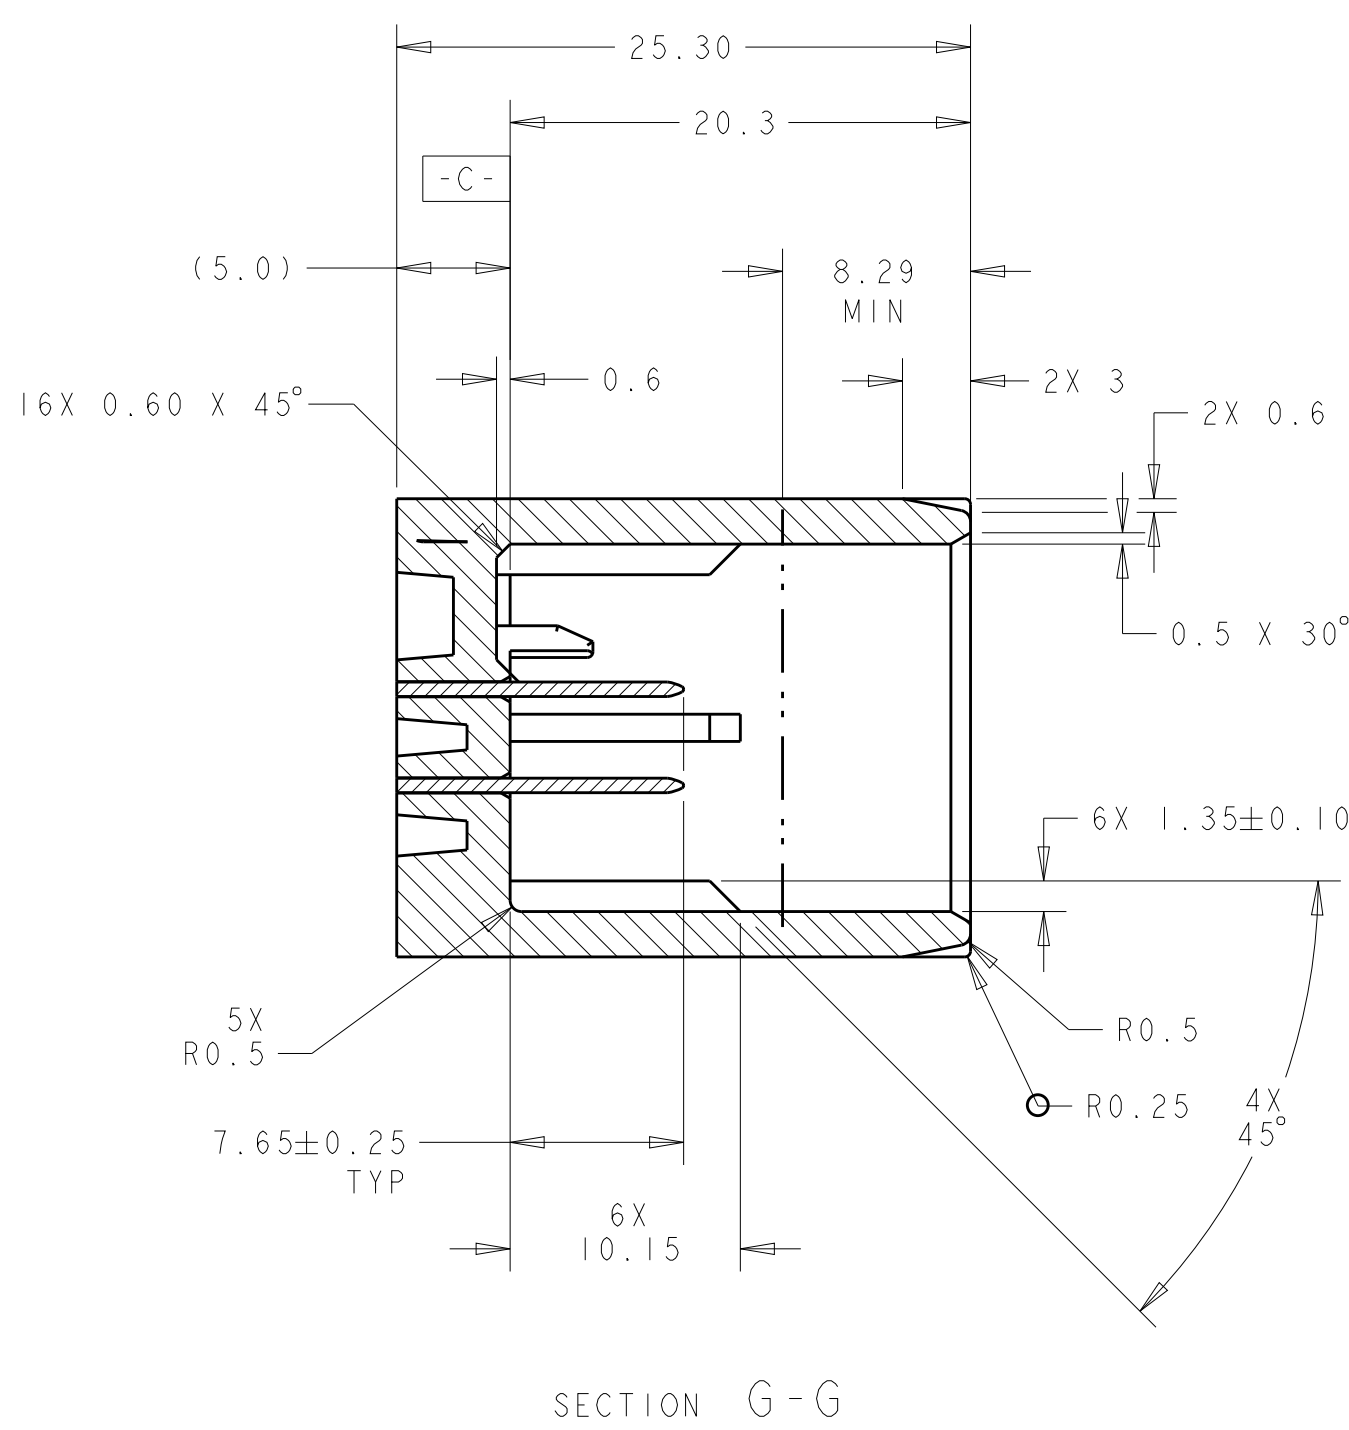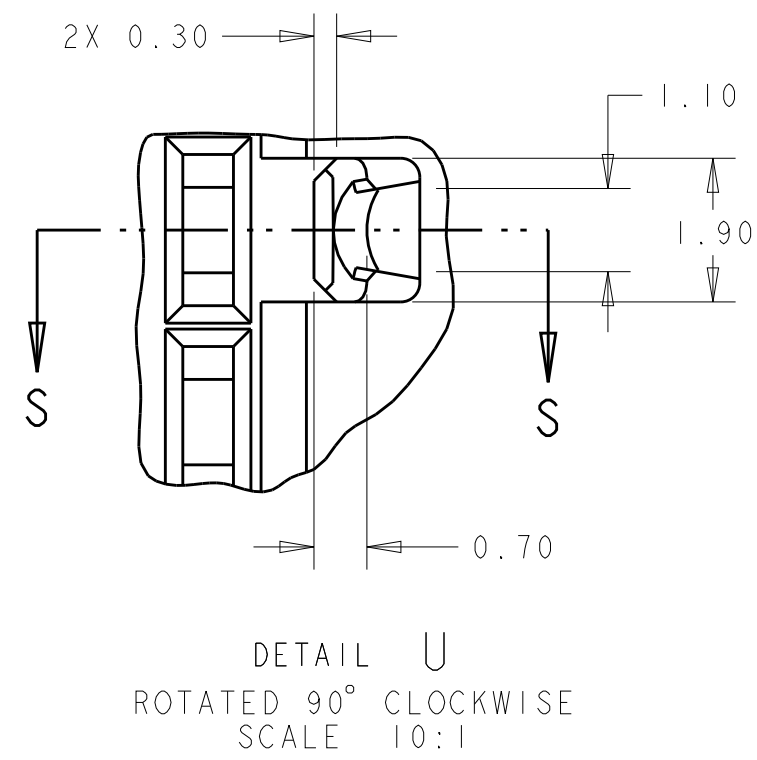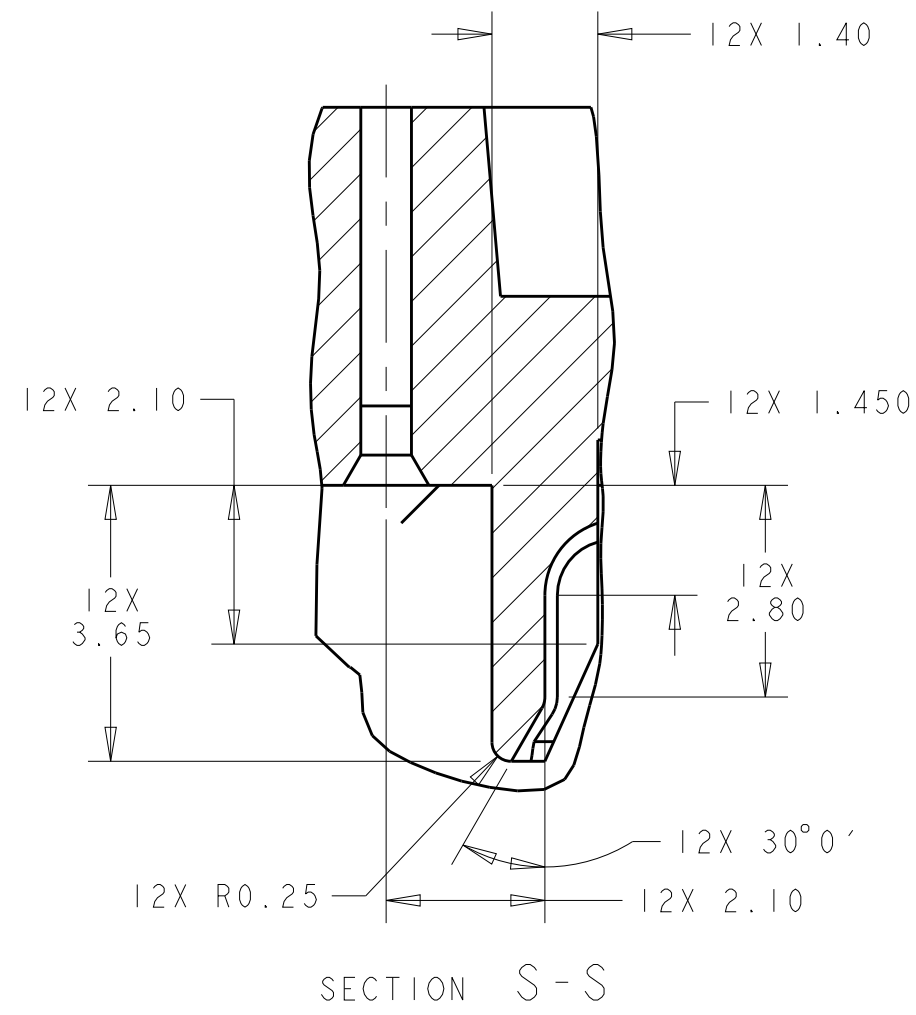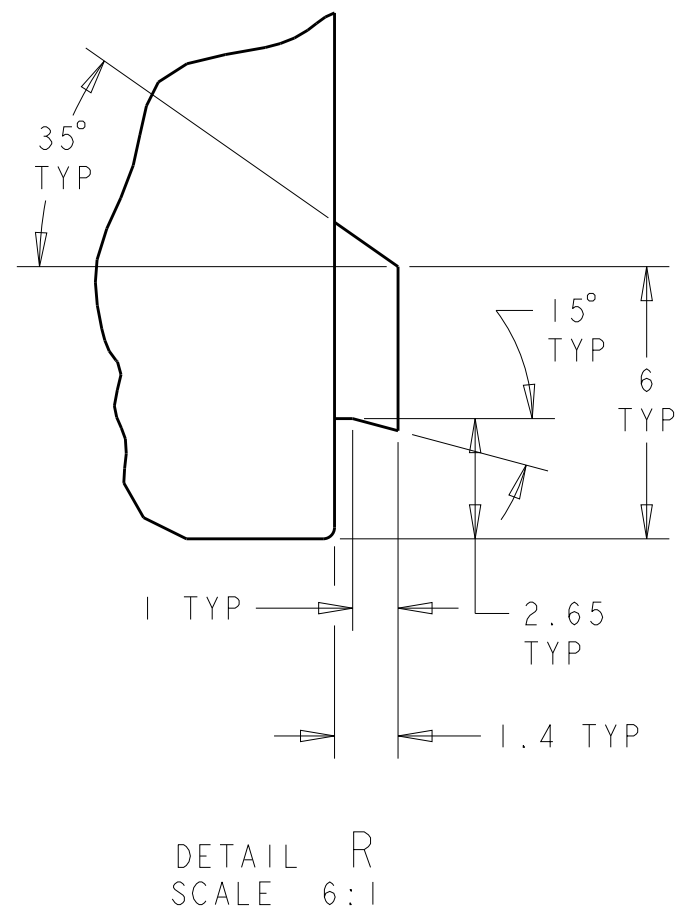

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. SHUEY 31MAR2000 CHG V. KANE 31MAR2000 APPD J. MYER 31MAR2000		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± 2 PLC ±0.5 2 PLC ±0.20 2 PLC ± 2 PLC ± ANGLES ±		NAME ASSEMBLY, FEMALE, 60 WAY GET SDM CONNECTOR (SHUNTLESS VERSION)	
		PRODUCT SPEC - APPLICATION SPEC 114-13060		SIZE CASE CODE DRAWING NO A100779C-638595	
MATERIAL SEE CALLOUT		WEIGHT CUSTOMER DRAWING		RESTRICTED TO - SCALE 2:1 SHEET 2 OF 10 REF B3	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

13577852	BLACK	C134	K5	3-1924558-7
13502172	BLACK	C130	K3	2-1924558-2
13502171	BLACK	C120	K3	2-1924558-1
13502170	BLACK	C42	K6	2-1924558-0
13502169	BLACK	C91	K6	1-1924558-9
19206496	BLACK	C125	K4	1-1924558-8
19206495	BLACK	C126	K2	1-1924558-7
19206494	BLACK	C125	K1	1-1924558-6
19206493	BLACK	C124	K3	1-1924558-5
19206492	BLACK	C123	K3	1-1924558-4
19206488	BLACK	C46	K3	1-1924558-0
19152767	BLACK	C37	K2	1924558-8
19180411	BLACK	C22	K3	1924558-7
19179682	BLACK	C22	K6	1924558-5
19179684	BLACK	C29	K5	1924558-2
19179685	BLACK	C28	K2	1924558-1
GM PART NUMBER	SLIDE COLOR	CIRCUIT ARRANGEMENT (SEE TABLE ON SH 5 & 6)	KEYING ARRANGEMENT (SEE TABLE ON SHEET 5)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.R. SHUEY 31MAR2000	TE Connectivity								
DIMENSIONS:		CHK V. KANE 31MAR2000									
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J.M. MYER 31MAR2000	NAME								
	0 PLC ±	PRODUCT SPEC	ASSEMBLY, FEMALE, 60 WAY GET-SDM CONNECTOR (SHUNTLESS VERSION)								
	1 PLC ±0.5	-									
	2 PLC ±0.20	APPLICATION SPEC									
3 PLC ±	114-13060	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO						
4 PLC ±	FINISH	WEIGHT	A100779C=638595								
MATERIAL - SEE CALLOUT	- SEE CALLOUT	CUSTOMER DRAWING		SCALE	2:1	SHEET	4	OF	10	REV	BA3

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
-	-	SEE SHEET 1	-	-	-

NOT INTENDED FOR PRODUCTION USE

SERVICE PART

9	BLACK	C3	K0	8-184464-7
	SLIDE COLOR	CIRCUIT ARRANGEMENT (SEE TABLE ON SHEET 4)	KEYING ARRANGEMENT (SEE TABLE ON SHEET 4)	PART NUMBER

NOT INTENDED FOR PRODUCTION USE

SERVICE PART

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
CIRCUIT ARRANGEMENT																													
[X] INDICATES UNAVAILABLE (BLOCKED) CIRCUIT																													
C3																													

	K0 (OPTIONAL)
	K0
KEYING ARRANGEMENT ([] INDICATES PRESENCE OF KEYWAY OR ABSENCE OF KEY)	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN. J. R. SHUEY 31MAR2000	TE Connectivity	
		CHK. V. KANE 31MAR2000		
DIMENSIONS:		APVD. J. M. MYER 31MAR2000	NAME	
mm		PRODUCT SPEC	ASSEMBLY, FEMALE, 60 WAY GET-SDM CONNECTOR (SHUNTLESS VERSION)	
		APPLICATION SPEC		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT	SIZE A1	CAGE CODE 00779
0 PLC ±.1		CUSTOMER DRAWING	SCALE 2:1	SHEET 5 OF 10
1 PLC ±0.5				
2 PLC ±0.20				
3 PLC ±.1				
4 PLC ±.1				
ANGLES FINISH				
MATERIAL -				
SEE CALLOUT				

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

	K 9 9
	K 7
	K 6
	K 5
	K 4
	K 3
	K 2
	K 1

KEYING ARRANGEMENT
( INDICATES PRESENCE OF
KEYWAY OR ABSENCE OF KEY)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. R. SHUEY	31MAR2000	 TE Connectivity			
		CHK	V. KANE	31MAR2000				
		APVD	J. M. MYER	31MAR2000				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME	ASSEMBLY, FEMALE, 60 WAY GET SDM CONNECTOR (SHUNTLESS VERSION)		
mm								
		0 PLC ±.1 1 PLC ±0.5 2 PLC ±0.20 3 PLC ±.1 4 PLC ±.1						
		ANGLES ±.1			PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
		APPLICATION SPEC						
		114-13060			A100779C=638595			
MATERIAL		FINISH			WEIGHT			
-		-			-		-	
SEE CALLOUT		SEE CALLOUT			CUSTOMER DRAWING		SCALE 2:1 SHEET 6 OF 10 REV BA3	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9