

## Distributed I/O device - FLM DIO 16/16 M12/8-DIAG - 2736738

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The local bus device has digital inputs and outputs. Functions: 16 digital inputs, 3 ms filter time, 16 digital outputs of 500 mA each, 500 kbaud/2 Mbaud selection, diagnostics strategy, short-circuit/overload protection, 8-pos. M12 fast connection technology.

### Product Features

- Flexible power supply concept
- SPEEDCON fast locking system
- Short-circuit and overload protection
- Diagnostic and status indicators
- Consistent connection via M12 connectors



### Key commercial data

|                                      |           |
|--------------------------------------|-----------|
| Packing unit                         | 1 pc      |
| Weight per Piece (excluding packing) | 448.6 GRM |
| Custom tariff number                 | 85176200  |
| Country of origin                    | Germany   |

### Technical data

#### Note

|                         |   |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

#### Dimensions

|                    |        |
|--------------------|--------|
| Width              | 70 mm  |
| Height             | 178 mm |
| Depth              | 50 mm  |
| Drill hole spacing | 168 mm |

#### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
| Ambient temperature (operation) | -25 °C ... 60 °C |
|---------------------------------|------------------|

## Distributed I/O device - FLM DIO 16/16 M12/8-DIAG - 2736738

### Technical data

#### Ambient conditions

|  |   |
|--|---|
| Ambient temperature (storage/transport)  | -25 °C ... 85 °C                                  |
| Permissible humidity (storage/transport) | 95 %  |
| Air pressure (operation)                 | 80 kPa ... 106 kPa (up to 2000 m above sea level) |
| Air pressure (storage/transport)         | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Degree of protection                     | IP65/IP67   |

#### General

|                  |                                      |
|------------------|--------------------------------------|
| Weight           | 400 g                                |
| Mounting type    | Wall mounting                        |
| Protection class | III, IEC 61140, EN 61140, VDE 0140-1 |
| Test section     | To I/O 500 V DC 1 min                |

#### Interfaces

|                              |                        |
|------------------------------|------------------------|
| Designation                  | Fieldline local bus    |
| Connection method            | M12 connector, B-coded |
| Designation connection point | Copper cable           |
| Transmission speed           | 500 kBit/s / 2 MBit/s  |
| Number of positions          | 5                      |

#### Power supply for module electronics

|                      |  |
|----------------------|--|
| Connection method    | M12 connector                          |
| Designation          | $U_L$                                  |
| Supply voltage       | 24 V DC                                |
| Supply voltage range | 18 V DC ... 30 V DC (including ripple) |

#### Fieldline potentials

|                                |  |
|--------------------------------|--|
| Voltage supply $U_L$           | 24 V DC                                    |
| Power supply at $U_L$          | max. 4 A                                   |
| Current consumption from $U_L$ | max. 100 mA (At 2 Mbaud)                   |
|                                | typ. 80 mA (At 2 Mbaud)                    |
|                                | max. 75 mA (At 500 kBaud)                  |
|                                | typ. 60 mA (At 500 kBaud)                  |
| Voltage supply $U_S$           | 24 V DC                                    |
| Power supply at $U_S$          | max. 4 A                                   |
| Current consumption from $U_S$ | typ. 20 mA (plus power supply for sensors) |
|                                | max. 1.2 A                                 |
|                                | max. 1.2 A                                 |
| Voltage supply $U_{A11}$       | 24 V DC                                    |
| Power supply at $U_{A11}$      | max. 4 A                                   |

## Distributed I/O device - FLM DIO 16/16 M12/8-DIAG - 2736738

### Technical data

#### Fieldline potentials

|                                  |            |
|----------------------------------|------------|
| Current consumption at $U_{A11}$ | typ. 15 mA |
|                                  | max. 4 A   |
| Voltage supply $U_{A12}$         | 24 V DC    |
| Power supply at $U_{A12}$        | max. 4 A   |
| Current consumption at $U_{A12}$ | typ. 15 mA |
|                                  | max. 4 A   |

#### Digital inputs

|                                    |   |
|------------------------------------|---|
| Input name                         | Digital inputs  |
| Connection method                  | M12 connector, 8-pos.   |
|                                    | 2, 3-wire   |
| Number of inputs                   | 16  |
| Protective circuit                 | Short-circuit protection, overload protection of the sensor supply Protection against polarity reversal |
| Filter time                        | 3 ms  |
| Input characteristic curve         | IEC 61131-2 type 1  |
| Input voltage                      | 24 V DC   |
| Input voltage range "0" signal     | -30 V DC ... 5 V DC   |
| Input voltage range "1" signal     | 13 V DC ... 30 V DC   |
| Delay at signal change from 0 to 1 | 3 ms  |
| Delay at signal change from 1 to 0 | 3 ms  |

#### Digital outputs

|                                    |  |
|------------------------------------|--|
| Output name                        | Digital outputs  |
| Connection method                  | M12 connector, 8-pos.  |
|                                    | 2-wire   |
| Number of outputs                  | 16   |
| Protective circuit                 | Short-circuit protection, overload protection of the sensor supply Polarity protection diode |
| Maximum output current per channel | 500 mA   |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27250302 |
| eCl@ss 4.1 | 27250302 |
| eCl@ss 5.0 | 27250302 |
| eCl@ss 5.1 | 27242604 |
| eCl@ss 6.0 | 27242604 |

# Distributed I/O device - FLM DIO 16/16 M12/8-DIAG - 2736738

## Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 7.0 | 27242604 |
| eCl@ss 8.0 | 27242604 |

ETIM


|          |          |
|----------|----------|
| ETIM 2.0 | EC001430 |
| ETIM 3.0 | EC001599 |
| ETIM 4.0 | EC001599 |
| ETIM 5.0 | EC001599 |

UNSPSC


|               |          |
|---------------|----------|
| UNSPSC 6.01   | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11     | 43172015 |
| UNSPSC 12.01  | 43201404 |
| UNSPSC 13.2   | 43201404 |

## Drawings

Connection diagram

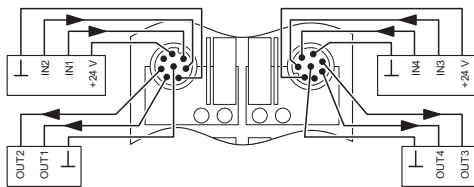

Dimensioned drawing

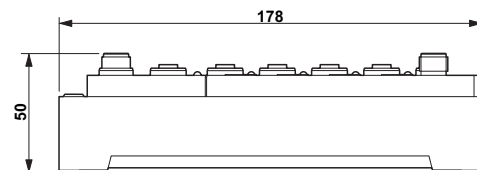

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9