



## Main

|                              |   |
|------------------------------|---|
| Range of product             | OsiSense XCC  |
| Encoder type                 | Multiturn absolute encoder fieldbus   |
| Device short name            | XCC   |
| Product specific application | -   |
| Diameter                     | 2.28 in (58 mm)   |
| Bus type                     | CANopen S10 (Transparent Ready) DS 406 V3.1, class C2 DR303-1V1.3, DR303-3 V1.2., ISO 11898, DS301 V4.02/CAN2.A             |
| Shaft diameter               | 0.39 in (10 mm)   |
| Shaft type                   | Solid shaft   |
| Resolution                   | 4096 turns/8192 points  |
| Electrical connection        | 1 male + 1 female connectors + 1 cable gland<br>M12 radial 5 pins Pg 9 radial for network input/outputs and external supply |
| Type of output stage         | CANopen 25-bit  |
| [Us] rated supply voltage    | 24 V DC   |
| Transmission rate            | 10 kbit/s<br>1000 kbit/s<br>125 kbit/s<br>20 kbit/s<br>250 kbit/s<br>50 kbit/s<br>500 kbit/s<br>800 kbit/s                  |
| Enclosure material           | Aluminium   |

## Complementary

|                          |   |
|--------------------------|---|
| Shaft tolerance          | H8  |
| Supply voltage limits    | 10...30 V DC  |
| Maximum revolution speed | 6000 rpm  |
| Shaft moment of inertia  | 0.01 lb.in <sup>2</sup> (30 g.cm <sup>2</sup> )         |
| Torque value             | 0.03 lbf.in (0.003 N.m)                                 |
| Maximum load             | 11 daN radial   |
| Output frequency         | 800 kHz   |
| Current consumption      | 0...100 mA no-load                                      |
| Protection type          | Reverse polarity protection<br>Voltage peaks protection |
| Status LED               | 1 LED green CAN_RUN<br>1 LED red CAN_ERR                |
| Surge withstand          | 0.5 kV level 1 IEC 61000-4-5                            |
| Base material            | Aluminium   |
| Shaft material           | Stainless steel   |
| Type of ball bearings    | 6000ZZ1   |
| Product weight           | 1.23 lb(US) (0.56 kg)                                   |

## Environment

|                                       |  |
|---------------------------------------|--|
| product certifications                | CiA<br>Schneider Electric interoperability standards |
| marking                               | CE   |
| ambient air temperature for operation | -40...185 °F (-40...85 °C)                           |
| ambient air temperature for storage   | -40...185 °F (-40...85 °C)                           |
| IP degree of protection               | IP64 IEC 60529                                       |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                                       |  |
|---------------------------------------|--|
| vibration resistance                  | 10 gn (10...2000 Hz) IEC 60068-2-6   |
| shock resistance                      | 100 gn (6 ms) IEC 60068-2-27   |
| resistance to electrostatic discharge | 2 kV contact discharge level 2 IEC 61000-4-2<br>4 kV air discharge level 2 IEC 61000-4-2 |
| resistance to electromagnetic fields  | 9.14 V/yd (10 V/m) level 3 IEC 61000-4-3   |
| resistance to fast transients         | 1 kV signal ports level 3 IEC 61000-4-4<br>2 kV power ports level 3 IEC 61000-4-4        |


## Offer Sustainability

|  |  |
|--|--|
| Not Green Premium product  | Not Green Premium product  |
| Compliant - since 1136 - Schneider Electric declaration of conformity  | Compliant - since 1136 - Schneider Electric declaration of conformity  |
| Reference not containing SVHC above the threshold  | Reference not containing SVHC above the threshold  |
| WARNING: This product can expose you to chemicals including:   | WARNING: This product can expose you to chemicals including:   |
| Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|


## Dimensions

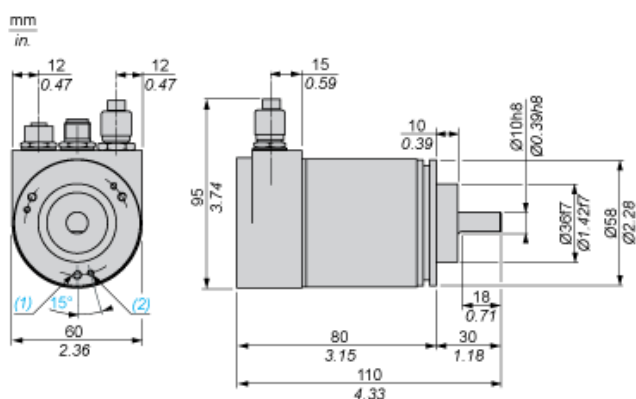

- (1) 3 M4 holes at 120° on 48 PCD, depth: 6 mm
- (2) 3 M3 holes at 120° on 48 PCD, depth: 6 mm

## Wiring Diagram

### CANOpen Connections

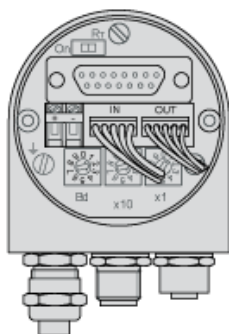


Bus termination resistor




- (1) 1st or last encoder
- (2) Encoder X

**Permissible address range**



- (1) (1 => 99) (0 => reserve)



- (1) Bus IN M12 male connector
- (2) Bus OUT M12 female connector

| Pin      | 1        | 2        | 3       | 4     | 5     |
|----------|----------|----------|---------|-------|-------|
| Function | CAN_SHLD | (CAN_V+) | CAN_GND | CAN_H | CAN_L |

| Terminal | +    | -   |
|----------|------|-----|
| Function | 24 V | 0 V |

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9