

# CAT1021, CAT1022, CAT1023

## Supervisory Circuits with I<sup>2</sup>C Serial 2k-bit CMOS EEPROM, Manual Reset and Watchdog Timer

### Description

The CAT1021, CAT1022 and CAT1023 are complete memory and supervisory solutions for microcontroller-based systems. A 2k-bit serial EEPROM memory and a system power supervisor with brown-out protection are integrated together in low power CMOS technology. Memory interface is via a 400 kHz I<sup>2</sup>C bus.

The CAT1021 and CAT1023 provide a precision V<sub>CC</sub> sense circuit and two open drain outputs: one (RESET) drives high and the other ( $\overline{\text{RESET}}$ ) drives low whenever V<sub>CC</sub> falls below the reset threshold voltage. The CAT1022 has only a  $\overline{\text{RESET}}$  output and does not have a Write Protect input. The CAT1021 also has a Write Protect input (WP). Write operations are disabled if WP is connected to a logic high.

All supervisors have a 1.6 second watchdog timer circuit that resets a system to a known state if software or a hardware glitch halts or “hangs” the system. For the CAT1021 and CAT1022, the watchdog timer monitors the SDA signal. The CAT1023 has a separate watchdog timer interrupt input pin, WDI.

The power supply monitor and reset circuit protect memory and system controllers during power up/down and against brownout conditions. Five reset threshold voltages support 5 V, 3.3 V and 3 V systems. If power supply voltages are out of tolerance reset signals become active, preventing the system microcontroller, ASIC or peripherals from operating. Reset signals become inactive typically 200 ms after the supply voltage exceeds the reset threshold level. With both active high and low reset signals, interface to microcontrollers and other ICs is simple. In addition, the RESET pin or a separate input,  $\overline{\text{MR}}$ , can be used as an input for push-button manual reset capability.

The on-chip, 2k-bit EEPROM memory features a 16-byte page. In addition, hardware data protection is provided by a V<sub>CC</sub> sense circuit that prevents writes to memory whenever V<sub>CC</sub> falls below the reset threshold or until V<sub>CC</sub> reaches the reset threshold during power up.

Available packages include an 8-pin PDIP and surface mount 8-pin SO, 8-pin TSSOP, 8-pin TDFN and 8-pin MSOP packages. The TDFN package thickness is 0.8 mm maximum. TDFN footprint options are 3 x 3 mm.

### Features

- Precision Power Supply Voltage Monitor
  - ◆ 5 V, 3.3 V and 3 V Systems
  - ◆ Five Threshold Voltage Options
- Watchdog Timer
- Active High or Low Reset
  - ◆ Valid Reset Guaranteed at V<sub>CC</sub> = 1 V
- 400 kHz I<sup>2</sup>C Bus
- 2.7 V to 5.5 V Operation
- Low Power CMOS Technology
- 16-Byte Page Write Buffer
- Built-in Inadvertent Write Protection
  - ◆ WP Pin (CAT1021)
- 1,000,000 Program/Erase Cycles
- Manual Reset Input
- 100 Year Data Retention
- Industrial and Extended Temperature Ranges
- 8-pin DIP, SOIC, TSSOP, MSOP or TDFN (3 x 3 mm Foot-print) Packages
  - ◆ TDFN Max Height is 0.8 mm
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant



ON Semiconductor®


<http://onsemi.com>



PDIP-8  
CASE 646AA



TSSOP-8  
CASE 948S



SOIC-8  
CASE 751BD



MSOP-8  
CASE 846AD



TDFN-8  
CASE 511AL

### ORDERING INFORMATION


For Ordering Information details, see page 13.

# CAT1021, CAT1022, CAT1023

**Table 1. THRESHOLD VOLTAGE OPTION**



| Part Dash Number | Minimum Threshold | Maximum Threshold |
|------------------|-------------------|-------------------|
| -45              | 4.50              | 4.75              |
| -42              | 4.25              | 4.50              |
| -30              | 3.00              | 3.15              |
| -28              | 2.85              | 3.00              |
| -25              | 2.55              | 2.70              |

## BLOCK DIAGRAM

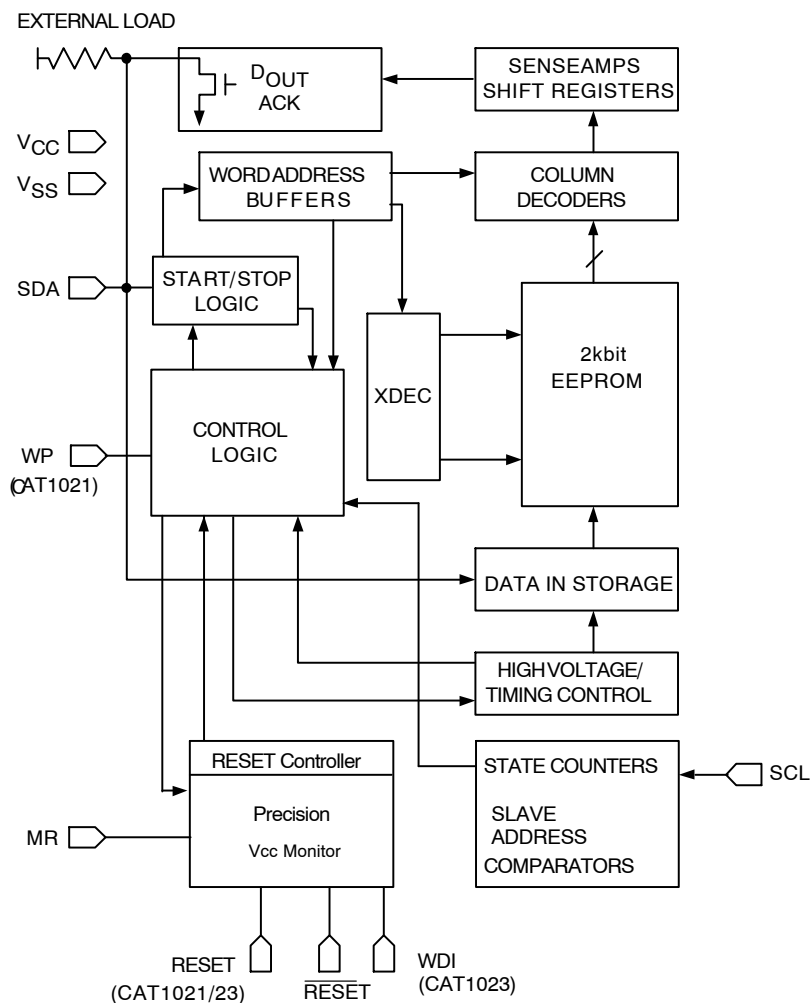

# CAT1021, CAT1022, CAT1023

## PIN CONFIGURATION

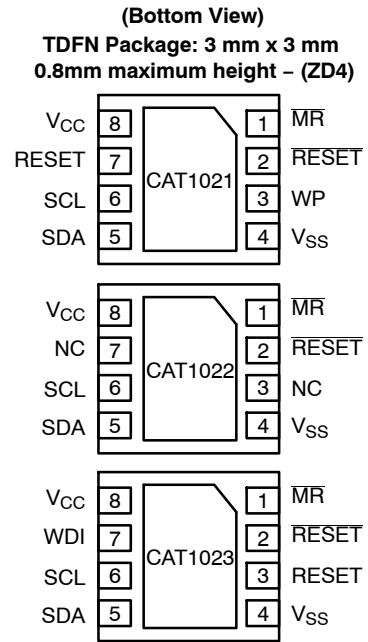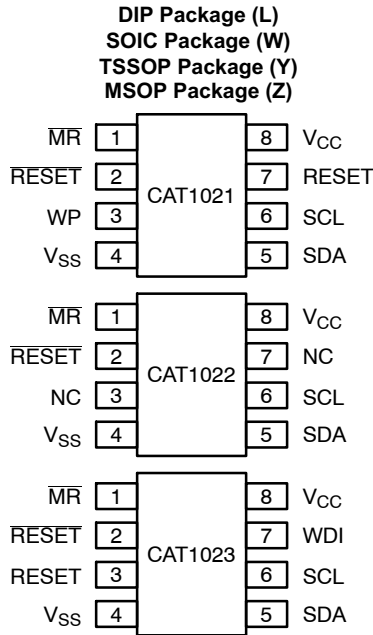

### PIN DESCRIPTION

**RESET/RESET:** RESET OUTPUT  
 (RESET CAT1021/23 Only)

These are open drain pins and **RESET** can be used as a manual reset trigger input. By forcing a reset condition on the pin the device will initiate and maintain a reset condition. The RESET pin must be connected through a pull-down resistor, and the **RESET** pin must be connected through a pull-up resistor.

**SDA:** SERIAL DATA ADDRESS

The bidirectional serial data/address pin is used to transfer all data into and out of the device. The SDA pin is an open drain output and can be wire-ORed with other open drain or open collector outputs.

**SCL:** SERIAL CLOCK

Serial clock input.

**MR:** MANUAL RESET INPUT

Manual Reset input is a debounced input that can be connected to an external source for Manual Reset. Pulling the MR input low will generate a Reset condition. Reset outputs are active while MR input is low and for the reset timeout period after MR returns to high. The input has an internal pull up resistor.

**WP (CAT1021 Only):** WRITE PROTECT INPUT

When WP input is tied to V<sub>SS</sub> or left unconnected write operations to the entire array are allowed. When tied to V<sub>CC</sub>, the entire array is protected. This input has an internal pull down resistor.

**WDI (CAT1023 Only):** WATCHDOG TIMER INTERRUPT

Watchdog Timer Interrupt Input is used to reset the watchdog timer. If a transition from high to low or low to high does not occur every 1.6 seconds, the RESET outputs will be driven active.

**Table 2. PIN FUNCTION**

| Pin Name        | Function                              |
|-----------------|---------------------------------------|
| NC              | No Connect                            |
| RESET           | Active Low Reset Input/Output         |
| V <sub>SS</sub> | Ground                                |
| SDA             | Serial Data/Address                   |
| SCL             | Clock Input                           |
| RESET           | Active High Reset Output (CAT1021/23) |
| V <sub>CC</sub> | Power Supply                          |
| WP              | Write Protect (CAT1021 Only)          |
| MR              | Manual Reset Input                    |
| WDI             | Watchdog Timer Interrupt (CAT1023)    |

**Table 3. OPERATING TEMPERATURE RANGE**

|            |                |
|------------|----------------|
| Industrial | –40°C to 85°C  |
| Extended   | –40°C to 125°C |

# CAT1021, CAT1022, CAT1023

**Table 4. CAT102X FAMILY OVERVIEW**

| Device  | Manual Reset Input Pin | Watchdog | Watchdog Monitor Pin | Write Protection Pin | Independent Auxiliary Voltage Sense | RESET: Active High and LOW | EEPROM |
|---------|------------------------|----------|----------------------|----------------------|-------------------------------------|----------------------------|--------|
| CAT1021 | ✓                      | ✓        | SDA                  | ✓                    |                                     | ✓                          | 2k     |
| CAT1022 | ✓                      | ✓        | SDA                  |                      |                                     |                            | 2k     |
| CAT1023 | ✓                      | ✓        | WDI                  |                      |                                     | ✓                          | 2k     |
| CAT1024 | ✓                      |          |                      |                      |                                     |                            | 2k     |
| CAT1025 | ✓                      |          |                      | ✓                    |                                     | ✓                          | 2k     |
| CAT1026 |                        |          |                      |                      | ✓                                   | ✓                          | 2k     |
| CAT1027 |                        | ✓        | WDI                  |                      | ✓                                   |                            | 2k     |

NOTE: For supervisory circuits with embedded 16k EEPROM, please refer to the CAT1161, CAT1162 and CAT1163 data sheets.

## SPECIFICATIONS

**Table 5. ABSOLUTE MAXIMUM RATINGS**

| Parameters                                                          | Ratings                | Units |
|---------------------------------------------------------------------|------------------------|-------|
| Temperature Under Bias                                              | –55 to +125            | °C    |
| Storage Temperature                                                 | –65 to +150            | °C    |
| Voltage on any Pin with Respect to Ground (Note 1)                  | –2.0 to $V_{CC} + 2.0$ | V     |
| $V_{CC}$ with Respect to Ground                                     | –2.0 to 7.0            | V     |
| Package Power Dissipation Capability ( $T_A = 25^{\circ}\text{C}$ ) | 1.0                    | W     |
| Lead Soldering Temperature (10 s)                                   | 300                    | °C    |
| Output Short Circuit Current (Note 2)                               | 100                    | mA    |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. The minimum DC input voltage is –0.5 V. During transitions, inputs may undershoot to –2.0 V for periods of less than 20 ns. Maximum DC voltage on output pins is  $V_{CC} + 0.5$  V, which may overshoot to  $V_{CC} + 2.0$  V for periods of less than 20 ns.
2. Output shorted for no more than one second. No more than one output shorted at a time.

**Table 6. D.C. OPERATING CHARACTERISTICS**

$V_{CC} = 2.7$  V to 5.5 V and over the recommended temperature conditions unless otherwise specified.

| Symbol            | Parameter                       | Test Conditions                                      | Min                 | Typ | Max                 | Units         |
|-------------------|---------------------------------|------------------------------------------------------|---------------------|-----|---------------------|---------------|
| $I_{LI}$          | Input Leakage Current           | $V_{IN} = \text{GND to } V_{CC}$                     | –2                  |     | 10                  | $\mu\text{A}$ |
| $I_{LO}$          | Output Leakage Current          | $V_{IN} = \text{GND to } V_{CC}$                     | –10                 |     | 10                  | $\mu\text{A}$ |
| $I_{CC1}$         | Power Supply Current (Write)    | $f_{SCL} = 400$ kHz<br>$V_{CC} = 5.5$ V              |                     |     | 3                   | mA            |
| $I_{CC2}$         | Power Supply Current (Read)     | $f_{SCL} = 400$ kHz<br>$V_{CC} = 5.5$ V              |                     |     | 1                   | mA            |
| $I_{SB}$          | Standby Current                 | $V_{CC} = 5.5$ V<br>$V_{IN} = \text{GND to } V_{CC}$ |                     |     | 60                  | $\mu\text{A}$ |
| $V_{IL}$ (Note 3) | Input Low Voltage               |                                                      | –0.5                |     | $0.3 \times V_{CC}$ | V             |
| $V_{IH}$ (Note 3) | Input High Voltage              |                                                      | $0.7 \times V_{CC}$ |     | $V_{CC} + 0.5$      | V             |
| $V_{OL}$          | Output Low Voltage (SDA, RESET) | $I_{OL} = 3$ mA<br>$V_{CC} = 2.7$ V                  |                     |     | 0.4                 | V             |
| $V_{OH}$          | Output High Voltage (RESET)     | $I_{OH} = -0.4$ mA<br>$V_{CC} = 2.7$ V               | $V_{CC} - 0.75$     |     |                     | V             |

# CAT1021, CAT1022, CAT1023

**Table 6. D.C. OPERATING CHARACTERISTICS**

$V_{CC} = 2.7\text{ V}$  to  $5.5\text{ V}$  and over the recommended temperature conditions unless otherwise specified.

| Symbol            | Parameter                           | Test Conditions                           | Min  | Typ | Max  | Units |
|-------------------|-------------------------------------|-------------------------------------------|------|-----|------|-------|
| $V_{TH}$          | Reset Threshold                     | CAT102x-45<br>( $V_{CC} = 5.0\text{ V}$ ) | 4.50 |     | 4.75 | V     |
|                   |                                     | CAT102x-42<br>( $V_{CC} = 5.0\text{ V}$ ) | 4.25 |     | 4.50 |       |
|                   |                                     | CAT102x-30<br>( $V_{CC} = 3.3\text{ V}$ ) | 3.00 |     | 3.15 |       |
|                   |                                     | CAT102x-28<br>( $V_{CC} = 3.3\text{ V}$ ) | 2.85 |     | 3.00 |       |
|                   |                                     | CAT102x-25<br>( $V_{CC} = 3.0\text{ V}$ ) | 2.55 |     | 2.70 |       |
| $V_{RVALID}$      | Reset Output Valid $V_{CC}$ Voltage |                                           | 1.00 |     |      | V     |
| $V_{RT}$ (Note 4) | Reset Threshold Hysteresis          |                                           | 15   |     |      | mV    |

3.  $V_{IL}$  min and  $V_{IH}$  max are reference values only and are not tested.

4. This parameter is tested initially and after a design or process change that affects the parameter. Not 100% tested.

**Table 7. CAPACITANCE**

$T_A = 25^\circ\text{C}$ ,  $f = 1.0\text{ MHz}$ ,  $V_{CC} = 5\text{ V}$

| Symbol             | Test               | Test Conditions        | Max | Units |
|--------------------|--------------------|------------------------|-----|-------|
| $C_{OUT}$ (Note 5) | Output Capacitance | $V_{OUT} = 0\text{ V}$ | 8   | pF    |
| $C_{IN}$ (Note 5)  | Input Capacitance  | $V_{IN} = 0\text{ V}$  | 6   | pF    |

**Table 8. AC CHARACTERISTICS**

$V_{CC} = 2.7\text{ V}$  to  $5.5\text{ V}$  and over the recommended temperature conditions, unless otherwise specified.

**Memory Read & Write Cycle** (Note 6)

| Symbol             | Parameter                                                     | Min | Max | Units         |
|--------------------|---------------------------------------------------------------|-----|-----|---------------|
| $f_{SCL}$          | Clock Frequency                                               |     | 400 | kHz           |
| $t_{SP}$           | Input Filter Spike Suppression (SDA, SCL)                     |     | 100 | ns            |
| $t_{LOW}$          | Clock Low Period                                              | 1.3 |     | $\mu\text{s}$ |
| $t_{HIGH}$         | Clock High Period                                             | 0.6 |     | $\mu\text{s}$ |
| $t_R$ (Note 5)     | SDA and SCL Rise Time                                         |     | 300 | ns            |
| $t_F$ (Note 5)     | SDA and SCL Fall Time                                         |     | 300 | ns            |
| $t_{HD}; STA$      | Start Condition Hold Time                                     | 0.6 |     | $\mu\text{s}$ |
| $t_{SU}; STA$      | Start Condition Setup Time (for a Repeated Start)             | 0.6 |     | $\mu\text{s}$ |
| $t_{HD}; DAT$      | Data Input Hold Time                                          | 0   |     | ns            |
| $t_{SU}; DAT$      | Data Input Setup Time                                         | 100 |     | ns            |
| $t_{SU}; STO$      | Stop Condition Setup Time                                     | 0.6 |     | $\mu\text{s}$ |
| $t_{AA}$           | SCL Low to Data Out Valid                                     |     | 900 | ns            |
| $t_{DH}$           | Data Out Hold Time                                            | 50  |     | ns            |
| $t_{BUF}$ (Note 5) | Time the Bus must be Free Before a New Transmission Can Start | 1.3 |     | $\mu\text{s}$ |
| $t_{WC}$ (Note 7)  | Write Cycle Time (Byte or Page)                               |     | 5   | ms            |

5. This parameter is characterized initially and after a design or process change that affects the parameter. Not 100% tested.

6. Test Conditions according to "AC Test Conditions" table.

7. The write cycle time is the time from a valid stop condition of a write sequence to the end of the internal program/erase cycle. During the write cycle, the bus interface circuits are disabled, SDA is allowed to remain high and the device does not respond to its slave address.

# CAT1021, CAT1022, CAT1023

**Table 9. RESET CIRCUIT AC CHARACTERISTICS**

| Symbol       | Parameter                          | Test Conditions | Min | Typ | Max | Units   |
|--------------|------------------------------------|-----------------|-----|-----|-----|---------|
| $t_{PURST}$  | Power-Up Reset Timeout             | Note 2          | 130 | 200 | 270 | ms      |
| $t_{RDP}$    | $V_{TH}$ to RESET output Delay     | Note 3          |     |     | 5   | $\mu s$ |
| $t_{GLITCH}$ | $V_{CC}$ Glitch Reject Pulse Width | Notes 4 and 5   |     |     | 30  | ns      |
| MR Glitch    | Manual Reset Glitch Immunity       | Note 1          |     |     | 100 | ns      |
| $t_{MRW}$    | MR Pulse Width                     | Note 1          | 5   |     |     | $\mu s$ |
| $t_{MRD}$    | MR Input to RESET Output Delay     | Note 1          |     |     | 1   | $\mu s$ |
| $t_{WD}$     | Watchdog Timeout                   | Note 1          | 1.0 | 1.6 | 2.1 | sec     |

**Table 10. POWER-UP TIMING** (Notes 5 and 6)

| Symbol    | Parameter                   | Test Conditions | Min | Typ | Max | Units |
|-----------|-----------------------------|-----------------|-----|-----|-----|-------|
| $t_{PUR}$ | Power-Up to Read Operation  |                 |     |     | 270 | ms    |
| $t_{PUW}$ | Power-Up to Write Operation |                 |     |     | 270 | ms    |

**Table 11. AC TEST CONDITIONS**

| Parameter                 | Test Conditions                                                  |
|---------------------------|------------------------------------------------------------------|
| Input Pulse Voltages      | $0.2 \times V_{CC}$ to $0.8 \times V_{CC}$                       |
| Input Rise and Fall Times | 10 ns                                                            |
| Input Reference Voltages  | $0.3 \times V_{CC}$ , $0.7 \times V_{CC}$                        |
| Output Reference Voltages | $0.5 \times V_{CC}$                                              |
| Output Load               | Current Source: $I_{OL} = 3 \text{ mA}$ ; $C_L = 100 \text{ pF}$ |

**Table 12. RELIABILITY CHARACTERISTICS**

| Symbol                  | Parameter          | Reference Test Method         | Min       | Max | Units       |
|-------------------------|--------------------|-------------------------------|-----------|-----|-------------|
| $N_{END}$ (Note 5)      | Endurance          | MIL-STD-883, Test Method 1033 | 1,000,000 |     | Cycles/Byte |
| $T_{DR}$ (Note 5)       | Data Retention     | MIL-STD-883, Test Method 1008 | 100       |     | Years       |
| $V_{ZAP}$ (Note 5)      | ESD Susceptibility | MIL-STD-883, Test Method 3015 | 2000      |     | Volts       |
| $I_{LTH}$ (Notes 5 & 7) | Latch-Up           | JEDEC Standard 17             | 100       |     | mA          |

1. Test Conditions according to "AC Test Conditions" table.
2. Power-up, Input Reference Voltage  $V_{CC} = V_{TH}$ , Reset Output Reference Voltage and Load according to "AC Test Conditions" Table
3. Power-Down, Input Reference Voltage  $V_{CC} = V_{TH}$ , Reset Output Reference Voltage and Load according to "AC Test Conditions" Table
4.  $V_{CC}$  Glitch Reference Voltage =  $V_{THmin}$ ; Based on characterization data
5. This parameter is characterized initially and after a design or process change that affects the parameter. Not 100% tested.
6.  $t_{PUR}$  and  $t_{PUW}$  are the delays required from the time  $V_{CC}$  is stable until the specified memory operation can be initiated.
7. Latch-up protection is provided for stresses up to 100 mA on input and output pins from  $-1 \text{ V}$  to  $V_{CC} + 1 \text{ V}$ .

## DEVICE OPERATION

**Reset Controller Description**

The CAT1021/22/23 precision RESET controllers ensure correct system operation during brownout and power up/down conditions. They are configured with open drain RESET outputs.

During power-up, the RESET outputs remain active until  $V_{CC}$  reaches the  $V_{TH}$  threshold and will continue driving the outputs for approximately 200 ms ( $t_{PURST}$ ) after reaching  $V_{TH}$ . After the  $t_{PURST}$  timeout interval, the device will cease to drive the reset outputs. At this point the reset outputs will be pulled up or down by their respective pull up/down resistors.

During power-down, the RESET outputs will be active when  $V_{CC}$  falls below  $V_{TH}$ . The  $\overline{RESET}$  output will be valid so long as  $V_{CC}$  is  $>1.0\text{ V}$  ( $V_{RVALID}$ ). The device is designed to ignore the fast negative going  $V_{CC}$  transient pulses (glitches).

Reset output timing is shown in Figure 1.

**Manual Reset Operation**

The  $\overline{RESET}$  pin can operate as reset output and manual reset input. The input is edge triggered; that is, the  $\overline{RESET}$  input will initiate a reset timeout after detecting a high to low transition.

When  $\overline{RESET}$  I/O is driven to the active state, the 200 ms timer will begin to time the reset interval. If external reset is shorter than 200 ms, Reset outputs will remain active at least 200 ms.

The CAT1021/22/23 also have a separate manual reset input. Driving the  $\overline{MR}$  input low by connecting a pushbutton (normally open) from  $\overline{MR}$  pin to GND will generate a reset condition. The input has an internal pull up resistor.

Reset remains asserted while  $\overline{MR}$  is low and for the Reset Timeout period after  $\overline{MR}$  input has gone high.

Glitches shorter than 100 ns on  $\overline{MR}$  input will not generate a reset pulse. No external debouncing circuits are required. Manual reset operation using  $\overline{MR}$  input is shown in Figure 2.

**Hardware Data Protection**

The CAT1021/22/23 supervisors have been designed to solve many of the data corruption issues that have long been associated with serial EEPROMs. Data corruption occurs when incorrect data is stored in a memory location which is assumed to hold correct data.

Whenever the device is in a Reset condition, the embedded EEPROM is disabled for all operations, including write operations. If the Reset output(s) are active, in progress communications to the EEPROM are aborted and no new communications are allowed. In this condition an internal write cycle to the memory can not be started, but an in progress internal nonvolatile memory write cycle can not be aborted. An internal write cycle initiated before the Reset condition can be successfully finished if there is enough time (5ms) before  $V_{CC}$  reaches the minimum value of 2V.

In addition, the CAT1021 includes a Write Protection Input which when tied to  $V_{CC}$  will disable any write operations to the device.

**Watchdog Timer**

The Watchdog Timer provides an independent protection for microcontrollers. During a system failure, CAT1021/22/23 devices will provide a reset signal after a time-out interval of 1.6 seconds for a lack of activity. The CAT1023 is designed with the Watchdog timer feature on the WDI pin. The CAT1021 and CAT1022 monitor the SDA line. If WDI or SDA does not toggle within a 1.6 second interval, the reset condition will be generated on the reset outputs. The watchdog timer is cleared by any transition on a monitored line.

As long as reset signal is asserted, the watchdog timer will not count and will stay cleared.

# CAT1021, CAT1022, CAT1023



Figure 1. RESET Output Timing



Figure 2.  $\overline{MR}$  Operation and Timing

## EMBEDDED EEPROM OPERATON

The CAT1021/22/23 feature a 2-kbit embedded serial EEPROM that supports the I<sup>2</sup>C Bus data transmission protocol. This Inter-Integrated Circuit Bus protocol defines any device that sends data to the bus to be a transmitter and any device receiving data to be a receiver. The transfer is controlled by the Master device which generates the serial clock and all START and STOP conditions for bus access. Both the Master device and Slave device can operate as either transmitter or receiver, but the Master device controls which mode is activated.

### I<sup>2</sup>C Bus Protocol

The features of the I<sup>2</sup>C bus protocol are defined as follows:

1. Data transfer may be initiated only when the bus is not busy.

2. During a data transfer, the data line must remain stable whenever the clock line is high. Any changes in the data line while the clock line is high will be interpreted as a START or STOP condition.

### Start Condition

The START Condition precedes all commands to the device, and is defined as a HIGH to LOW transition of SDA when SCL is HIGH. The CAT1021/22/23 monitor the SDA and SCL lines and will not respond until this condition is met.

### Stop Condition

A LOW to HIGH transition of SDA when SCL is HIGH determines the STOP condition. All operations must end with a STOP condition.

## DEVICE ADDRESSING

The Master begins a transmission by sending a START condition. The Master sends the address of the particular slave device it is requesting. The four most significant bits of the 8-bit slave address are programmable in metal and the default is 1010.

The last bit of the slave address specifies whether a Read or Write operation is to be performed. When this bit is set to 1, a Read operation is selected, and when set to 0, a Write operation is selected.

After the Master sends a START condition and the slave address byte, the CAT1021/22/23 monitors the bus and responds with an acknowledge (on the SDA line) when its address matches the transmitted slave address. The CAT1021/22/23 then perform a Read or Write operation depending on the R/W bit.

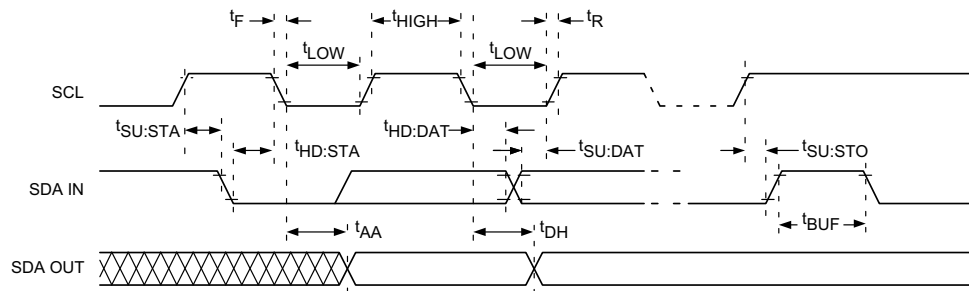


Figure 3. Bus Timing

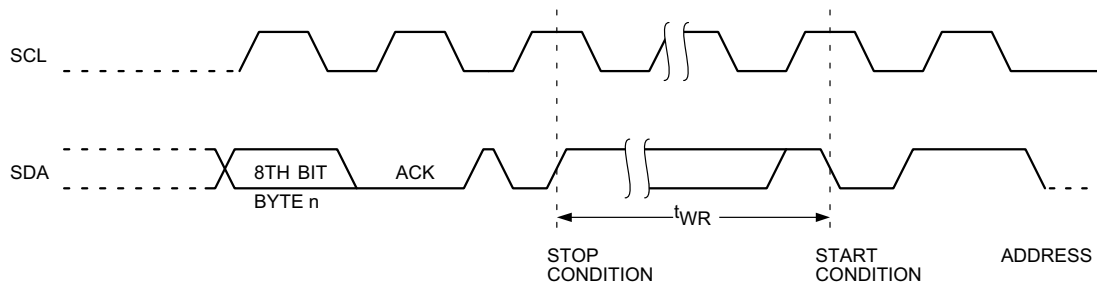


Figure 4. Write Cycle Timing

## ACKNOWLEDGE

After a successful data transfer, each receiving device is required to generate an acknowledge. The acknowledging device pulls down the SDA line during the ninth clock cycle, signaling that it received the 8 bits of data.

All devices respond with an acknowledge after receiving a START condition and its slave address. If the device has been selected along with a write operation, it responds with an acknowledge after receiving each 8-bit byte.

When a device begins a READ mode it transmits 8 bits of data, releases the SDA line and monitors the line for an acknowledge. Once it receives this acknowledge, the device will continue to transmit data. If no acknowledge is sent by the Master, the device terminates data transmission and waits for a STOP condition.

## WRITE OPERATIONS

### Byte Write

In the Byte Write mode, the Master device sends the START condition and the slave address information (with the  $\overline{R/W}$  bit set to zero) to the Slave device. After the Slave generates an acknowledge, the Master sends a 8-bit address that is to be written into the address pointers of the device. After receiving another acknowledge from the Slave, the

Master device transmits the data to be written into the addressed memory location. The device acknowledges once more and the Master generates the STOP condition. At this time, the device begins an internal programming cycle to non-volatile memory. While the cycle is in progress, the device will not respond to any request from the Master device.

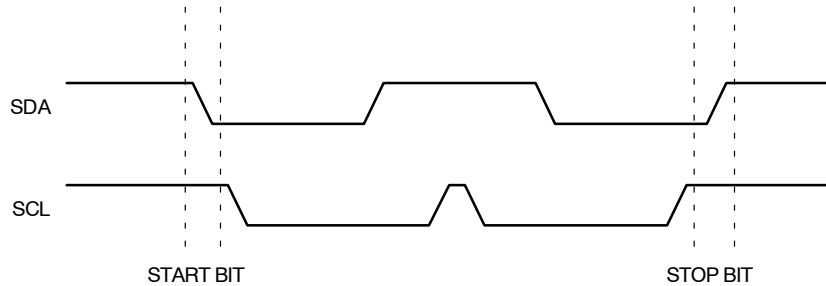


Figure 5. Start/Stop Timing

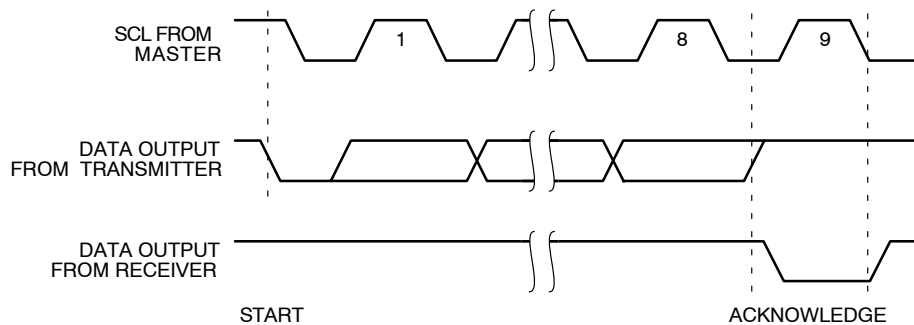


Figure 6. Acknowledge Timing

|                       |   |   |   |   |   |   |   |                  |
|-----------------------|---|---|---|---|---|---|---|------------------|
| Default Configuration | 1 | 0 | 1 | 0 | 0 | 0 | 0 | $\overline{R/W}$ |
|-----------------------|---|---|---|---|---|---|---|------------------|

Figure 7. Slave Address Bits

## CAT1021, CAT1022, CAT1023

### Page Write

The CAT1021/22/23 writes up to 16 bytes of data in a single write cycle, using the Page Write operation. The page write operation is initiated in the same manner as the byte write operation, however instead of terminating after the initial byte is transmitted, the Master is allowed to send up to 15 additional bytes. After each byte has been transmitted, the CAT1021/22/23 will respond with an acknowledge and internally increment the lower order address bits by one. The high order bits remain unchanged.

If the Master transmits more than 16 bytes before sending the STOP condition, the address counter ‘wraps around,’ and previously transmitted data will be overwritten.

When all 16 bytes are received, and the STOP condition has been sent by the Master, the internal programming cycle begins. At this point, all received data is written to the CAT1021/22/23 in a single write cycle.



Figure 8. Byte Write Timing



Figure 9. Page Write Timing

### Acknowledge Polling

Disabling of the inputs can be used to take advantage of the typical write cycle time. Once the stop condition is issued to indicate the end of the host's write operation, the CAT1021/22/23 initiates the internal write cycle. ACK polling can be initiated immediately. This involves issuing

the start condition followed by the slave address for a write operation. If the device is still busy with the write operation, no ACK will be returned. If a write operation has completed, an ACK will be returned and the host can then proceed with the next read or write operation.

### WRITE PROTECTION PIN (WP)

The Write Protection feature (CAT1021 only) allows the user to protect against inadvertent memory array programming. If the WP pin is tied to V<sub>CC</sub>, the entire memory array is protected and becomes read only. The

CAT1021 will accept both slave and byte addresses, but the memory location accessed is protected from programming by the device's failure to send an acknowledge after the first byte of data is received.

### READ OPERATIONS

The READ operation for the CAT1021/22/23 is initiated in the same manner as the write operation with one exception, the R/ $\overline{W}$  bit is set to one. Three different READ

operations are possible: Immediate/Current Address READ, Selective/Random READ and Sequential READ.

## CAT1021, CAT1022, CAT1023



Figure 10. Immediate Address Read Timing

### Immediate/Current Address Read

The CAT1021/22/23 address counter contains the address of the last byte accessed, incremented by one. In other words, if the last READ or WRITE access was to address N, the READ immediately following would access data from address N + 1. For N = E = 255, the counter will wrap around to zero and continue to clock out valid data. After the CAT1021/22/23 receives its slave address information (with the  $R/\overline{W}$  bit set to one), it issues an acknowledge, then transmits the 8-bit byte requested. The master device does not send an acknowledge, but will generate a STOP condition.

### Selective/Random Read

Selective/Random READ operations allow the Master device to select at random any memory location for a READ operation. The Master device first performs a 'dummy' write operation by sending the START condition, slave address and byte addresses of the location it wishes to read. After the CAT1021/22/23 acknowledges, the Master device

sends the START condition and the slave address again, this time with the  $R/\overline{W}$  bit set to one. The CAT1021/22/23 then responds with its acknowledge and sends the 8-bit byte requested. The master device does not send an acknowledge but will generate a STOP condition.

### Sequential Read

The Sequential READ operation can be initiated by either the Immediate Address READ or Selective READ operations. After the CAT1021/22/23 sends the initial 8-bit byte requested, the Master will respond with an acknowledge which tells the device it requires more data. The CAT1021/22/23 will continue to output an 8-bit byte for each acknowledge, thus sending the STOP condition.

The data being transmitted from the CAT1021/22/23 is sent sequentially with the data from address N followed by data from address N + 1. The READ operation address counter increments all of the CAT1021/22/23 address bits so that the entire memory array can be read during one operation.


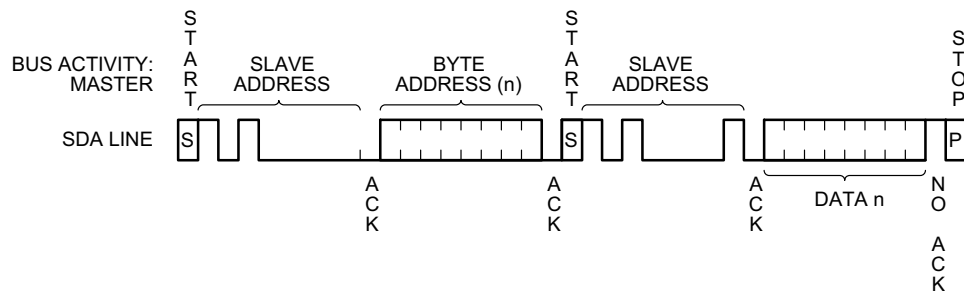


Figure 11. Selective Read Timing

## CAT1021, CAT1022, CAT1023

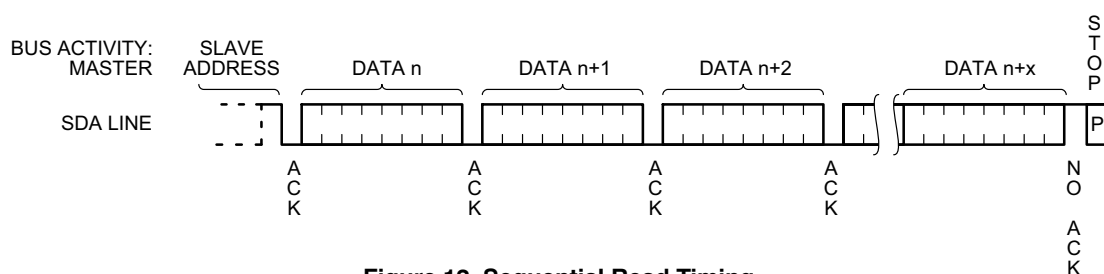

## ORDERING INFORMATION

| Orderable Part Numbers – CAT1021 Series<br>(See Notes 1 – 5) |                 |         |                  |
|--------------------------------------------------------------|-----------------|---------|------------------|
| Device                                                       | Reset Threshold | Package | Shipping         |
| CAT1021LI-45-G                                               | 4.50 V – 4.75 V | PDIP    | 3000 Tape & Reel |
| CAT1021LI-42-G                                               | 4.25 V – 4.50 V |         |                  |
| CAT1021LI-30-G                                               | 3.00 V – 3.15 V |         |                  |
| CAT1021LI-28-G                                               | 2.85 V – 3.00 V |         |                  |
| CAT1021LI-25-G                                               | 2.55 V – 2.70 V |         |                  |
| CAT1021WI-45-GT3                                             | 4.50 V – 4.75 V | SOIC    |                  |
| CAT1021WI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1021WI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1021WI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1021WI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1021YI-45-GT3                                             | 4.50 V – 4.75 V | TSSOP   |                  |
| CAT1021YI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1021YI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1021YI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1021YI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1021ZI-45-GT3                                             | 4.50 V – 4.75 V | MSOP    |                  |
| CAT1021ZI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1021ZI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1021ZI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1021ZI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1021ZD4I-45T3*                                            | 4.50 V – 4.75 V | TDFN    |                  |
| CAT1021ZD4I-42T3*                                            | 4.25 V – 4.50 V |         |                  |
| CAT1021ZD4I-30T3*                                            | 3.00 V – 3.15 V |         |                  |
| CAT1021ZD4I-28T3*                                            | 2.85 V – 3.00 V |         |                  |
| CAT1021ZD4I-25T3*                                            | 2.55 V – 2.70 V |         |                  |

1. All packages are RoHS-compliant (Lead-free, Halogen-free).
2. The standard lead finish is NiPdAu.
3. For additional package and temperature options, please contact your nearest ON Semiconductor Sales office.
4. TDFN not available in NiPdAu (–G) version.
5. For detailed information and a breakdown of device nomenclature and numbering systems, please see the ON Semiconductor Device Nomenclature document, TND310/D, available at [www.onsemi.com](http://www.onsemi.com)

## CAT1021, CAT1022, CAT1023

| Orderable Part Numbers – CAT1022 Series<br>(See Notes 1 – 5) |                 |         |                  |
|--------------------------------------------------------------|-----------------|---------|------------------|
| Device                                                       | Reset Threshold | Package | Shipping         |
| CAT1022LI-45-G                                               | 4.50 V – 4.75 V | PDIP    | 3000 Tape & Reel |
| CAT1022LI-42-G                                               | 4.25 V – 4.50 V |         |                  |
| CAT1022LI-30-G                                               | 3.00 V – 3.15 V |         |                  |
| CAT1022LI-28-G                                               | 2.85 V – 3.00 V |         |                  |
| CAT1022LI-25-G                                               | 2.55 V – 2.70 V |         |                  |
| CAT1022WI-45-GT3                                             | 4.50 V – 4.75 V | SOIC    |                  |
| CAT1022WI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1022WI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1022WI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1022WI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1022YI-45-GT3                                             | 4.50 V – 4.75 V | TSSOP   |                  |
| CAT1022YI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1022YI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1022YI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1022YI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1022ZI-45-GT3                                             | 4.50 V – 4.75 V | MSOP    |                  |
| CAT1022ZI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1022ZI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1022ZI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1022ZI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1022ZD4I-45T3*                                            | 4.50 V – 4.75 V | TDFN    |                  |
| CAT1022ZD4I-42T3*                                            | 4.25 V – 4.50 V |         |                  |
| CAT1022ZD4I-30T3*                                            | 3.00 V – 3.15 V |         |                  |
| CAT1022ZD4I-28T3*                                            | 2.85 V – 3.00 V |         |                  |
| CAT1022ZD4I-25T3*                                            | 2.55 V – 2.70 V |         |                  |

1. All packages are RoHS-compliant (Lead-free, Halogen-free).
2. The standard lead finish is NiPdAu.
3. For additional package and temperature options, please contact your nearest ON Semiconductor Sales office.
4. TDFN not available in NiPdAu (-G) version.
5. For detailed information and a breakdown of device nomenclature and numbering systems, please see the ON Semiconductor Device Nomenclature document, TND310/D, available at [www.onsemi.com](http://www.onsemi.com)

## CAT1021, CAT1022, CAT1023

| Orderable Part Numbers – CAT1023 Series<br>(See Notes 1 – 5) |                 |         |                  |
|--------------------------------------------------------------|-----------------|---------|------------------|
| Device                                                       | Reset Threshold | Package | Shipping         |
| CAT1023LI-45-G                                               | 4.50 V – 4.75 V | PDIP    | 3000 Tape & Reel |
| CAT1023LI-42-G                                               | 4.25 V – 4.50 V |         |                  |
| CAT1023LI-30-G                                               | 3.00 V – 3.15 V |         |                  |
| CAT1023LI-28-G                                               | 2.85 V – 3.00 V |         |                  |
| CAT1023LI-25-G                                               | 2.55 V – 2.70 V |         |                  |
| CAT1023WI-45-GT3                                             | 4.50 V – 4.75 V | SOIC    |                  |
| CAT1023WI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1023WI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1023WI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1023WI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1023YI-45-GT3                                             | 4.50 V – 4.75 V | TSSOP   |                  |
| CAT1023YI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1023YI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1023YI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1023YI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1023ZI-45-GT3                                             | 4.50 V – 4.75 V | MSOP    |                  |
| CAT1023ZI-42-GT3                                             | 4.25 V – 4.50 V |         |                  |
| CAT1023ZI-30-GT3                                             | 3.00 V – 3.15 V |         |                  |
| CAT1023ZI-28-GT3                                             | 2.85 V – 3.00 V |         |                  |
| CAT1023ZI-25-GT3                                             | 2.55 V – 2.70 V |         |                  |
| CAT1023ZD4I-45T3*                                            | 4.50 V – 4.75 V | TDFN    |                  |
| CAT1023ZD4I-42T3*                                            | 4.25 V – 4.50 V |         |                  |
| CAT1023ZD4I-30T3*                                            | 3.00 V – 3.15 V |         |                  |
| CAT1023ZD4I-28T3*                                            | 2.85 V – 3.00 V |         |                  |
| CAT1023ZD4I-25T3*                                            | 2.55 V – 2.70 V |         |                  |

1. All packages are RoHS-compliant (Lead-free, Halogen-free).
2. The standard lead finish is NiPdAu.
3. For additional package and temperature options, please contact your nearest ON Semiconductor Sales office.
4. TDFN not available in NiPdAu (-G) version.
5. For detailed information and a breakdown of device nomenclature and numbering systems, please see the ON Semiconductor Device Nomenclature document, TND310/D, available at [www.onsemi.com](http://www.onsemi.com)

# CAT1021, CAT1022, CAT1023


## PACKAGE DIMENSIONS

SOIC 8, 150 mils  
CASE 751BD-01  
ISSUE O




TOP VIEW

| SYMBOL   | MIN      | NOM | MAX  |
|----------|----------|-----|------|
| A        | 1.35     |     | 1.75 |
| A1       | 0.10     |     | 0.25 |
| b        | 0.33     |     | 0.51 |
| c        | 0.19     |     | 0.25 |
| D        | 4.80     |     | 5.00 |
| E        | 5.80     |     | 6.20 |
| E1       | 3.80     |     | 4.00 |
| e        | 1.27 BSC |     |      |
| h        | 0.25     |     | 0.50 |
| L        | 0.40     |     | 1.27 |
| $\theta$ | 0°       |     | 8°   |

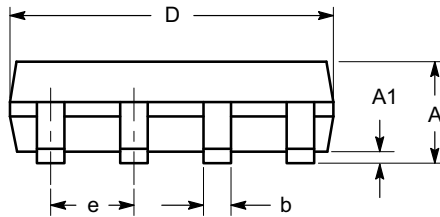

SIDE VIEW

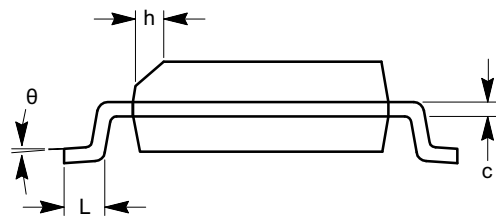


END VIEW

### Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MS-012.


# CAT1021, CAT1022, CAT1023

PDIP-8, 300 mils  
CASE 646AA-01  
ISSUE A

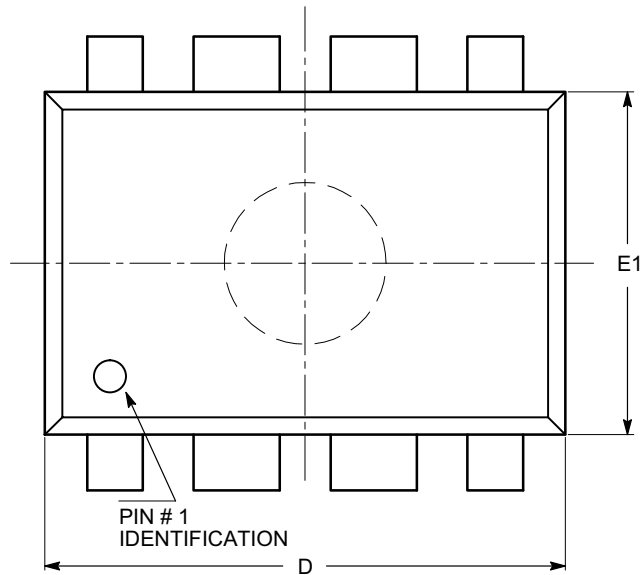


TOP VIEW

| SYMBOL | MIN      | NOM  | MAX   |
|--------|----------|------|-------|
| A      |          |      | 5.33  |
| A1     | 0.38     |      |       |
| A2     | 2.92     | 3.30 | 4.95  |
| b      | 0.36     | 0.46 | 0.56  |
| b2     | 1.14     | 1.52 | 1.78  |
| c      | 0.20     | 0.25 | 0.36  |
| D      | 9.02     | 9.27 | 10.16 |
| E      | 7.62     | 7.87 | 8.25  |
| E1     | 6.10     | 6.35 | 7.11  |
| e      | 2.54 BSC |      |       |
| eB     | 7.87     |      | 10.92 |
| L      | 2.92     | 3.30 | 3.80  |

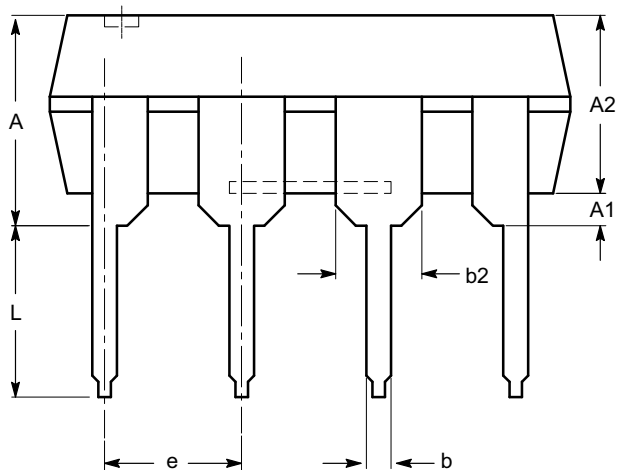

SIDE VIEW

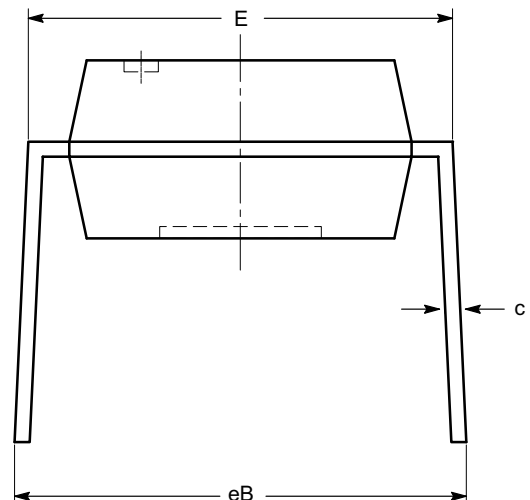

END VIEW

## Notes:

- (1) All dimensions are in millimeters.
- (2) Complies with JEDEC MS-001.


# CAT1021, CAT1022, CAT1023

MSOP 8, 3x3  
CASE 846AD-01  
ISSUE O




TOP VIEW


| SYMBOL   | MIN      | NOM  | MAX  |
|----------|----------|------|------|
| A        |          |      | 1.10 |
| A1       | 0.05     | 0.10 | 0.15 |
| A2       | 0.75     | 0.85 | 0.95 |
| b        | 0.22     |      | 0.38 |
| c        | 0.13     |      | 0.23 |
| D        | 2.90     | 3.00 | 3.10 |
| E        | 4.80     | 4.90 | 5.00 |
| E1       | 2.90     | 3.00 | 3.10 |
| e        | 0.65 BSC |      |      |
| L        | 0.40     | 0.60 | 0.80 |
| L1       | 0.95 REF |      |      |
| L2       | 0.25 BSC |      |      |
| $\theta$ | 0°       |      | 6°   |

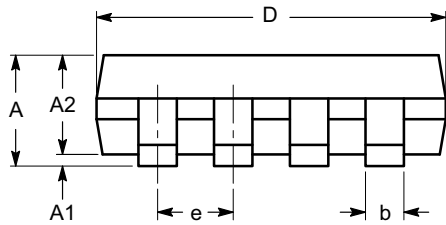

SIDE VIEW

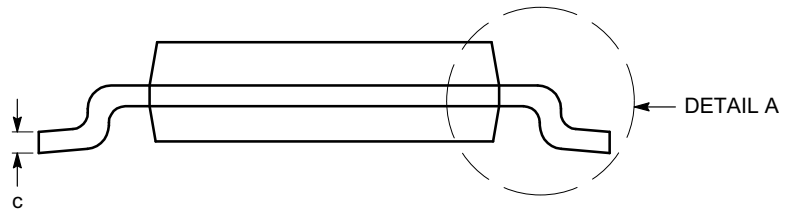

END VIEW

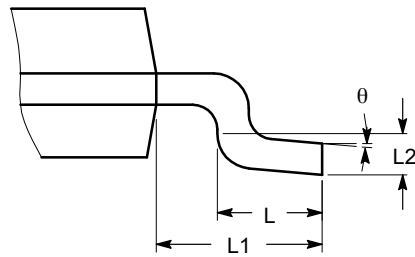


DETAIL A

## Notes:


- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MO-187.

# CAT1021, CAT1022, CAT1023

TDFN8, 3x3  
CASE 511AL-01  
ISSUE A

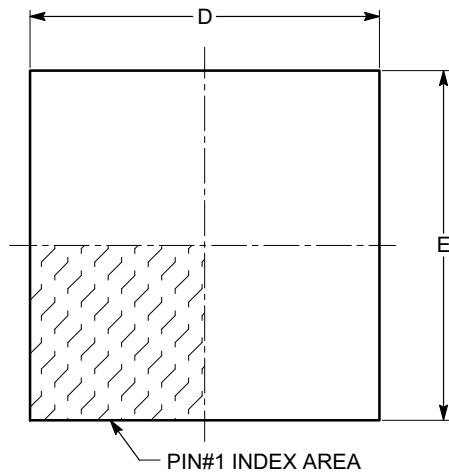

TOP VIEW

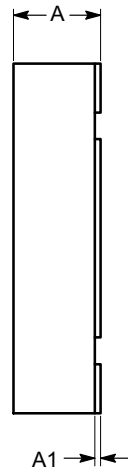


SIDE VIEW



BOTTOM VIEW

| SYMBOL | MIN      | NOM  | MAX  |
|--------|----------|------|------|
| A      | 0.70     | 0.75 | 0.80 |
| A1     | 0.00     | 0.02 | 0.05 |
| A3     | 0.20 REF |      |      |
| b      | 0.23     | 0.30 | 0.37 |
| D      | 2.90     | 3.00 | 3.10 |
| D2     | 2.20     | ---  | 2.50 |
| E      | 2.90     | 3.00 | 3.10 |
| E2     | 1.40     | ---  | 1.80 |
| e      | 0.65 TYP |      |      |
| L      | 0.20     | 0.30 | 0.40 |

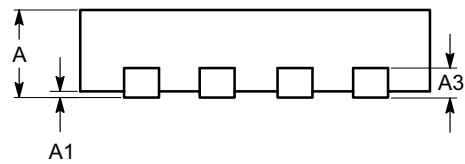


FRONT VIEW

## Notes:

- (1) All dimensions are in millimeters.
- (2) Complies with JEDEC MO-229.

# CAT1021, CAT1022, CAT1023

TSSOP-8  
CASE 948S-01  
ISSUE C

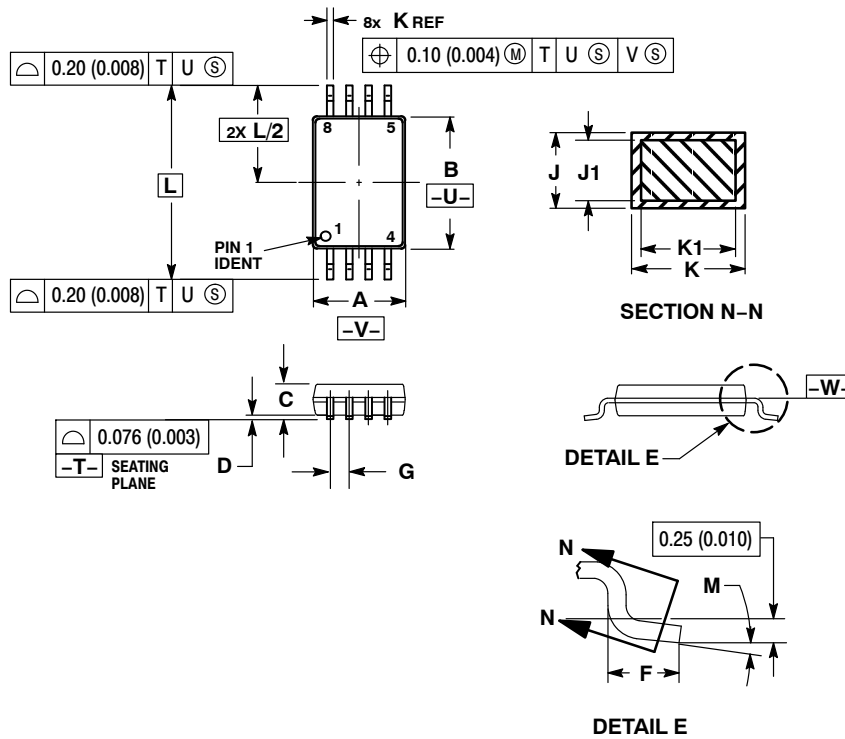

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
6. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 2.90        | 3.10 | 0.114     | 0.122 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.10 | ---       | 0.043 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.70 | 0.020     | 0.028 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9