

Specification

Part No.	:	GW.05.0E23
Product Name	:	Dual-Band WiFi 2.4/5.8GHz Fakra Code I Mount Hinged Monopole Antenna
Features	:	High Efficiency – With and Without Ground Plane Wi-Fi / Bluetooth / Zigbee Extremely Compact – 69.6mm height, Ø 5mm Aesthetic Look and Feel Fits in places other antennas can't Peak Gain Compliant with Most WiFi Modules Connector: Fakra Code I Beige SMB(F) ROHS Compliant



1. Introduction

The GW.05.0E23 dual band WiFi Hinged Rotatable Fakra Mount Antenna is a high efficiency monopole antenna for Wi-Fi, WLAN, Zigbee, Bluetooth, and 802.11a/b/g/n/ac applications. The direct mount Fakra connector enables a more robust mating to the device compared to a SMA, the locking feature prevents the antenna coming loose due to vibration or shock.

This small antenna fits in places other antennas cannot since the radiating element can be moved and rotated in one hemisphere. For optimized efficiency, keep the element as far away from metal as possible.

Like all monopole antennas, the GW.05 works best when connected directly to the ground-plane of the device main PCB or to the outside of a metal housing. However, it maintains excellent performance even without a ground plane (>50%), making it the best all-around small WiFi terminal antenna on the market. Even compared with other much larger antennas, the GW.05 offers superior high-efficiency wide-band characteristics.

GW.05 is also available as a standard SMA(M) version.

Contact your regional Taoglas facility for support on testing and integration.

2. Specification


Parameter		Wireless Bands	
Straight Position			
Frequency (MHz)		2400~2500	5150~5850
Average Gain (dBi)	In Free Space	-4.63	-2.60
Efficiency (%)		34.49	55.03
Peak Gain (dBi)		3.73	0.64
Average Gain (dBi)	With 15x9cm Ground Plane	-5.27	-4.63
Efficiency (%)		29.74	34.65
Peak Gain (dBi)		0.64	0.34
Average Gain (dBi)	On 30x30cm Metal Plane Edge	-5.53	-4.17
Efficiency (%)		28.23	38.71
Peak Gain (dBi)		2.18	0.19
Average Gain (dBi)	On 30x30cm Metal Plane Center	-4.63	-4.72
Efficiency (%)		34.48	33.78
Peak Gain (dBi)		1.94	1.45
Return Loss (dB)		<-3	<-5

Bent Position 90°			
Average Gain (dBi)	In Free Space	-4.74	-2.12
Efficiency (%)		33.60	61.77
Peak Gain (dBi)		4.09	2.46
Average Gain (dBi)	With 15x9cm Ground Plane	-5.32	-4.43
Efficiency (%)		29.45	36.29
Peak Gain (dBi)		0.38	1.27
Average Gain (dBi)	On 30x30cm Metal Plane Edge	-5.57	-3.50
Efficiency (%)		27.93	44.97
Peak Gain (dBi)		1.42	1.64
Average Gain (dBi)	On 30x30cm Metal Plane Center	-4.72	-3.99
Efficiency (%)		33.81	40.43
Peak Gain (dBi)		1.99	2.37
Return Loss (dB)		<-3	<-5
Radiation		Omni-directional	
Polarization		Linear	
Impedance		50 Ω	
Input Power		10W	
MECHANICAL			
Antenna length		69.6mm	
Antenna Diameter		5mm	
Casing		POM	
Connector		Fakra Code I Beige SMB(F)	
Weight		6g	
ENVIRONMENTAL			
Operation Temperature		-40°C ~ + 85°C	
Storage Temperature		-40°C ~ + 85°C	
Humidity		Non-condensing 65°C 95% RH	


3. Antenna Characteristics

3.1 Testing Setup


Antenna Straight Position

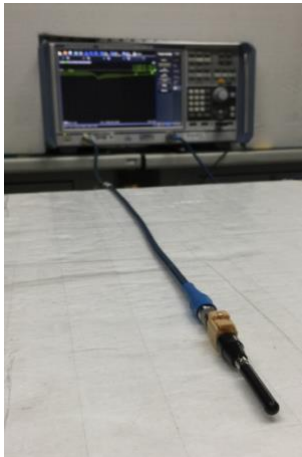


a)In free space

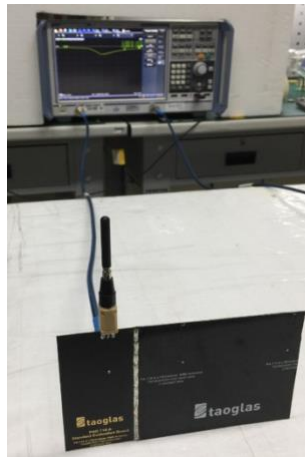

b)with 15*9cm
Ground Plane

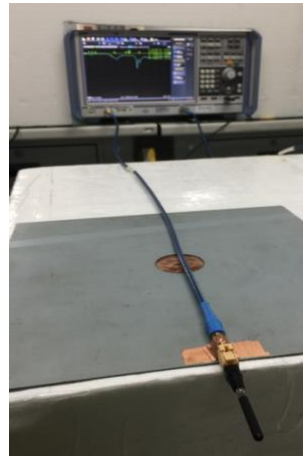


c)with 30*30cm
Ground Plane Edge

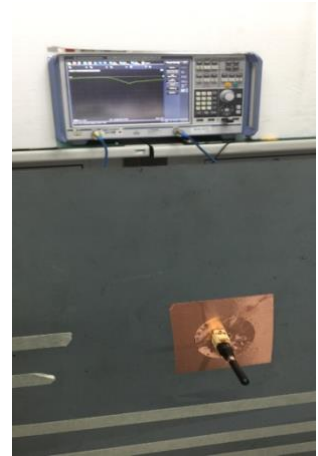

d)with 30*30cm
Ground Plane Center


Antenna Bent 90° Position

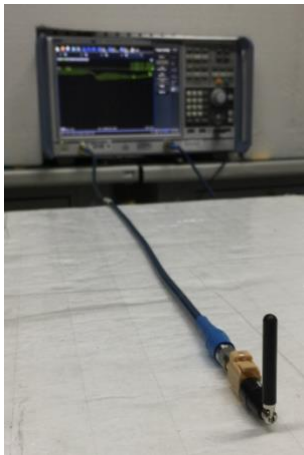

a)In free space



b)with 15*9cm
Ground Plane

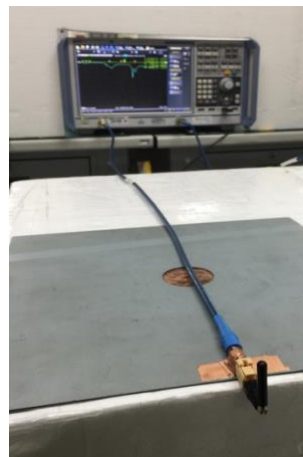

c)with 30*30cm
Ground Plane Edge



d)with 30*30cm
Ground Plane

Center

Figure.1 Measurement environments

3.2 Return Loss

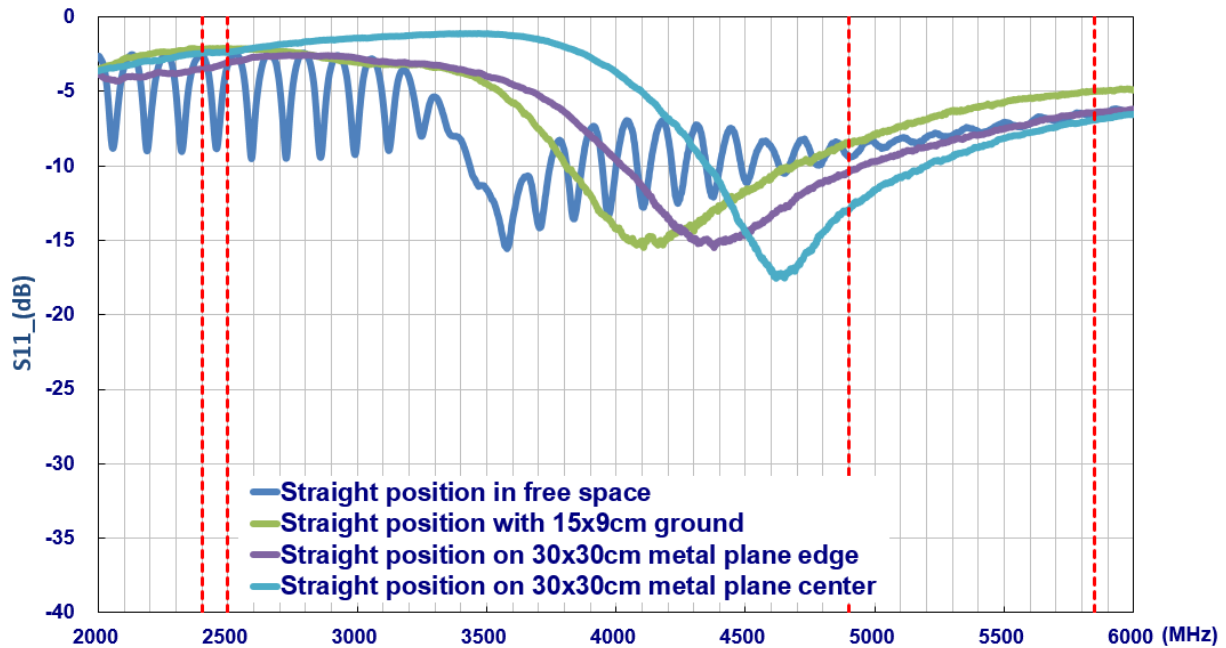


Figure2. Return loss of GW.05 antenna with straight position

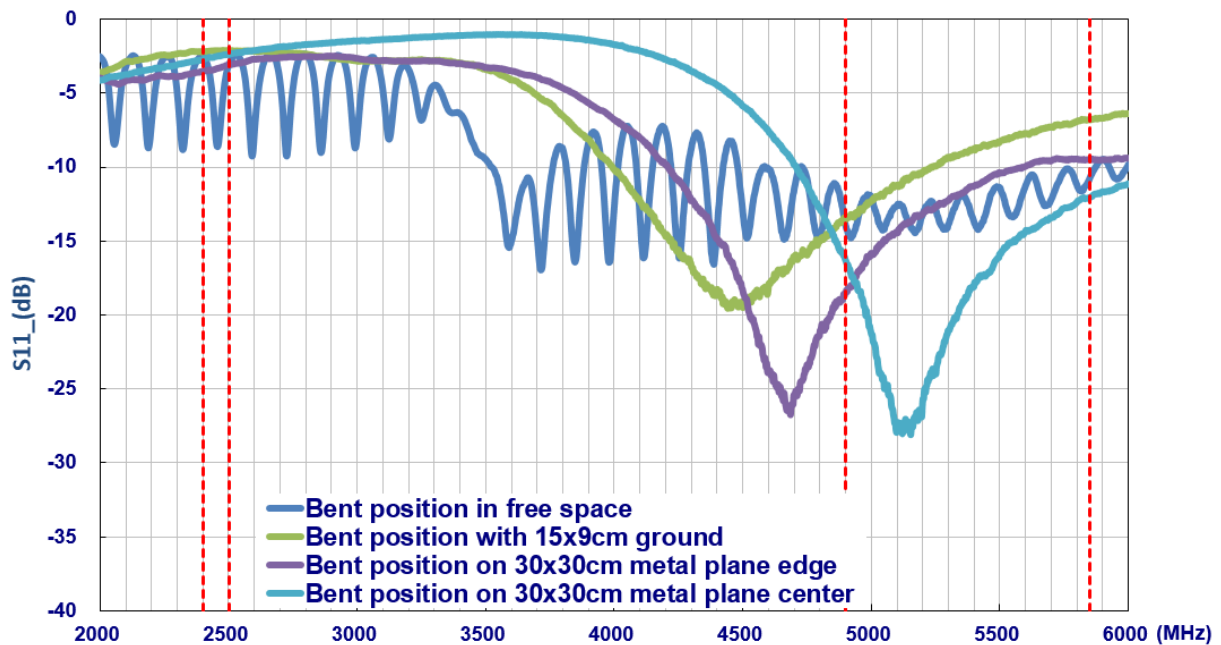


Figure3. Return loss of GW.05 antenna with bent position

3.3 Efficiency

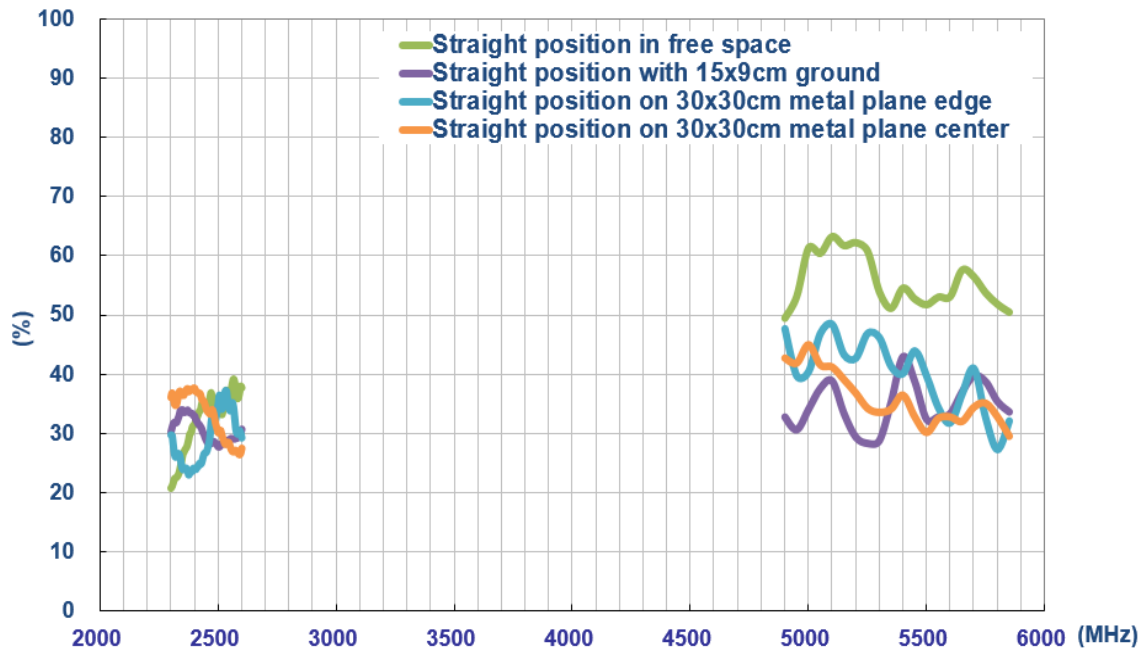


Figure4. Efficiency of GW.05 antenna with straight position

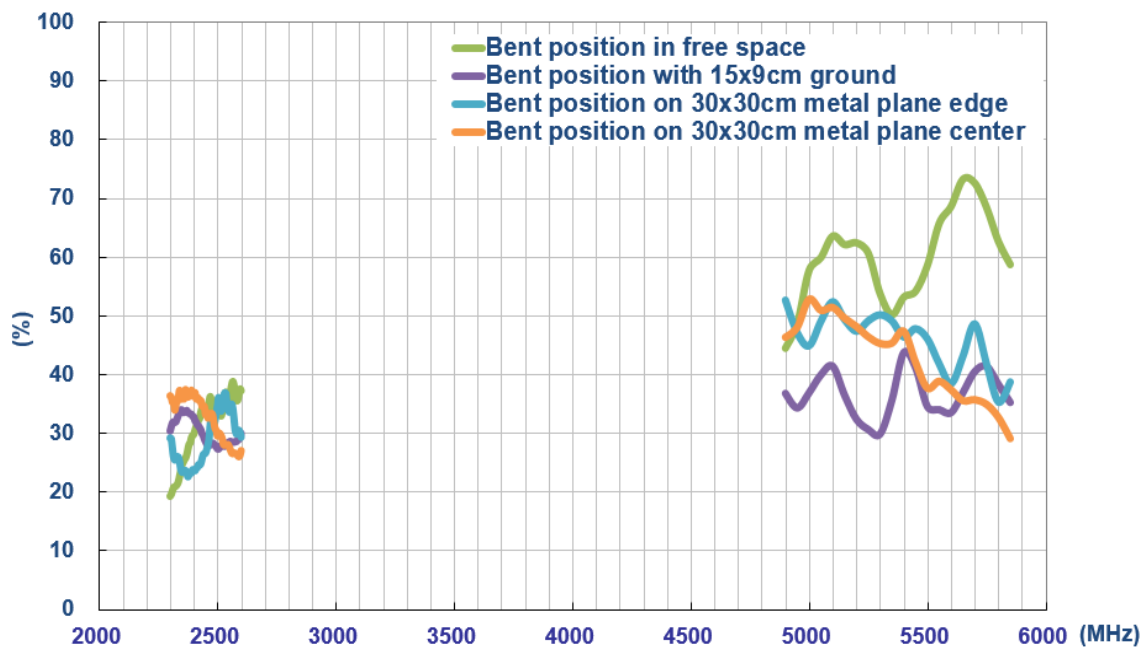


Figure5. Efficiency of GW.05 antenna with bent position

3.4 Peak Gain

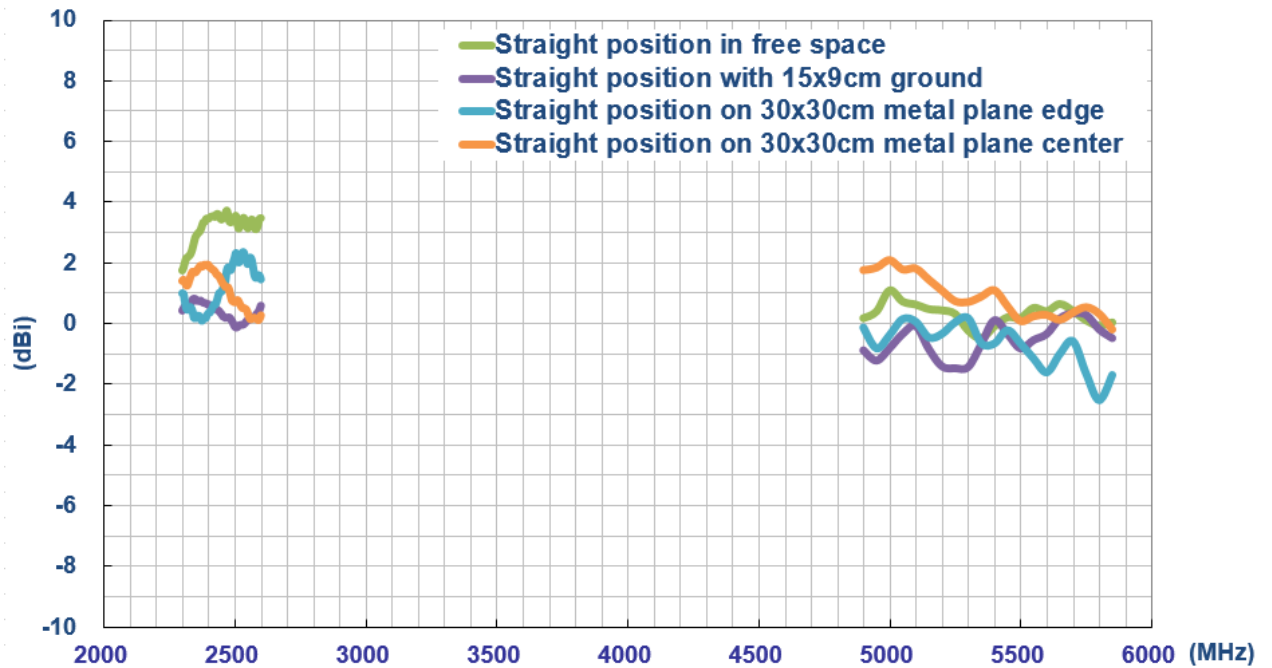


Figure6. Peak gain of GW.05 antenna with straight position

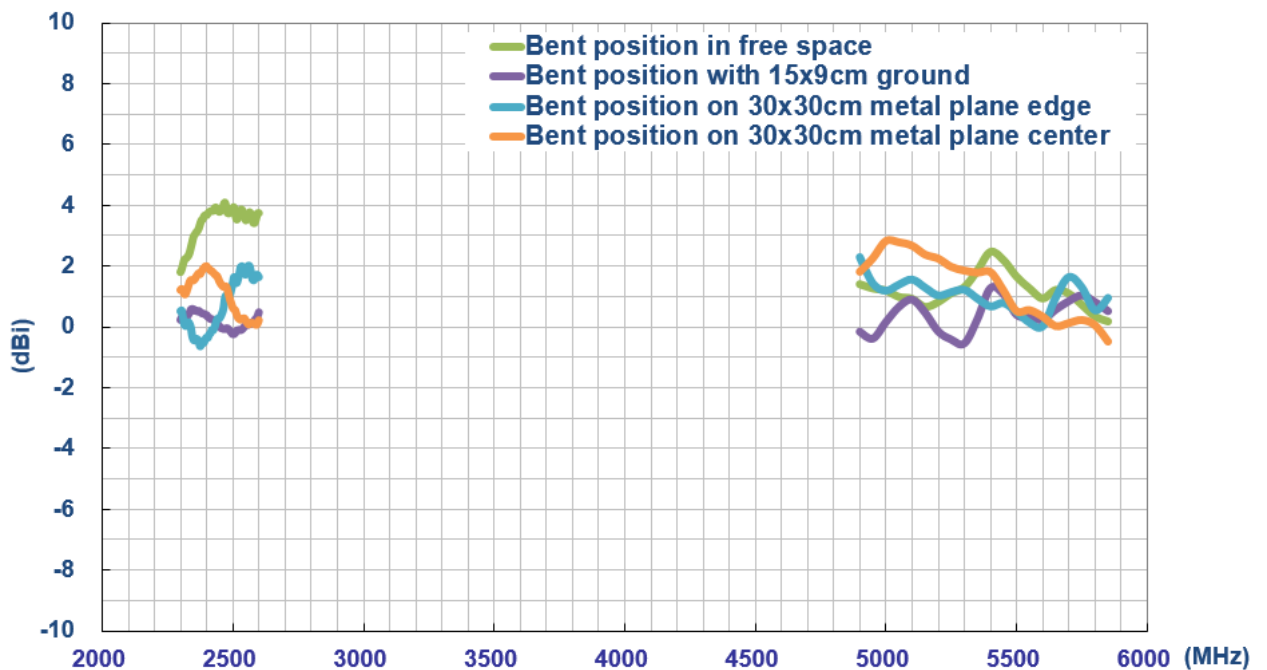


Figure7. Peak gain of GW.05 antenna with bent position

3.5 Average Gain

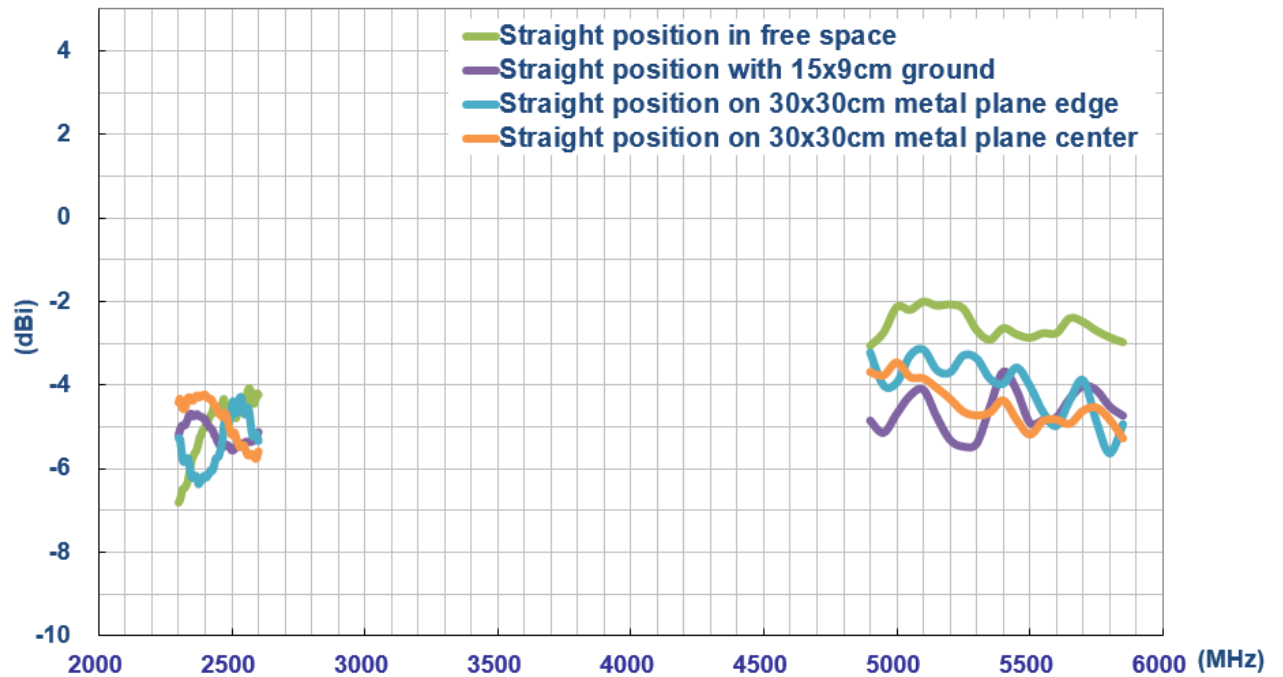


Figure8. Average gain of GW.05 with antenna straight position


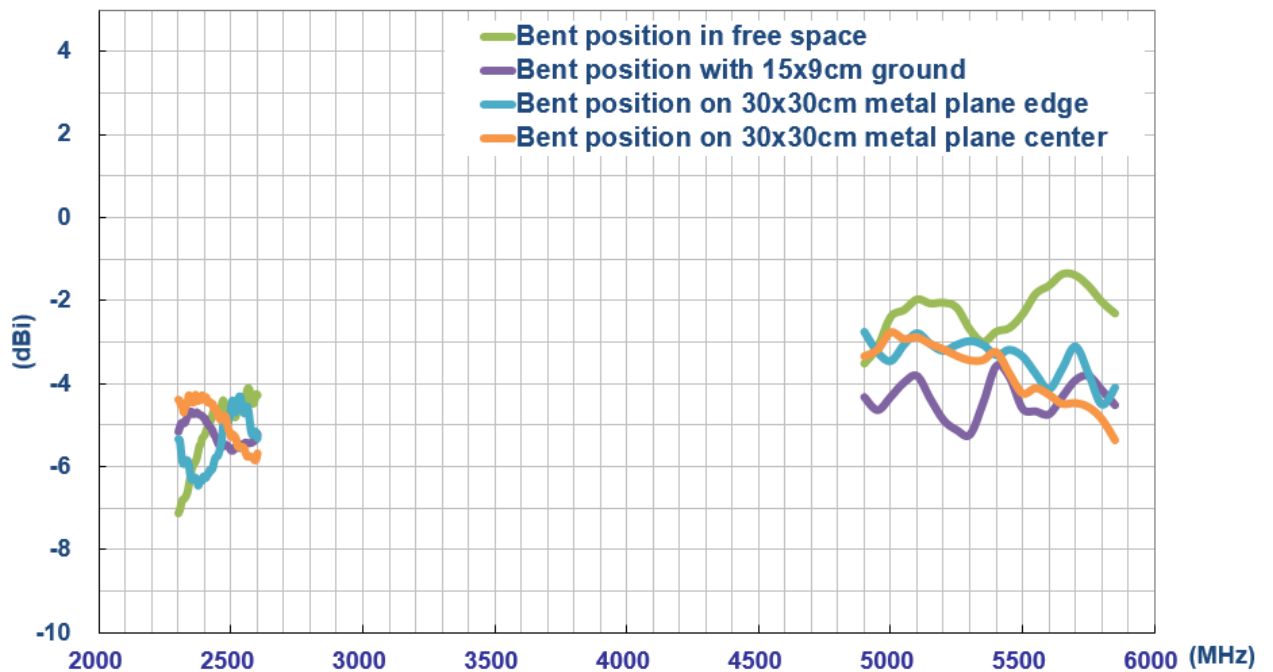


Figure9. Average gain of GW.05 antenna with bent position


4. Antenna Radiation Patterns

The antenna radiation patterns were measured in a CTIA certified ETS Anechoic Chamber. The measurement setup is shown below.


Antenna with Straight Position

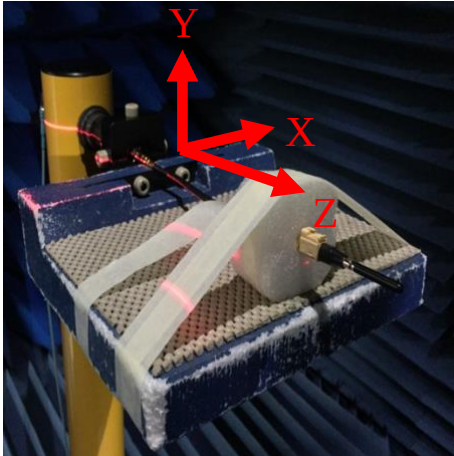


In free space

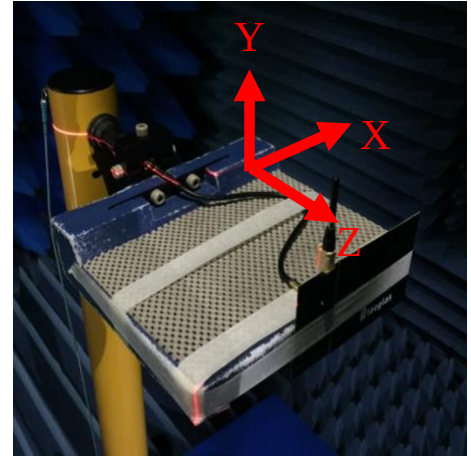

15x9cm ground plane

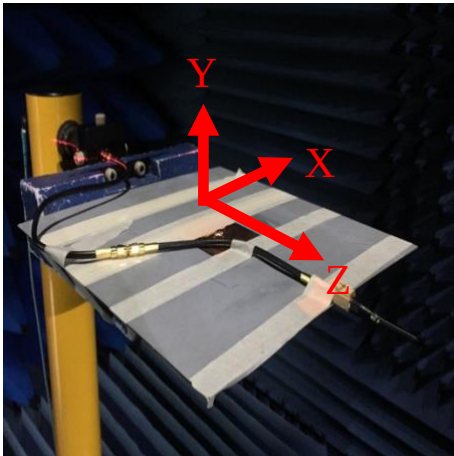


30x30cm metal ground center
edge

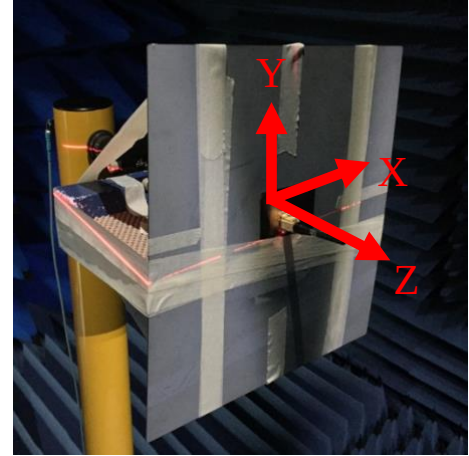


30x30cm metal ground


Antenna Bent Position

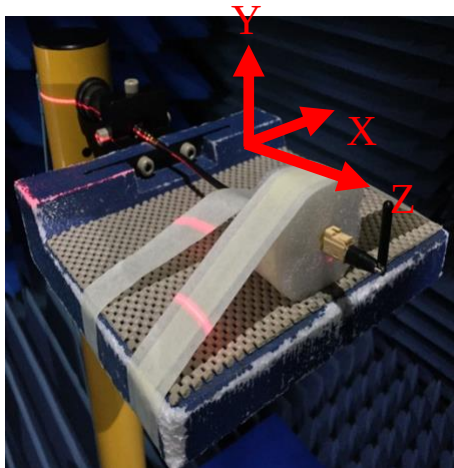


In free space

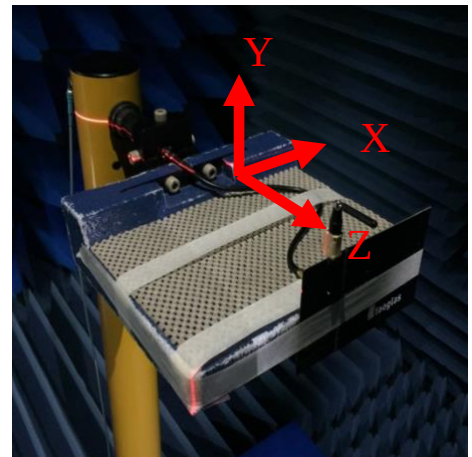

15x9cm ground plane

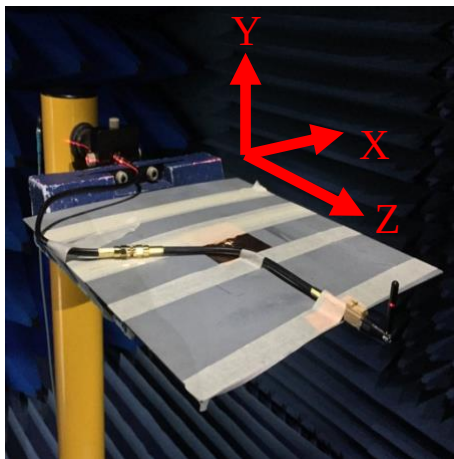

30x30cm metal ground center


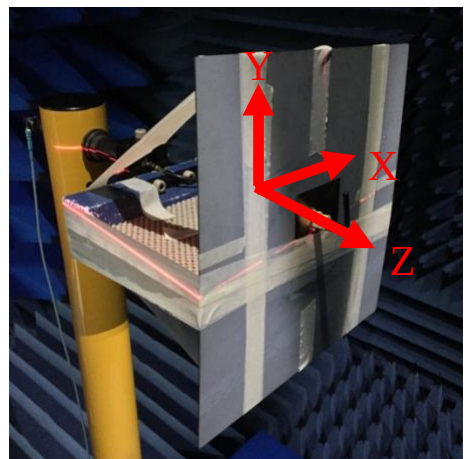


30x30cm metal ground edge



Figure.10. Testing Setup in ETS Anechoic Chamber

4.1 2D Radiation Pattern (Straight position in free space)



XY Plane

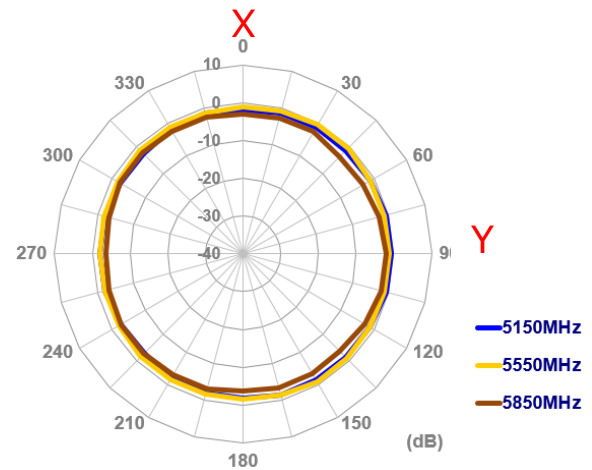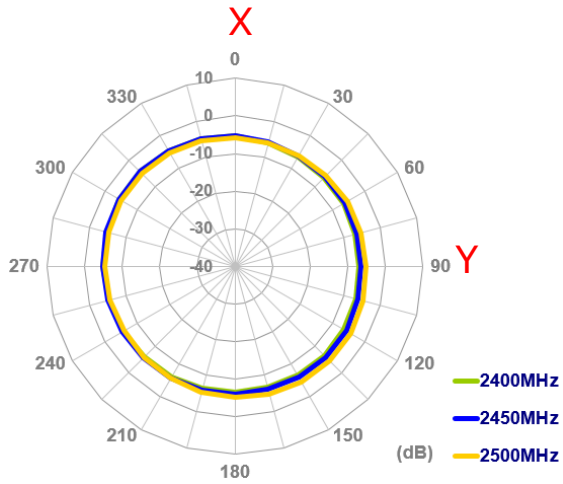

XZ Plane

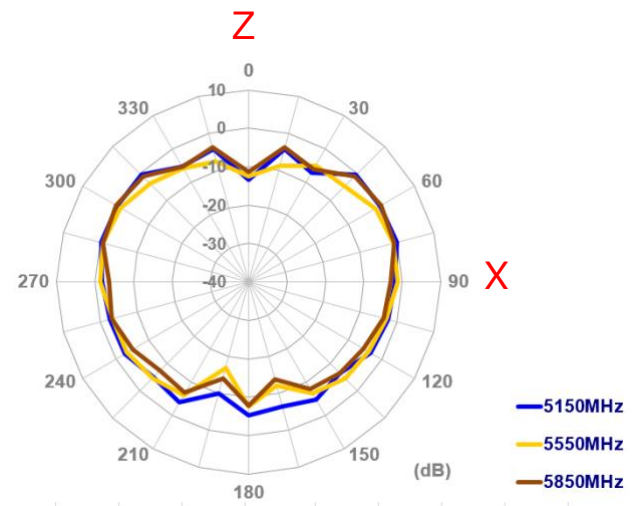
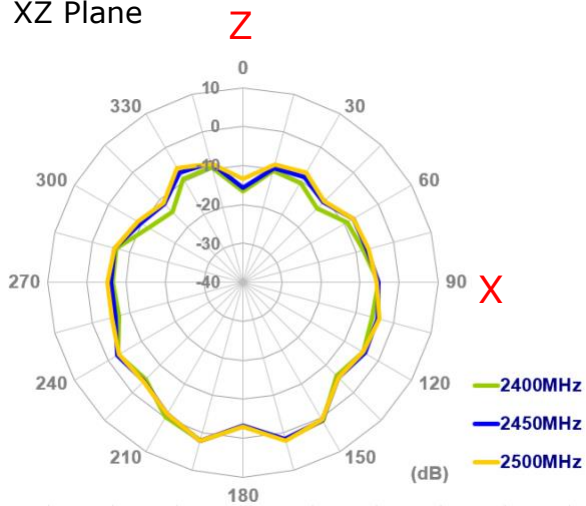


YZ Plane

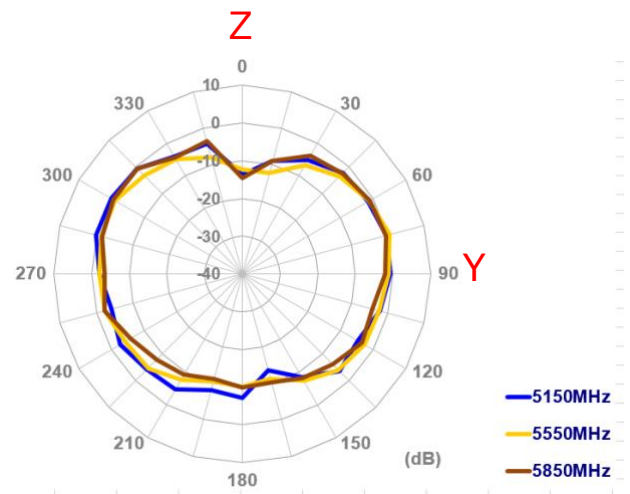
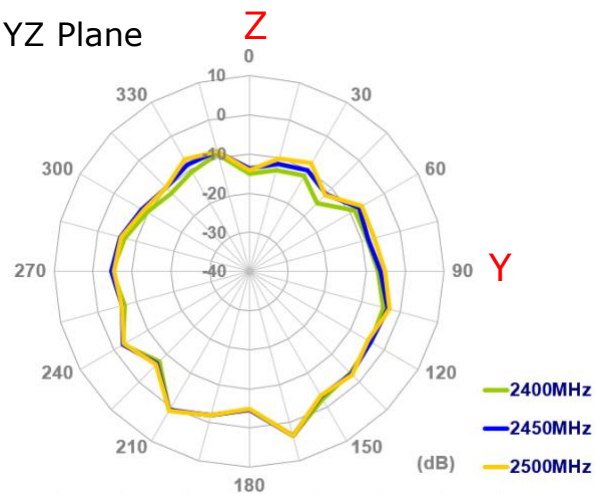


4.2 2D Radiation Pattern (Straight position with 15x9cm ground plane)



XY Plane

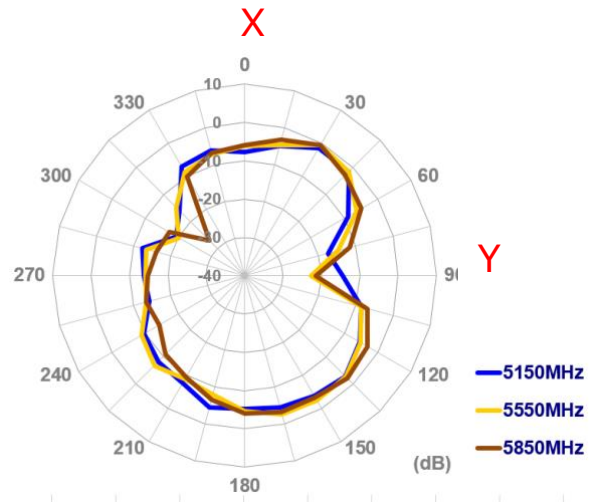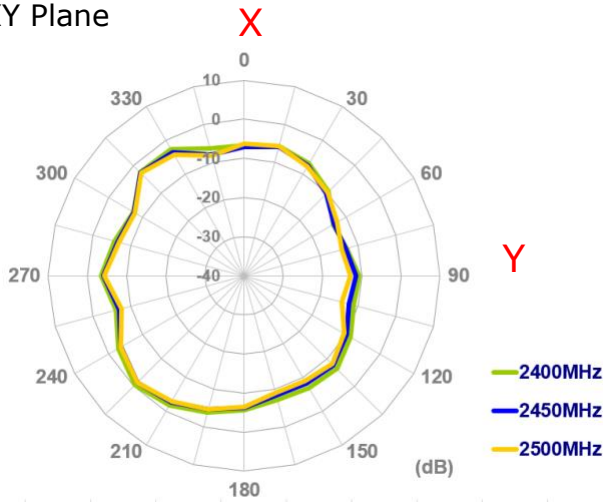

XZ Plane

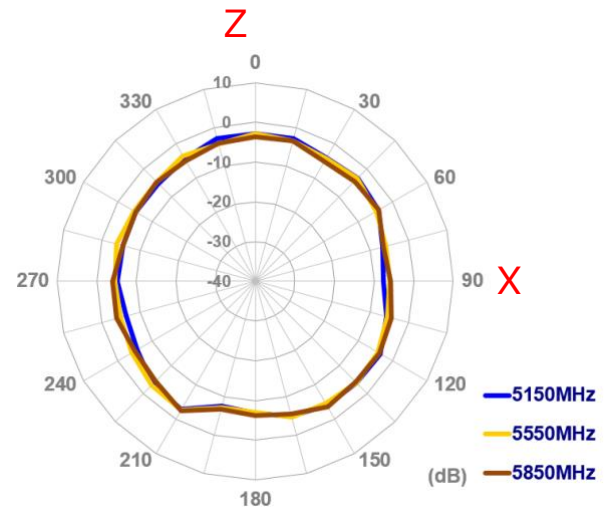
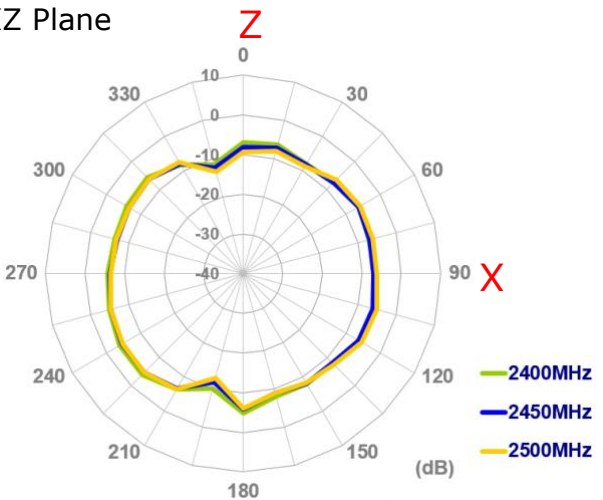


YZ Plane

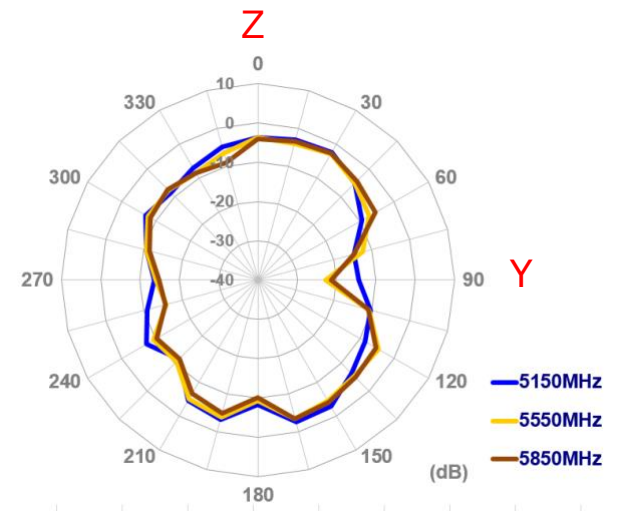
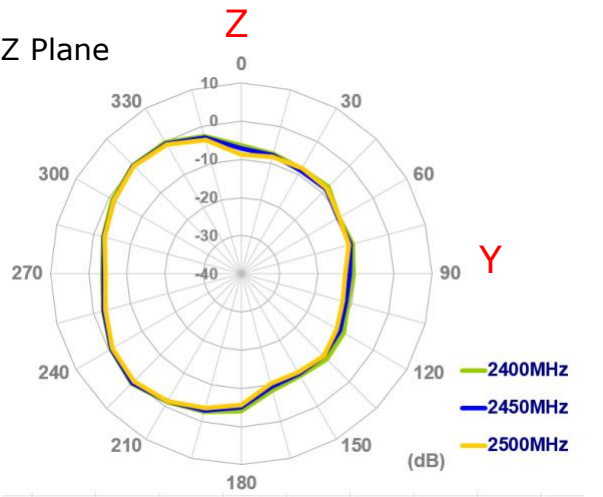


4.3 2D Radiation Pattern (Straight position with 30x30cm ground plane edge)



XY Plane

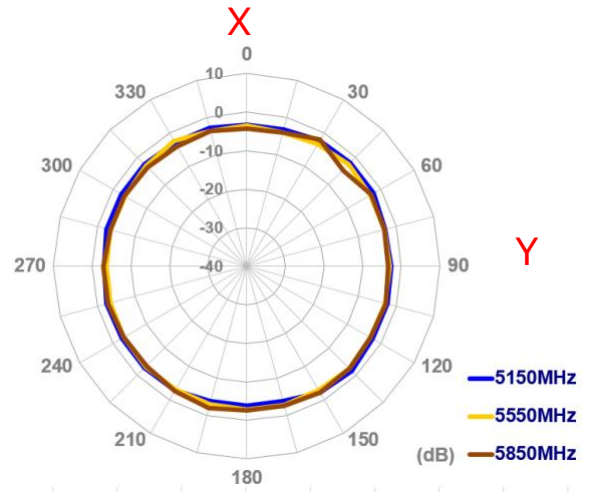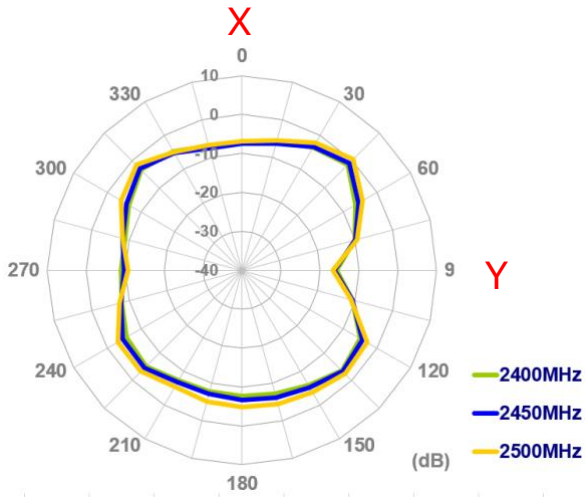

XZ Plane

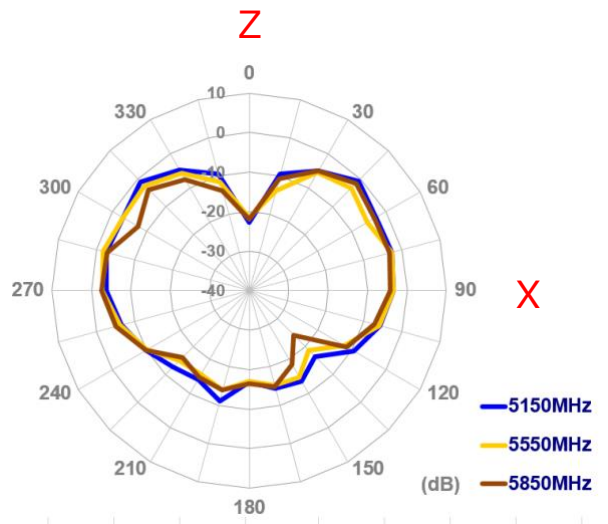
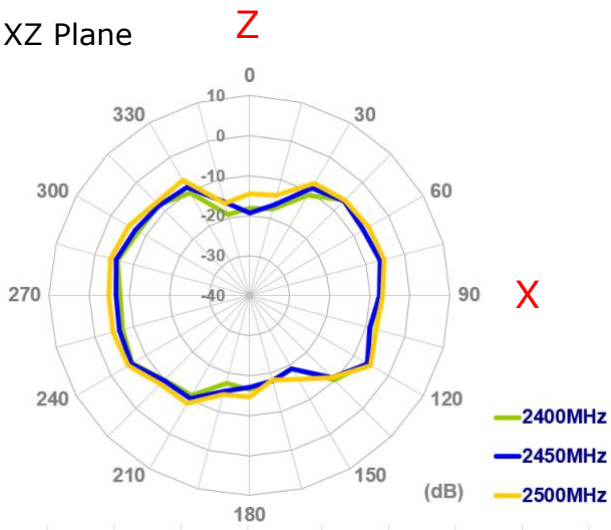


YZ Plane

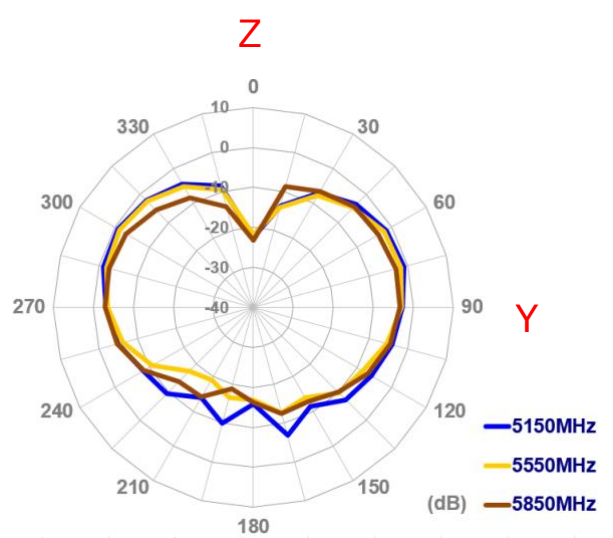
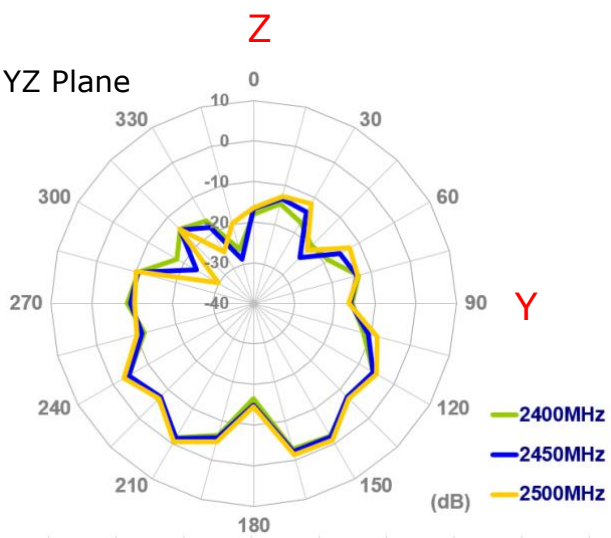


4.3 2D Radiation Pattern (Straight position with 30x30cm ground plane center)



XY Plane

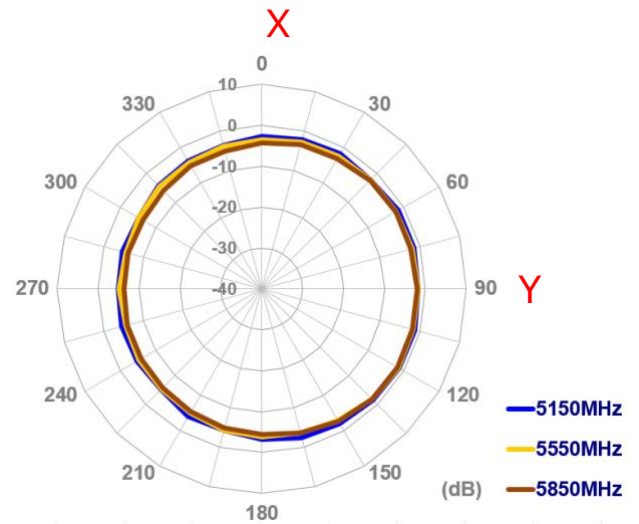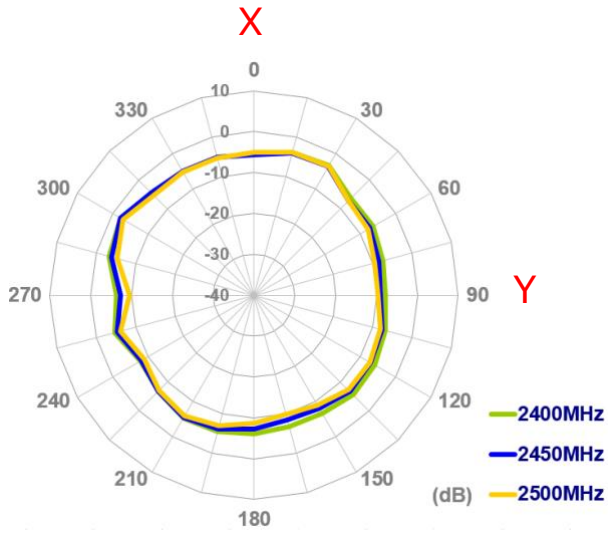

XZ Plane

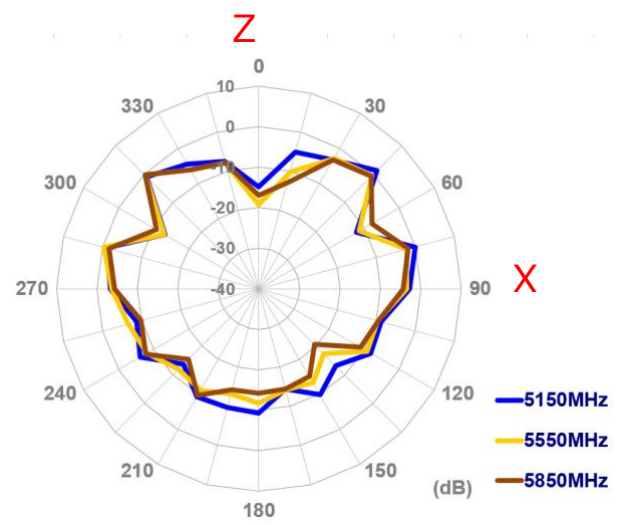
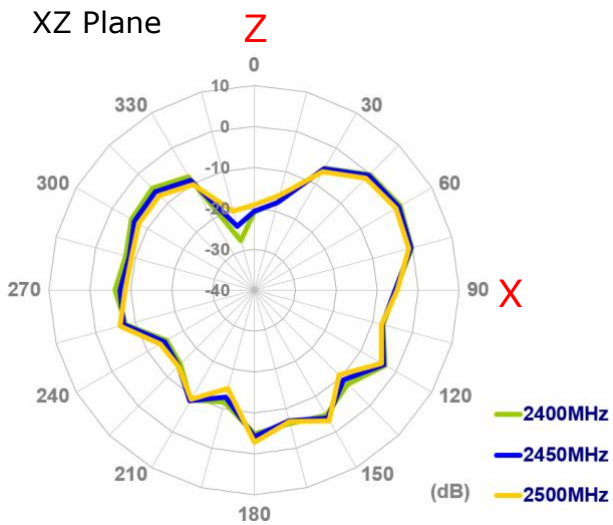


YZ Plane

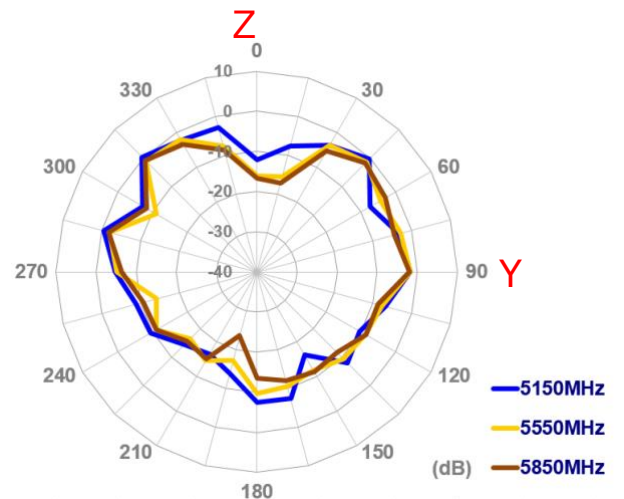
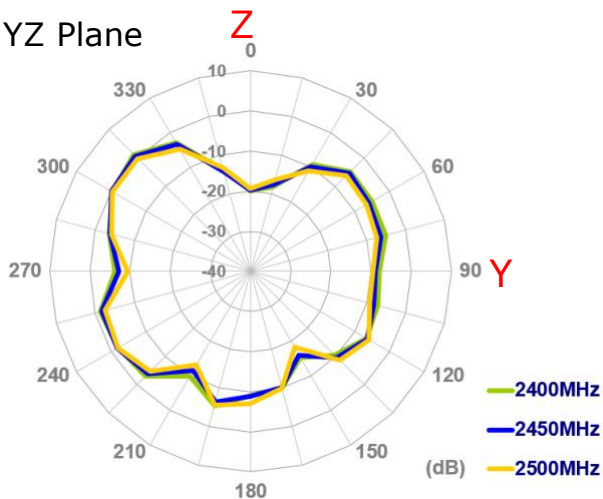


4.4 2D Radiation Pattern (Bent position in free space)



XY Plane

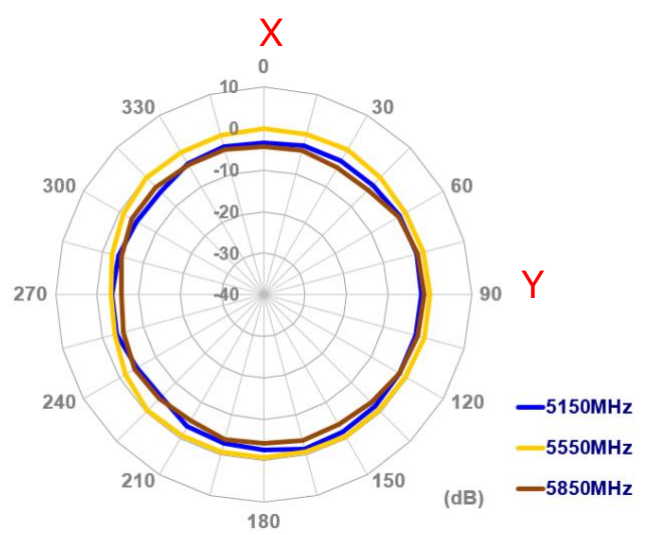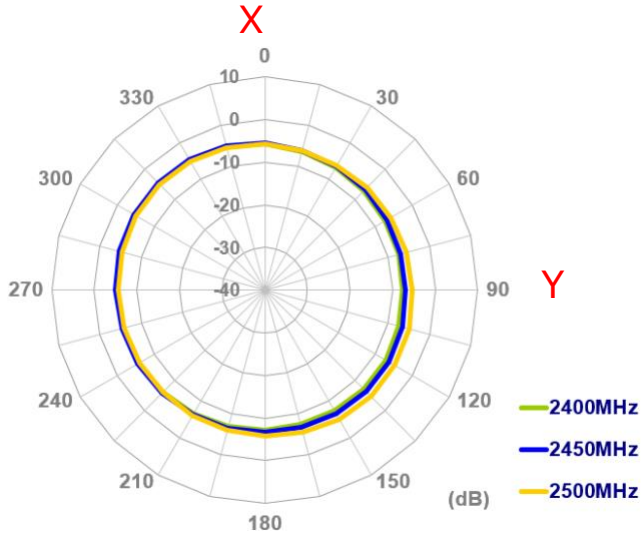

XZ Plane

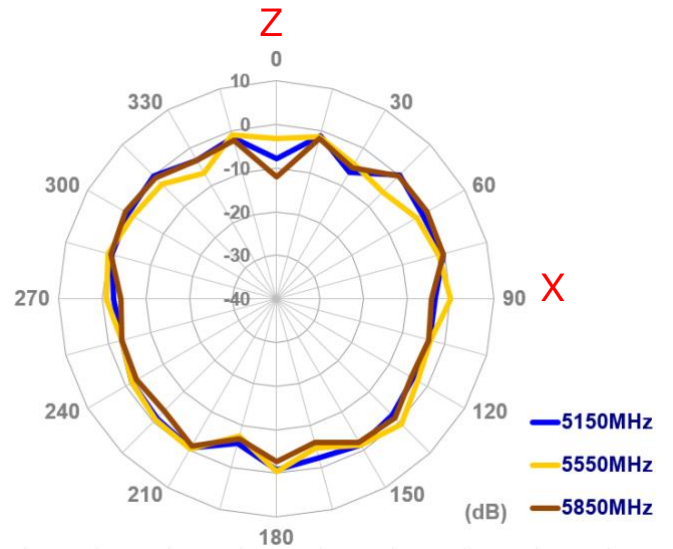
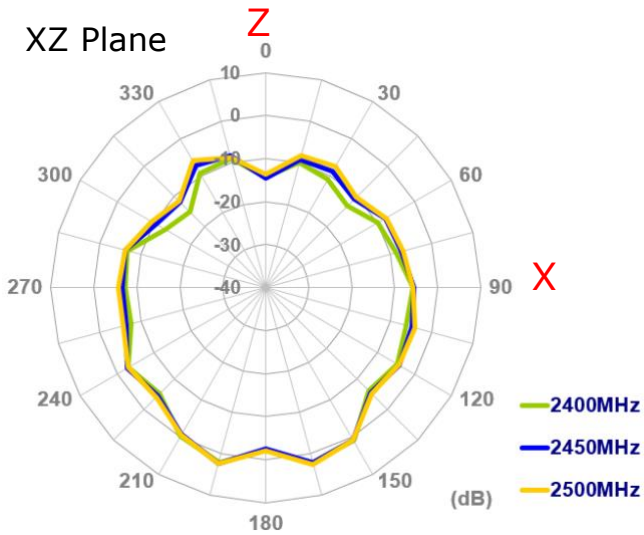


YZ Plane

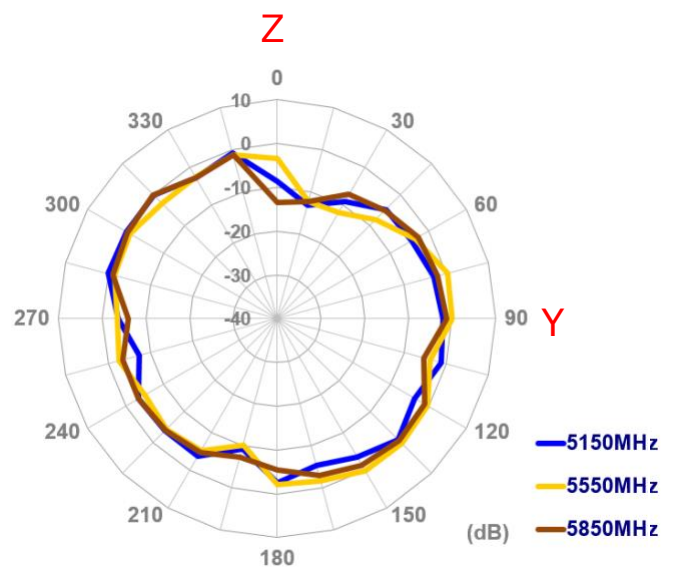
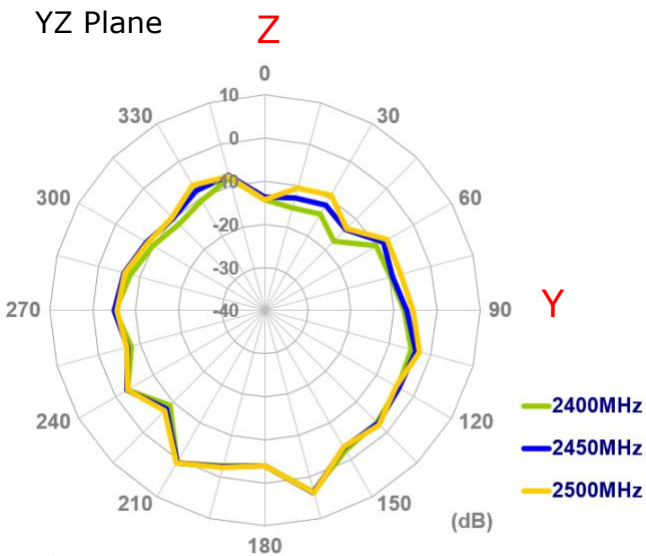


4.5 2D Radiation Pattern (Bent position with 15x9cm ground plane)



XY Plane

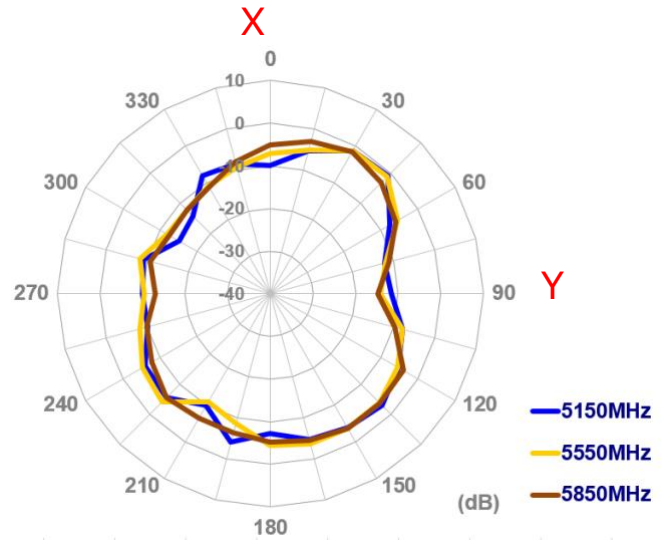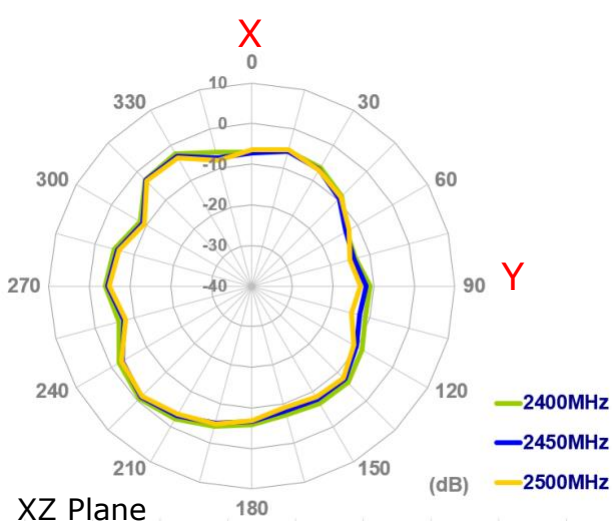

XZ Plane

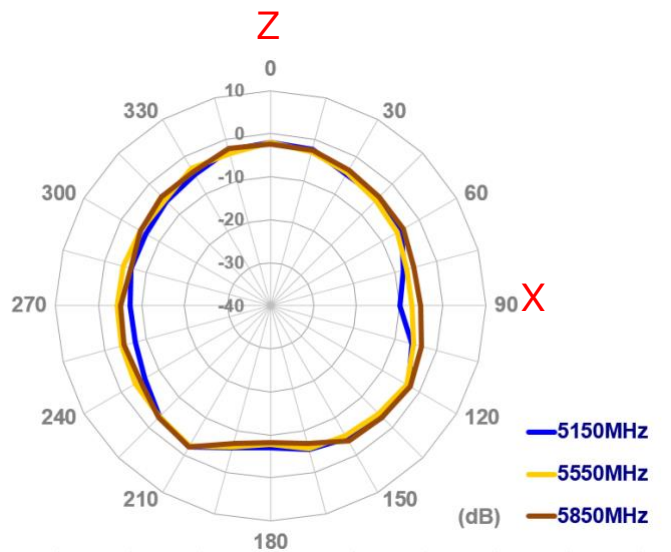
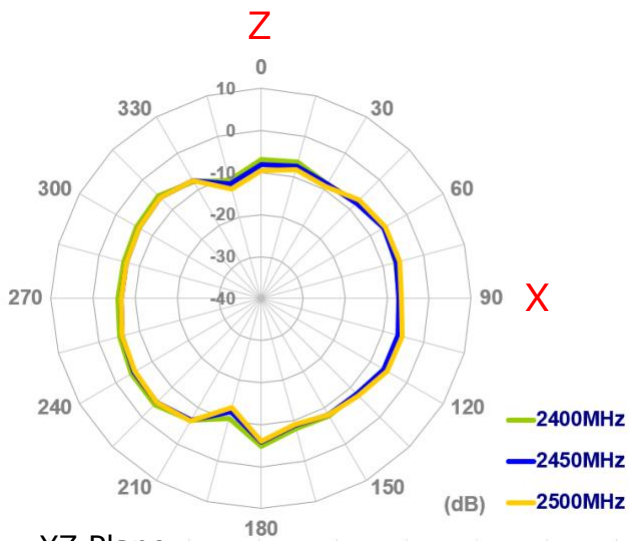


YZ Plane

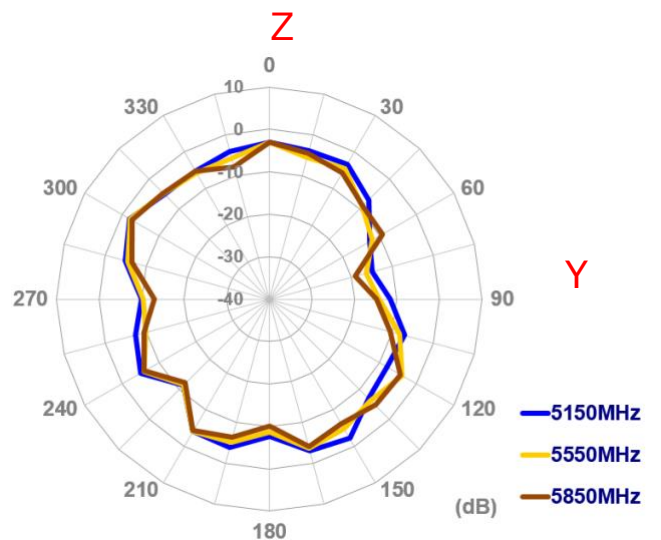
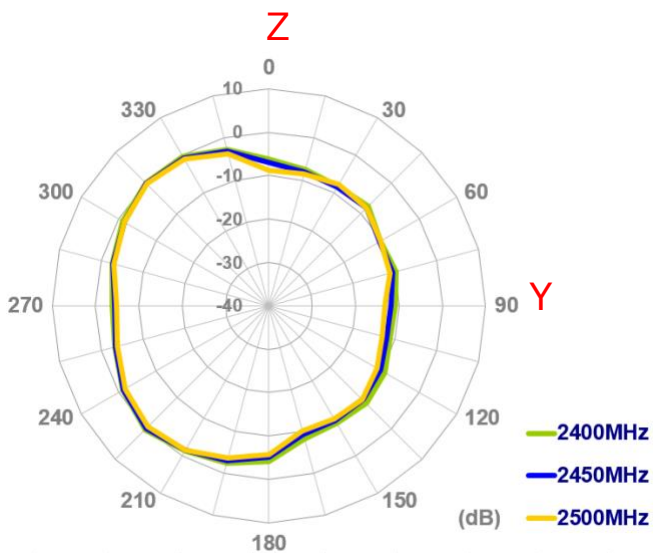


4.7 2D Radiation Pattern (Bent position with 30x30cm ground plane edge)



XY Plane

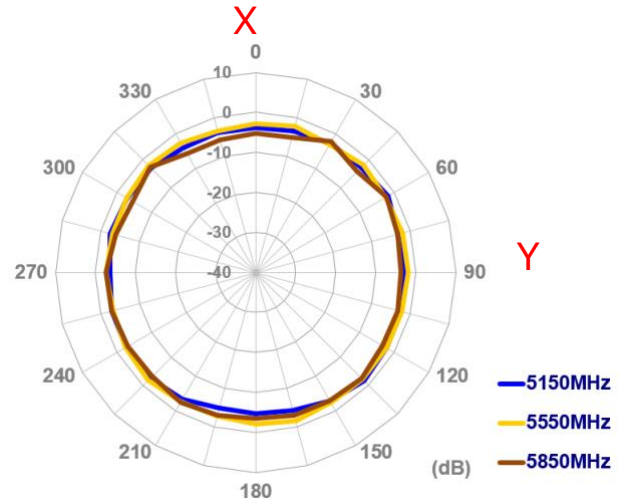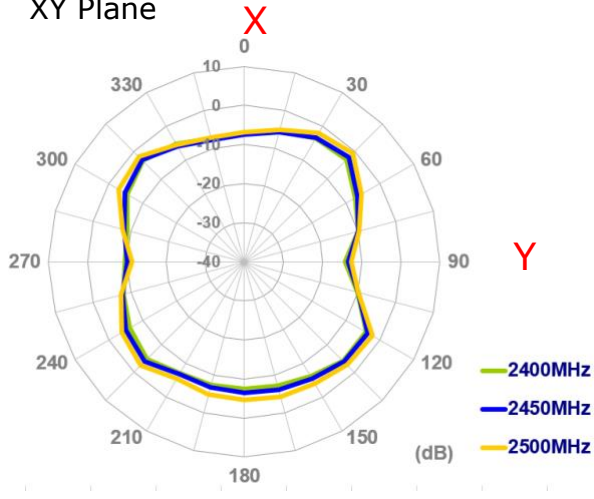

XZ Plane

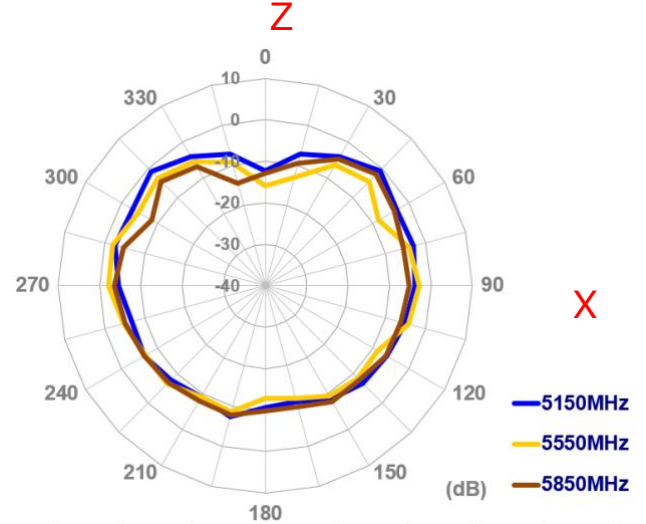
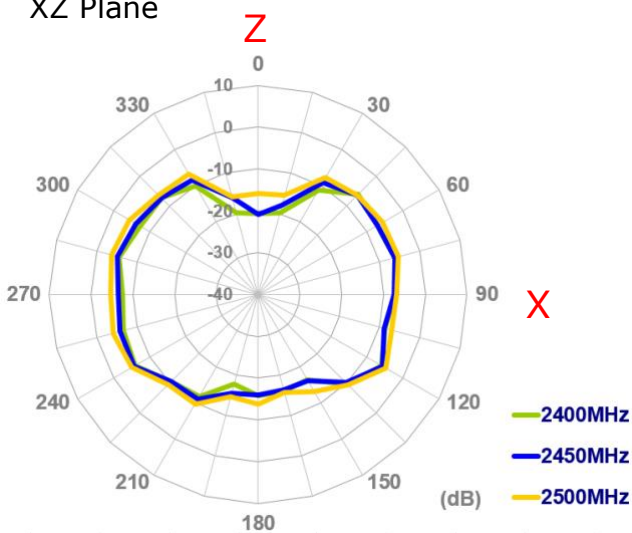


YZ Plane

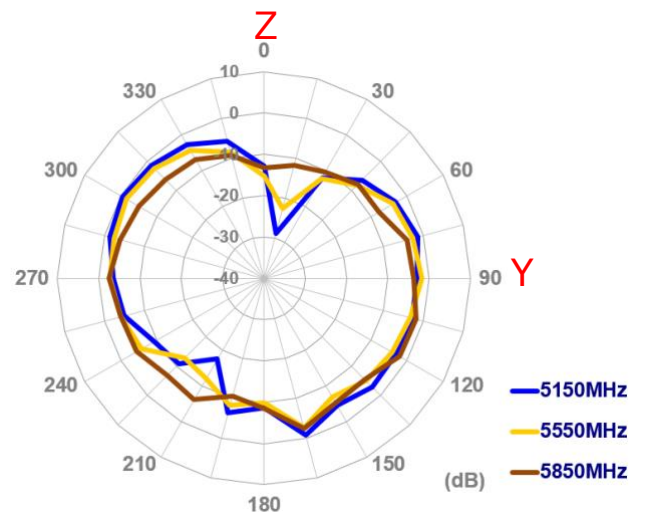
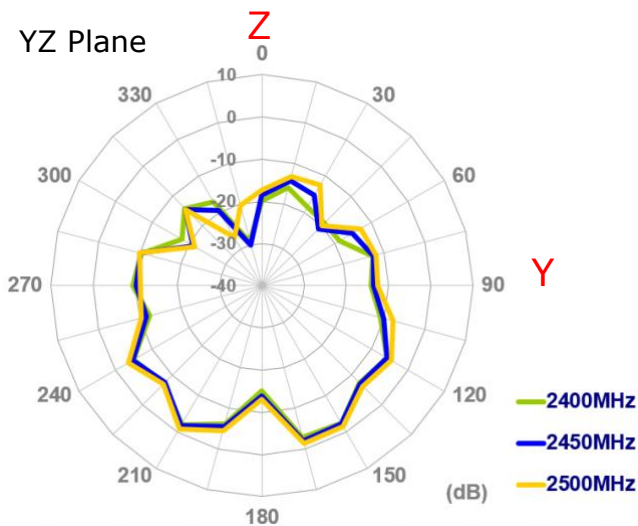


4.8 2D Radiation Pattern (Bent position with 30*30cm ground plane center)



XY Plane **X**

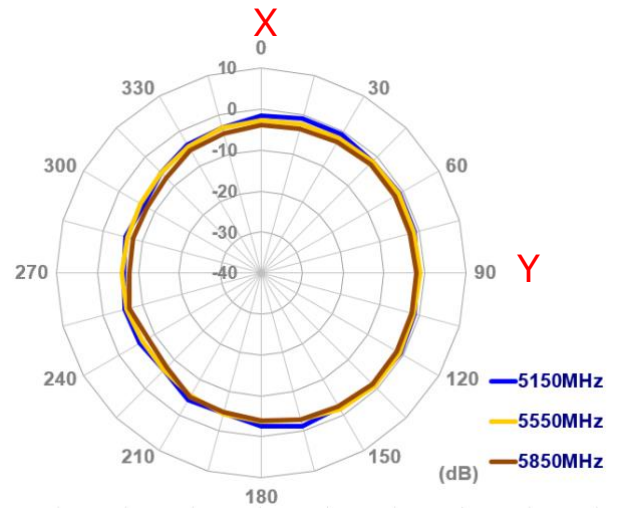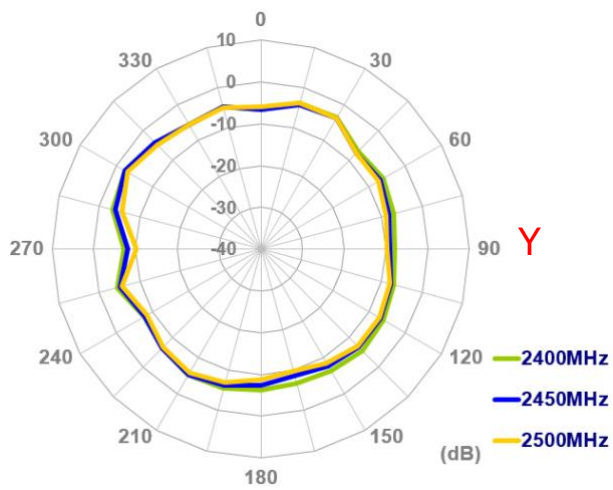


XZ Plane **Z**

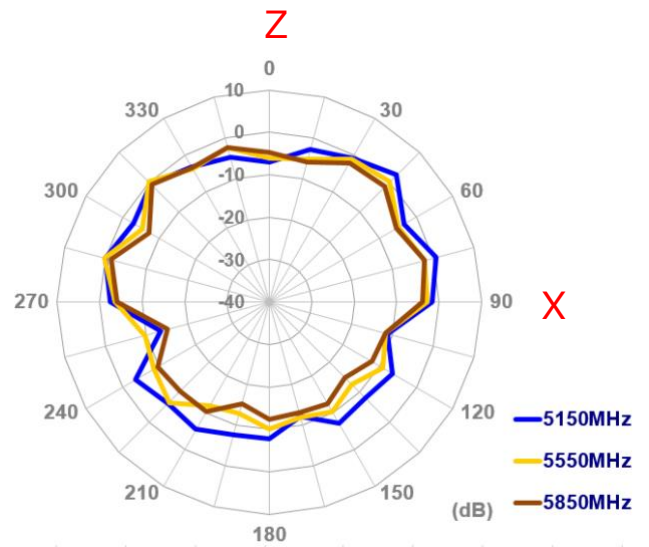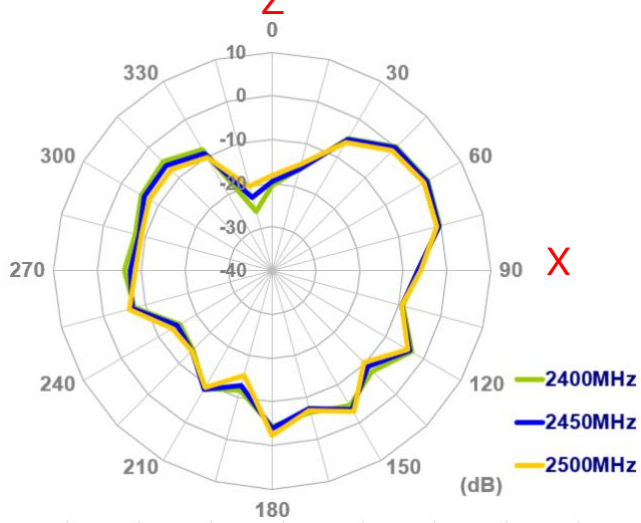


YZ Plane **Z**

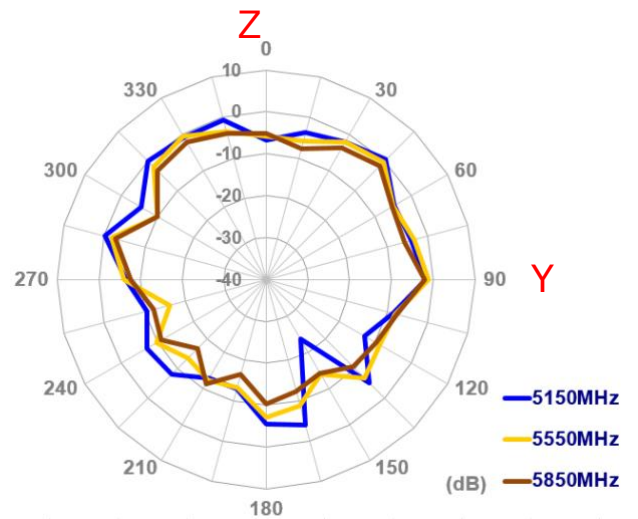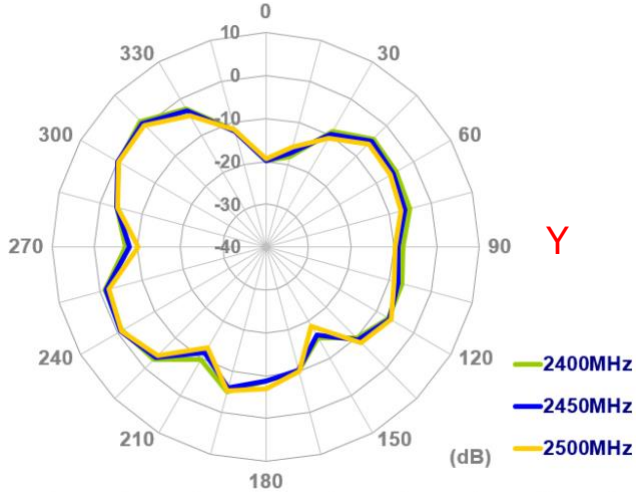


4.9 3D Radiation Pattern (Straight position in free space)

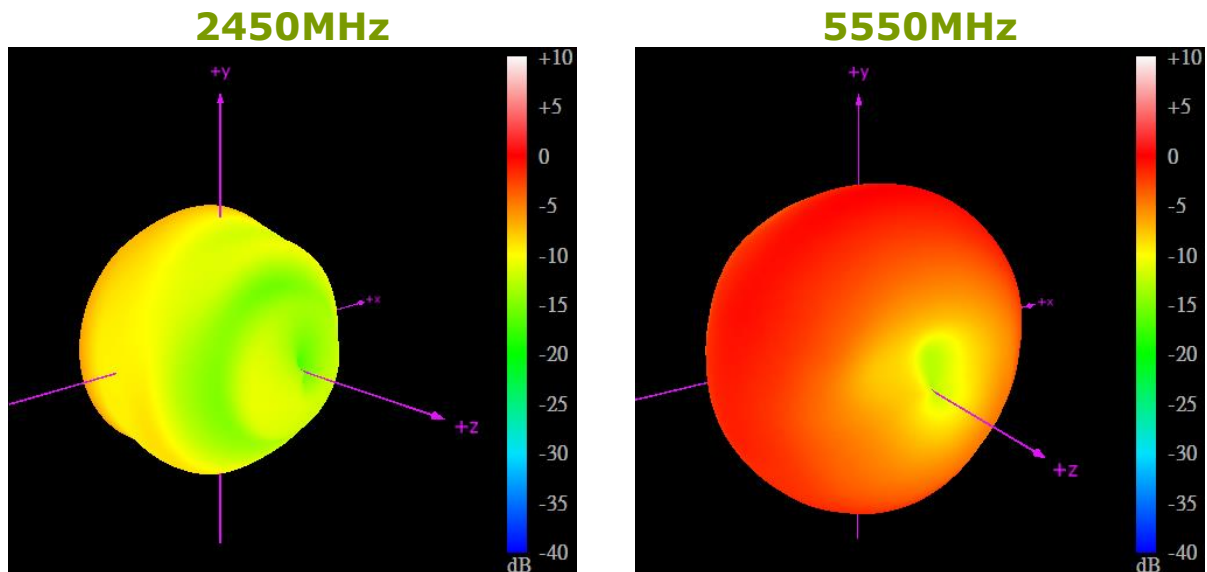


4.10 3D Radiation Pattern (Straight position with 15x9cm ground plane)

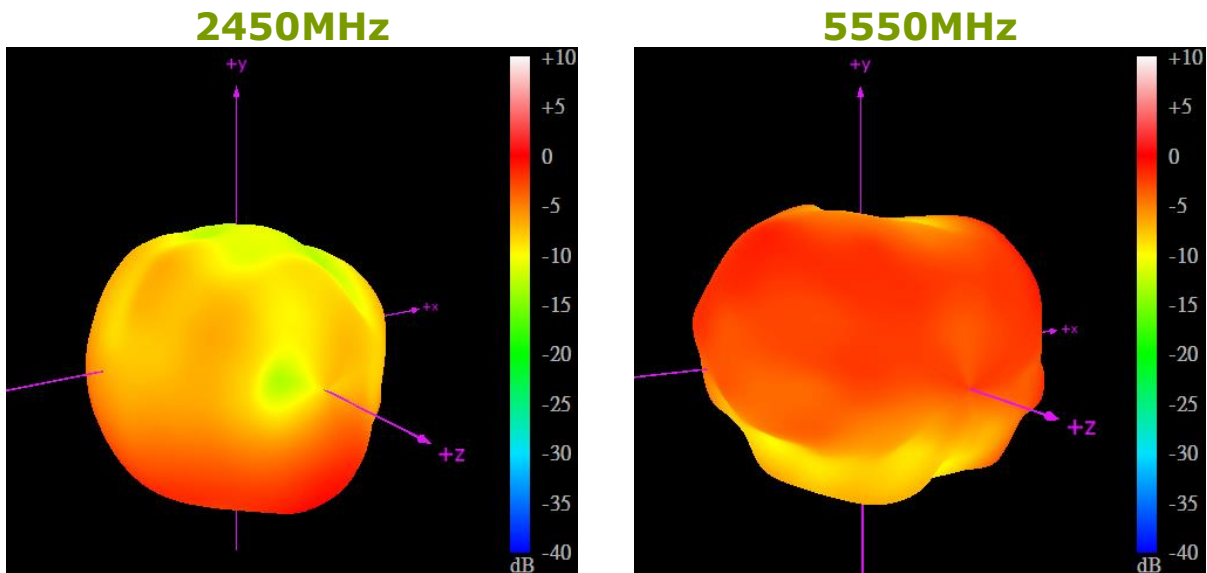


4.11 3D Radiation Pattern (Straight position with 30x30cm ground plane edge)

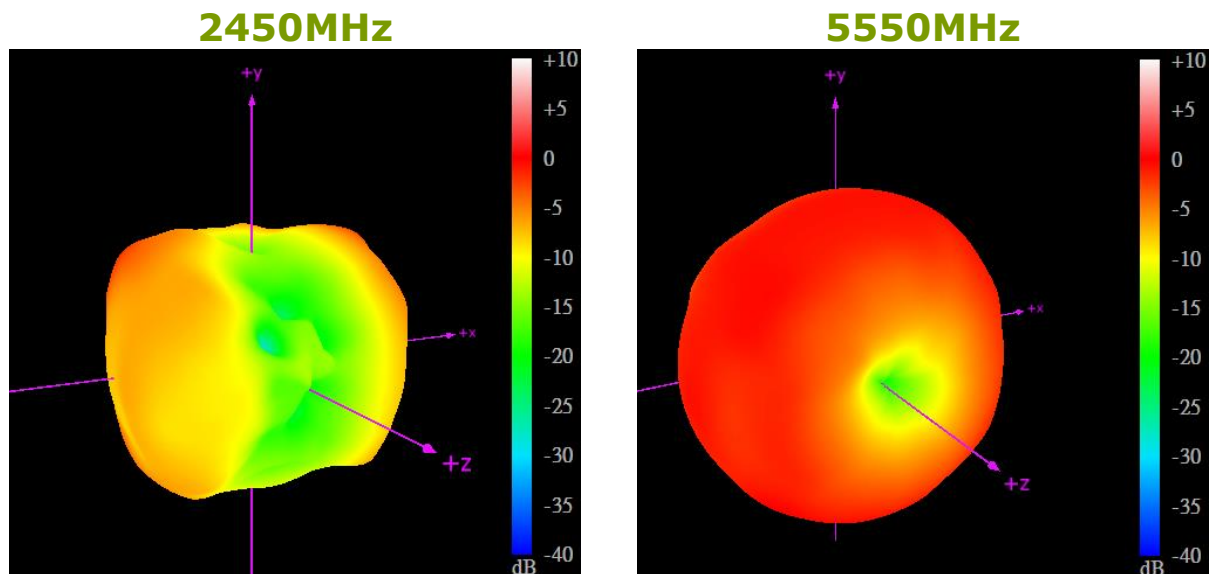


4.12 3D Radiation Pattern (Straight position with 30x30cm ground plane center)

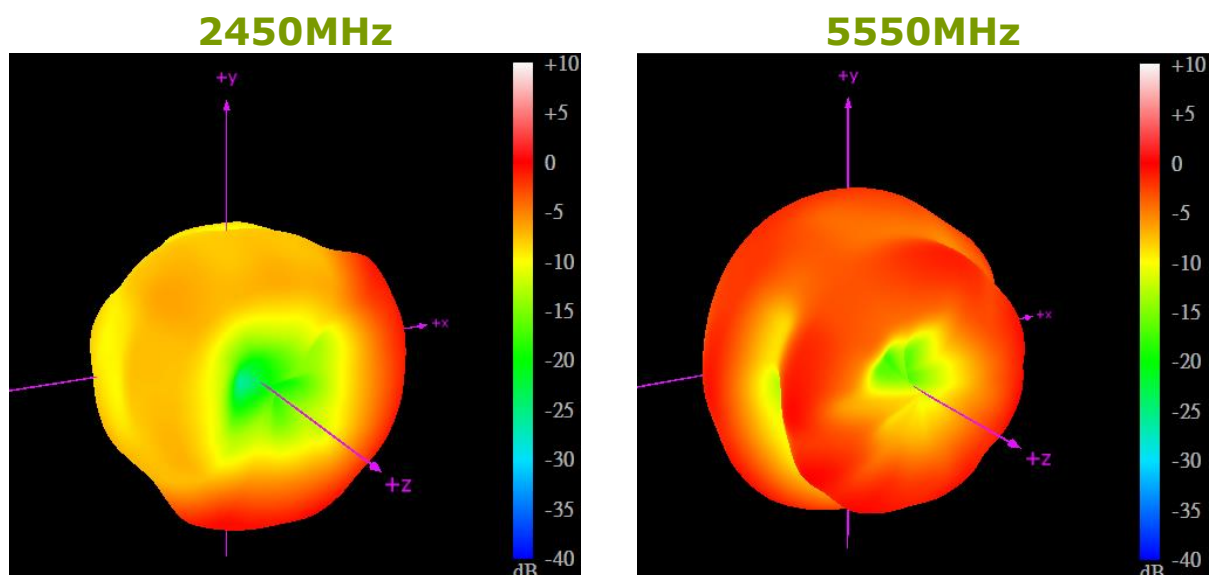


4.13 3D Radiation Pattern (Bent position in free space)

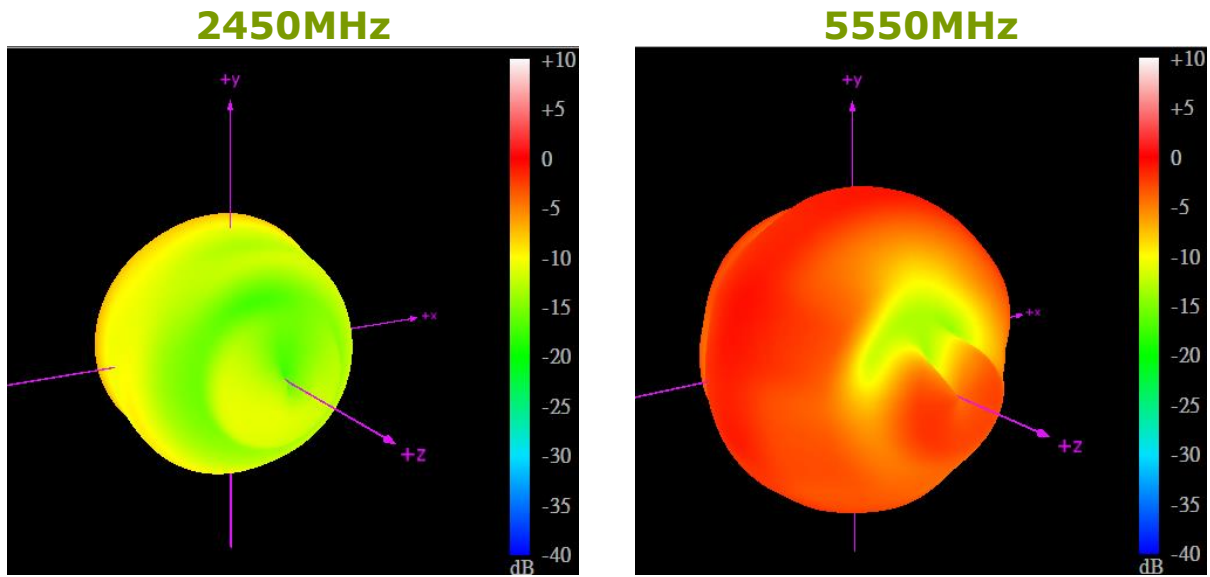


4.14 3D Radiation Pattern (Bent position with 15x9cm ground plane)

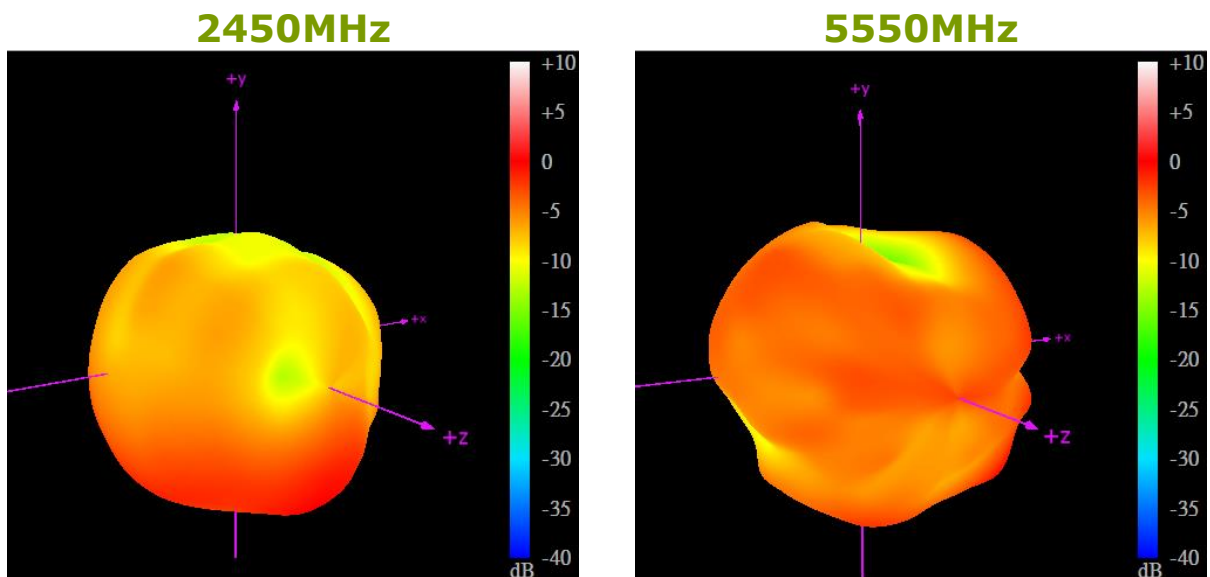


4.15 3D Radiation Pattern (Bent position with 30x30cm ground plane edge)

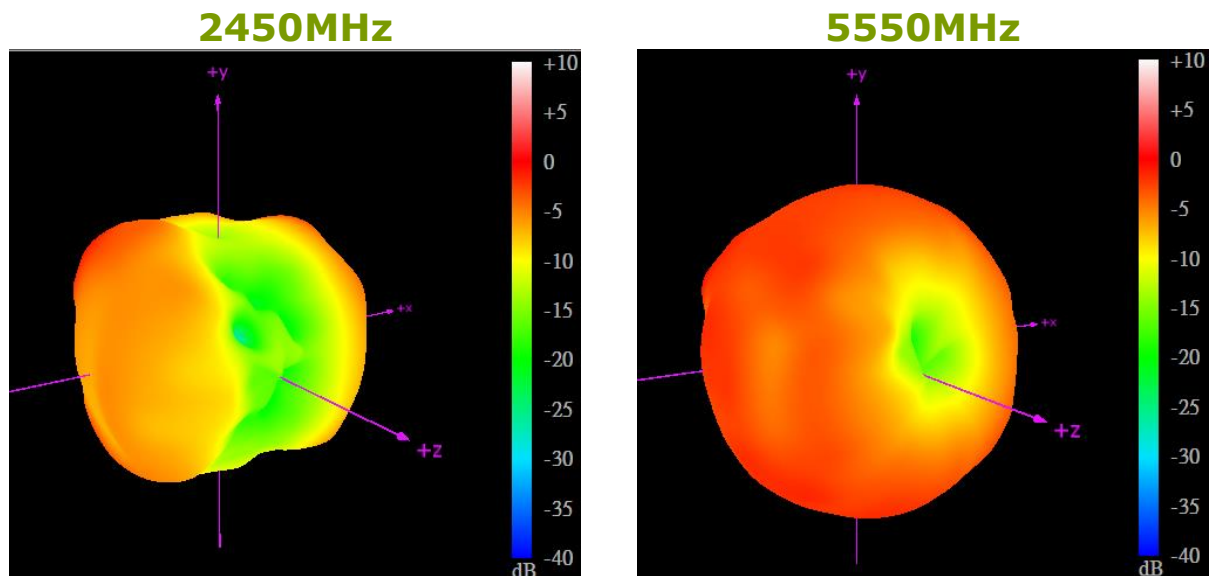

4.16 3D Radiation Pattern (Bent position with 30x30cm ground plane center)

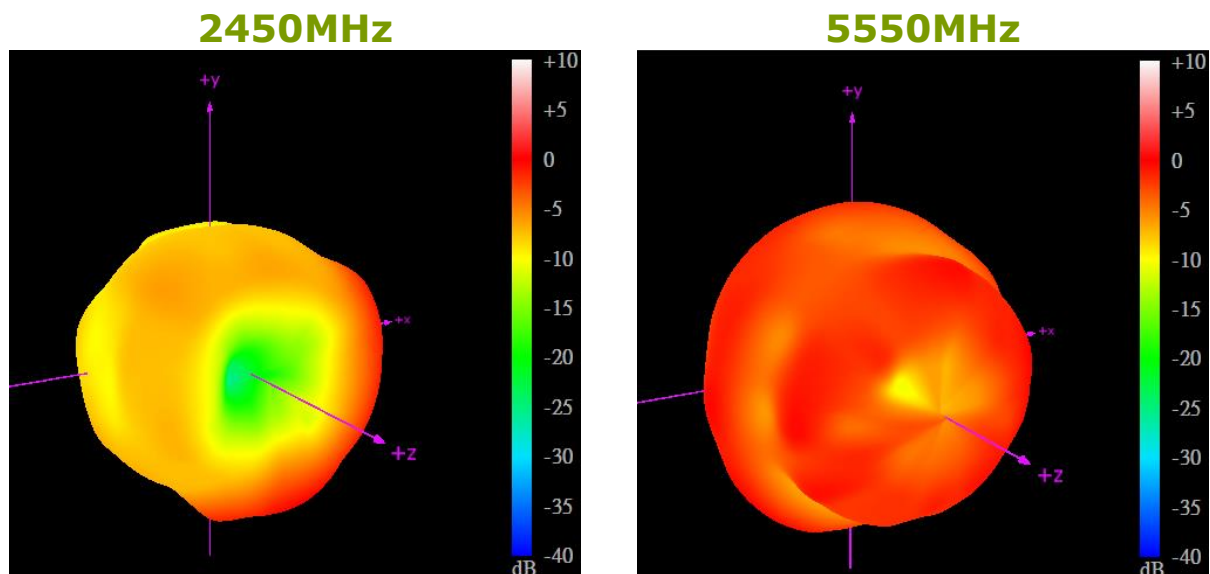


5. Mechanical Drawing (Unit:mm)

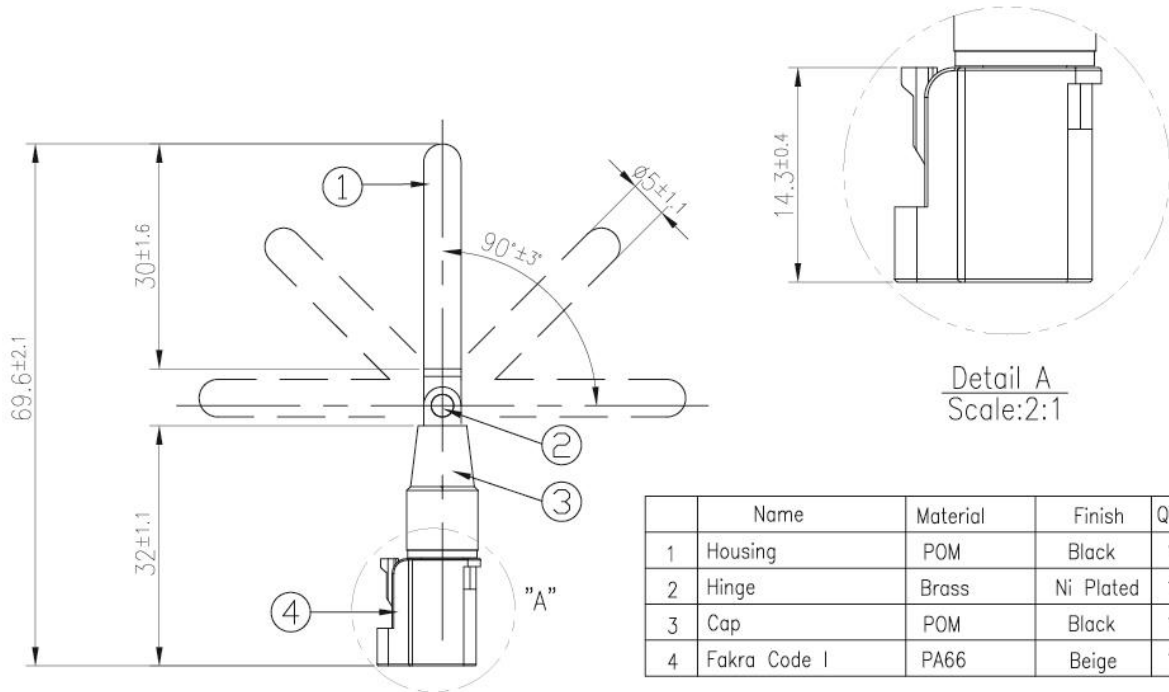


6. Packaging


1pc GW.05.0E23 per small PE bag
Bag Dimensions - 86*52 mm
Weight - 8.5g




100pcs GW.05.0E23 per large PE bag
Bag Dimensions - 280*180 mm
Weight - 0.85Kg

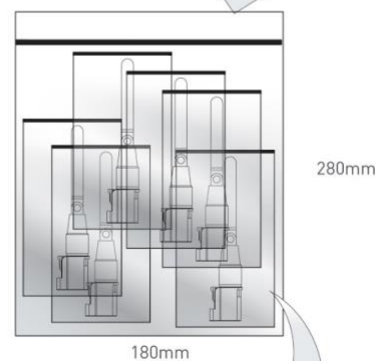

1000pcs GW.05.0E23 per carton
Carton Dimensions - 360*310*160mm
Weight - 9Kg

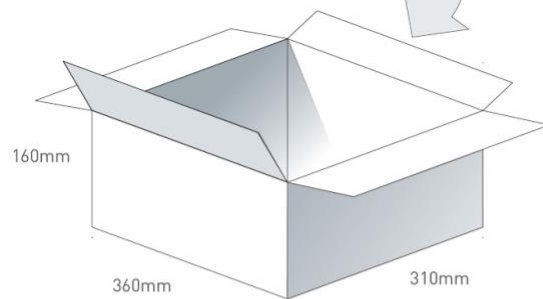

Pallet Dimensions 1200mm*1000mm*1480mm
72 Cartons per Pallet
9 Cartons per layer
8 Layers

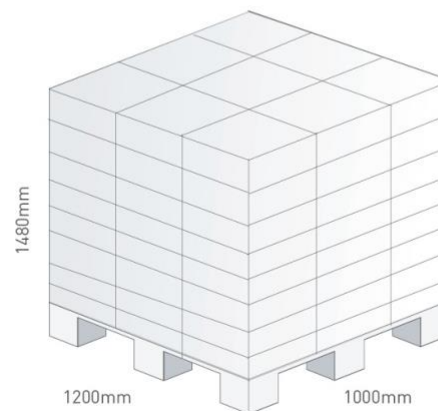

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

© Taoglas

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9