


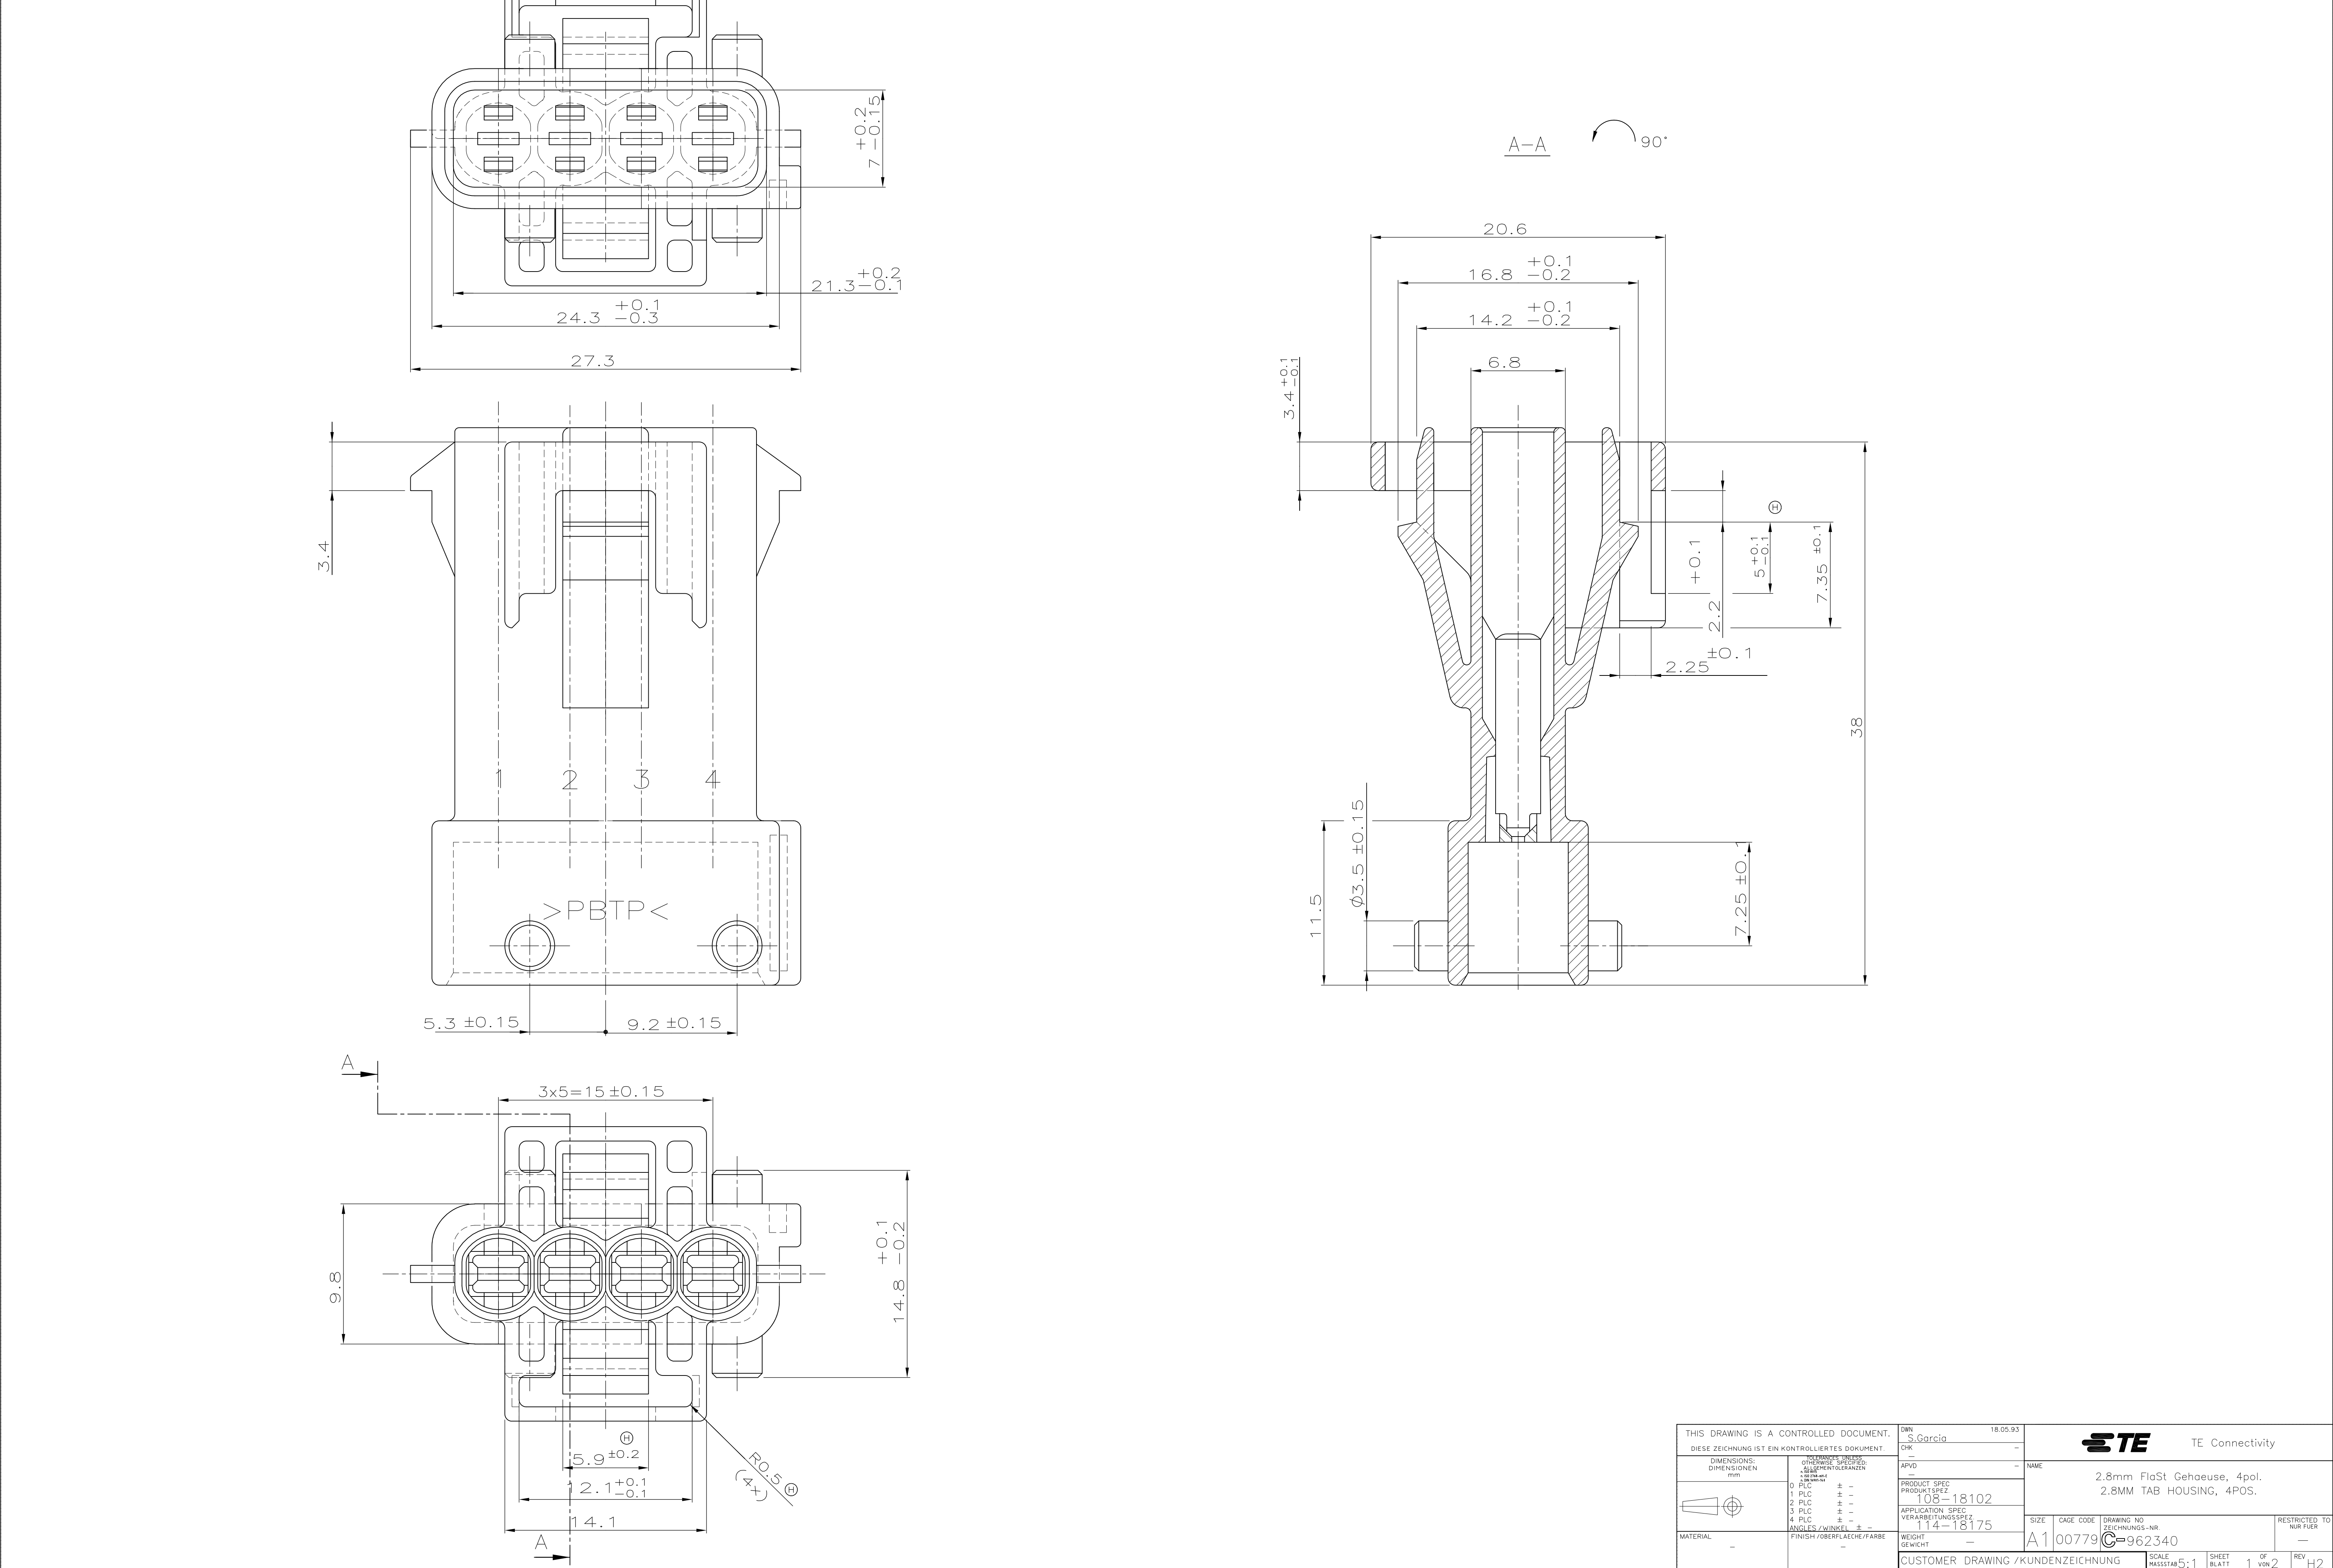


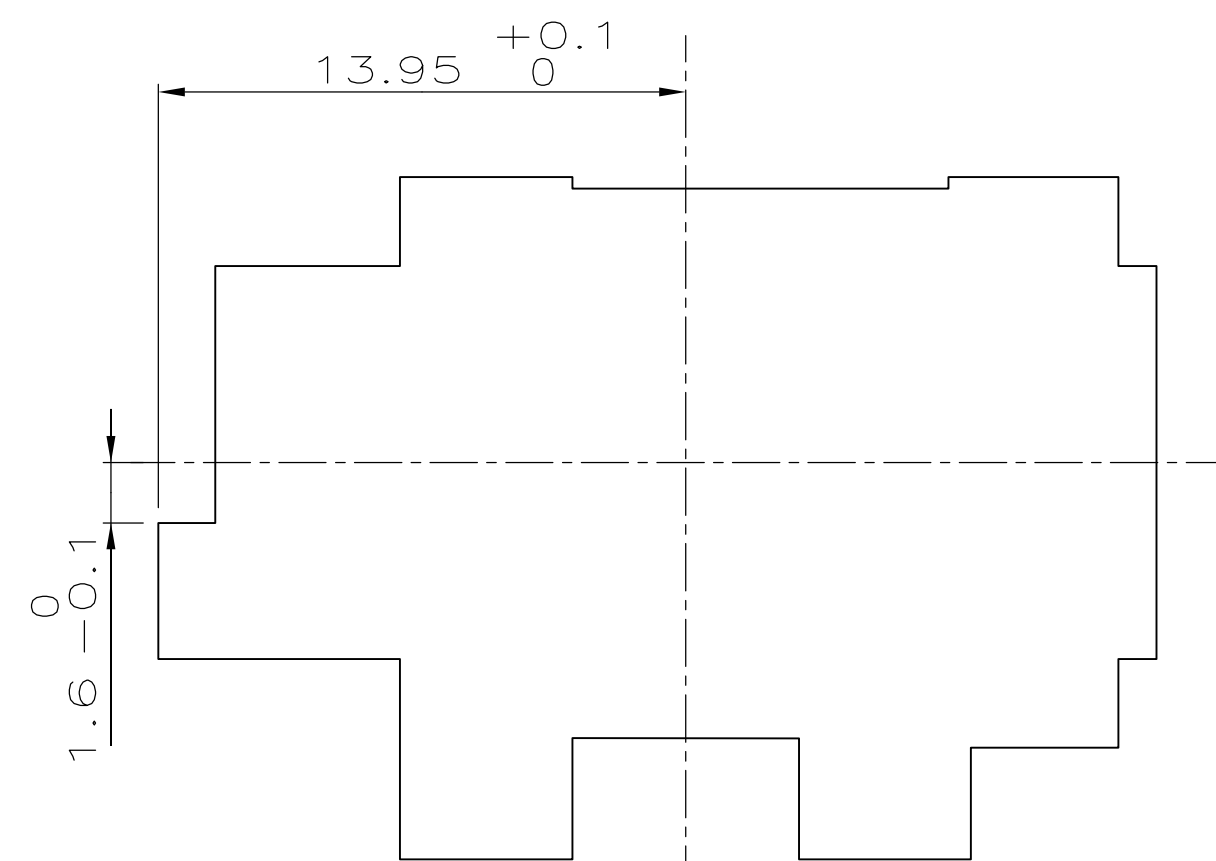

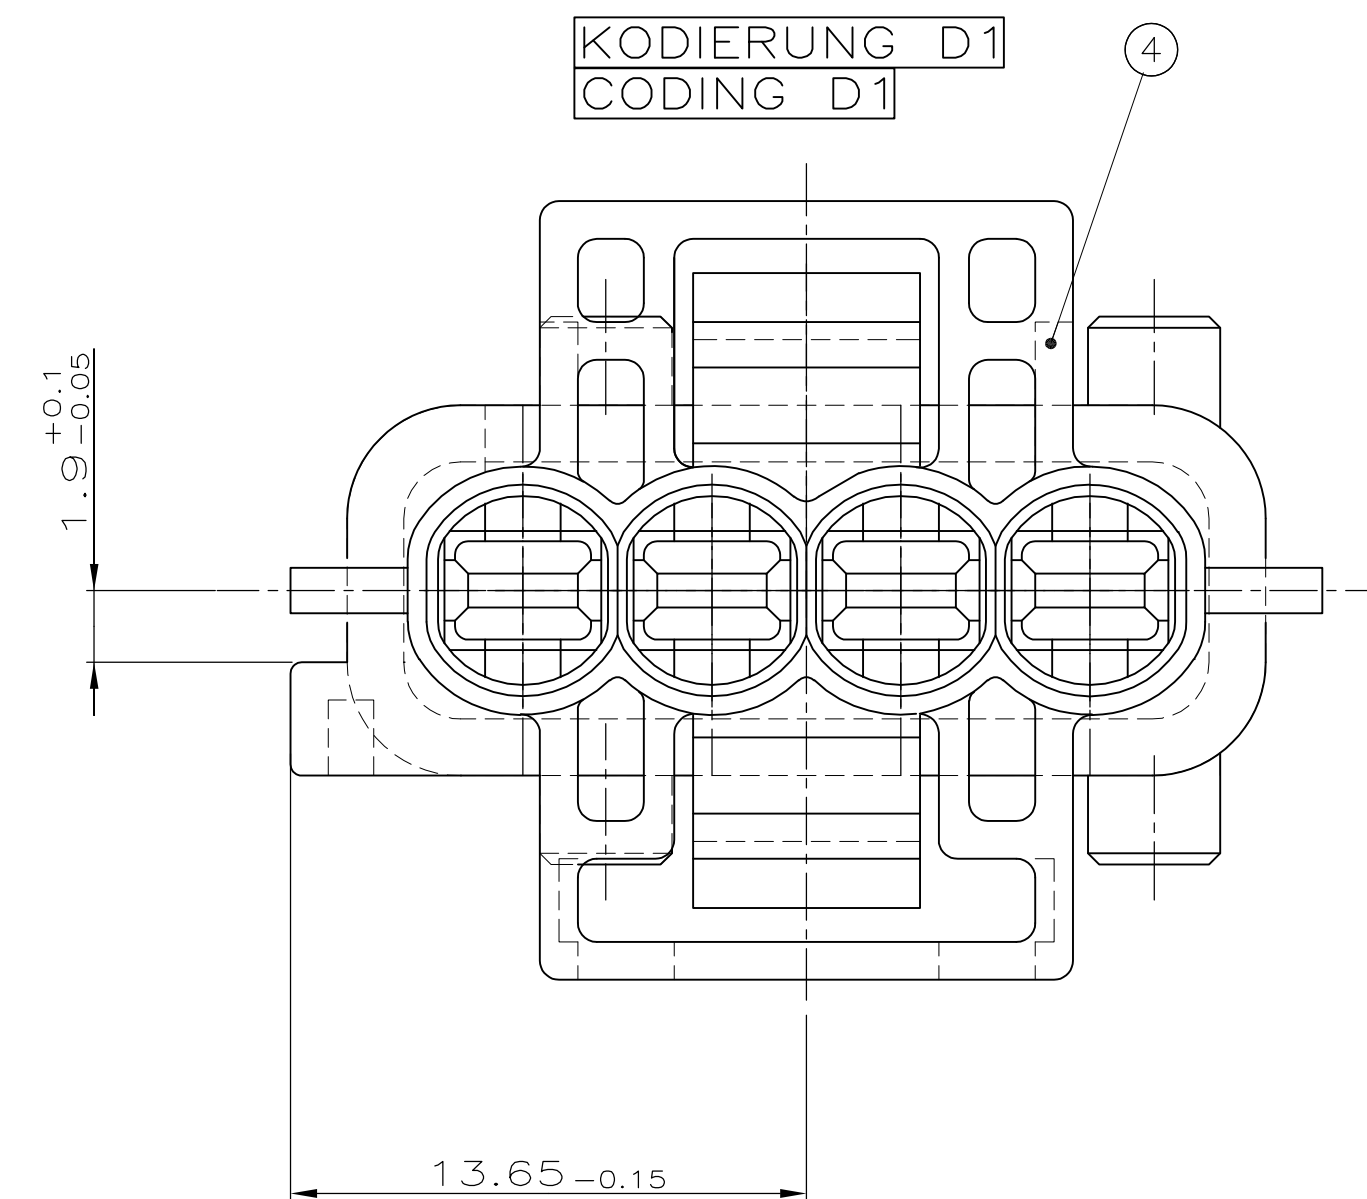


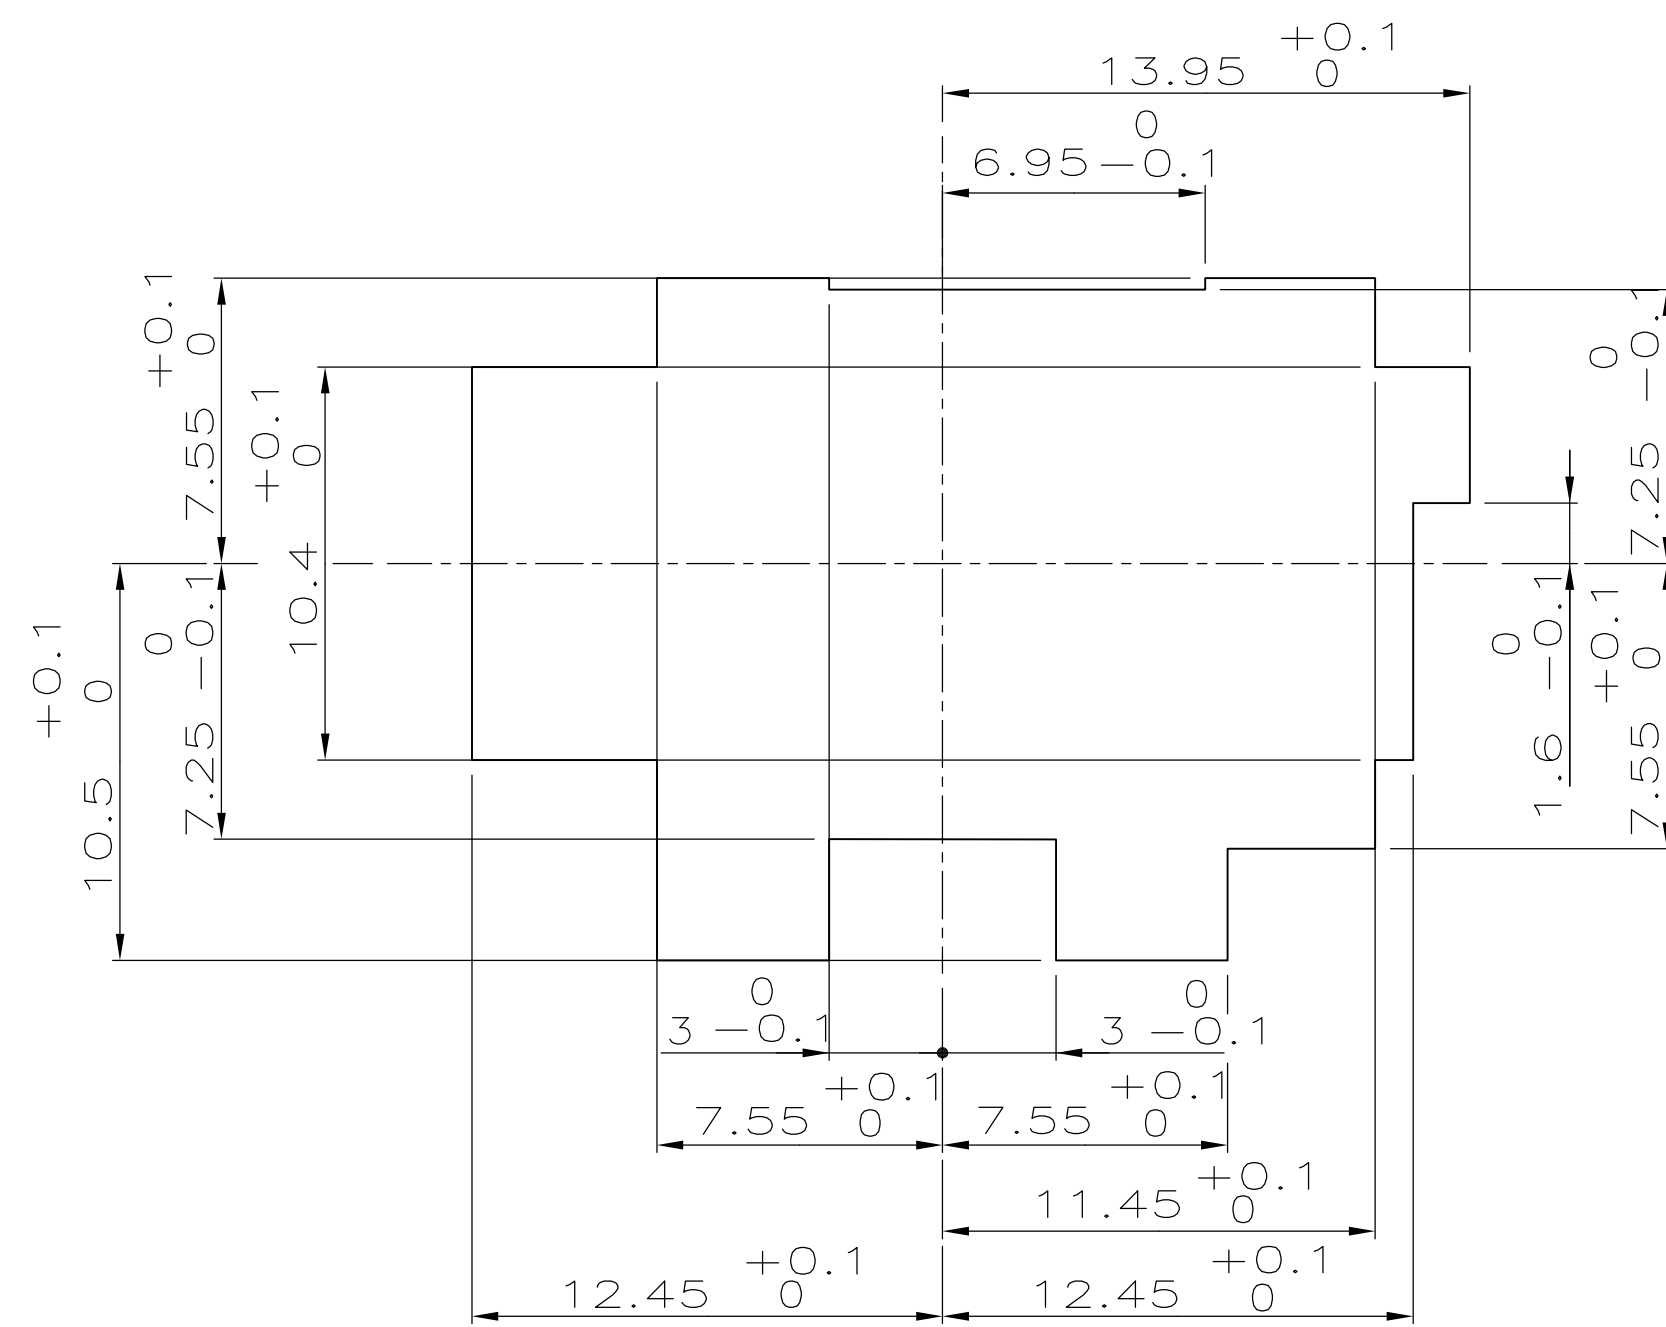

Technical drawing of a 4-way valve assembly. The drawing shows a cross-section of the valve with four internal ports. The main body is labeled "KODIERUNG B1" and "CODING B1". A dimension line indicates a width of  $13.65_{-0.15}$ . A callout (2) points to a specific feature on the right side. A dimension line on the right indicates a height of  $1.0_{+0.1}^{-0.05}$ .

Technical drawing of a mechanical part. The drawing shows a cross-section of a part with a central vertical axis (indicated by a dashed line) and a horizontal axis (indicated by a dashed line). The part has a complex, stepped profile. The dimensions are given as follows:

- Horizontal dimension:  $13.95^{+0.1}_0$
- Vertical dimension:  $1.6^{-0.1}_0$

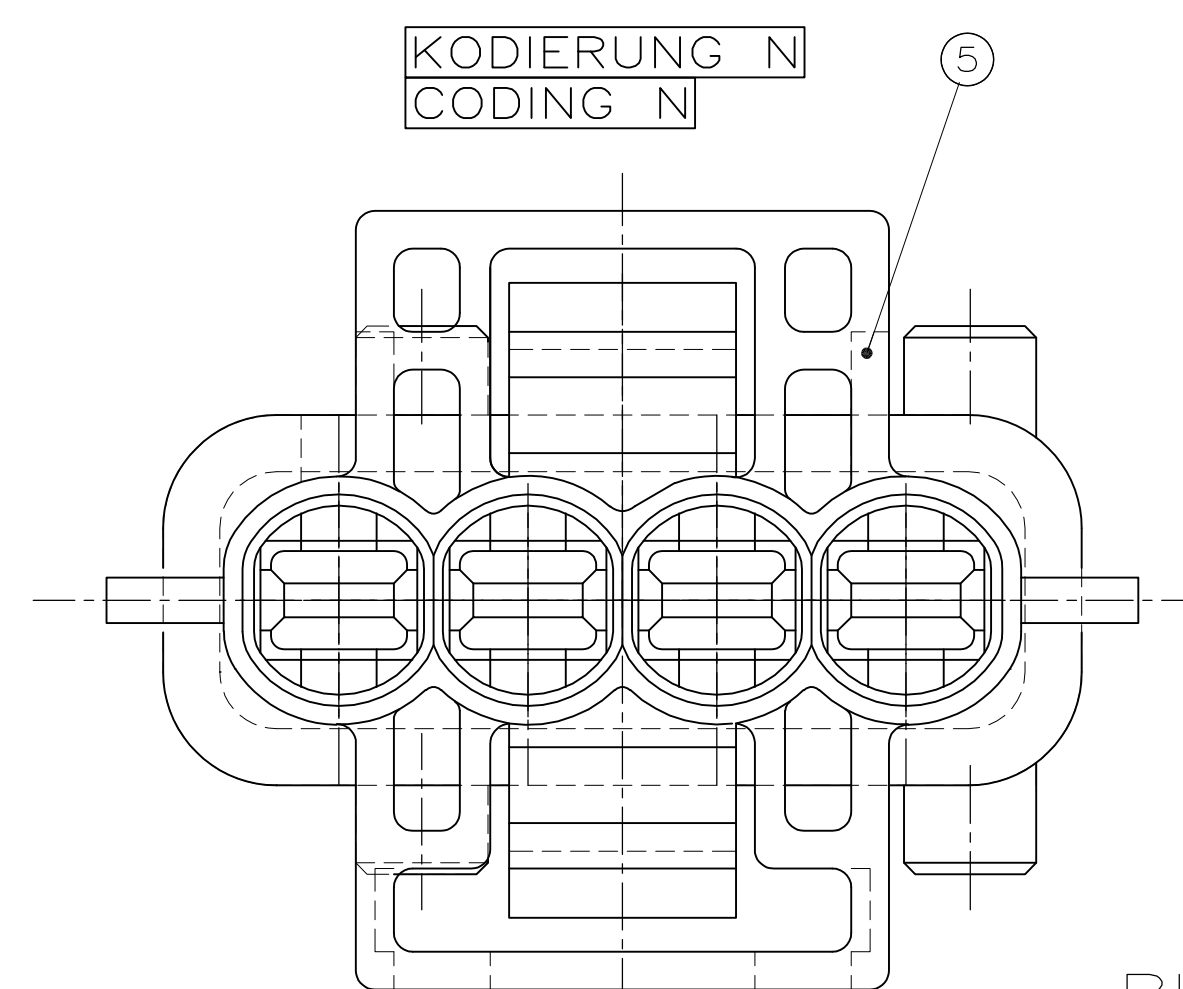

Technical drawing of a 4-pin connector. The drawing shows a top view of the connector with four pins. The dimensions are as follows:

- Overall width:  $13.65_{-0.15}$
- Pin pitch (center-to-center distance):  $1.9_{-0.05}$
- Pin diameter:  $\varnothing 0.8$
- Pin length:  $1.5_{-0.05}$
- Pin thickness:  $0.5_{-0.05}$
- Pin spacing (from center to edge):  $0.5_{-0.05}$
- Pin thickness (from center to edge):  $0.5_{-0.05}$
- Pin thickness (from center to edge):  $0.5_{-0.05}$
- Pin thickness (from center to edge):  $0.5_{-0.05}$

Callouts:

- 3: Points to the pin.
- 4: Points to the pin.
- 5: Points to the pin.
- 6: Points to the pin.
- 7: Points to the pin.
- 8: Points to the pin.
- 9: Points to the pin.
- 10: Points to the pin.
- 11: Points to the pin.
- 12: Points to the pin.
- 13: Points to the pin.
- 14: Points to the pin.
- 15: Points to the pin.
- 16: Points to the pin.
- 17: Points to the pin.
- 18: Points to the pin.
- 19: Points to the pin.
- 20: Points to the pin.
- 21: Points to the pin.
- 22: Points to the pin.
- 23: Points to the pin.
- 24: Points to the pin.
- 25: Points to the pin.
- 26: Points to the pin.
- 27: Points to the pin.
- 28: Points to the pin.
- 29: Points to the pin.
- 30: Points to the pin.
- 31: Points to the pin.
- 32: Points to the pin.
- 33: Points to the pin.
- 34: Points to the pin.
- 35: Points to the pin.
- 36: Points to the pin.
- 37: Points to the pin.
- 38: Points to the pin.
- 39: Points to the pin.
- 40: Points to the pin.
- 41: Points to the pin.
- 42: Points to the pin.
- 43: Points to the pin.
- 44: Points to the pin.
- 45: Points to the pin.
- 46: Points to the pin.
- 47: Points to the pin.
- 48: Points to the pin.
- 49: Points to the pin.
- 50: Points to the pin.
- 51: Points to the pin.
- 52: Points to the pin.
- 53: Points to the pin.
- 54: Points to the pin.
- 55: Points to the pin.
- 56: Points to the pin.
- 57: Points to the pin.
- 58: Points to the pin.
- 59: Points to the pin.
- 60: Points to the pin.
- 61: Points to the pin.
- 62: Points to the pin.
- 63: Points to the pin.
- 64: Points to the pin.
- 65: Points to the pin.
- 66: Points to the pin.
- 67: Points to the pin.
- 68: Points to the pin.
- 69: Points to the pin.
- 70: Points to the pin.
- 71: Points to the pin.
- 72: Points to the pin.
- 73: Points to the pin.
- 74: Points to the pin.
- 75: Points to the pin.
- 76: Points to the pin.
- 77: Points to the pin.
- 78: Points to the pin.
- 79: Points to the pin.
- 80: Points to the pin.
- 81: Points to the pin.
- 82: Points to the pin.
- 83: Points to the pin.
- 84: Points to the pin.
- 85: Points to the pin.
- 86: Points to the pin.
- 87: Points to the pin.
- 88: Points to the pin.
- 89: Points to the pin.
- 90: Points to the pin.
- 91: Points to the pin.
- 92: Points to the pin.
- 93: Points to the pin.
- 94: Points to the pin.
- 95: Points to the pin.
- 96: Points to the pin.
- 97: Points to the pin.
- 98: Points to the pin.
- 99: Points to the pin.
- 100: Points to the pin.


Annotations:

- KODIERUNG C1
- CODING C1

Technical drawing of a stepped profile. The drawing shows a cross-section with a central vertical dashed line and a horizontal dashed line. The profile is symmetrical about the vertical line. The dimensions are as follows:

- Horizontal dimension (width): 13.95 (total width) and  $+0.1$  (tolerance).
- Vertical dimension (height): 1.6 (total height) and  $-0.1$  (tolerance).

5-96234

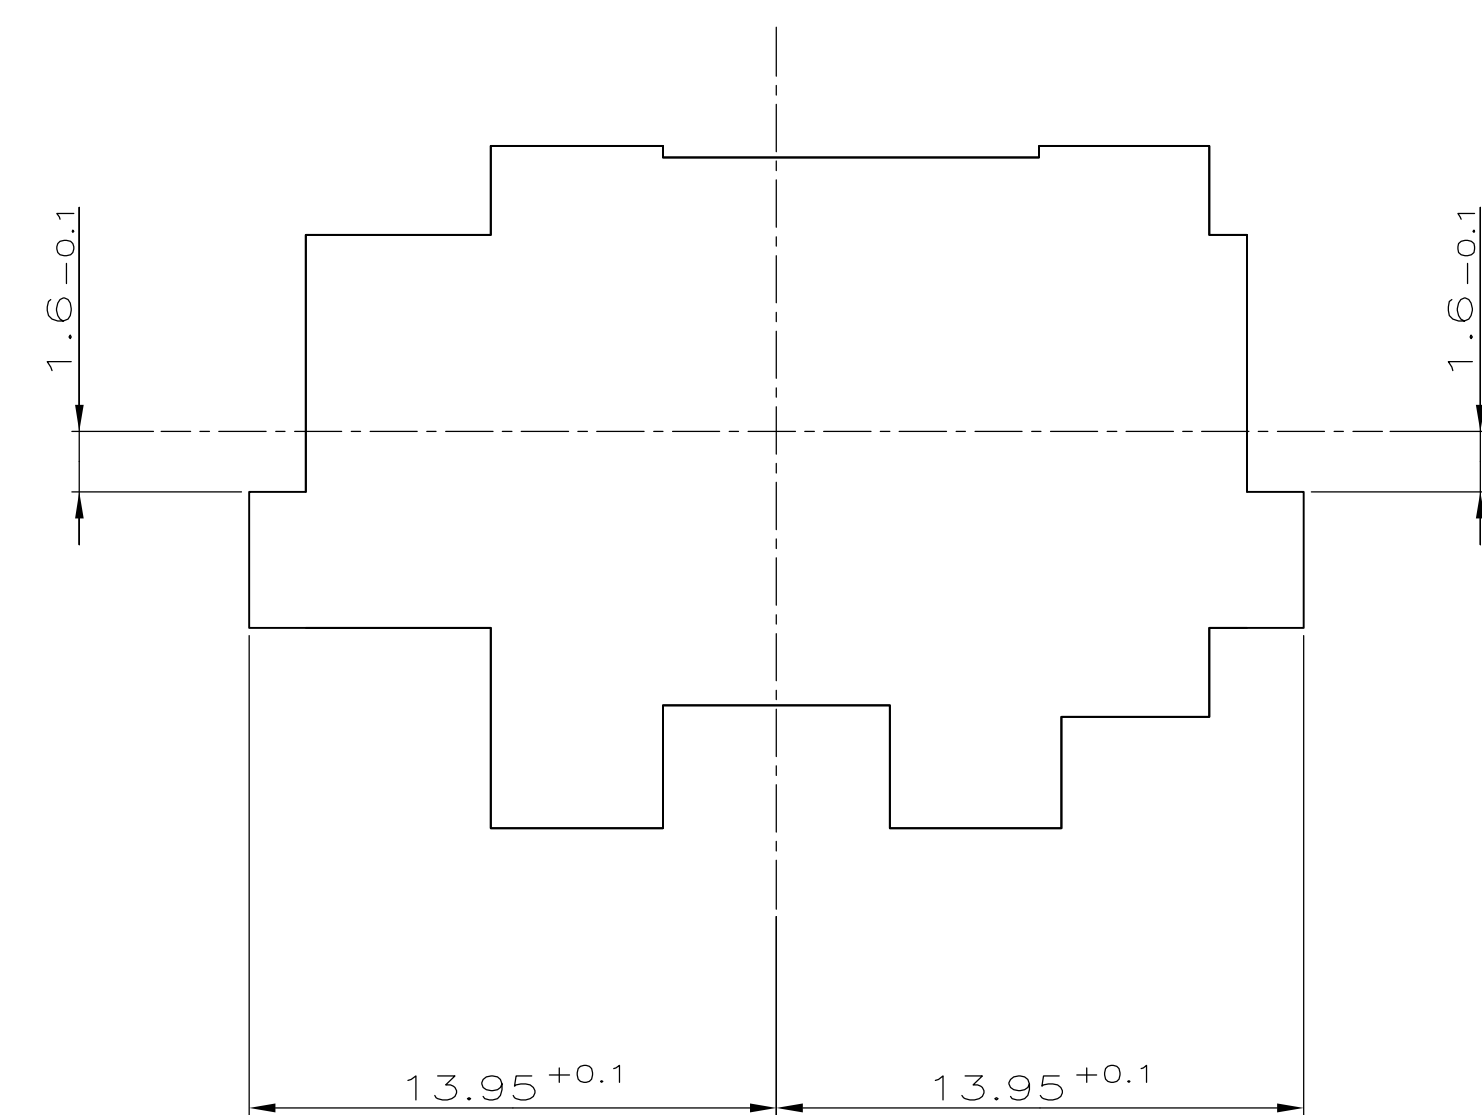4805 (3/11)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9