
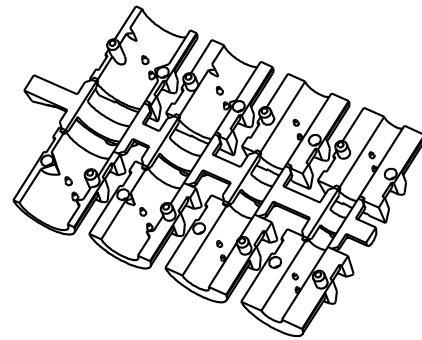
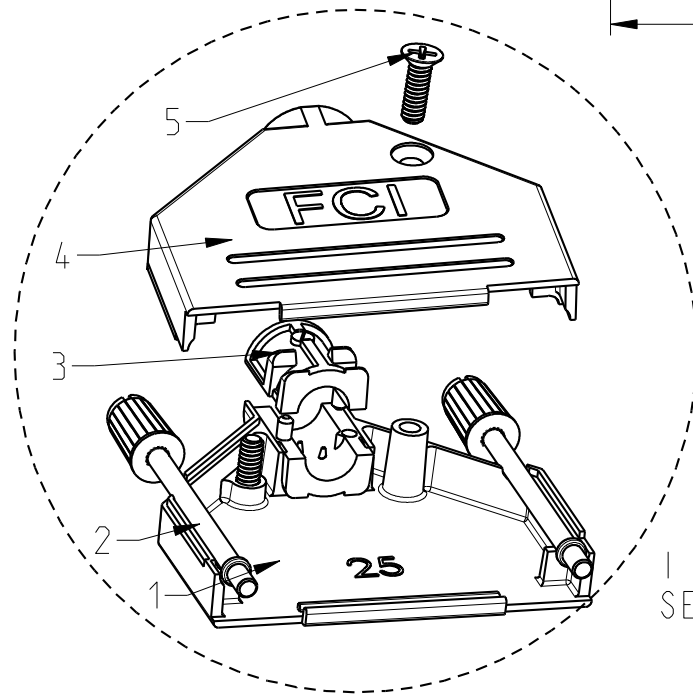


SIZE	Part Num.	Threading	Headscrew	Packaging
25	8655MH2501BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH2501BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH2502BLF	M3	Grey	BULK
	8655MH2502BKLF	M3	Grey	KIT

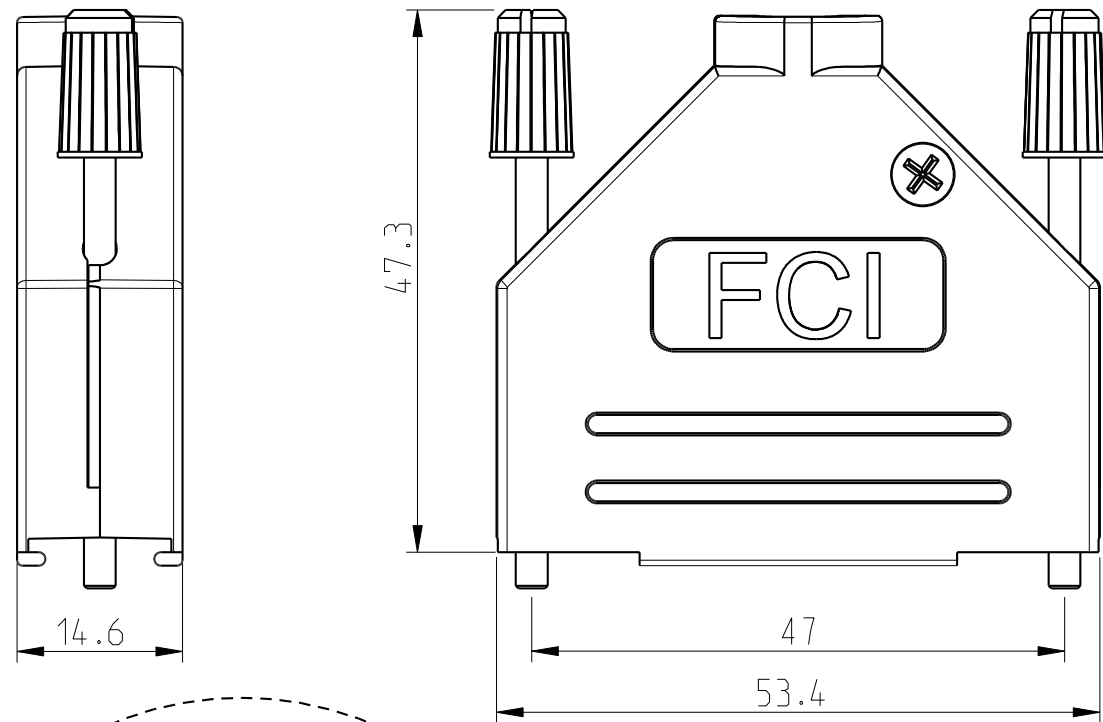

NOTES:

Material and finish: Zinc die-cast
Nickel plated

Cable strain relief: Polycarbonate (UL94V-0)

Jackscrews:

- Headscrew : plastic, color according threading
- Body : metal, threading according tables

Temperature range: -40°C to 120°C

Cable diameter: 4,0 to 13,0mm

Attenuation factor: >40 dB between 30MHz and 1 GHz

Marking FCI logo: Height 6 mm for all versions

Covers screwing force (max): 100 Ncm

Jackscrew screwing force (max): 50 Ncm

Packaging notes (see tables):

- 1 - Bulk : Every spare part packaged per 100 or 200 into plastic bag.5 plastic bags per carton box. 1 plastic bag per part.
- 2 - Kit : 1 set of spare parts necessary to realise 1 kit into a plastic bag. 100 plastic bags per carton box.



NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.



DESIGNATION	REP.	09	15	25	37
COVER BOTTOM	1			1	
JACKSCREW	2			2	
STRAIN RELIEF	3			2	
COVER TOP	4			1	
SCREW POZIDRIVE	5			2	

spec ref		dr		A Parrenin	2009/05/20	projection				size	A3	scale	3:2						
tolerance std		GENERAL TOLERANCES: ISO 2768-m				eng		D Detouillon	2017/01/16			ecn no		ELX-F-25931-1					
ISO 406 ISO 1101						chr		J Dalibard	2017/01/16										
						appr		Aymeric Soudy	2017/01/17							product family		rel level	
surface			linear	0.X	± /	Amphenol FCI		title		D-SUB METAL HOODS STRAIGHT		dwg no		10085962		rev		F	
			0.XX	± /															
ISO 1302			0.XXX	± /															
		angular	0°	± / °	www.fci.com		cat. no.		Product - Customer Drw				sheet 1 of 3						



SIZE	Part Num.	Threading	Headscrew	Packaging
09	8655MH0901BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH0901BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH0902BLF	M3	Grey	BULK
	8655MH0902BKLF	M3	Grey	KIT

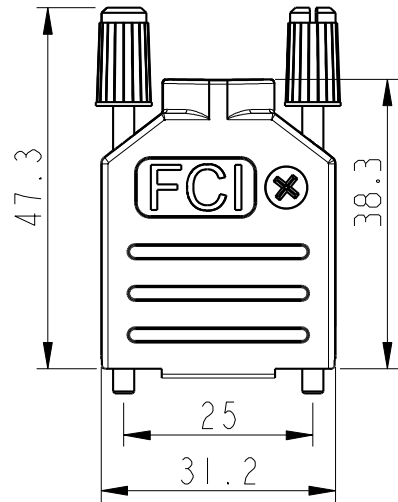

SIZE	Part Num.	Threading	Headscrew	Packaging
15	8655MH1501BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH1501BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH1502BLF	M3	Grey	BULK
	8655MH1502BKLF	M3	Grey	KIT

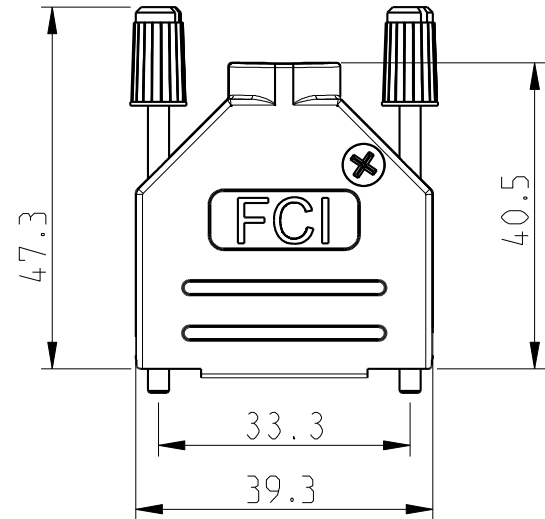


SIZE	Part Num.	Threading	Headscrew	Packaging
37	8655MH3701BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH3701BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH3702BLF	M3	Grey	BULK
	8655MH3702BKLF	M3	Grey	KIT

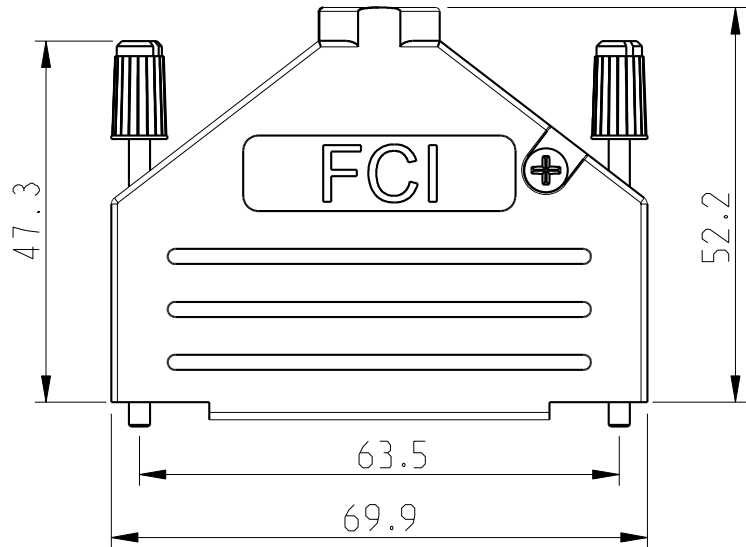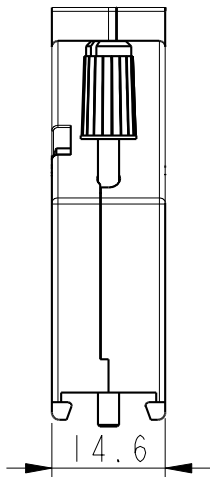


spec ref		dr		A Parrenin	2009/05/20	projection 	mm 	size	A3	scale	1:1		
tolerance std ISO 406 ISO 1101	GENERAL TOLERANCES: ISO 2768-m			eng	D Detouillon			2017/01/16	ecn no				ELX-F-25931-1
				chr	J Dalibard			2017/01/16	rel level				Released
				appr	Aymeric Soudy			2017/01/17	product family				
surface  ISO 1302	linear	0.X	± /	Amphenol FCi	title D-SUB METAL HOODS STRAIGHT	dwg no	10085962		rev	F			
		0.XX	± /										
		0.XXX	± /										
	angular	0°	± / °	www.fci.com	cat. no.	Product - Customer Drw			sheet 2 of 3				

CABLING INSTRUCTIONS FOR CABLE Ø 4, 5, 7 or 9 mm


1- Use two halves of strain relief, different sizes can be mixed (Ø4,5,7 or 9)

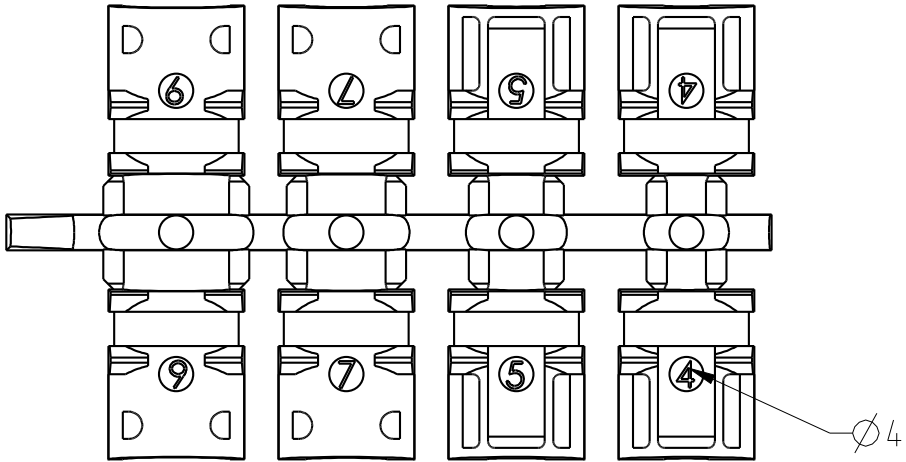

2- Strip cable 18mm and shape to two pigtails

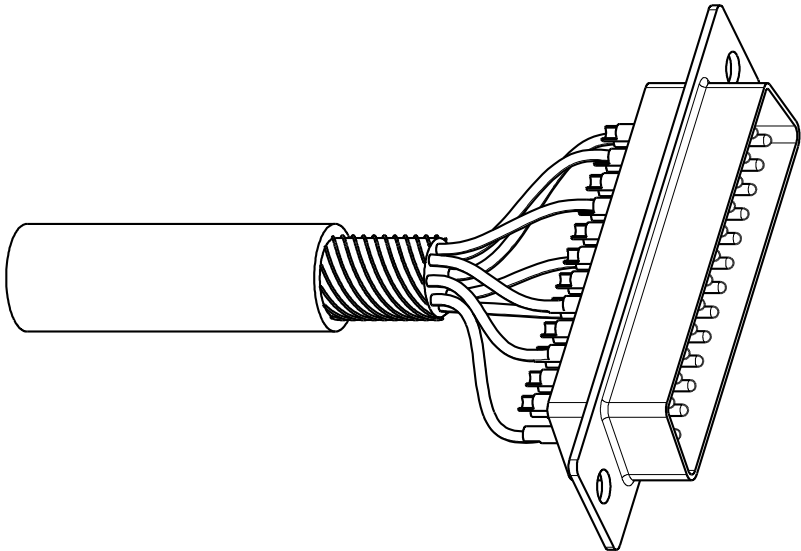


3- Attach the strain relief around the cable

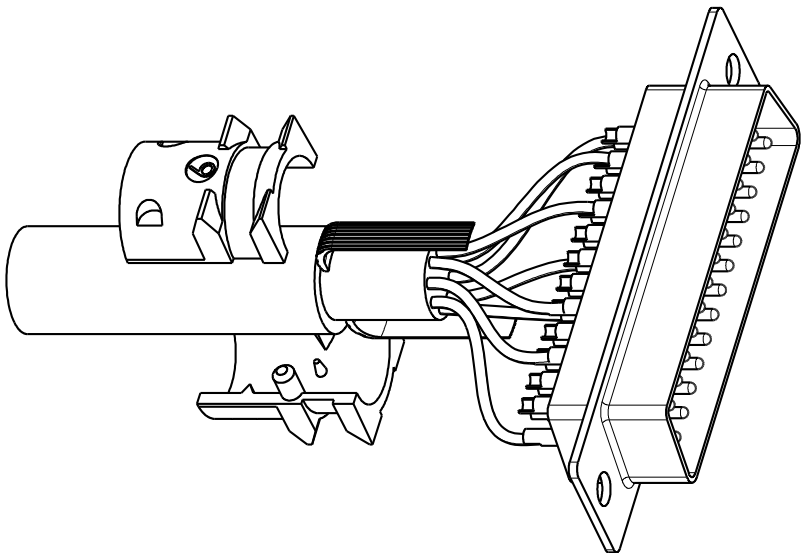


CABLING INSTRUCTIONS FOR CABLE Ø > 9 to 11 mm
1- Use one half of strain relief, (Ø9).


4- Bend cable shielding back on outside of strain relief

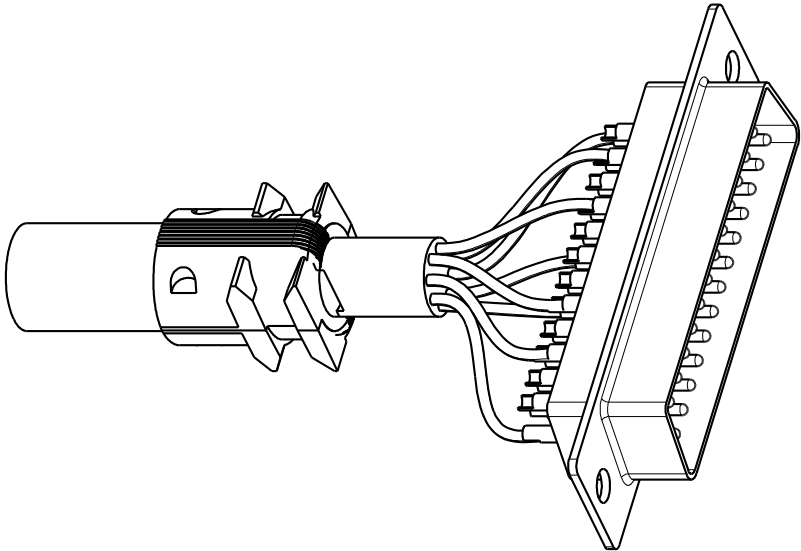

5- Mount connector and cable into the backshell

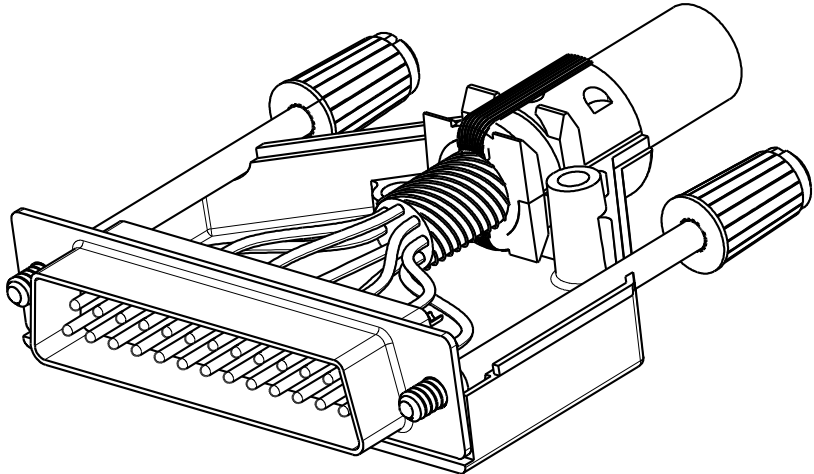

6- Assemble the other half screwing force: 100 Ncm

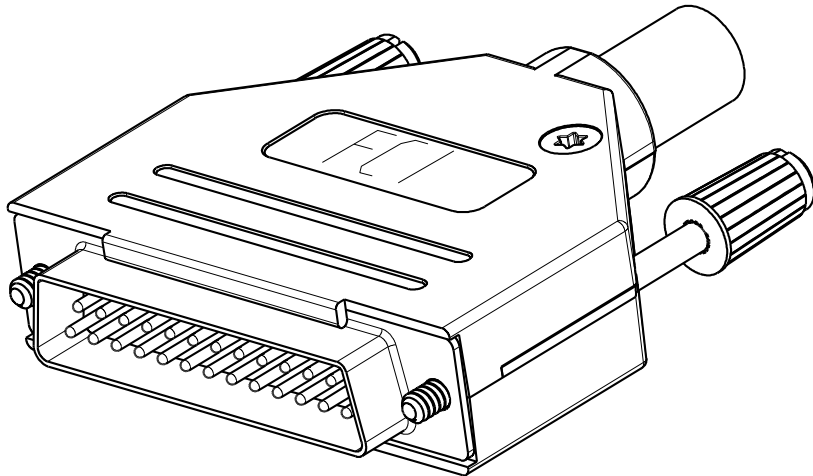

spec ref				dr		A Parrenin	2009/05/20		projection		mm		size		A3	scale		3:2													
tolerance std		GENERAL TOLERANCES: ISO 2768-m				eng		D Detouillon	2017/01/16						ecn no				ELX-F-25931-1												
ISO 406						chr		J Dalibard	2017/01/16						rel level				Released												
ISO 1101						appr		Aymeric Soudy	2017/01/17										product family												
surface		linear		0.X		±/		Amphenol FCi		title		D-SUB METAL HOODS		dwg no		10085962		rev		F											
																				0.XX		±/		www.fci.com		cat. no.		Product - Customer Drw		sheet 3 of 3	
ISO 1302		angular		0°		±/°		www.fci.com		cat. no.		Product - Customer Drw		sheet 3 of 3																	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9