

## Features

- Programmable 4,194,304 x 1 and 8,388,608 x 1-bit Serial Memories Designed to Store Configuration Programs for Field Programmable Gate Arrays (FPGAs)
- 3.3V Output Capability
- 5V Tolerant I/O Pins
- Program Support using the Atmel ATDH2200E System or Industry Third-party Programmers
- In-System Programmable (ISP) via 2-wire Bus
- Simple Interface to SRAM FPGAs
- Compatible with Atmel AT40K and AT94K Devices, Altera® FLEX®, APEX™ Devices, Lucent® ORCA® FPGAs, Xilinx® XC3000, XC4000, XC5200, Spartan®, Virtex® FPGAs, Motorola® MPA1000 FPGAs
- Cascadable Read-back to Support Additional Configurations or Higher-density Arrays
- Low-power CMOS FLASH Process
- Available in 6 mm x 6 mm x 1 mm 8-lead LAP (Pin-compatible with 8-lead SOIC/VOIC Packages), 20-lead PLCC and 44-lead TQFP Packages
- Emulation of Atmel's AT24CXXX Serial EEPROMs
- Low-power Standby Mode
- Single Device Capable of Holding 4-bit Stream Files Allowing Simple System Reconfiguration
- Fast Serial Download Speeds up to 33 MHz
- Endurance: 5,000 Write Cycles Typical
- Green (Pb/Halide-free/RoHS Compliant) Package Options Available

## 1. Description

The AT17F Series of In-System Programmable Configuration PROMs (Configurators) provide an easy-to-use, cost-effective configuration memory for Field Programmable Gate Arrays. The AT17F Series device is packaged in the 8-lead LAP, 20-lead PLCC, and 44-lead TQFP, see [Table 1-1](#). The AT17F Series Configurator uses a simple serial-access procedure to configure one or more FPGA devices.

The AT17F Series Configurators can be programmed with industry-standard programmers, Atmel's ATDH2200E Programming Kit or Atmel's ATDH2225 ISP Cable.

**Table 1-1.** AT17F Series Packages

| Package      | AT17F040 | AT17F080 |
|--------------|----------|----------|
| 8-lead LAP   | Yes      | Yes      |
| 20-lead PLCC | Yes      | Yes      |
| 44-lead TQFP | —        | Yes      |




## FPGA Configuration Flash Memory

**AT17F040**  
**AT17F080**




## 2. Pin Configuration


**8-lead LAP**

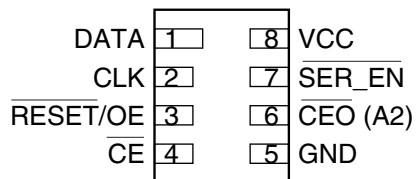


**20-lead PLCC**

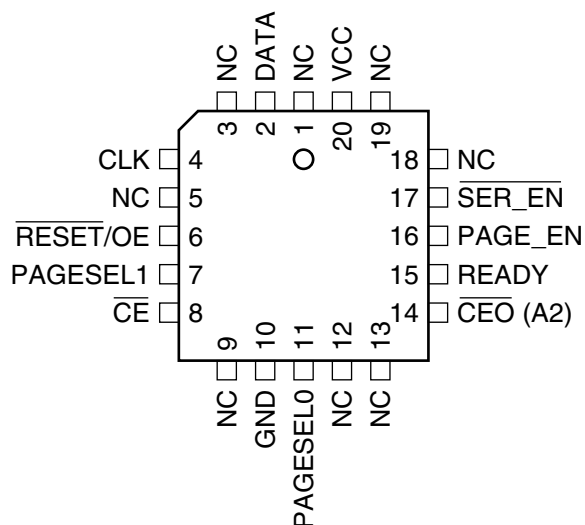


**20-lead PLCC (Virtex Pinout)<sup>(1)(2)</sup>**

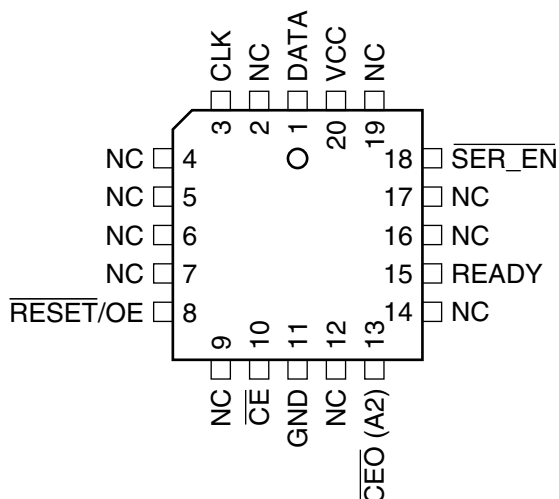

- Notes: 1. 20-lead PLCC (Virtex pinout) is only available in the AT17F040.  
2. Virtex pinout is compatible with the XC17V and XC18V Series PROM.

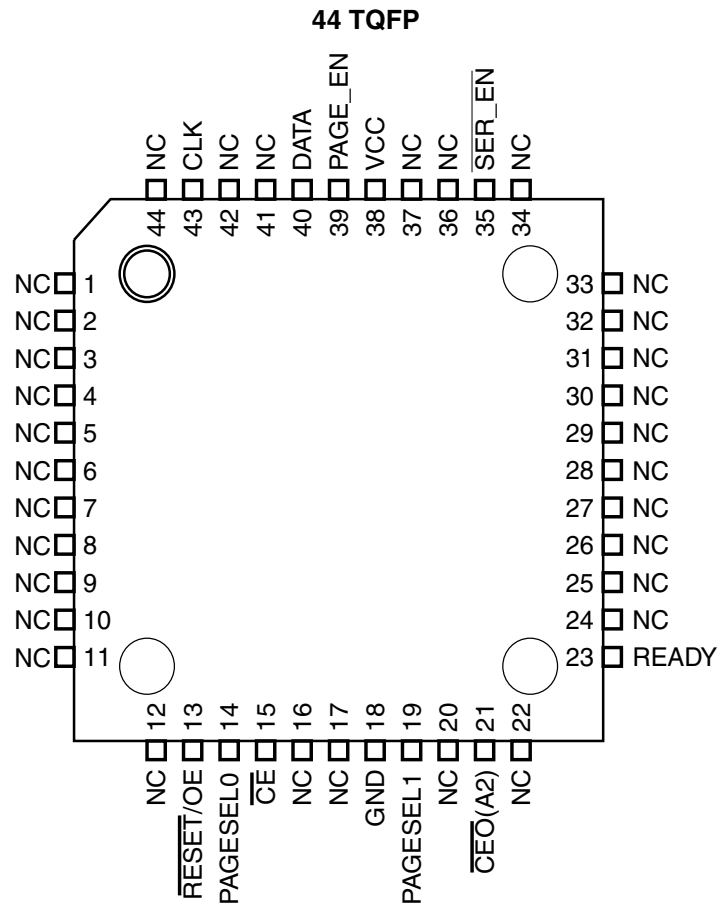

### 3. Block Diagram

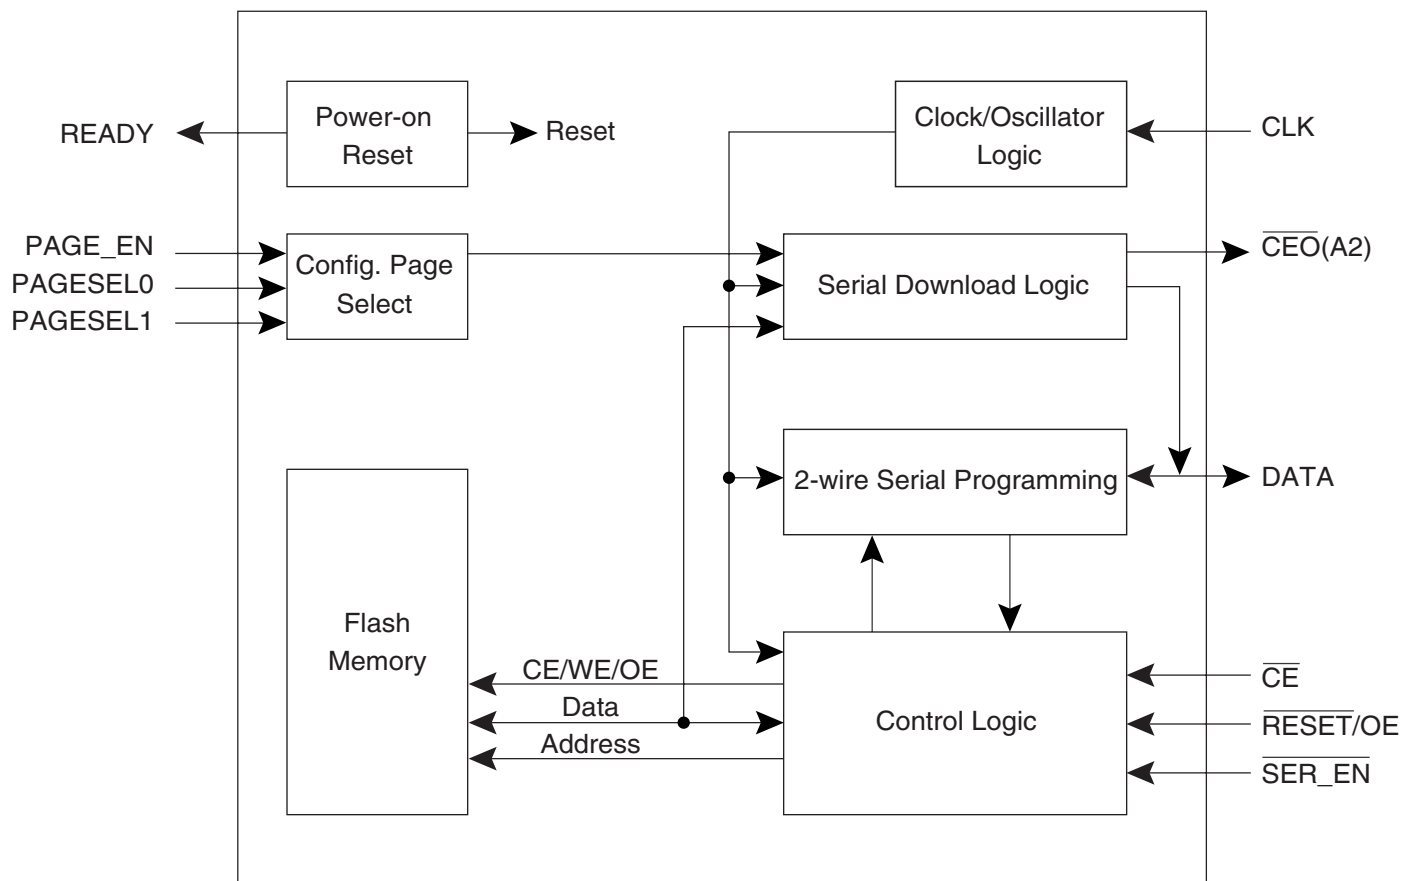

### 4. Device Description

The control signals for the configuration memory device ( $\overline{CE}$ ,  $\overline{RESET/OE}$  and  $CLK$ ) interface directly with the FPGA device control signals. All FPGA devices can control the entire configuration process and retrieve data from the configuration device without requiring an external intelligent controller.

The  $\overline{RESET/OE}$  and  $\overline{CE}$  pins control the tri-state buffer on the **DATA** output pin and enable the address counter. When  $\overline{RESET/OE}$  is driven Low, the configuration device resets its address counter and tri-states its **DATA** pin. The  $\overline{CE}$  pin also controls the output of the AT17F Series Configurator. If  $\overline{CE}$  is held High after the  $\overline{RESET/OE}$  reset pulse, the counter is disabled and the **DATA** output pin is tri-stated. When  $\overline{OE}$  is subsequently driven High, the counter and the **DATA** output pin are enabled. When  $\overline{RESET/OE}$  is driven Low again, the address counter is reset and the **DATA** output pin is tri-stated, regardless of the state of  $\overline{CE}$ .

When the configurator has driven out all of its data and  $\overline{CEO}$  is driven Low, the device tri-states the **DATA** pin to avoid contention with other configurators. Upon power-up, the address counter is automatically reset.

## 5. Pin Description

**Table 5-1.** Pin Description

| Name                 | I/O | AT17F040 |         |                  | AT17F080 |         |         |
|----------------------|-----|----------|---------|------------------|----------|---------|---------|
|                      |     | 8 LAP    | 20 PLCC | 20 PLCC (Virtex) | 8 LAP    | 20 PLCC | 44 TQFP |
| DATA                 | I/O | 1        | 2       | 1                | 1        | 2       | 40      |
| CLK                  | I   | 2        | 4       | 3                | 2        | 4       | 43      |
| PAGE_EN              | I   | –        | 16      | –                | –        | 16      | 39      |
| PAGESEL0             | I   | –        | 11      | –                | –        | 11      | 14      |
| PAGESEL1             | I   | –        | 7       | –                | –        | 7       | 19      |
| RESET/OE             | I   | 3        | 6       | 8                | 3        | 6       | 13      |
| $\overline{CE}$      | I   | 4        | 8       | 10               | 4        | 8       | 15      |
| GND                  | –   | 5        | 10      | 11               | 5        | 10      | 18      |
| $\overline{CEO}$     | O   | 6        | 14      | 13               | 6        | 14      | 21      |
| A2                   | I   |          |         |                  |          |         |         |
| READY                | O   | –        | 15      | 15               | –        | 15      | 23      |
| $\overline{SER\_EN}$ | I   | 7        | 17      | 18               | 7        | 17      | 35      |
| V <sub>CC</sub>      | –   | 8        | 20      | 20               | 8        | 20      | 38      |

### 5.1 DATA<sup>(1)</sup>

Three-state DATA output for configuration. Open-collector bi-directional pin for programming.

### 5.2 CLK<sup>(1)</sup>

Clock input. Used to increment the internal address and bit counter for reading and programming.

### 5.3 PAGE\_EN<sup>(2)</sup>

Input used to enable page download mode. When PAGE\_EN is high the configuration download address space is partitioned into 4 equal pages. This gives users the ability to easily store and retrieve multiple configuration bitstreams from a single configuration device. This input works in conjunction with the PAGESSEL inputs. PAGE\_EN must be remain low if paging is not desired. When  $\overline{SER\_EN}$  is Low (ISP mode) this pin has no effect.

- Notes:
1. This pin has an internal 20 K $\Omega$  pull-up resistor.
  2. This pin has an internal 30 K $\Omega$  pull-down resistor.

## 5.4 PAGESEL[1:0]<sup>(2)</sup>

Page select inputs. Used to determine which of the 4 memory pages are targeted during a serial configuration download. The address space for each of the pages is shown in [Table 5-2](#). When  $\overline{\text{SER\_EN}}$  is Low (ISP mode) these pins have no effect.

**Table 5-2.** Address Space

| Paging Decodes            | AT17F040 (4 Mbits) | AT17F080 (8 Mbits) |
|---------------------------|--------------------|--------------------|
| PAGESEL = 00, PAGE_EN = 1 | 00000 – 0FFFFh     | 00000 – 1FFFFh     |
| PAGESEL = 01, PAGE_EN = 1 | 10000 – 1FFFFh     | 20000 – 3FFFFh     |
| PAGESEL = 10, PAGE_EN = 1 | 20000 – 2FFFFh     | 40000 – 5FFFFh     |
| PAGESEL = 11, PAGE_EN = 1 | 30000 – 3FFFFh     | 60000 – 7FFFFh     |
| PAGESEL = XX, PAGE_EN = 0 | 00000 – 3FFFFh     | 00000 – 7FFFFh     |

## 5.5 $\overline{\text{RESET/OE}}$ <sup>(1)</sup>

Output Enable (active High) and  $\overline{\text{RESET}}$  (active Low) when  $\overline{\text{SER\_EN}}$  is High. A Low level on  $\overline{\text{RESET/OE}}$  resets both the address and bit counters. A High level (with  $\overline{\text{CE}}$  Low) enables the data output driver.

## 5.6 $\overline{\text{CE}}$ <sup>(1)</sup>

Chip Enable input (active Low). A Low level (with OE High) allows CLK to increment the address counter and enables the data output driver. A High level on  $\overline{\text{CE}}$  disables both the address and bit counters and forces the device into a low-power standby mode. Note that this pin will *not* enable/disable the device in the 2-wire Serial Programming mode ( $\overline{\text{SER\_EN}}$  Low).

## 5.7 GND

Ground pin. A 0.2  $\mu\text{F}$  decoupling capacitor between  $V_{\text{CC}}$  and GND is recommended.

## 5.8 $\overline{\text{CEO}}$

Chip Enable Output (when  $\overline{\text{SER\_EN}}$  is High). This output goes Low when the internal address counter has reached its maximum value. If the PAGE\_EN input is set High, the maximum value is the highest address in the selected partition. The PAGESEL[1:0] inputs are used to make the 4 partition selections. If the PAGE\_EN input is set Low, the device is not partitioned and the address maximum value is the highest address in the device, see [Table 5-2 on page 6](#). In a daisy chain of AT17F Series devices, the  $\overline{\text{CEO}}$  pin of one device must be connected to the  $\overline{\text{CE}}$  input of the next device in the chain. It will stay Low as long as  $\overline{\text{CE}}$  is Low and OE is High. It will then follow  $\overline{\text{CE}}$  until OE goes Low; thereafter,  $\overline{\text{CEO}}$  will stay High until the entire EEPROM is read again.

- Notes:
1. This pin has an internal 20 k $\Omega$  pull-up resistor.
  2. This pin has an internal 30 k $\Omega$  pull-down resistor.

## 5.9 A2<sup>(1)</sup>

Device selection input, (when  $\overline{\text{SER\_EN}}$  Low). The input is used to enable (or chip select) the device during programming (i.e., when  $\overline{\text{SER\_EN}}$  is Low). Refer to the AT17F Programming Specification available on the Atmel web site for additional details.

## 5.10 READY

Open collector reset state indicator. Driven Low during power-up reset, released when power-up is complete. (recommended 4.7 k $\Omega$  pull-up on this pin if used).

## 5.11 $\overline{\text{SER\_EN}}$ <sup>(1)</sup>

The serial enable input must remain High during FPGA configuration operations. Bringing  $\overline{\text{SER\_EN}}$  Low enables the 2-Wire Serial Programming Mode. For non-ISP applications,  $\overline{\text{SER\_EN}}$  should be tied to  $V_{CC}$ .

## 5.12 $V_{CC}$

+3.3V ( $\pm 10\%$ ).

- Notes:
1. This pin has an internal 20 k $\Omega$  pull-up resistor.
  2. This pin has an internal 30 k $\Omega$  pull-down resistor.

## 6. FPGA Master Serial Mode Summary

The I/O and logic functions of any SRAM-based FPGA are established by a configuration program. The program is loaded either automatically upon power-up, or on command, depending on the state of the FPGA mode pins. In Master mode, the FPGA automatically loads the configuration program from an external memory. The AT17F Serial Configuration PROM has been designed for compatibility with the Master Serial mode.

This document discusses the Atmel AT40K, AT40KAL and AT94KAL applications as well as Xilinx applications.

## 7. Control of Configuration

Most connections between the FPGA device and the AT17F Serial Configurator PROM are simple and self-explanatory.

- The DATA output of the AT17F Series Configurator drives DIN of the FPGA devices.
- The master FPGA CCLK output drives the CLK input of the AT17F Series Configurator.
- The  $\overline{\text{CEO}}$  output of any AT17F Series Configurator drives the  $\overline{\text{CE}}$  input of the next Configurator in a cascade chain of configurator devices.
- $\overline{\text{SER\_EN}}$  must be connected to  $V_{\text{CC}}$  (except during ISP).
- The READY pin is available as an open-collector indicator of the device's reset status; it is driven Low while the device is in its power-on reset cycle and released (tri-stated) when the cycle is complete.
- PAGE\_EN must be held Low if download paging is not desired. The PAGESEL[1:0] inputs must be tied off High or Low. If paging is desired, PAGE\_EN must be High and the PAGESEL pins must be set to High or Low such that the desired page is selected, see [Table 5-2 on page 6](#).

## 8. Cascading Serial Configuration Devices

For multiple FPGAs configured as a daisy-chain, or for FPGAs requiring larger configuration memories, cascaded configurators provide additional memory.

After the last bit from the first configurator is read, the clock signal to the configurator asserts its  $\overline{\text{CEO}}$  output Low and disables its DATA line driver. The second configurator recognizes the Low level on its  $\overline{\text{CE}}$  input and enables its DATA output.

After configuration is complete, the address counters of all cascaded configurators are reset if the  $\overline{\text{RESET/OE}}$  on each configurator is driven to its active (Low) level.

If the address counters are not to be reset upon completion, then the  $\overline{\text{RESET/OE}}$  input can be tied to its inactive (High) level.

## 9. Programming Mode

The programming mode is entered by bringing  $\overline{\text{SER\_EN}}$  Low. In this mode the chip can be programmed by the 2-wire serial bus. The programming is done at  $V_{\text{CC}}$  supply only. Programming super voltages are generated inside the chip. The AT17F parts are read/write at 3.3V nominal. Refer to the AT17F Programming Specification available on the Atmel web site ([www.atmel.com](http://www.atmel.com)) for more programming details. AT17F devices are supported by the Atmel ATDH2200 programming system along with many third party programmers.

## 10. Standby Mode

The AT17F Series Configurators enter a low-power standby mode whenever  $\overline{\text{SER\_EN}}$  is High and  $\overline{\text{CE}}$  is asserted High. In this mode, the AT17F Configurator consumes less than 1 mA of current at 3.3V. The output remains in a high-impedance state regardless of the state of the OE input.

## 11. Absolute Maximum Ratings\*

|                                                    |                          |
|----------------------------------------------------|--------------------------|
| Operating Temperature.....                         | -40° C to +85° C         |
| Storage Temperature .....                          | -65° C to +150° C        |
| Voltage on Any Pin<br>with Respect to Ground ..... | -0.1V to $V_{CC} + 0.5V$ |
| Supply Voltage ( $V_{CC}$ ) .....                  | -0.5V to +4.0V           |
| Maximum Soldering Temp. (10 sec. @ 1/16 in.).....  | 260° C                   |
| ESD ( $R_{ZAP} = 1.5K$ , $C_{ZAP} = 100$ pF).....  | 2000V                    |

**\*NOTICE:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those listed under operating conditions is not implied. Exposure to Absolute Maximum Rating conditions for extended periods of time may affect device reliability.

## 12. Operating Conditions

| Symbol          | Description |                                                    | AT17F Series Configurator |      | Units |
|-----------------|-------------|----------------------------------------------------|---------------------------|------|-------|
|                 |             |                                                    | Min                       | Max  |       |
| V <sub>CC</sub> | Commercial  | Supply voltage relative to GND<br>-0° C to +70° C  | 2.97                      | 3.63 | V     |
|                 | Industrial  | Supply voltage relative to GND<br>-40° C to +85° C | 2.97                      | 3.63 | V     |

## 13. DC Characteristics

| Symbol    | Description                                                 | AT17F040   |          | AT17F080 |          | Units |
|-----------|-------------------------------------------------------------|------------|----------|----------|----------|-------|
|           |                                                             | Min        | Max      | Min      | Max      |       |
| $V_{IH}$  | High-level Input Voltage                                    | 2.0        | $V_{CC}$ | 2.0      | $V_{CC}$ | V     |
| $V_{IL}$  | Low-level Input Voltage                                     | 0          | 0.8      | 0        | 0.8      | V     |
| $V_{OH}$  | High-level Output Voltage ( $I_{OH} = -2.5$ mA)             | Commercial | 2.4      | 2.4      |          | V     |
| $V_{OL}$  | Low-level Output Voltage ( $I_{OL} = +3$ mA)                |            | 0.4      |          | 0.4      | V     |
| $V_{OH}$  | High-level Output Voltage ( $I_{OH} = -2$ mA)               | Industrial | 2.4      | 2.4      |          | V     |
| $V_{OL}$  | Low-level Output Voltage ( $I_{OL} = +3$ mA)                |            | 0.4      |          | 0.4      | V     |
| $I_{CCA}$ | Supply Current, Active Mode                                 |            | 20       |          | 20       | mA    |
| $I_L$     | Input or Output Leakage Current ( $V_{IN} = V_{CC}$ or GND) | -10        | 10       | -10      | 10       | μA    |
| $I_{CCS}$ | Supply Current, Standby Mode                                | Commercial | 1        |          | 1        | mA    |
|           |                                                             | Industrial | 1        |          | 1        | mA    |



## 16. AC Characteristics

| Symbol                          | Description                                                                 |                           | AT17F040/080 |    |     | Units |
|---------------------------------|-----------------------------------------------------------------------------|---------------------------|--------------|----|-----|-------|
|                                 |                                                                             |                           | Min          |    | Max |       |
| T <sub>OE</sub> <sup>(2)</sup>  | OE to Data Delay                                                            | Commercial                |              |    | 50  | ns    |
|                                 |                                                                             | Industrial <sup>(1)</sup> |              |    | 55  | ns    |
| T <sub>CE</sub> <sup>(2)</sup>  | $\overline{\text{CE}}$ to Data Delay                                        | Commercial                |              |    | 55  | ns    |
|                                 |                                                                             | Industrial <sup>(1)</sup> |              |    | 60  | ns    |
| T <sub>CAC</sub> <sup>(2)</sup> | CLK to Data Delay                                                           | Commercial                | 3            |    | 30  | ns    |
|                                 |                                                                             | Industrial <sup>(1)</sup> |              |    | 30  | ns    |
| T <sub>OH</sub>                 | Data Hold from $\overline{\text{CE}}$ , OE, or CLK                          | Commercial                | 0            |    |     | ns    |
|                                 |                                                                             | Industrial <sup>(1)</sup> | 0            |    |     | ns    |
| T <sub>DF</sub> <sup>(3)</sup>  | $\overline{\text{CE}}$ or OE to Data Float Delay                            | Commercial                |              |    | 15  | ns    |
|                                 |                                                                             | Industrial <sup>(1)</sup> |              |    | 15  | ns    |
| T <sub>LC</sub>                 | CLK Low Time                                                                | Commercial                | 15           |    |     | ns    |
|                                 |                                                                             | Industrial <sup>(1)</sup> | 15           |    |     | ns    |
| T <sub>HC</sub>                 | CLK High Time                                                               | Commercial                | 15           |    |     | ns    |
|                                 |                                                                             | Industrial <sup>(1)</sup> | 15           |    |     | ns    |
| T <sub>SCE</sub>                | $\overline{\text{CE}}$ Setup Time to CLK<br>(to guarantee proper counting)  | Commercial                | 20           |    |     | ns    |
|                                 |                                                                             | Industrial <sup>(1)</sup> | 25           |    |     | ns    |
| T <sub>HCE</sub>                | $\overline{\text{CE}}$ Hold Time from CLK<br>(to guarantee proper counting) | Commercial                | 0            |    |     | ns    |
|                                 |                                                                             | Industrial <sup>(1)</sup> | 0            |    |     | ns    |
| T <sub>HOE</sub>                | $\overline{\text{RESET}}$ /OE Low Time<br>(guarantees counter is reset)     | Commercial                | 20           |    |     | ns    |
|                                 |                                                                             | Industrial <sup>(1)</sup> | 20           |    |     | ns    |
| F <sub>MAX</sub>                | Maximum Input Clock Frequency<br>$\overline{\text{SEREN}} = 0$              | Commercial                |              |    | 10  | MHz   |
|                                 |                                                                             | Industrial <sup>(1)</sup> |              |    | 10  | MHz   |
| F <sub>MAX</sub>                | Maximum Input Clock Frequency<br>$\overline{\text{SEREN}} = 1$              | Commercial                |              |    | 33  | MHz   |
|                                 |                                                                             | Industrial <sup>(1)</sup> |              |    | 33  | MHz   |
| T <sub>WR</sub>                 | Write Cycle Time <sup>(4)</sup>                                             | Commercial                |              | 12 |     | μs    |
|                                 |                                                                             | Industrial <sup>(1)</sup> |              | 12 |     | μs    |
| T <sub>EC</sub>                 | Erase Cycle Time <sup>(4)</sup>                                             | Commercial                |              | 13 |     | s     |
|                                 |                                                                             | Industrial <sup>(1)</sup> |              | 13 |     | s     |

- Notes:
1. Preliminary specifications for military operating range only.
  2. AC test lead = 50 pF.
  3. Float delays are measured with 5 pF AC loads. Transition is measured  $\pm 200$  mV from steady-state active levels.
  4. See the AT17F Programming Specification for procedural information.

## 16.1 AC Characteristics When Cascading

| Symbol          | Description                                     |            | AT17F040 |     | AT17F080 |     | Units |
|-----------------|-------------------------------------------------|------------|----------|-----|----------|-----|-------|
|                 |                                                 |            | Min      | Max | Min      | Max |       |
| $T_{CDF}^{(3)}$ | CLK to Data Float Delay                         | Commercial |          | 60  |          | 50  | ns    |
|                 |                                                 | Industrial |          | 60  |          | 50  | ns    |
| $T_{OCK}^{(2)}$ | CLK to $\overline{CEO}$ Delay                   | Commercial |          | 55  |          | 50  | ns    |
|                 |                                                 | Industrial |          | 60  |          | 55  | ns    |
| $T_{OCE}^{(2)}$ | $\overline{CE}$ to $\overline{CEO}$ Delay       | Commercial |          | 55  |          | 35  | ns    |
|                 |                                                 | Industrial |          | 60  |          | 40  | ns    |
| $T_{OOE}^{(2)}$ | $\overline{RESET}/OE$ to $\overline{CEO}$ Delay | Commercial |          | 40  |          | 35  | ns    |
|                 |                                                 | Industrial |          | 45  |          | 35  | ns    |
| $F_{MAX}$       | Maximum Input Clock Frequency                   | Commercial |          | 33  |          | 33  | MHz   |
|                 |                                                 | Industrial |          | 33  |          | 33  | MHz   |

Notes: 1. AC test lead = 50 pF.  
2. Float delays are measured with 5 pF AC loads. Transition is measured  $\pm 200$  mV from steady-state active levels.

## 17. Thermal Resistance Coefficients

| Package Type |                                       |                                          | AT17F040 | AT17F080 |
|--------------|---------------------------------------|------------------------------------------|----------|----------|
| 8CN4         | Leadless Array Package (LAP)          | $\theta_{JC} [^{\circ}\text{C/W}]$       |          | —        |
|              |                                       | $\theta_{JA} [^{\circ}\text{C/W}]^{(1)}$ |          | —        |
| 20J          | Plastic Leaded Chip Carrier (PLCC)    | $\theta_{JC} [^{\circ}\text{C/W}]$       |          | —        |
|              |                                       | $\theta_{JA} [^{\circ}\text{C/W}]^{(1)}$ |          | —        |
| 44A          | Thin Plastic Quad Flat Package (TQFP) | $\theta_{JC} [^{\circ}\text{C/W}]$       | —        | 17       |
|              |                                       | $\theta_{JA} [^{\circ}\text{C/W}]^{(1)}$ | —        | 62       |

Note: 1. Airflow = 0 ft/min.

## 18. Ordering Information

| Memory Size | Ordering Code  | Package <sup>(1)(2)</sup> | Operation Range                 |
|-------------|----------------|---------------------------|---------------------------------|
| 4-Mbit      | AT17F040-30VJC | 20J - 20 PLCC             | Commercial<br>(0° C to 70° C)   |
|             | AT17F040-30VJI | 20J - 20 PLCC             | Industrial<br>(-40° C to 85° C) |
| 8-Mbit      | AT17F080-30TQC | 44A - 44 TQFP             | Commercial<br>(0° C to 70° C)   |
|             | AT17F080-30TQI | 44A - 44 TQFP             | Industrial<br>(-40° C to 85° C) |

Notes: 1. For the -30BJC and -30BJI packages, customers may migrate to the AT17F32-30BJU.  
2. For the -30JC and -30JI packages, customers may migrate to the AT17Fxxx-30JU.


## 19. Green Package Options (Pb/Halide-free/RoHS Compliant)

| Memory Size | Ordering Code | Package       | Operation Range                 |
|-------------|---------------|---------------|---------------------------------|
| 4-Mbit      | AT17F040-30CU | 8CN4 - 8 LAP  | Industrial<br>(-40° C to 85° C) |
|             | AT17F040-30JU | 20J - 20 PLCC |                                 |
| 8-Mbit      | AT17F080-30CU | 8CN4 - 8 LAP  |                                 |
|             | AT17F080-30JU | 20J - 20 PLCC |                                 |


| Package Type |                                                                                                             |
|--------------|-------------------------------------------------------------------------------------------------------------|
| <b>8CN4</b>  | 8-lead, 6 mm x 6 mm x 1.04 mm, Leadless Array Package (LAP) – Pin-compatible with 8-lead SOIC/VOIC Packages |
| <b>20J</b>   | 20-lead, Plastic J-leaded Chip Carrier (PLCC)                                                               |
| <b>44A</b>   | 44-lead, Thin (1.0 mm) Plastic Quad Flat Package Carrier (TQFP)                                             |

## 20. Packaging Information


### 20.1 8CN4 – LAP

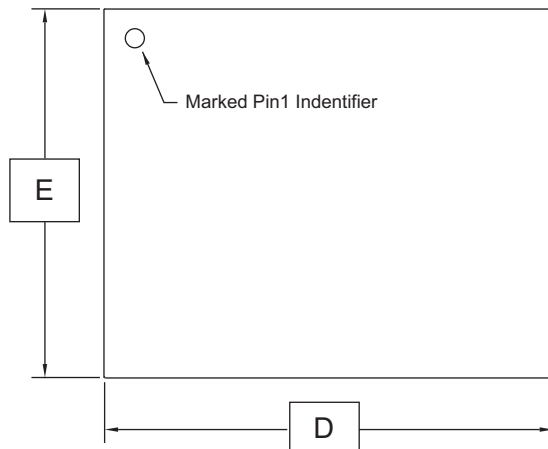

Top View

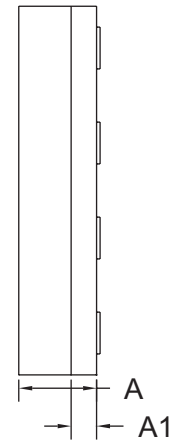

Side View

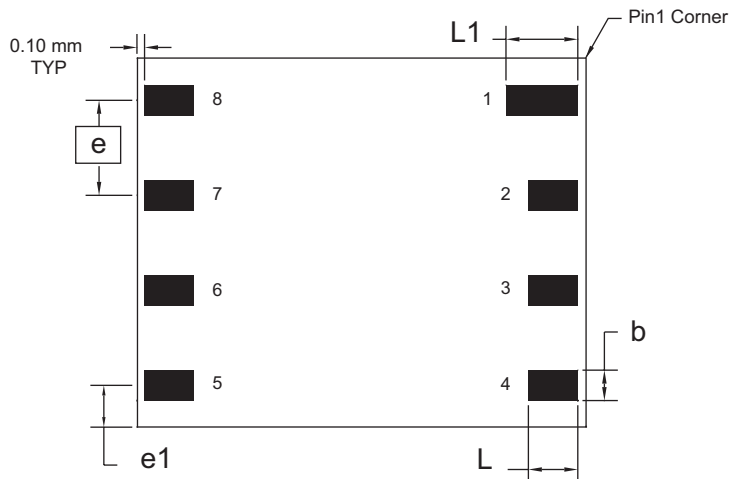

Bottom View

COMMON DIMENSIONS  
(Unit of Measure = mm)

| SYMBOL | MIN      | NOM  | MAX  | NOTE |
|--------|----------|------|------|------|
| A      | 0.94     | 1.04 | 1.14 |      |
| A1     | 0.30     | 0.34 | 0.38 |      |
| b      | 0.45     | 0.50 | 0.55 | 1    |
| D      | 5.89     | 5.99 | 6.09 |      |
| E      | 5.89     | 5.99 | 6.09 |      |
| e      | 1.27 BSC |      |      |      |
| e1     | 1.10 REF |      |      |      |
| L      | 0.95     | 1.00 | 1.05 | 1    |
| L1     | 1.25     | 1.30 | 1.35 | 1    |

- Note:
1. Metal Pad Dimensions.
  2. All exposed metal area shall have the following finished platings.  
Ni: 0.0005 to 0.015 mm  
Au: 0.0005 to 0.001 mm

2/15/08



**Package Drawing Contact:**  
packagedrawings@atmel.com

**TITLE**  
**8CN4**, 8-lead (6 x 6 x 1.04 mm Body),  
Lead Pitch 1.27mm,  
Leadless Array Package (LAP)

**GPC**

DMH


**DRAWING NO.**

8CN4

**REV.**

D

## 20.2 20J – PLCC

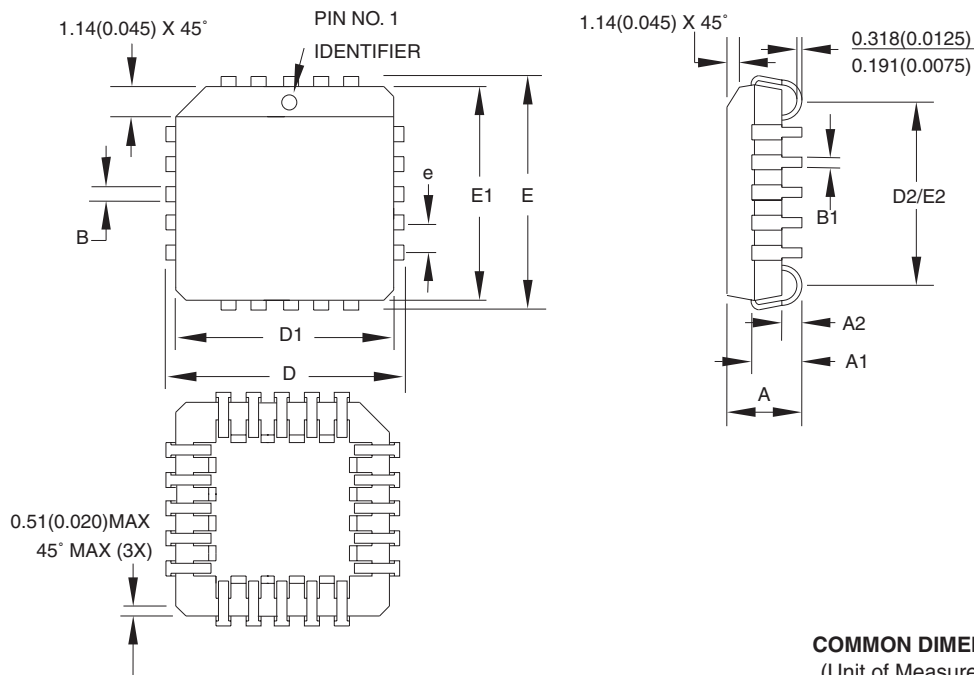

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN       | NOM | MAX    | NOTE   |
|--------|-----------|-----|--------|--------|
| A      | 4.191     | —   | 4.572  |        |
| A1     | 2.286     | —   | 3.048  |        |
| A2     | 0.508     | —   | —      |        |
| D      | 9.779     | —   | 10.033 |        |
| D1     | 8.890     | —   | 9.042  | Note 2 |
| E      | 9.779     | —   | 10.033 |        |
| E1     | 8.890     | —   | 9.042  | Note 2 |
| D2/E2  | 7.366     | —   | 8.382  |        |
| B      | 0.660     | —   | 0.813  |        |
| B1     | 0.330     | —   | 0.533  |        |
| e      | 1.270 TYP |     |        |        |

- Notes:
1. This package conforms to JEDEC reference MS-018, Variation AA.
  2. Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is .010" (0.254 mm) per side. Dimension D1 and E1 include mold mismatch and are measured at the extreme material condition at the upper or lower parting line.
  3. Lead coplanarity is 0.004" (0.102 mm) maximum.

10/04/01



2325 Orchard Parkway  
San Jose, CA 95131

### TITLE

**20J, 20-lead, Plastic J-leaded Chip Carrier (PLCC)**


### DRAWING NO.

20J

### REV.

B

## 20.3 44A – TQFP

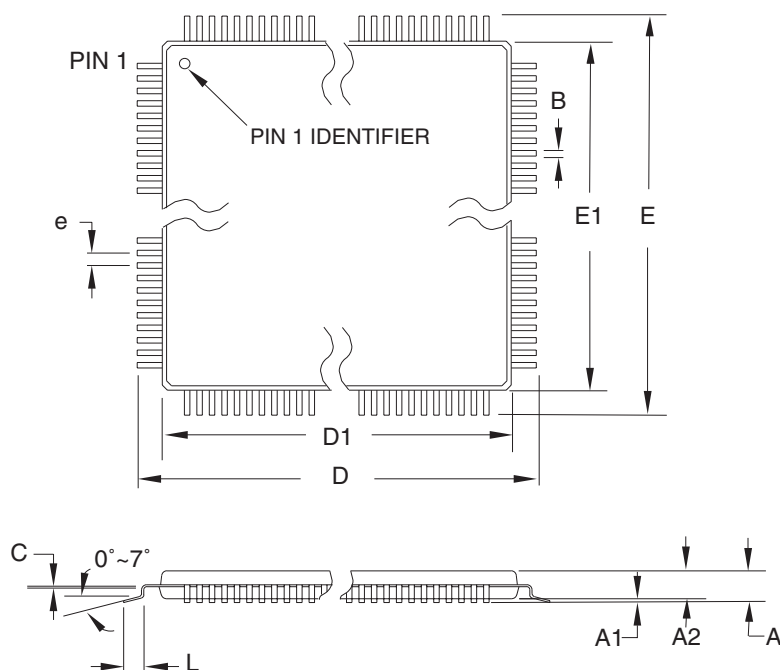

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN      | NOM   | MAX   | NOTE   |
|--------|----------|-------|-------|--------|
| A      | —        | —     | 1.20  |        |
| A1     | 0.05     | —     | 0.15  |        |
| A2     | 0.95     | 1.00  | 1.05  |        |
| D      | 11.75    | 12.00 | 12.25 |        |
| D1     | 9.90     | 10.00 | 10.10 | Note 2 |
| E      | 11.75    | 12.00 | 12.25 |        |
| E1     | 9.90     | 10.00 | 10.10 | Note 2 |
| B      | 0.30     | —     | 0.45  |        |
| C      | 0.09     | —     | 0.20  |        |
| L      | 0.45     | —     | 0.75  |        |
| e      | 0.80 TYP |       |       |        |

- Notes:
1. This package conforms to JEDEC reference MS-026, Variation ACB.
  2. Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is 0.25 mm per side. Dimensions D1 and E1 are maximum plastic body size dimensions including mold mismatch.
  3. Lead coplanarity is 0.10 mm maximum.

10/5/2001



2325 Orchard Parkway  
San Jose, CA 95131

**TITLE**

**44A**, 44-lead, 10 x 10 mm Body Size, 1.0 mm Body Thickness,  
0.8 mm Lead Pitch, Thin Profile Plastic Quad Flat Package (TQFP)

**DRAWING NO.**

44A

**REV.**

B

## 21. Revision History

| Revision Level – Release Date | History                                                                    |
|-------------------------------|----------------------------------------------------------------------------|
| J – March 2006                | Added last-time buy for AT17FXXX-30CC and AT17FXXX-30CI.                   |
| K – February 2008             | Removed -30JC, -30JI, -30BJC and -30BJI devices from ordering information. |



## Headquarters

---

**Atmel Corporation**  
2325 Orchard Parkway  
San Jose, CA 95131  
USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## International

---

**Atmel Asia**  
Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
Tel: (852) 2721-9778  
Fax: (852) 2722-1369

**Atmel Europe**  
Le Krebs  
8, Rue Jean-Pierre Timbaud  
BP 309  
78054 Saint-Quentin-en-  
Yvelines Cedex  
France  
Tel: (33) 1-30-60-70-00  
Fax: (33) 1-30-60-71-11

**Atmel Japan**  
9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## Product Contact

---

**Web Site**  
[www.atmel.com](http://www.atmel.com)

**Technical Support**  
[configurator@atmel.com](mailto:configurator@atmel.com)

**Sales Contact**  
[www.atmel.com/contacts](http://www.atmel.com/contacts)

**Literature Requests**  
[www.atmel.com/literature](http://www.atmel.com/literature)

---

**Disclaimer:** The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© 2008 Atmel Corporation. All rights reserved. Atmel®, logo and combinations thereof, and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9