

# XB6ECG221P

square black key selector switch Ø16-  
projecting keylock 2 positions-1CO



Product availability: Non-Stock - Not normally stocked in distribution facility



## Main

Range of product	Harmony XB6E
Product or component type	Monolithic selector switch
Device short name	XB6E
Bezel material	Plastic
Mounting diameter	0.63 in (16 mm)
Sale per indivisible quantity	5
Shape of signaling unit head	Square
Type of operator	Stay put
Operator profile	Key switch
Operator position information	2 positions
Key number	132
Key withdrawal position	In any position
Contacts type and composition	1 C/O
Contact operation	Snap action
Connections - terminals	Insulated faston 2.8 x 0.5 mm Solder terminal <= 0.75 mm <sup>2</sup> AWG 19 Fast connector socket
Contacts material	Gold-flashed silver

## Complementary

Net weight	0.04 lb(US) (0.02 kg)
Overvoltage category	II IEC 60536
Marking	CE
Mechanical durability	250000 cycles
Tightening torque	5.31...8.85 lbf.in (0.6...1 N.m)
Contact resistance	50 mOhm 1/6 V
Short-circuit protection	2 A cartridge fuse gG
[I <sub>th</sub> ] conventional free air thermal current	3 A fast connector socket 5 A
[I <sub>e</sub> ] rated operational current	1.5 A 120 V, AC-12 EN/IEC 60947-5-1 1 A 240 V, AC-12 EN/IEC 60947-5-1 0.7 A 240 V, AC-13 EN/IEC 60947-5-1 1 A 120 V, AC-13 EN/IEC 60947-5-1 1 A 24 V, DC-12 EN/IEC 60947-5-1 0.7 A 24 V, DC-13 EN/IEC 60947-5-1 0.2 A 125 V, DC-12 EN/IEC 60947-5-1 0.15 A 125 V, DC-13 EN/IEC 60947-5-1
Electrical durability	100000 cycles, AC, 0.7 A 220 V EN/IEC 60947-5-1 appendix C

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Ambient air temperature for operation	14...131 °F (-10...55 °C)
IP degree of protection	IP65 IEC 60529
Standards	IEC 60947-5-1 JIS C 852 IEC 60947-1 UL 508 CSA C22.2 No 14 JIS C8201-5-1 JIS C8201-1
Product certifications	CCC CURus
Vibration resistance	1 mm 10...55 Hz)IEC 60068-2-6
Shock resistance	10 gn 11 ms) half sine wave acceleration IEC 60068-2-27

## Ordering and shipping details

Category	22459 - PUSHBUTTONS, 16MM
Discount Schedule	CS2
GTIN	03389110640670
Package weight(Lbs)	0.11 kg (0.25 lb(US))
Returnability	No
Country of origin	CN

## Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Contractual warranty

Warranty	18 months
----------	-----------

Key Switch

Square Head

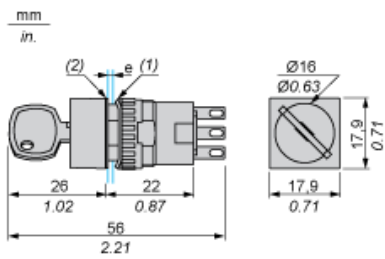

- (1) Anti-rotation plate (thickness: 0.6 mm / 0.02 in.)
- (2) Seal (thickness: 0.5 mm / 0.01 in.)
- e panel thickness: 0.5 mm (0.01 in.) ≤ e ≤ 6 mm (0.24 in.)

---

Panel Cut-Out and Mounting

---

Circular or Square Head



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9