

Features

- $I_{T(RMS)} = 0.8\text{ A}$
- $V_{DRM}, V_{RRM} = 600\text{ V}$
- $I_{GT} = 30\text{ to }200\ \mu\text{A}$

Applications

- Limited gate current topologies
- Ground fault circuit interrupters
- Overvoltage crowbar protection in power supplies
- Protection in electronic ballasts
- Capacitive discharge ignitions
- Igniters (lighting, oven...)

Description

The X006 SCR can be used as on/off function in applications where topology does not offer high current for gate triggering.

This device is optimized in forward voltage drop and inrush current capabilities for reduced power losses and high reliability in harsh environments.

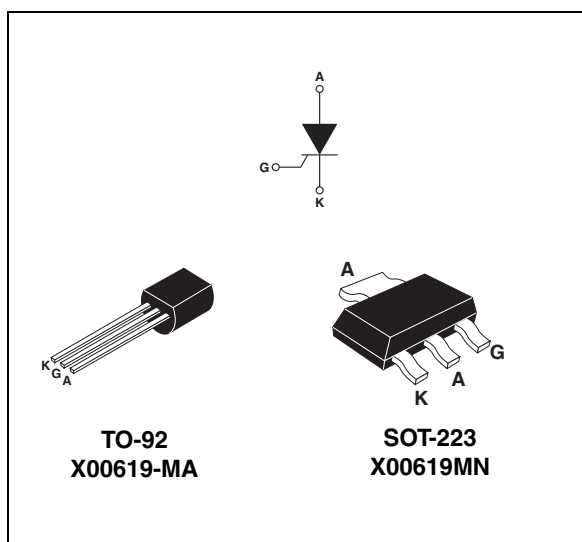


Table 1. Device summary

| | |
|---------------------|-------------------------|
| $I_{T(RMS)}$ | 0.8 A |
| V_{DRM} / V_{RRM} | 600 V |
| I_{GT} | 30 to 200 μA |

1 Characteristics

Table 2. Absolute ratings (limiting values, $T_j = 25\text{ °C}$ unless otherwise specified)

| Symbol | Parameter | | Value | Unit | |
|--------------------|--|-------------------------|-----------------------|--------------------------------|-------------|
| $I_{T(RMS)}$ | On-state rms current (180 °Conduction angle) | TO-92 | $T_L = 83\text{ °C}$ | 0.8 | A |
| | | SOT-223 | $T_c = 107\text{ °C}$ | | |
| $I_{T(AV)}$ | Average on-state current (180 °Conduction angle) | TO-92 | $T_L = 83\text{ °C}$ | 0.5 | A |
| | | SOT-223 | $T_c = 107\text{ °C}$ | | |
| I_{TSM} | Non repetitive surge peak on-state current | $t_p = 8.3\text{ ms}$ | $T_j = 25\text{ °C}$ | 10 | A |
| | | $t_p = 10\text{ ms}$ | | 9 | |
| I^2t | I^2t Value for fusing | $t_p = 10\text{ ms}$ | $T_j = 25\text{ °C}$ | 0.4 | A^2s |
| di/dt | Critical rate of rise of on-state current $I_G = 2 \times I_{GT}, t_r \leq 100\text{ ns}$ | F = 60 Hz | $T_j = 125\text{ °C}$ | 50 | A/ μs |
| I_{GM} | Peak gate current | $t_p = 20\text{ }\mu s$ | $T_j = 125\text{ °C}$ | 1 | A |
| $P_{G(AV)}$ | Average gate power dissipation | | $T_j = 125\text{ °C}$ | 0.1 | W |
| T_{stg} T_j | Storage junction temperature range Operating junction temperature range | | | - 40 to + 150 - 40 to + 125 | $^{\circ}C$ |

Table 3. Electrical characteristics ($T_j = 25\text{ °C}$ unless otherwise specified)

| Symbol | Test conditions | | Value | Unit | |
|----------|--|-----------------------|-------|---------|------------|
| I_{GT} | $V_D = 12\text{ V}, R_L = 140\text{ }\Omega$ | MIN. | 30 | μA | |
| | | MAX. | 200 | | |
| V_{GT} | | | 0.8 | V | |
| V_{GD} | $V_D = V_{DRM}, R_L = 3.3\text{ k}\Omega, R_{GK} = 1\text{ k}\Omega$ | $T_j = 125\text{ °C}$ | MIN. | 0.2 | V |
| V_{RG} | $I_{RG} = 10\text{ }\mu A$ | | MIN. | 5 | V |
| I_H | $I_T = 50\text{ mA}, R_{GK} = 1\text{ k}\Omega$ | | MAX. | 5 | mA |
| I_L | $I_G = 1\text{ mA}, R_{GK} = 1\text{ k}\Omega$ | | MAX. | 6 | mA |
| dV/dt | $V_D = 67\% V_{DRM}, R_{GK} = 1\text{ k}\Omega$ | $T_j = 125\text{ °C}$ | MIN. | 40 | V/ μs |

Table 4. Static electrical characteristics

| Symbol | Test conditions | | Value | Unit | |
|-------------------|--|-----------------------|-------|---------|-----------|
| V_{TM} | $I_{TM} = 1\text{ A}, t_p = 380\text{ }\mu s$ | $T_j = 25\text{ °C}$ | MAX | 1.35 | V |
| V_{TO} | Threshold voltage | $T_j = 125\text{ °C}$ | | 0.85 | V |
| R_d | Dynamic resistance | | | 245 | $m\Omega$ |
| $I_{DRM} I_{RRM}$ | $V_{DRM} = V_{RRM}, R_{GK} = 1\text{ k}\Omega$ | $T_j = 25\text{ °C}$ | | 1 | μA |
| | | $T_j = 125\text{ °C}$ | 100 | μA | |

Table 5. Thermal resistances

| Symbol | Parameter | | Value | Unit |
|---------------|--------------------------|---------------------------------|-------|-----------------------------|
| $R_{th(j-l)}$ | Junction to leads (DC) | TO-92 | Max. | $^{\circ}\text{C}/\text{W}$ |
| $R_{th(j-c)}$ | Junction to case (DC) | SOT-223 | | |
| $R_{th(j-a)}$ | Junction to ambient (DC) | TO-92 | | |
| | | $S = 5 \text{ cm}^2$ SOT-223 | | |
| | | | 70 | |
| | | | 30 | |
| | | | 150 | |
| | | | 60 | |

Figure 1. Maximum average power dissipation versus average on-state current



Figure 2. Average and DC on-state current versus case temperature (SOT-223)



Figure 3. Average and DC on-state current versus lead temperature (TO-92)



Figure 4. Average and DC on-state current versus ambient temperature (free air convection)



Figure 5. Relative variation of thermal impedance junction to ambient versus pulse duration

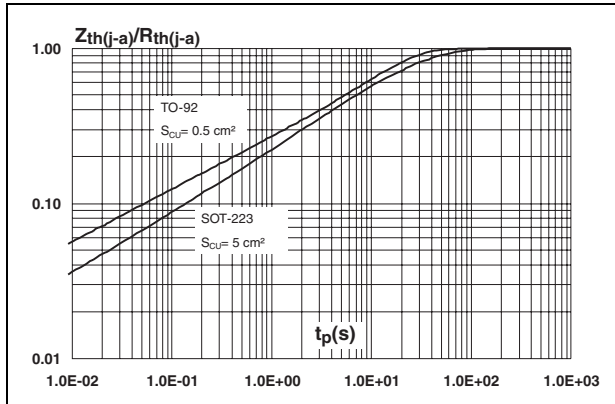


Figure 6. Relative variation of gate trigger, holding and latching current versus junction temperature



Figure 7. Relative variation of holding current versus gate-cathode resistance (typical values)

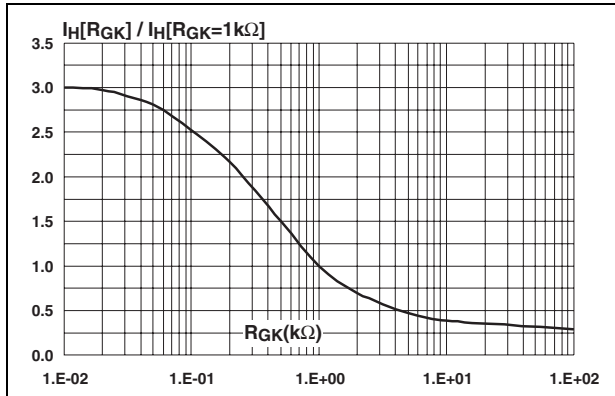


Figure 8. Relative variation of dV/dt immunity versus gate-cathode resistance (typical values)



Figure 9. Relative variation of dV/dt immunity versus gate-cathode capacitance (typical values)

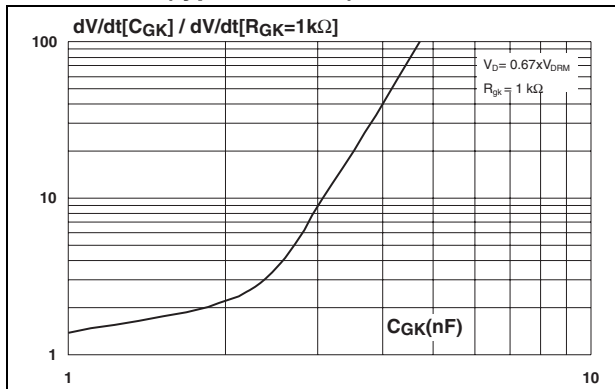


Figure 10. Surge peak on-state current versus number of cycles



Figure 11. Non repetitive surge peak on state current for a sinusoidal pulse and corresponding value of I^2t

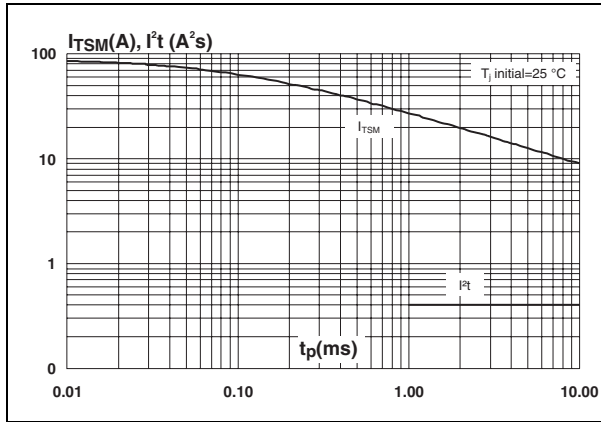


Figure 12. On-state characteristics (maximum values)

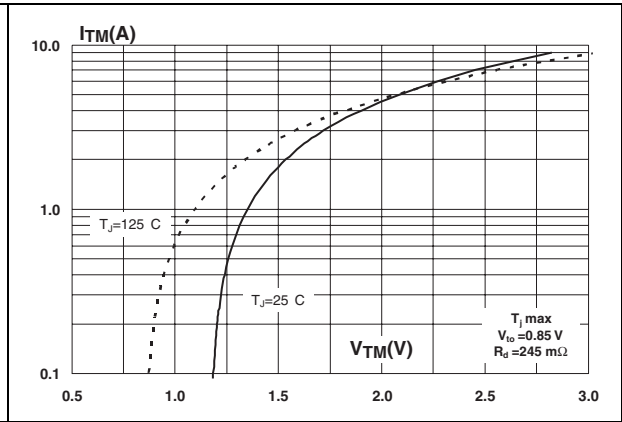
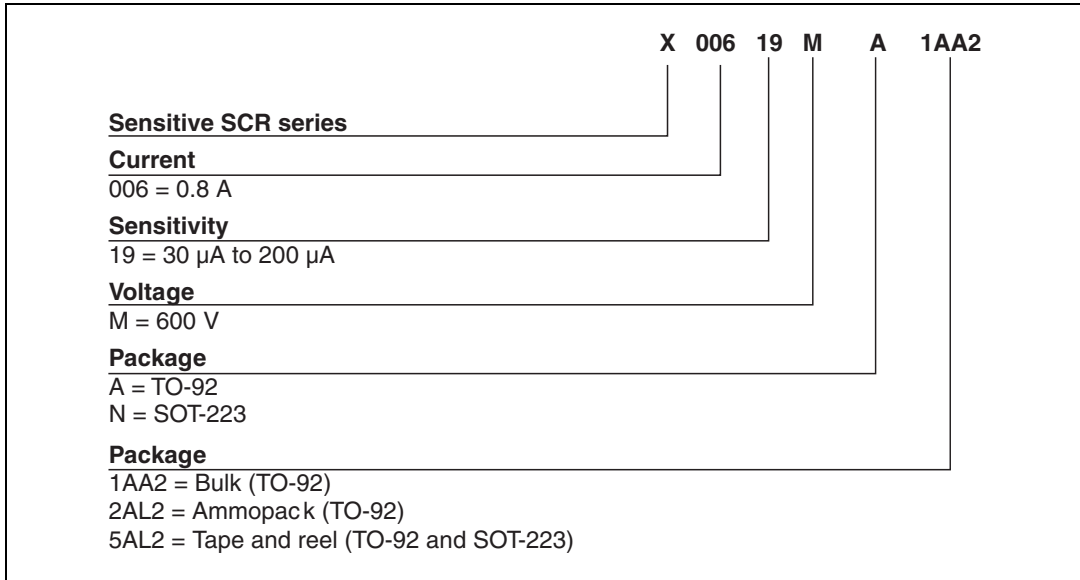


Figure 13. Thermal resistance junction to ambient versus copper surface under tab (SOT-223)



2 Ordering information scheme

Figure 14. Ordering information scheme



3 Package information

- Epoxy meets UL94, V0
- Lead-free packages

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

Table 6. TO-92 (plastic) dimensions








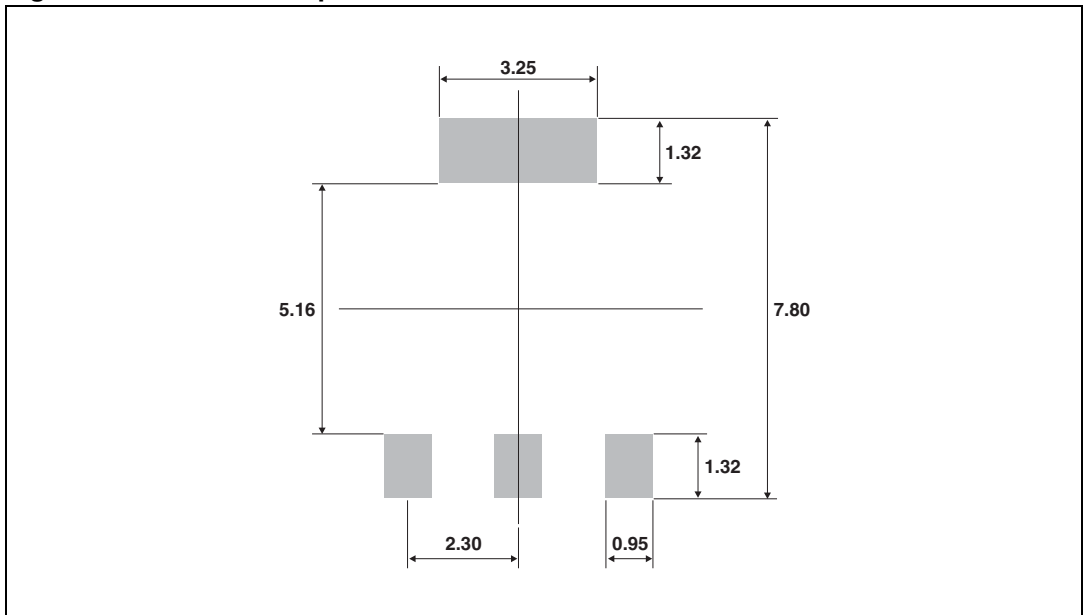
| | Dimensions | | | | | | |
|--|------------|-------------|------|------|--------|-------|-------|
| | Ref. | Millimeters | | | Inches | | |
| | | Min. | Typ. | Max. | Min. | Typ. | Max. |
|  | A | - | 1.35 | - | - | 0.053 | - |
|  | B | - | - | 4.70 | - | - | 0.185 |
|  | C | - | 2.54 | - | - | 0.100 | - |
|  | D | 4.40 | - | - | 0.173 | - | - |
|  | E | 12.70 | - | - | 0.500 | - | - |
|  | F | - | - | 3.70 | - | - | 0.146 |
|  | a | - | - | 0.50 | - | - | 0.019 |

Table 7. SOT-223 dimensions

| Ref. | Dimensions | | | | | |
|------------------|-------------|------|------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | | | 1.80 | | | 0.071 |
| A1 | | 0.02 | 0.10 | | 0.001 | 0.004 |
| B | 0.60 | 0.70 | 0.85 | 0.024 | 0.027 | 0.033 |
| B1 | 2.90 | 3.00 | 3.15 | 0.114 | 0.118 | 0.124 |
| c | 0.24 | 0.26 | 0.35 | 0.009 | 0.010 | 0.014 |
| D ⁽¹⁾ | 6.30 | 6.50 | 6.70 | 0.248 | 0.256 | 0.264 |
| e | | 2.3 | | | 0.090 | |
| e1 | | 4.6 | | | 0.181 | |
| E ⁽¹⁾ | 3.30 | 3.50 | 3.70 | 0.130 | 0.138 | 0.146 |
| H | 6.70 | 7.00 | 7.30 | 0.264 | 0.276 | 0.287 |
| V | 10° max | | | | | |

1. Do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15mm (0.006inches)

Figure 15. SOT-223 footprint



4 Ordering information

Table 8. Ordering information

| Order code | Marking | Package | Weight | Base qty | Delivery mode |
|--------------|-----------|---------|--------|----------|---------------|
| X00619MA1AA2 | X0619 MA | TO-92 | 0.2 g | 2500 | Bulk |
| X00619MA2AL2 | | | | 2000 | Ammopack |
| X00619MA5AL2 | | | | 2000 | Tape and reel |
| X00619MN5AL2 | X0 619 MN | SOT-223 | 0.12 g | 1000 | |

5 Revision history

Table 9. Document revision history

| Date | Revision | Changes |
|-------------|----------|------------------------|
| 26-May-2009 | 1 | First issue |
| 03-May-2012 | 2 | Added SOT-223 package. |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9