


MINIATURE HERMAPHRODITIC CONNECTOR SYSTEM

Low profile board to board
and NEW wire to board connectors

Miniature Hermaphroditic Connector

The low profile SMT miniature hermaphroditic board-to-board connectors are designed to provide power between adjacent linear printed circuit boards. Ideal for use in compact spaces with features designed for vacuum pick and place that make it suitable for high volume automated manufacturing.

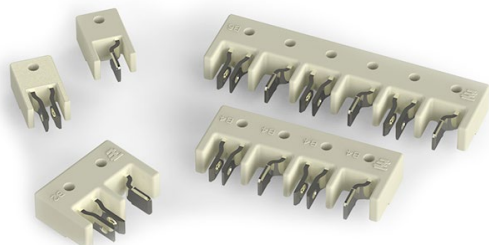

Electrical

- **Current Rating:** 3 A max.
- **Voltage Rating:** 300 VAC / DC (UL)
50 VAC / DC (TUV)
- **Dielectric Withstanding Voltage:** 1600 VAC

Mechanical

- **Operating Temperature:** -40°C to +105°C (UL)
-35°C to 65°C (TUV)

Materials


- **Housing:** High temperature thermoplastic UL 94V-0
- **Contacts:** Copper alloy, tin over nickel plated

Standards and Specifications

- **Product Specification:** 108-106050
- **Application Specification:** 114-106050
- **UL and cUL Recognized:** File No. E321453
- **EN 60838-1 & EN 60838-2-2:** Certificate No. 50280860

Product Offering

Part Number	Description	
1971567-1	2 position hermaphroditic board to board connector	
1971567-2	4 position hermaphroditic board to board connector	
1971567-3	6 position hermaphroditic board to board connector	
2213203-1	2 position mini hermaphroditic insert molded wire to board lead assembly (<i>mates with 1971567-1</i>)	
1971742-1	1 position blade board to board connector	Mating Pair
1971743-1	1 position receptacle board to board connector	
2213610-1	2 position mini hermaphroditic assy with posts	
2213610-2	4 position mini hermaphroditic assy with posts	
2213610-3	6 position mini hermaphroditic assy with posts	

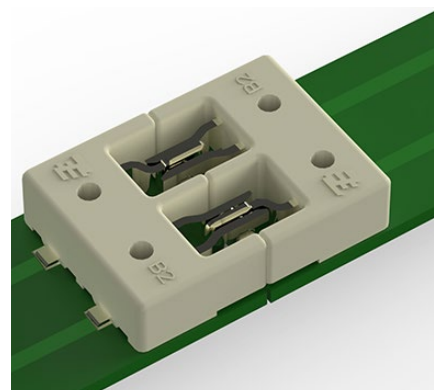

Key Benefits



- Reduce assembly time, minimize inventory and lower production costs with connectors that mate and un-mate to themselves horizontally and vertically
- Connect data and control signals with 2, 4 and 6 position hermaphroditic versions
- Automate production with flat top surface for vacuum pick and place assembly
- Support re-flow processing with high temperature material

Applications

- Architectural and sign lighting
- Retail and display lighting
- Fluorescent LED retrofit lighting
- Cabinet or furniture lighting
- Commercial / residential cove lighting
- Access control equipment
- Thermostats
- Vending Machines

Dimensions

2, 4 and 6 position Mini Hermaphroditic Connectors¹

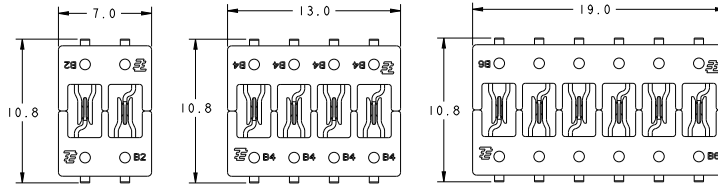


2, 4 and 6 position showing 2 mated parts



¹ All features and dimensions of 2, 4 and 6 position versions are the same except as shown

PCB Layout and Packaging Details


Horizontal mating and unmating only with 0.2 mm gap between PCBs




Horizontal and vertical mating and unmating with 2.4 mm gap between PCBs

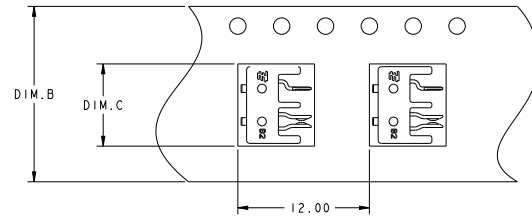


6P	19.30	32.00	1971567-3
4P	13.30	24.00	1971567-2
2P	7.30	16.00	1971567-1
POSITION	DIM.C	DIM.B	FOR P/N

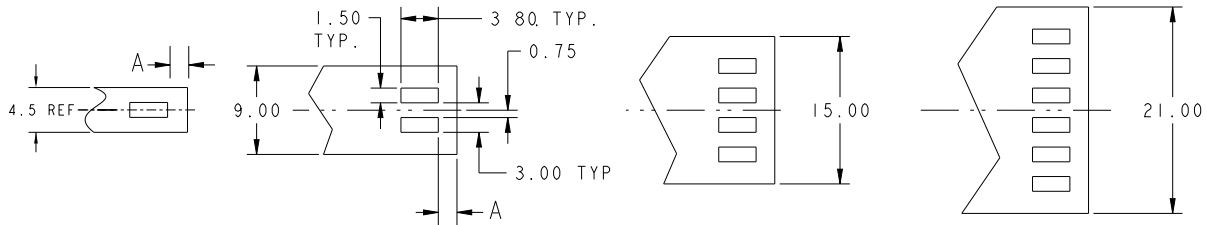



1 position receptacle



1 position blade



2 position mini hermaphroditic wire to board lead assembly

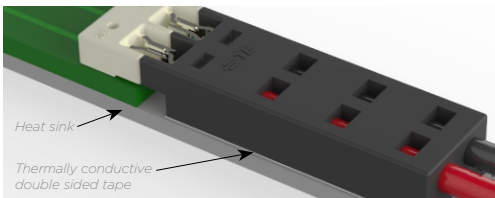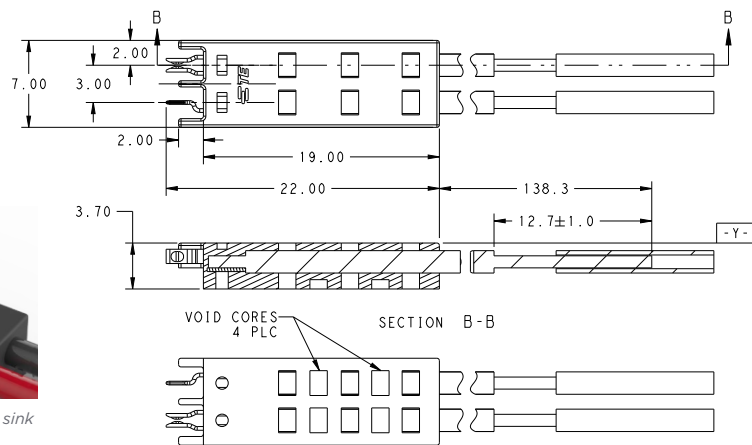


2 position wire to board lead assembly is secured to heat sink with thermally conductive double sided tape

Dimensions are shown in millimeters for reference purposes only. Specifications subject to change. Customer drawing should be used for all design activity.

Miniature Hermaphroditic Connector

Dimensions

2, 4 and 6 position Mini Hermaphroditic Connectors¹


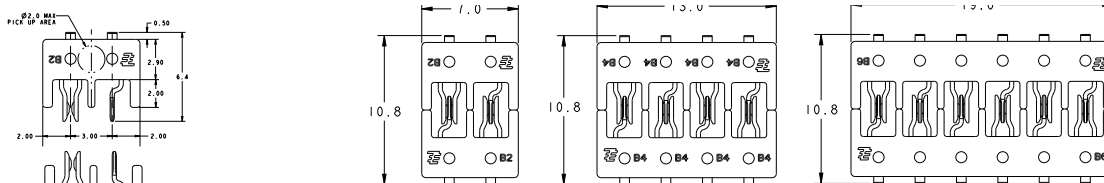


2, 4 and 6 position showing 2 mated parts


¹ All features and dimensions of 2, 4 and 6 position versions are the same except as shown

PCB Layout and Packaging Details


Horizontal mating and unmating only with 0.2 mm gap between PCBs

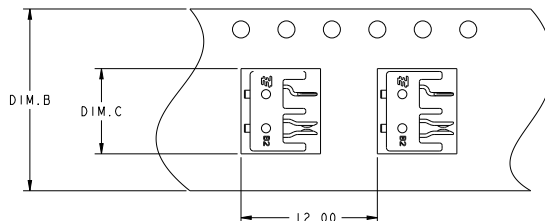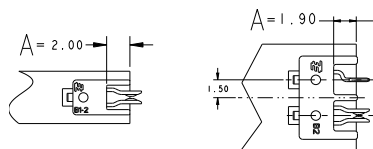

Horizontal and vertical mating and unmating with 2.4 mm gap between PCBs

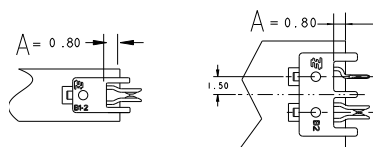





6P	19.30	32.00	2213610-3
4P	13.30	24.00	2213610-2
2P	7.30	16.00	2213610-1
POSITION	DIM. C	DIM. B	FOR P/N

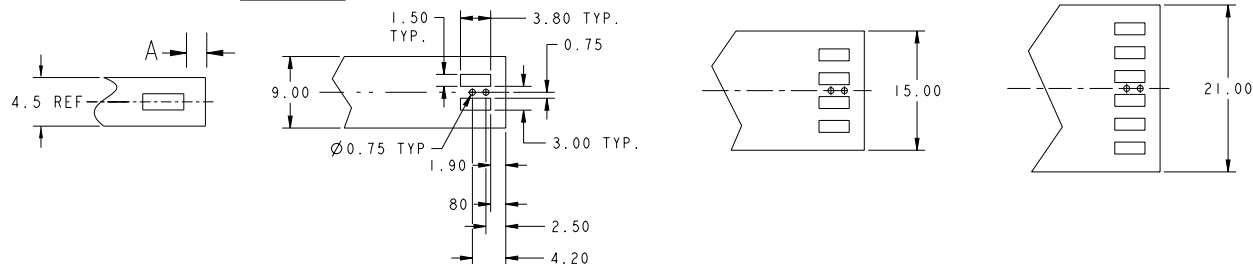

1 position receptacle

1 position blade

2 position mini hermaphroditic wire to board lead assembly

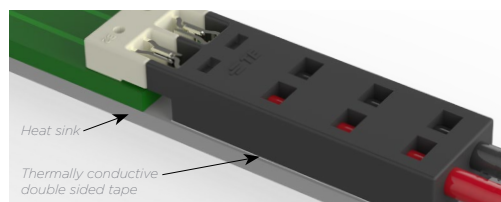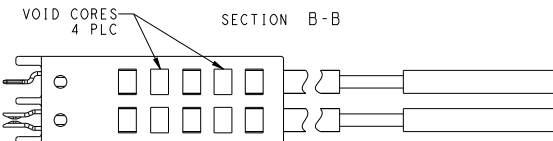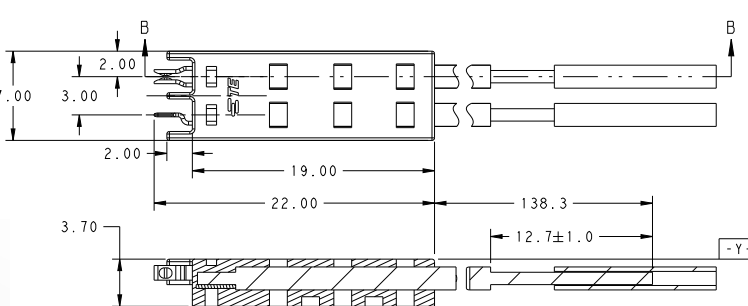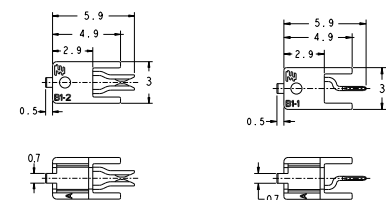

2 position wire to board lead assembly is secured to heat sink with thermally conductive double sided tape

Dimensions are shown in millimeters for reference purposes only. Specifications subject to change. Customer drawing should be used for all design activity.

te.com

© 2017 TE Connectivity Ltd. Family of Companies. All Rights Reserved. TE, TE Connectivity, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and Company names mentioned herein may be trademarks of their respective owners.
7-1773456-9 JN 2/2017

USA: +1 (800) 522-6752
Canada: +1 (905) 475-6222
Mexico: +52 (0) 55-1106-0800
Latin/S. America: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
The Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9