


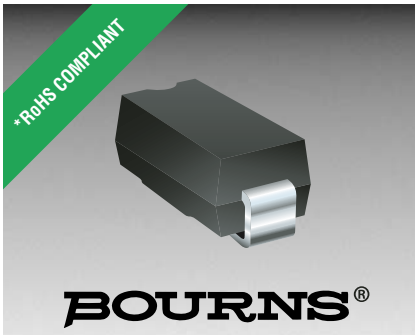

## Features

- Lead free device (RoHS compliant\*)
- Glass passivated chip
- Low reverse leakage current
- Low forward voltage drop
- High current capability

## CD214C-F350~F3600 Fast Response Rectifiers

### General Information

The markets of portable communications, computing and video equipment are challenging the semiconductor industry to develop increasingly smaller electronic components. Bourns offers Glass Passivated Rectifiers for rectification applications, in compact chip DO-214AB (SMC) size format, which offers PCB real estate savings and are considerably smaller than competitive parts. The Glass Passivated Rectifier Diodes offer a forward current of 3.0 A with a choice of repetitive peak reverse voltage of 50 V up to 600 V.

Bourns Chip Diodes® conform to JEDEC standards, are easy to handle on standard pick and place equipment and their flat configuration minimizes roll away.

### Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

| Parameter                                                                                         | Symbol          | CD214C- |       |       |       |       | Unit               |
|---------------------------------------------------------------------------------------------------|-----------------|---------|-------|-------|-------|-------|--------------------|
|                                                                                                   |                 | F350    | F3100 | F3200 | F3400 | F3600 |                    |
| Maximum Repetitive Peak Reverse Voltage                                                           | $V_{RRM}$       | 50      | 100   | 200   | 400   | 600   | V                  |
| Maximum RMS Voltage                                                                               | $V_{RMS}$       | 35      | 70    | 140   | 280   | 420   | V                  |
| Maximum DC Blocking Voltage                                                                       | $V_{DC}$        | 50      | 100   | 200   | 400   | 600   | V                  |
| Maximum Average Forward Rectified Current (@ $T_L = 100^\circ\text{C}$ ) <sup>1</sup>             | $I_{(AV)}$      | 3.0     |       |       |       |       | A                  |
| DC Reverse Current @ Rated DC Blocking Voltage (@ $T_J = 25^\circ\text{C}$ )                      | $I_R$           | 10.0    |       |       |       |       | $\mu\text{A}$      |
| DC Reverse Current @ Rated DC Blocking Voltage (@ $T_J = 125^\circ\text{C}$ )                     | $I_R$           | 500.0   |       |       |       |       | $\mu\text{A}$      |
| Typical Junction Capacitance <sup>2</sup>                                                         | $C_J$           | 45      |       |       |       |       | pF                 |
| Maximum Instantaneous Forward Voltage @ 3 A                                                       | $V_F$           | 0.92    |       |       | 1.25  | 1.30  | V                  |
| Typical Thermal Resistance <sup>3</sup>                                                           | $R_{\theta JA}$ | 15      |       |       |       |       | $^\circ\text{C/W}$ |
| Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method) | $I_{FSM}$       | 100     |       |       |       |       | A                  |
| Maximum Reverse Recovery Time                                                                     | $T_{rr}$        | 25      |       |       |       |       | ns                 |

Notes:

1 See Forward Derating Curve.

2 Measured at 1 MHz and an applied reverse voltage of 4.0 V.

3 Thermal resistance from junction to lead.

### Thermal Characteristics (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

| Parameter                   | Symbol    | CD214C-F350~F3600 | Unit             |
|-----------------------------|-----------|-------------------|------------------|
| Operating Temperature Range | $T_J$     | -55 to +150       | $^\circ\text{C}$ |
| Storage Temperature Range   | $T_{STG}$ | -55 to +150       | $^\circ\text{C}$ |

\*RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

Specifications are subject to change without notice.



Customers should verify actual device performance in their specific applications.

## CD214C-F350~F3600 Fast Response Rectifiers

**BOURNS®**


### Product Dimensions

This is a lead free product using 100 % Sn termination. It is a molded plastic package. A cathode band indicates the polarity. The package weighs approximately 0.21 g. The package and dimensions are shown below.

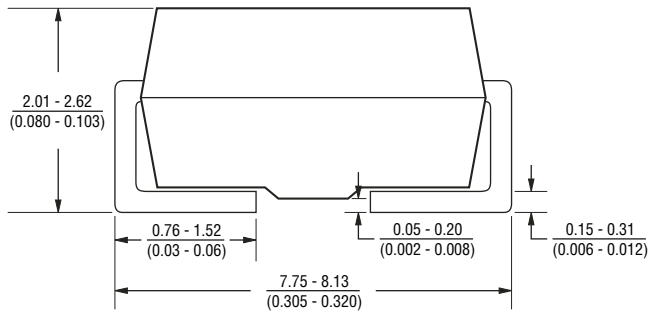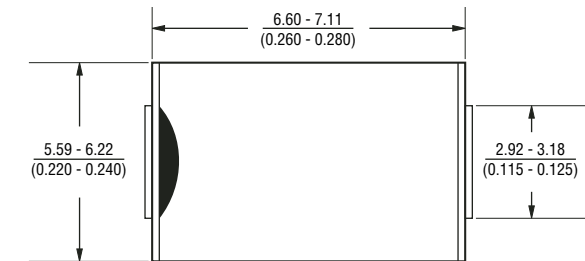

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

### Recommended Pad Layout

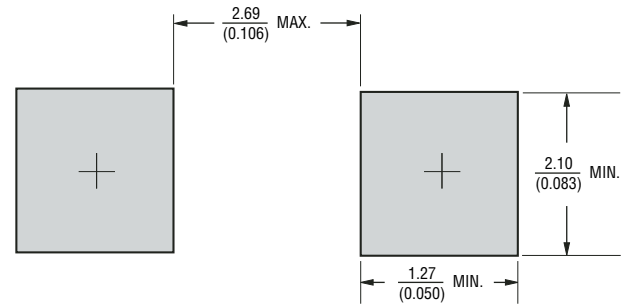

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

### How To Order

|                          | CD | 214C | - F | 3 | 50 |
|--------------------------|----|------|-----|---|----|
| Common Code              | CD |      |     |   |    |
| Package                  |    | 214C |     |   |    |
| Model Series             |    |      | F   |   |    |
| Forward Current $I_{AV}$ |    |      |     | 3 |    |
| Reverse Voltage          |    |      |     |   | 50 |
| 50 = 50 V                |    |      |     |   |    |
| 100 = 100 V              |    |      |     |   |    |
| 200 = 200 V              |    |      |     |   |    |
| 400 = 400 V              |    |      |     |   |    |
| 600 = 600 V              |    |      |     |   |    |

### Typical Part Marking



|                    |            |
|--------------------|------------|
| CD214C-F350 .....  | <b>F3A</b> |
| CD214C-F3100 ..... | <b>F3B</b> |
| CD214C-F3200 ..... | <b>F3D</b> |
| CD214C-F3400 ..... | <b>F3G</b> |
| CD214C-F3600 ..... | <b>F3J</b> |

## CD214C-F350~F3600 Fast Response Rectifiers

**BOURNS®**

### Packaging Information

The product will be dispensed in Tape and Reel format (see diagram below).

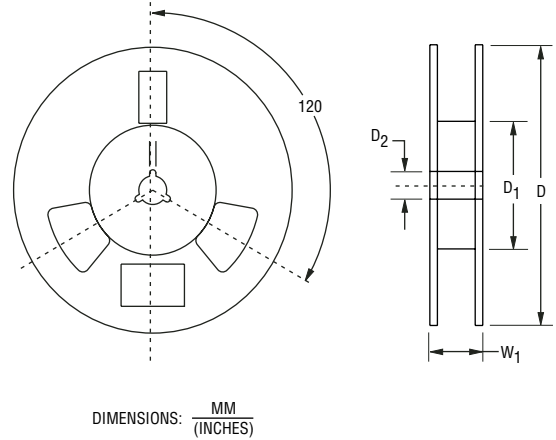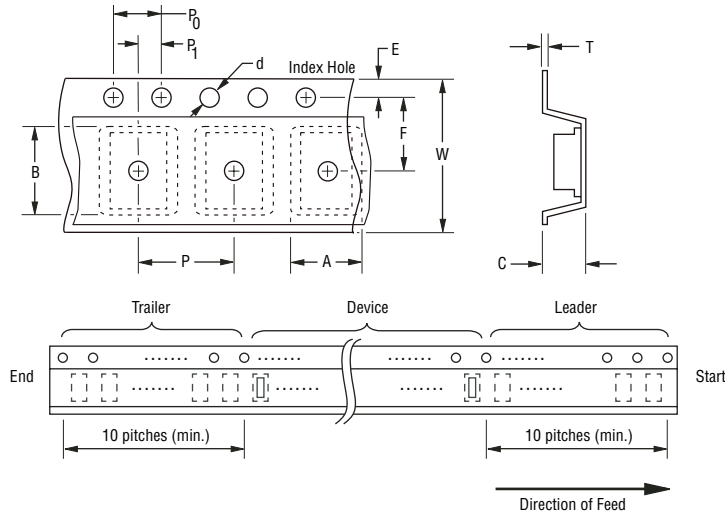

Devices are packed in accordance with EIA standard RS-481-A and specifications shown here.

| Item                   | Symbol         | SMC (DO-214AB)                             |
|------------------------|----------------|--------------------------------------------|
| Carrier Width          | A              | $\frac{7.22 \pm 0.10}{(0.284 \pm 0.004)}$  |
| Carrier Length         | B              | $\frac{8.11 \pm 0.10}{(0.319 \pm 0.004)}$  |
| Carrier Depth          | C              | $\frac{2.36 \pm 0.10}{(0.093 \pm 0.004)}$  |
| Sprocket Hole          | d              | $\frac{1.55 \pm 0.05}{(0.061 \pm 0.002)}$  |
| Reel Outside Diameter  | D              | $\frac{330}{(12.992)}$                     |
| Reel Inner Diameter    | D <sub>1</sub> | $\frac{50.0}{(1.969)}$ Min.                |
| Feed Hole Diameter     | D <sub>2</sub> | $\frac{13.0 \pm 0.20}{(0.512 \pm 0.008)}$  |
| Sprocket Hole Position | E              | $\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$  |
| Punch Hole Position    | F              | $\frac{7.50 \pm 0.10}{(0.295 \pm 0.004)}$  |
| Punch Hole Pitch       | P              | $\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$  |
| Sprocket Hole Pitch    | P <sub>0</sub> | $\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$  |
| Embossment Center      | P <sub>1</sub> | $\frac{2.00 \pm 0.10}{(0.079 \pm 0.004)}$  |
| Overall Tape Thickness | T              | $\frac{0.30 \pm 0.10}{(0.012 \pm 0.004)}$  |
| Tape Width             | W              | $\frac{16.00 \pm 0.20}{(0.630 \pm 0.008)}$ |
| Reel Width             | W <sub>1</sub> | $\frac{22.4}{(0.882)}$ Max.                |
| Quantity per Reel      | —              | 3,000                                      |


Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

## CD214C-F350~F3600 Fast Response Rectifiers


**BOURNS®**

### Performance Graphs


#### Forward Current Derating Curve

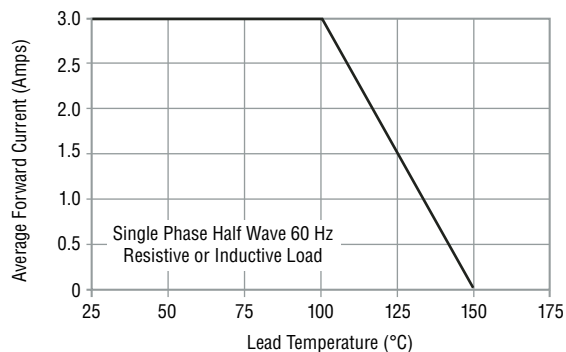


#### Maximum Non-Repetitive Surge Current

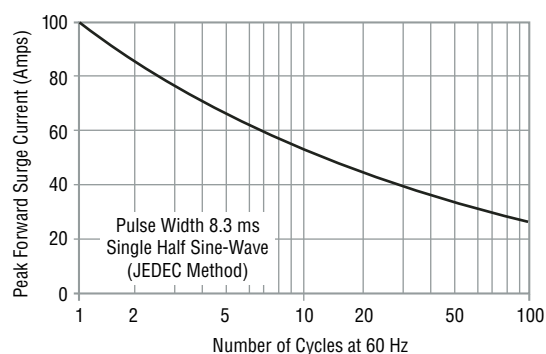

#### Typical Forward Characteristics

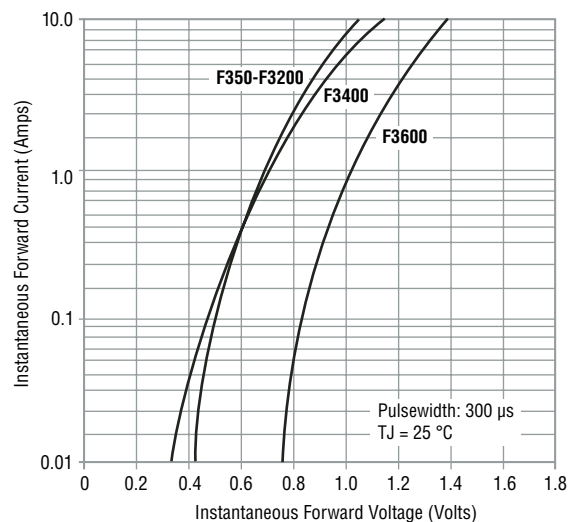

#### Typical Reverse Characteristics

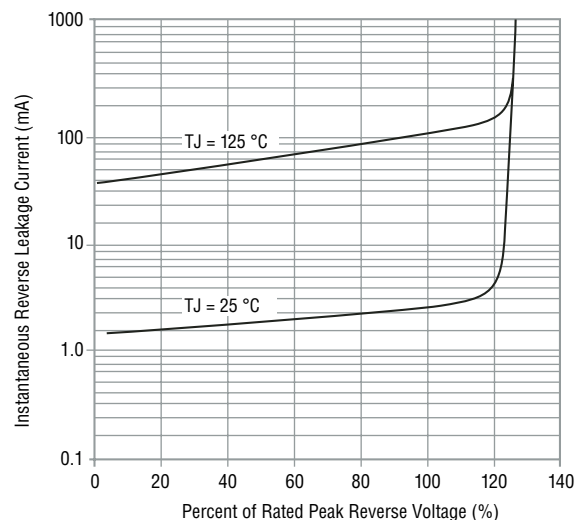

*Reliable Electronic Solutions*

#### Asia-Pacific:

Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

#### Europe:

Tel: +41-41 768 5555 • Fax: +41-41 768 5510

#### The Americas:

Tel: +1-951 781-5500 • Fax: +1-951 781-5700

[www.bourns.com](http://www.bourns.com)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9