


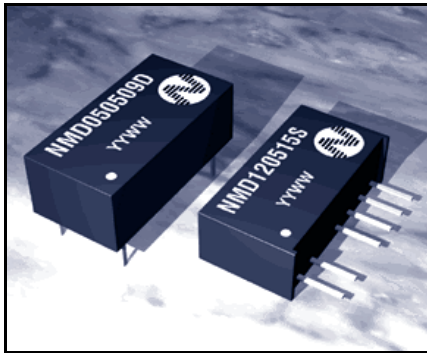

FEATURES

- Twin Independent Outputs
- Output/Output Isolation 1kVDC
- Power Sharing on Outputs
- Input/Output Isolation 1kVDC
- SIP & DIP Package Styles
- Efficiency to 80%
- Power Density 0.85W/cm³
- 5V & 12V Input
- One 5V Output (V1)
- 3.3V, 5V, 9V, 12V and 15V Output (V2)
- Footprint from 1.17cm²
- UL 94V-0 Package Material
- No Heatsink Required
- Internal SMD Construction
- Toroidal Magnetics
- Fully Encapsulated
- No External Components Required
- MTTF up to 1.9 Million hours
- PCB Mounting
- Custom Solutions Available

DESCRIPTION

The NMD series of DC-DC converters are ideally suited to applications where a potential difference exists between loads, eg motor control circuits. The twin outputs offer cost and space savings by consolidating two DC-DC Converters into one package. All of the rated power may be drawn from a single output provided the total load does not exceed 1 Watt.

SELECTION GUIDE

	Nominal Input Voltage	Output Voltage 1	Output Voltage 2	Output Current 1	Output Current 2	Efficiency	MTTF ¹	Package Style
Order Code	(V)	(V)	(V)	(mA)	(mA)	(%)	kHrs	
NMD050503D	5	5	3.3	100	152	70	1615	DIP
NMD050503S	5	5	3.3	100	152	70	1615	SIP
NMD050505D	5	5	5	100	100	70	1615	DIP
NMD050505S	5	5	5	100	100	70	1615	SIP
NMD050509D	5	5	9	100	56	80	669	DIP
NMD050509S	5	5	9	100	56	80	669	SIP
NMD050512D	5	5	12	100	42	80	339	DIP
NMD050512S	5	5	12	100	42	80	339	SIP
NMD050515D	5	5	15	100	34	80	187	DIP
NMD050515S	5	5	15	100	34	80	187	SIP
NMD120505D	12	5	5	100	100	70	489	DIP
NMD120505S	12	5	5	100	100	70	489	SIP
NMD120509D	12	5	9	100	56	80	343	DIP
NMD120509S	12	5	9	100	56	80	343	SIP
NMD120512D	12	5	12	100	42	80	229	DIP
NMD120512S	12	5	12	100	42	80	229	SIP
NMD120515D	12	5	15	100	34	80	148	DIP
NMD120515S	12	5	15	100	34	80	148	SIP

When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Voltage Range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	

OUTPUT CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Rated Power ²	T _A = 0°C to 125°C			1	W
Voltage Set Point Accuracy	See tolerance envelope				
Line Regulation	High V _{IN} to low V _{IN}		1.0	1.2	%/%
Load Regulation	10% load to rated load, 3.3V output types			15	%
	10% load to rated load, 5V output types			15	
	10% load to rated load, 9V output types			10	
	10% load to rated load, 12V output types			10	
	10% load to rated load, 15V output types			10	
Ripple & Noise	BW=DC to 20MHz, All output types			75	mV p-p

ABSOLUTE MAXIMUM RATINGS

Short-circuit duration ³	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage V _{IN} , NMD05 types	7V
Input voltage V _{IN} , NMD12 types	15V

¹ Calculated using MIL-HDBK-217F with nominal input voltage at full load.

² See derating curve

³ Supply voltage must be discontinued at the end of the short circuit duration.

All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.

NMD SERIES

Isolated 1W Twin Output DC-DC Converters

ISOLATION CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Isolation Test Voltage	Flash tested for 1 second	1000			VDC
Resistance	Viso=500VDC	1			GW

GENERAL CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Switching Frequency	All input types		100		kHz

TEMPERATURE CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Specification	All output types	0		70	°C
Storage		-55		150	°C
Cooling	Free air convection				

PIN CONNECTIONS


14 Pin DIP

PIN	
1	GND
7	NC
8	0V
9	+V2
10	0V
11	+V1
14	V _{IN}


7 Pin SIP

PIN	
1	V _{IN}
2	GND
4	+V1
5	0V
6	+V2
7	0V

PERFORMANCE CHARACTERISTICS

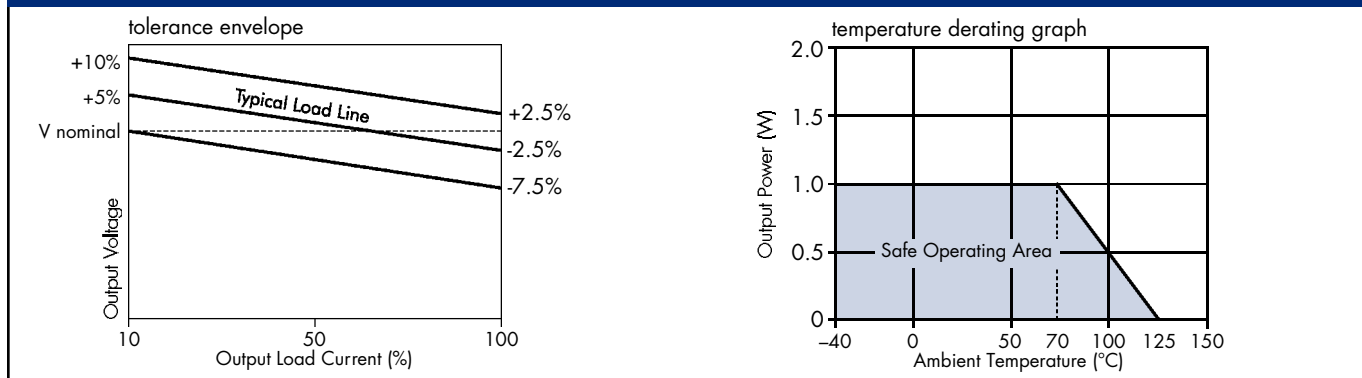

MECHANICAL DIMENSIONS

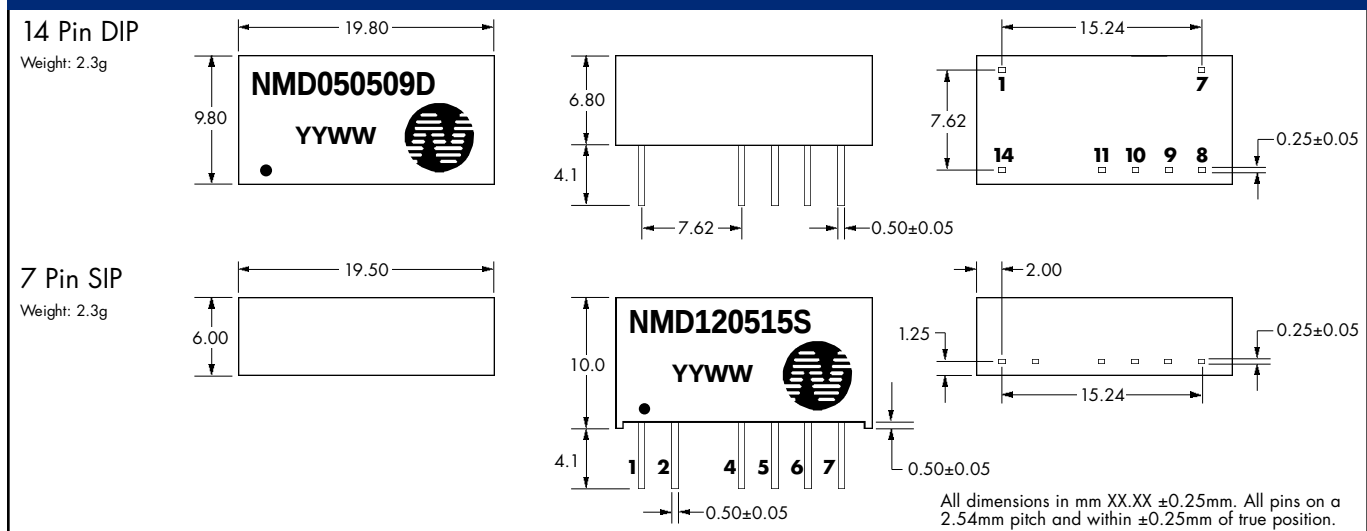

C&D Technologies (NCL) Limited reserve the right to alter or improve the specification, internal design or manufacturing process at any time, without notice. Please check with your supplier or visit our web site to ensure that you have the current and complete specification for your product before use.

© C&D Technologies (NCL) Limited 2001

NDC NMD.3

No part of this publication may be copied, transmitted or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, magnetic or other recording means, without prior written permission from C&D Technologies (NCL) Limited.

Instructions for use are available from www.dc-dc.com

C&D Technologies (NCL) Ltd
Tanners Drive, Blakelands North
Milton Keynes MK14 5BU, England
Tel: +44 (0)1908 615232
Fax: +44 (0)1908 617545
email: info@cdtechno-ncl.com

[www: http://www.dc-dc.com](http://www.dc-dc.com)

C&D Technologies (NCL), Inc.
5816 Creedmoor Road, Raleigh
NC 27612, USA
Tel: +1 (919) 571-9405
Fax: +1 (919) 571-9262
email: info@us.cdtechno-ncl.com

C&D TECHNOLOGIES
Power Solutions

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9