
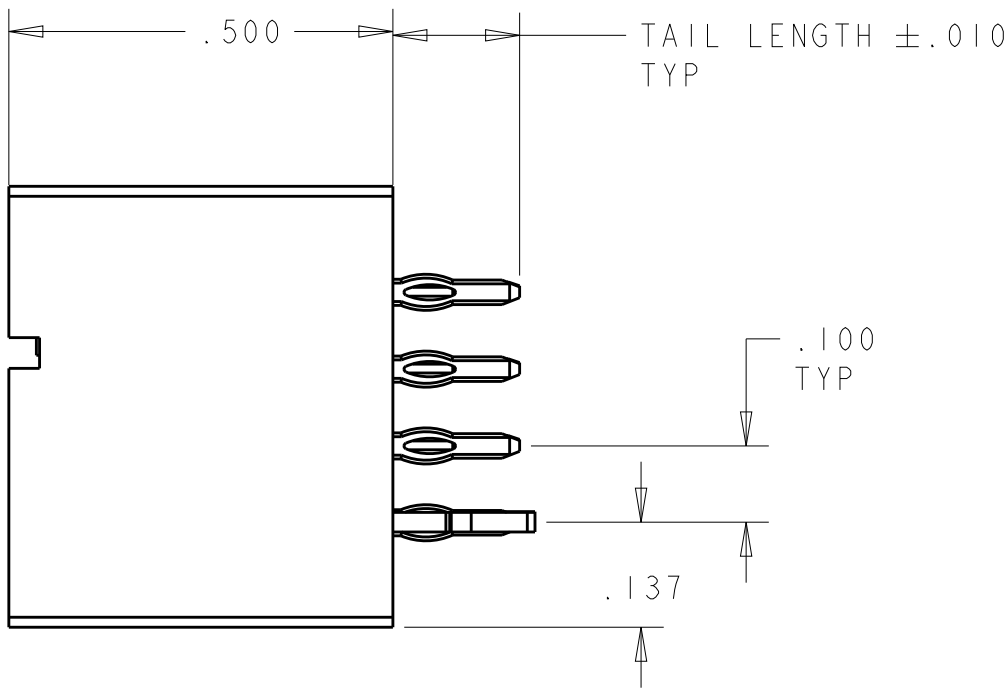
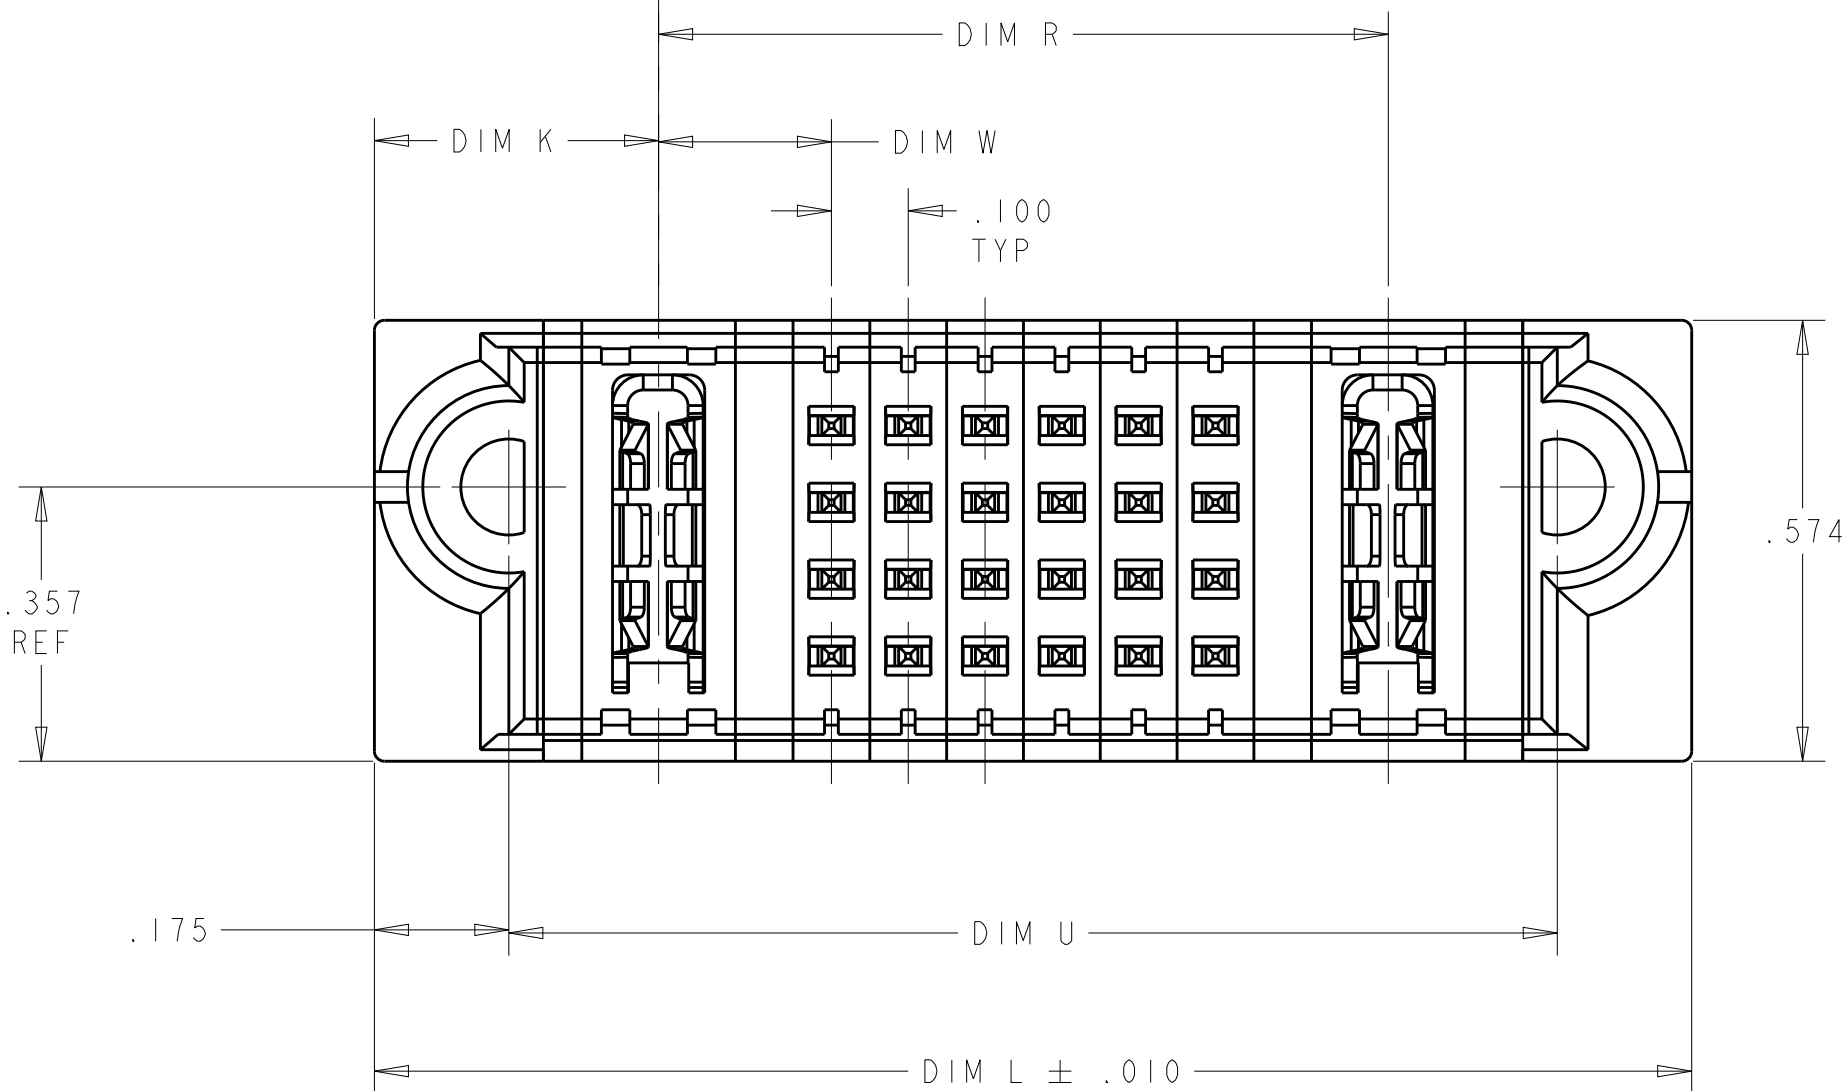
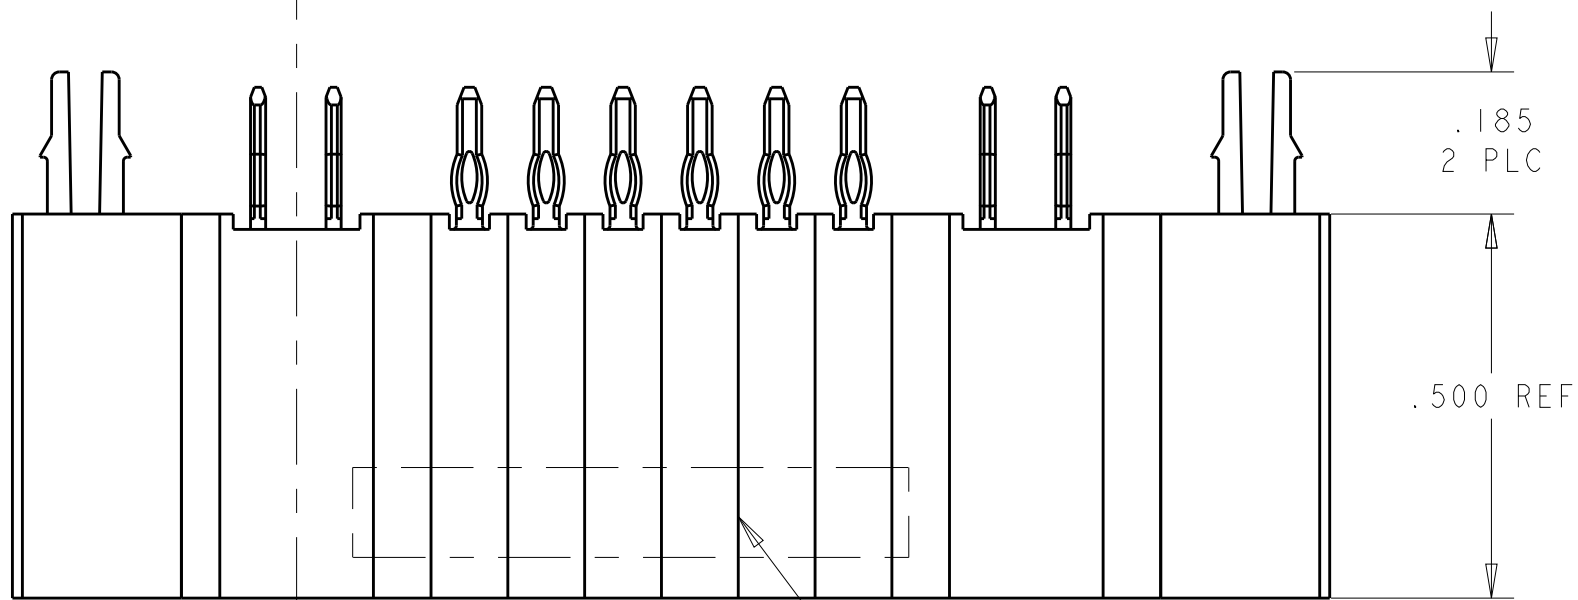


LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			G6	ADD NEW PART -25	19AUG2013	AY	SZ	
			G7	UPDATE -25 MATING SEQUENCE	29AUG2013	AY	SZ	
			G8	UPDATE -25 MATING SEQUENCE	30AUG2013	AY	SZ	

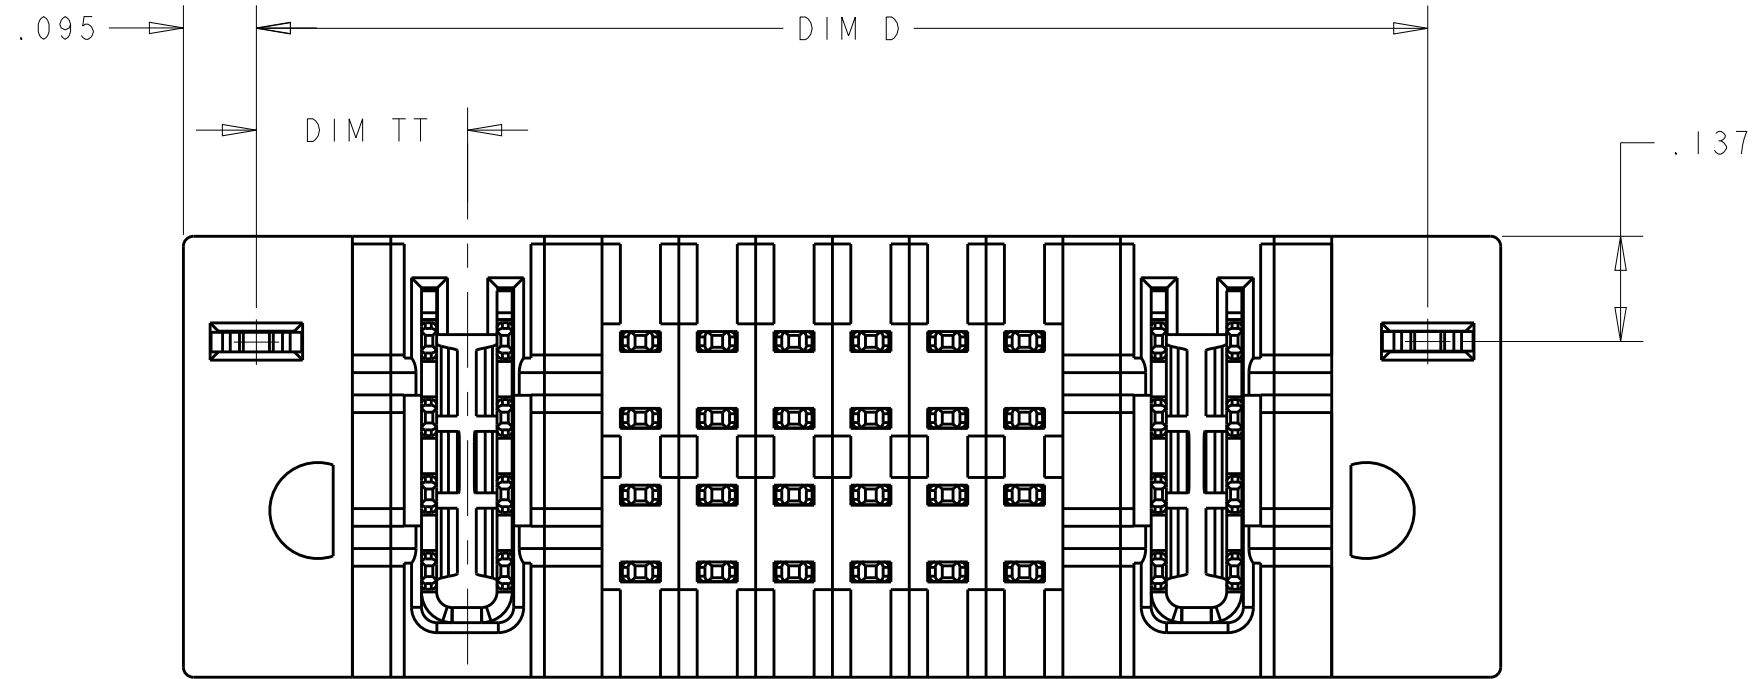

- 1

HEADER HOUSING: THERMO PLASTIC, BLACK, UL94 V-O; CONTACTS AND RETENTION CLIPS: COPPER ALLOY.
- 2

CONTACT PLATING:NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- 3

"AMP", PART NUMBER AND DATE CODE MARKED IN THIS AREA. PARTS UNDER 2.50 LONG MAY BE MARKED ON BOTH SIDES.
- 4

DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5

PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 6

A SEATING TOOL IS REQUIRED TO SEAT THE HEADER ON THE P.C. BOARD. PLEASE REFER TO THE 114-13251 APPLICATION SPEC.
- 7


MECHANICAL CONNECTOR KEEP OUT ZONE.
- 8

DETAIL DIM SEE PART VIEW
- 9

FOR THE CONFIGURATION WITH VENT, PLEASE REFER TO SHEET 2.
- 10

FOR THE CONFIGURATION LP/S/LP WITH VENT, PLEASE REFER TO SHEET 3.
- 11

FOR THE CONFIGURATION LP/S/P, WITH VENT, PLEASE REFER TO SHEET 4.

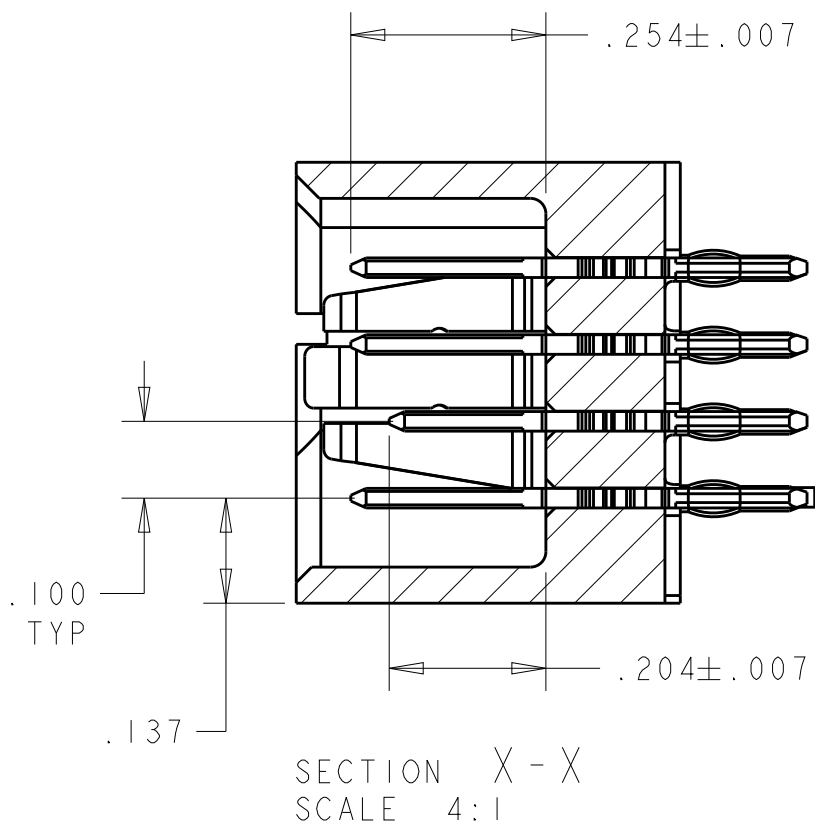

66	.240	.165	.1825	2.220	1.870	2.030	1.145	.7125	.2775	3LP + 16S + 4LP	2-6450820-5
	.200	-	.225	3.065	2.715	2.875	-	1.975	.320	10HDP + 24S	2-6450820-3
	.300	-	.275	1.790	1.440	1.600	-	1.150	.370	4ACP + 4S	2-6450820-2
	.115	.250	.2075	2.555	2.205	2.365	1.4075	.7325	.3025	6LP + 24S + 3P	2-6450820-1
	-	-	.1825	1.120	.770	.930	.565	.1575	.2775	1LP + 16S + 1LP	2-6450820-0
	.250	.250	.250	3.540	3.190	3.350	1.850	1.175	.345	5P + 24S + 5P	1-6450820-9
	.250	.250	.225	4.140	3.790	3.950	2.500	1.200	.320	5P + 48S + 5P	1-6450820-8
	.250	-	.225	4.640	4.290	4.450	-	2.950	.320	12P + 48S	1-6450820-7
	.250	-	.225	2.415	2.065	2.225	-	1.425	.320	6P + 20S	1-6450820-5
	-	.300	.175	2.665	2.315	2.475	.575	-	.270	20S + 6ACP	1-6450820-4
	.300	.300	.225	2.840	2.490	2.650	1.600	.850	.320	3ACP + 24S + 3ACP	1-6450820-3
	.250	.250	.250	4.040	3.690	3.850	2.100	1.425	.345	6P + 24S + 6P	1-6450820-1
63	.250	.250	.225	6.240	5.890	6.050	3.850	1.950	.320	8P + 72S + 8P	6450820-9
	.250	.250	.225	6.240	5.890	6.050	3.850	1.950	.320	8P + 72S + 8P	6450820-8
	8	8	.250	5.390	5.040	5.200	8	8	.345	14P + 40S	6450820-7
	8	8	.250	5.390	5.040	5.200	8	8	.345	14P + 40S	6450820-6
	.250	.250	.250	2.640	2.290	2.450	1.200	.925	.345	4P + 8S + 4P	6450820-5
	.250	.250	.250	3.640	3.290	3.450	1.700	1.425	.345	6P + 8S + 6P	6450820-4
	.250	.250	.275	2.790	2.440	2.600	1.550	.675	.370	3P + 32S + 3P	6450820-3
	-	-	.250	1.540	1.190	1.350	.850	.175	.345	1P + 24S + 1P	6450820-2
	-	-	.275	1.715	1.365	1.525	.950	.225	.370	1P + 24S + 1P	6450820-1
	DIM S	DIM T	DIM TT	DIM L	DIM U	DIM D	DIM R	DIM W	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.0020
FINISH

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251

WEIGHT

Customer Drawing

15NOV2007
15NOV2007

NAME
S. ZHAO

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251

WEIGHT

Customer Drawing

TE Connectivity

VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE

SIZE
A100779

CAGE CODE
6450820

RESTRICTED TO




SCALE
-

SHEET
1


OF
20

REV
G8

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


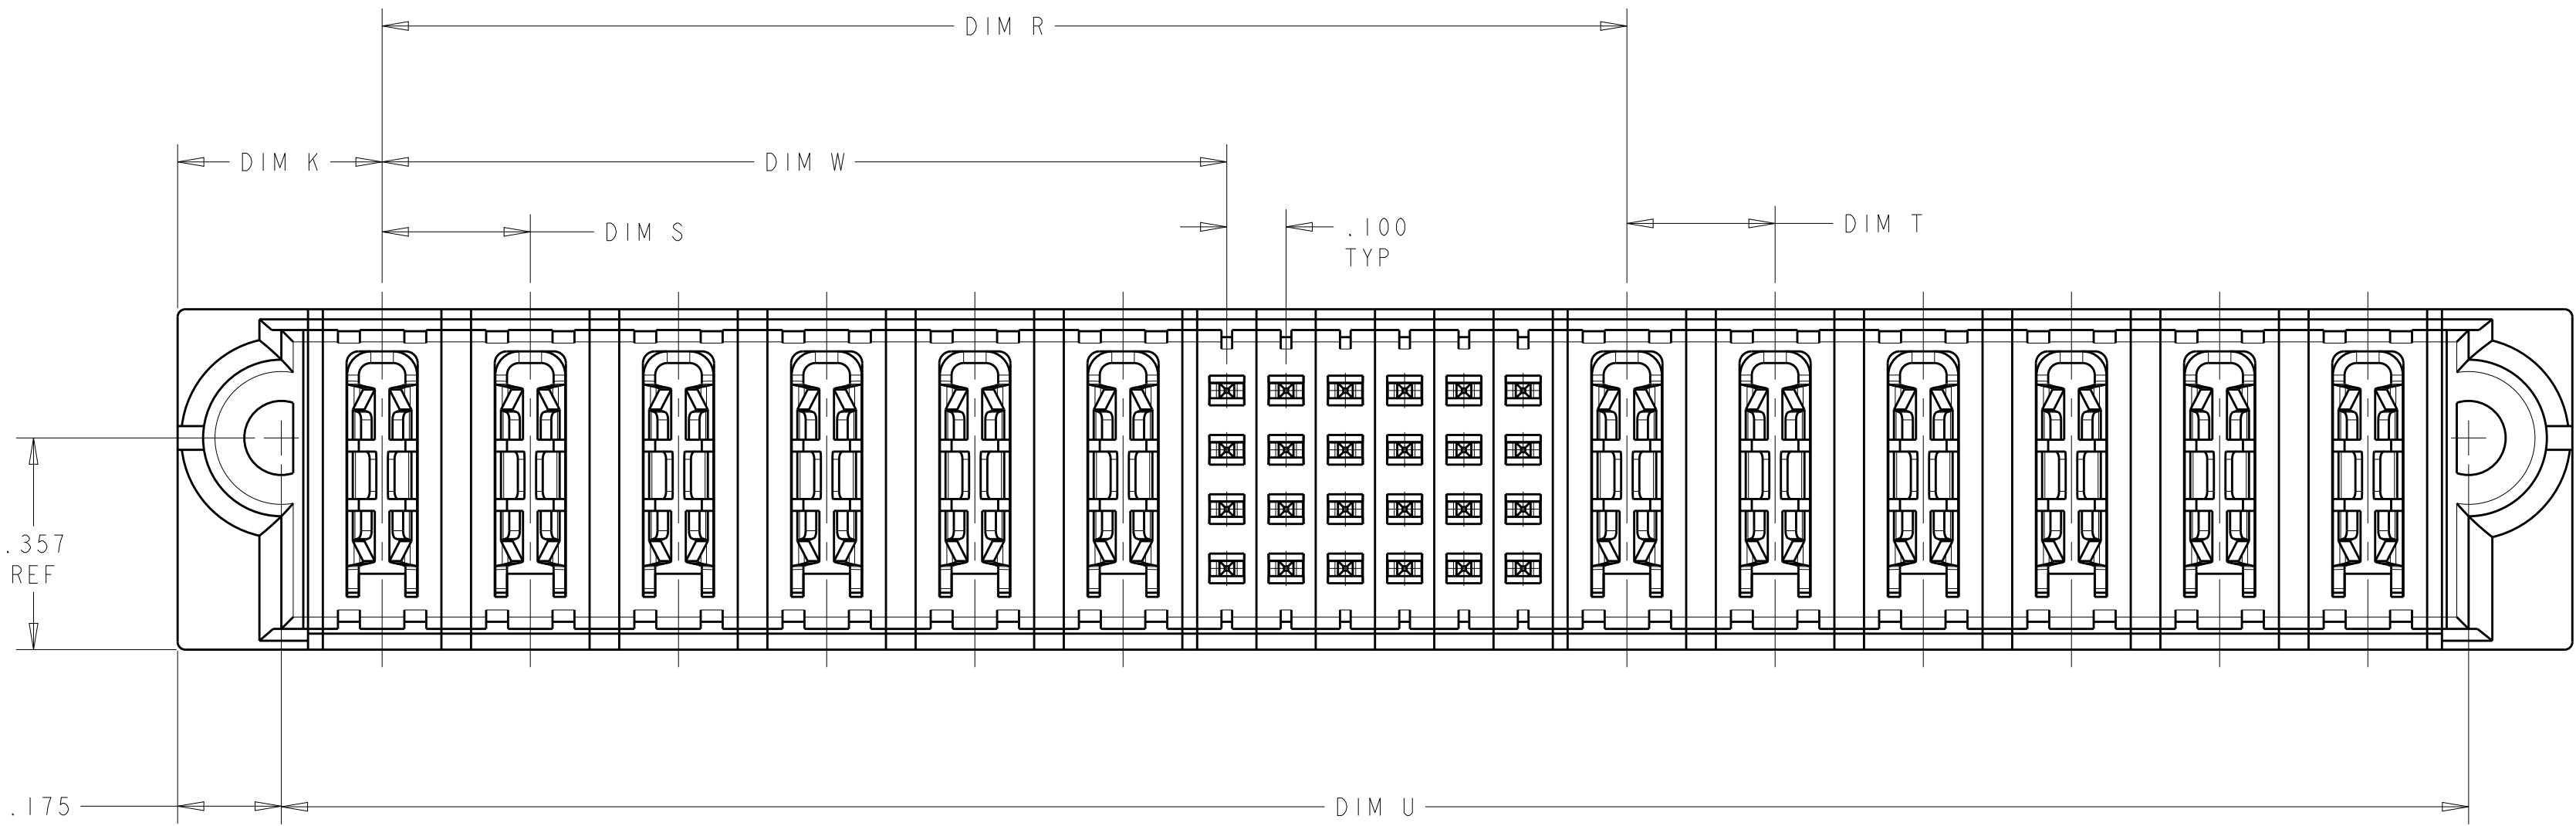
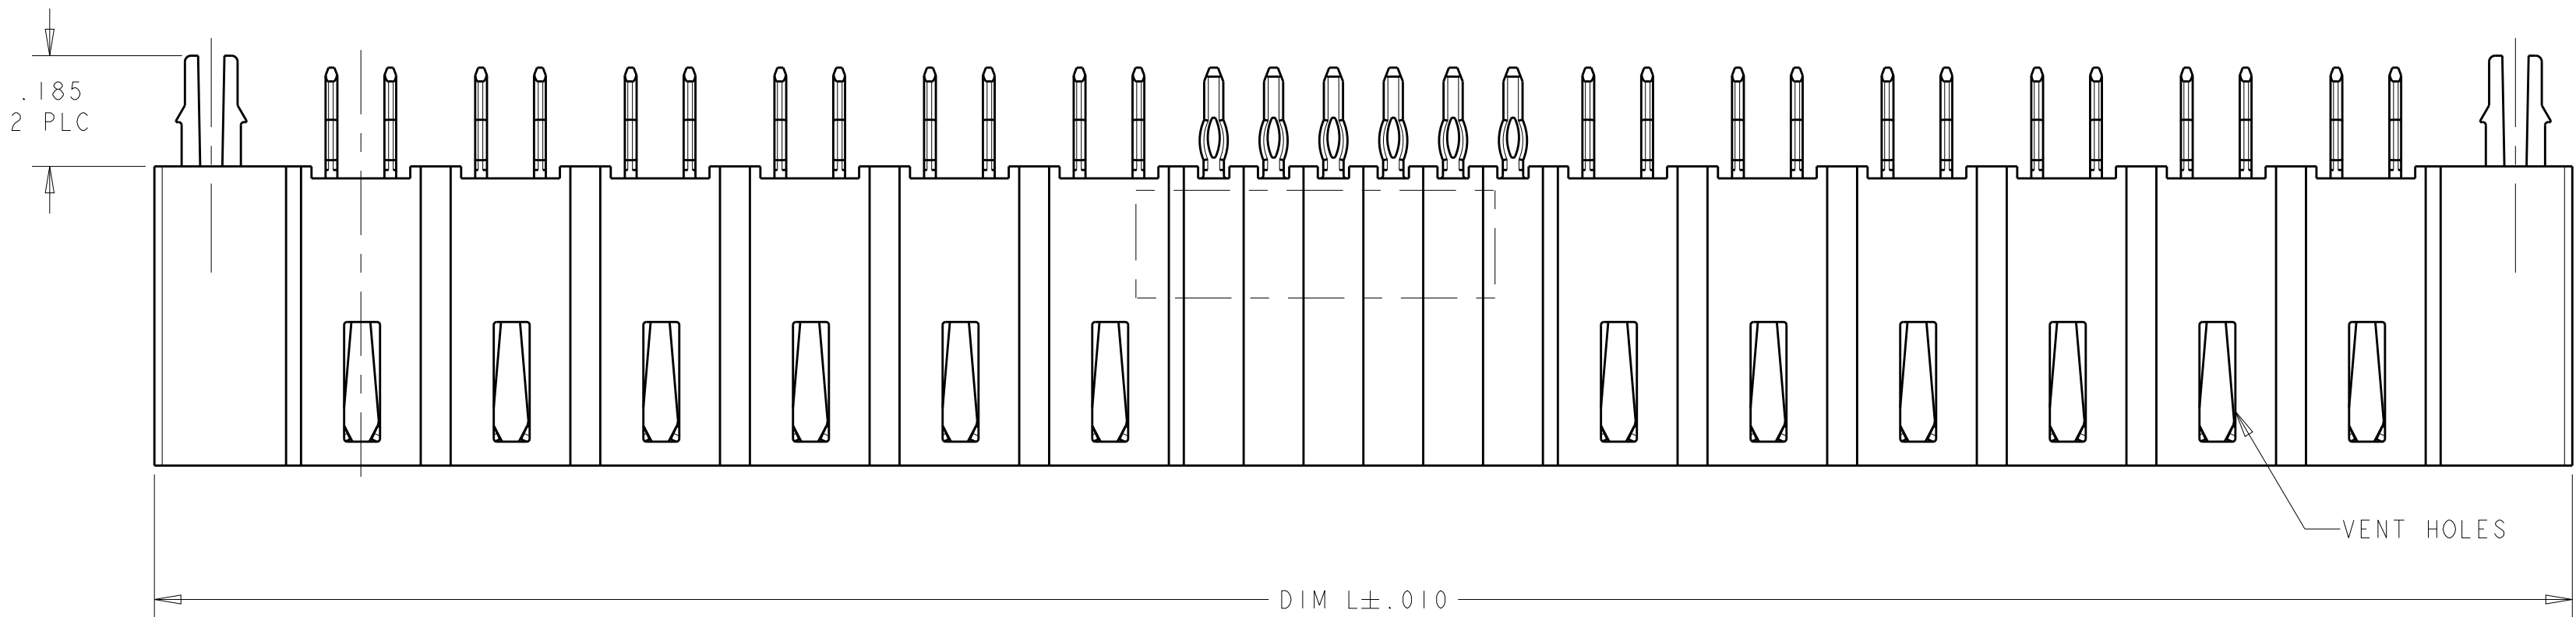
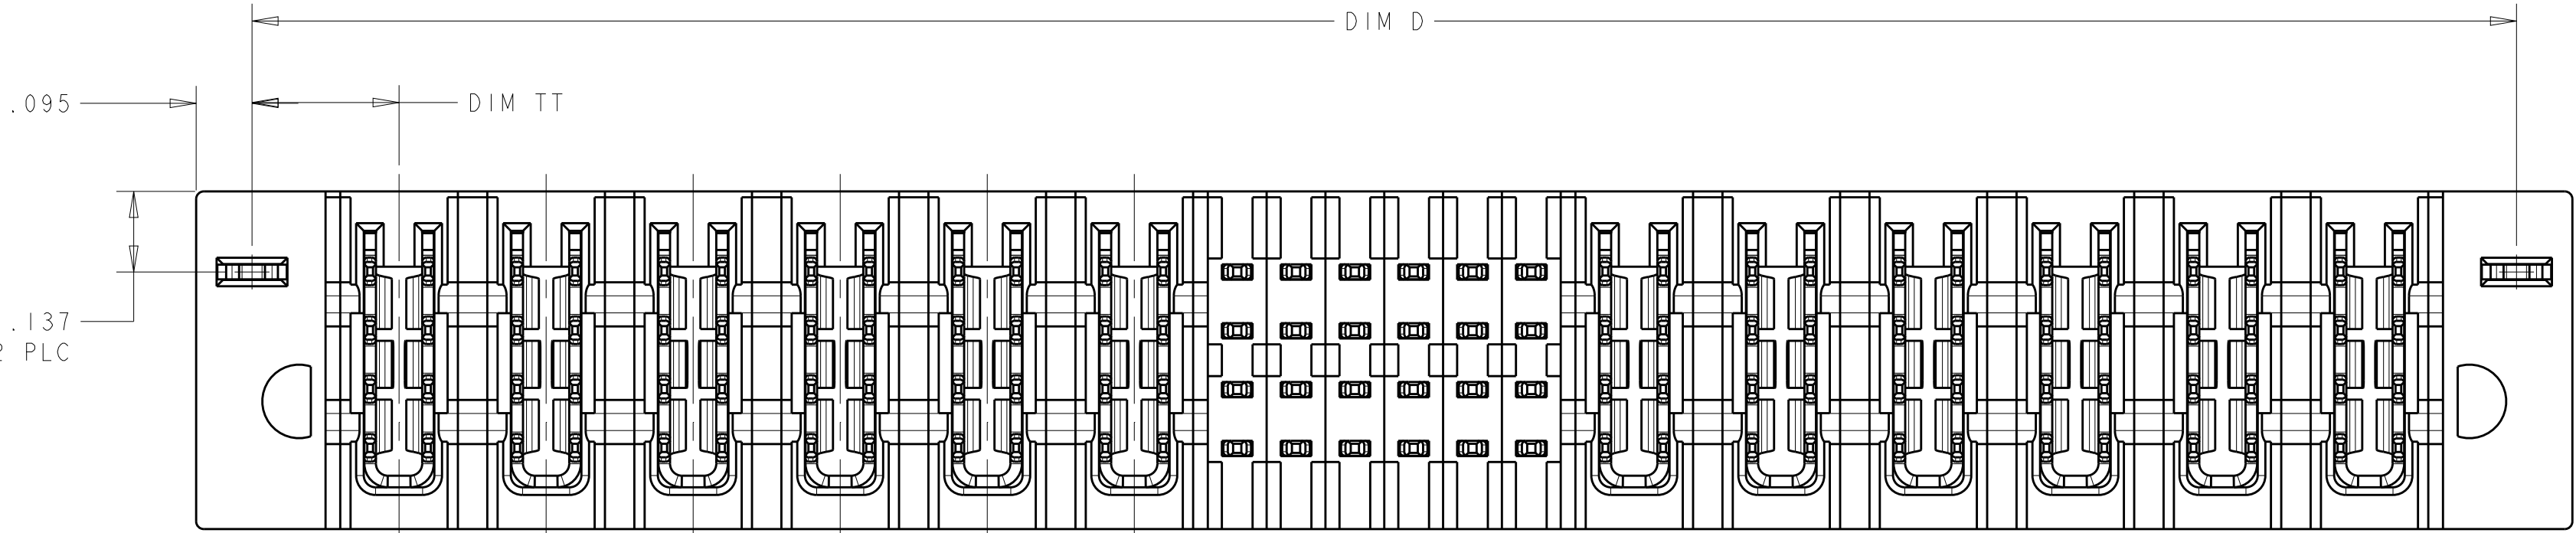


⑨ FOR THE CONFIGURATION WITH VENT
PART NO. 1-6450820-1

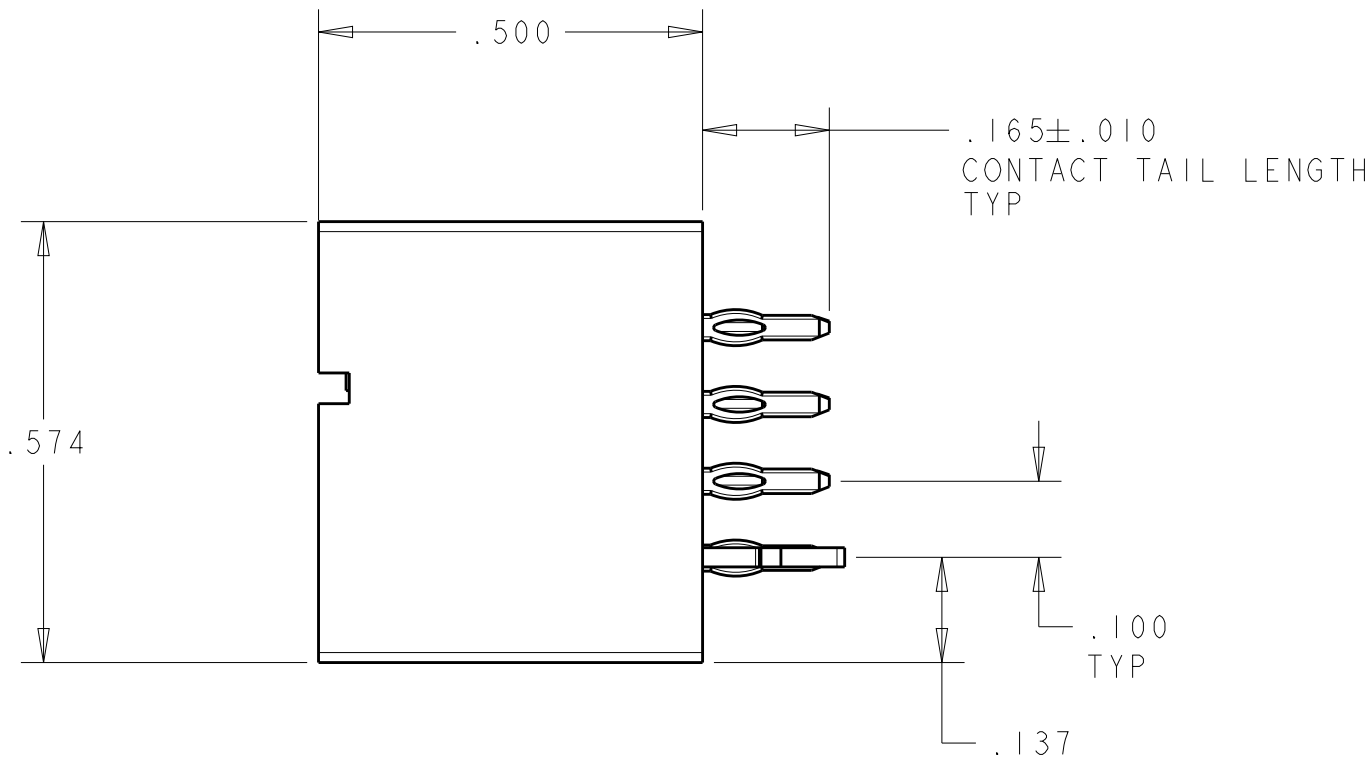


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
		0 PLC	±"	PRODUCT SPEC	
		1 PLC	±.01	108-2292	
		2 PLC	±.01	APPLICATION SPEC	
		3 PLC	±.005	114-13251	
		4 PLC	±.0020	WEIGHT	
		ANGLES	±2°	Customer Drawing	
MATERIAL		FINISH	-	SCALE	
			-	SHEET 2 OF 20	
			-	REV G8	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

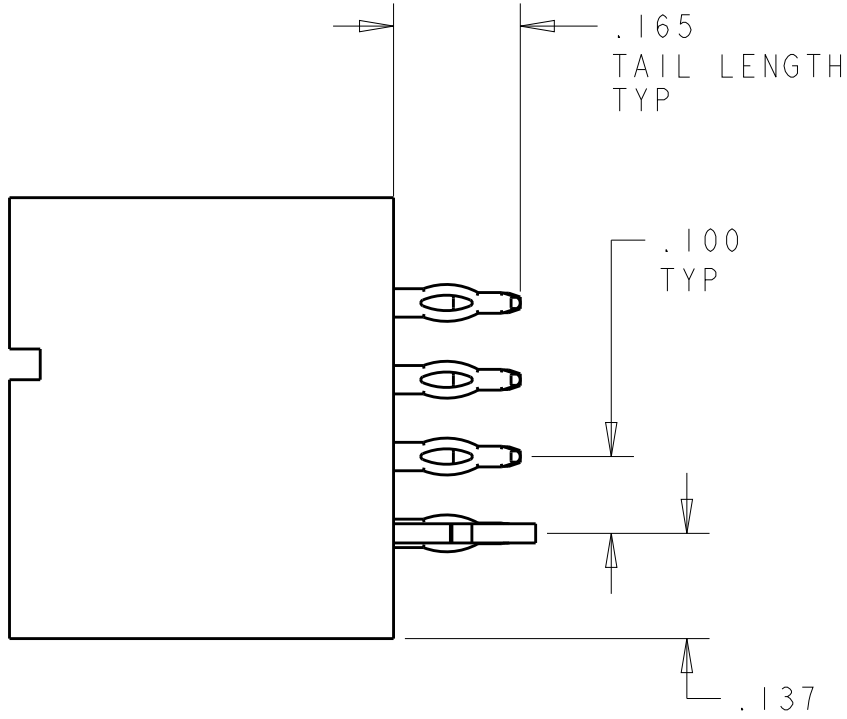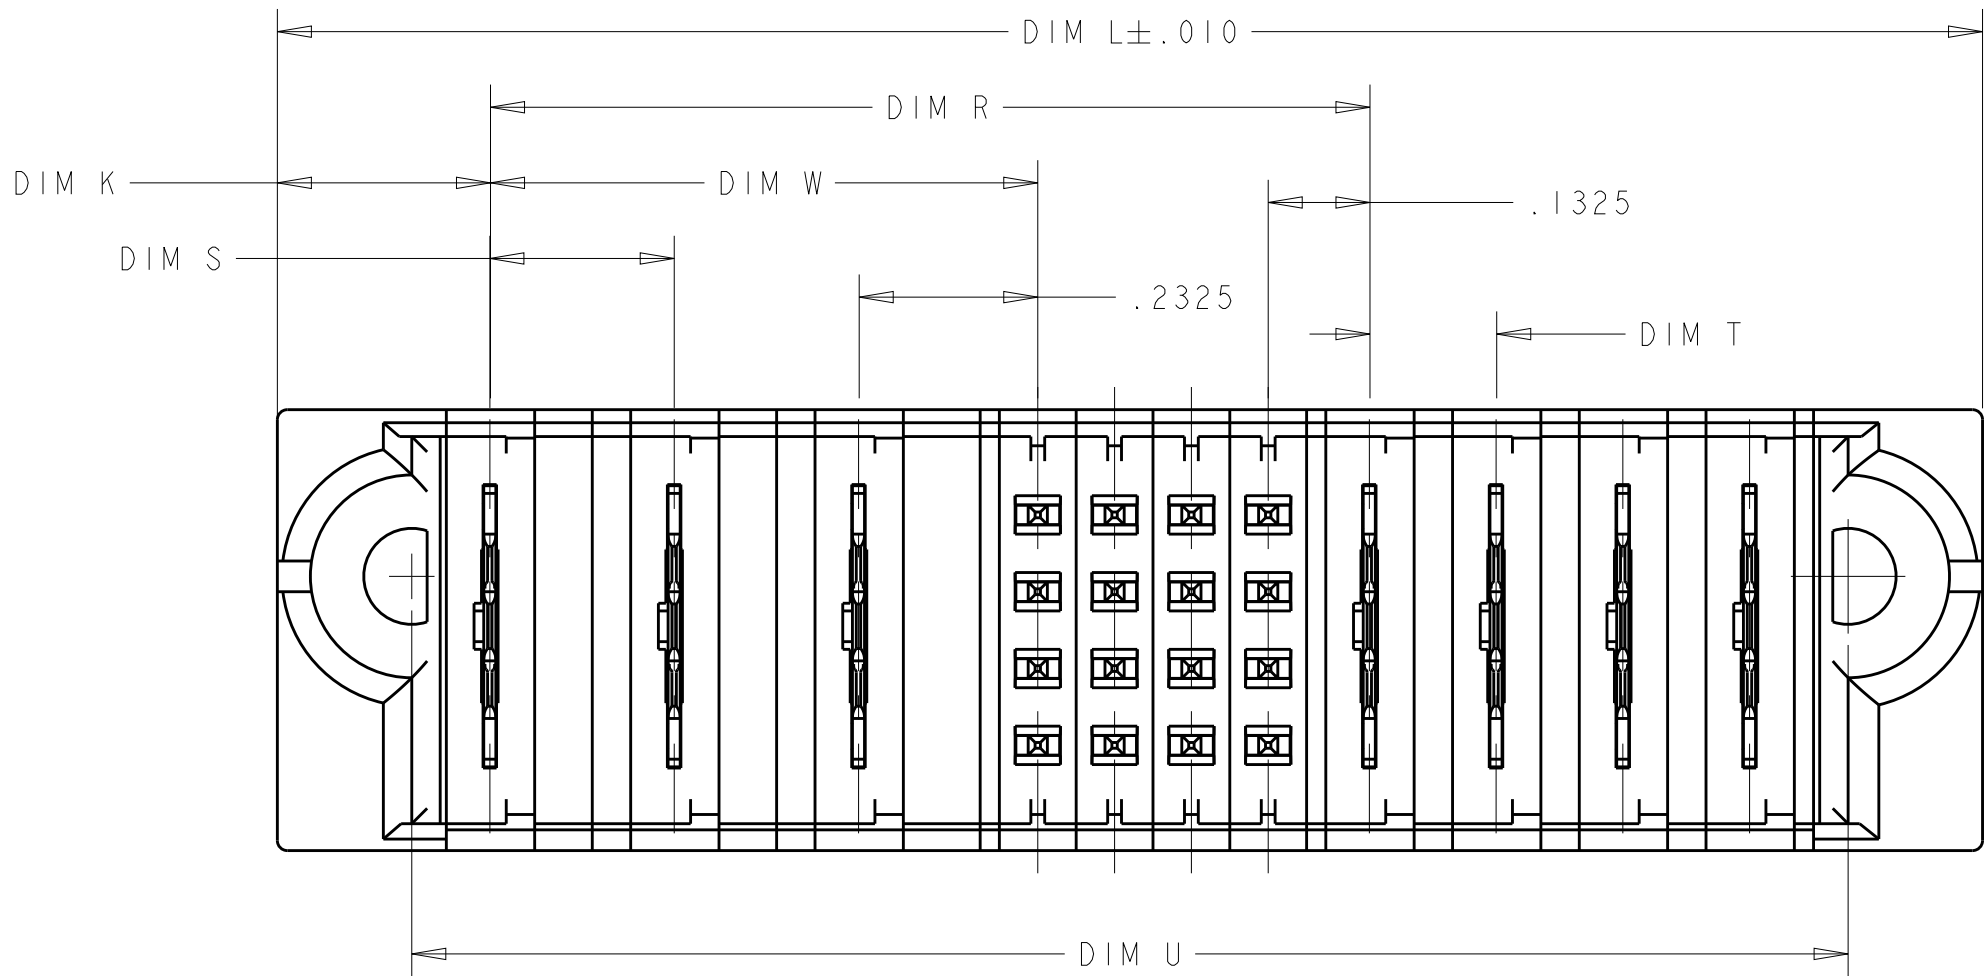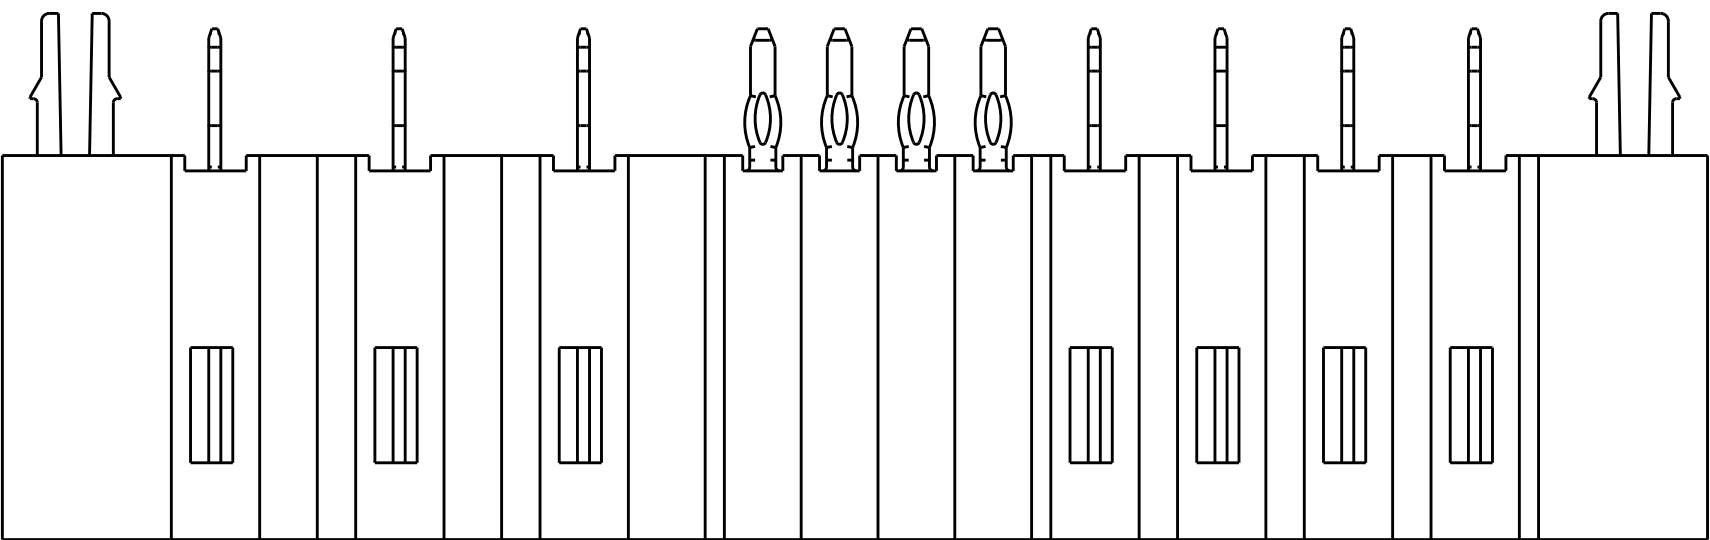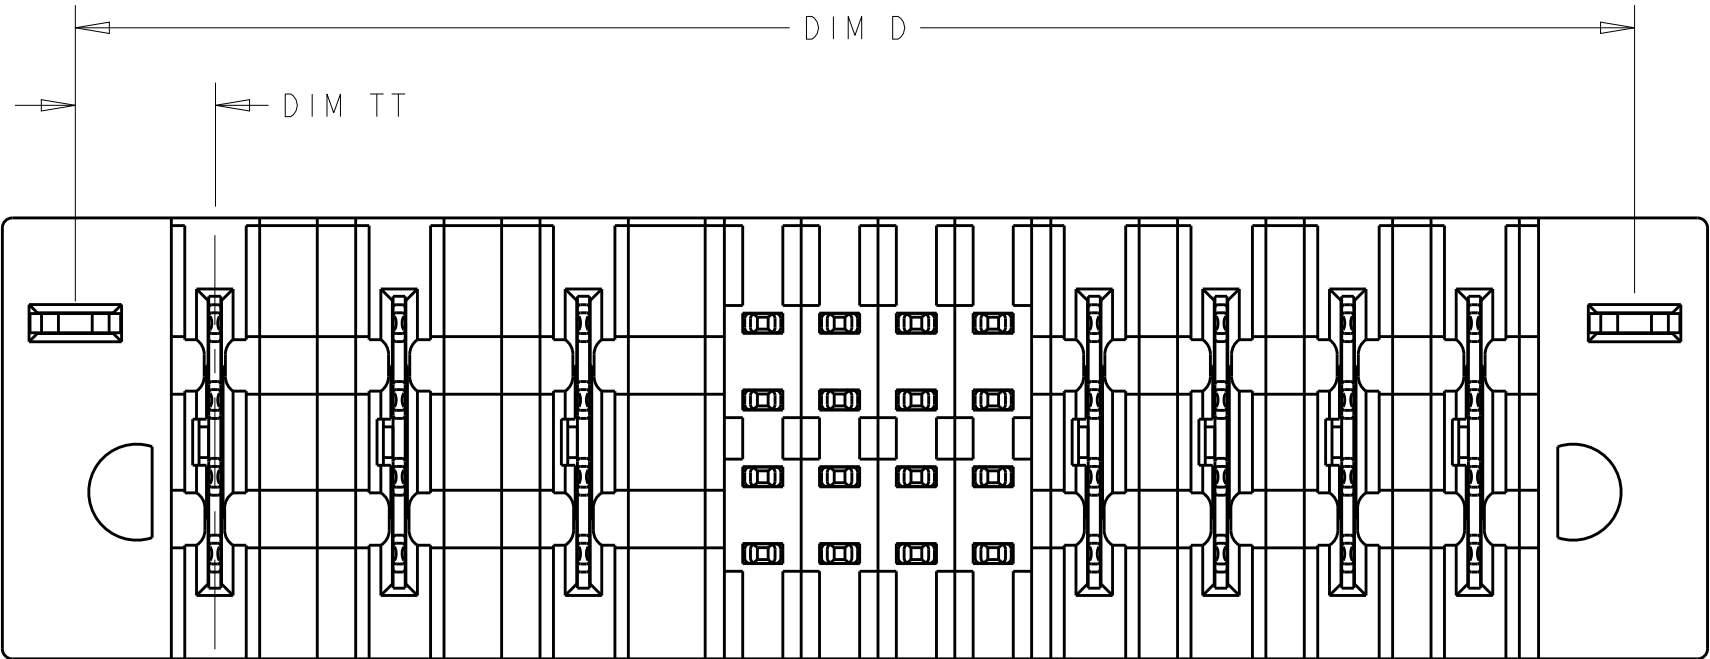


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
INCHES		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		APPLICATION SPEC	
		2 PLC ±.005		SIZE	
		3 PLC ±.0020		CAGE CODE	
		ANGLES		DRAWING NO	
		FINISH		RESTRICTED TO	
MATERIAL		WEIGHT		A100779C=6450820	
		Customer Drawing		SCALE	
				SHEET 3 OF 20	
				REV G8	


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

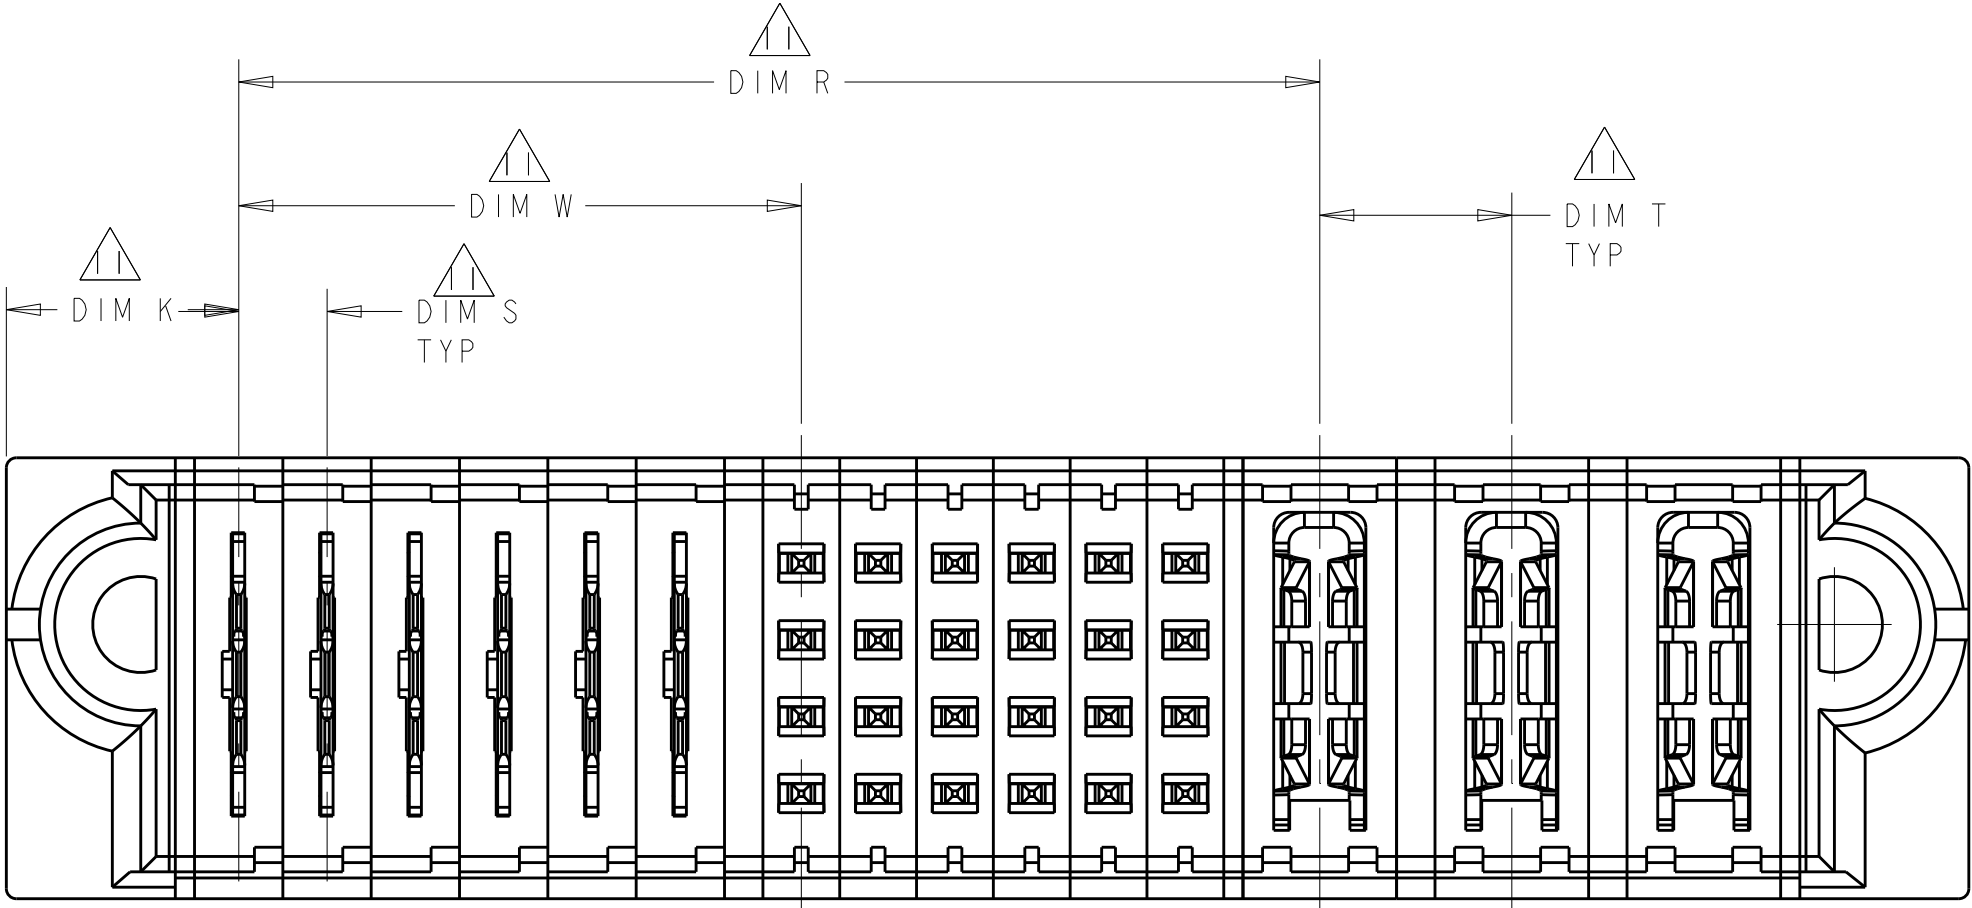

FOR THE CONFIGURATION LP/S/P WITH VENT
OTHER DIMSENSIONS PLEASE REFER TO SHEET 2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	 TE Connectivity	
DIMENSIONS: INCHES		CHK S. ZHAO	15NOV2007		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME S. ZHAO	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH		APVD S. ZHAO	
MATERIAL -		PRODUCT SPEC 108-2292		SIZE A1	
		APPLICATION SPEC 114-13251		CAGE CODE 00779	
		WEIGHT -		DRAWING NO 6450820	
		Customer Drawing		RESTRICTED TO -	
		SCALE -		SHEET 4	
				OF 20	
				REV G8	


PART NUMBER	ROWS		SIGNAL					POWER									
			1	2	3	4	5	P1	P2	P3	P4	P5	P6				
1-6450820-4	D		EV	EV	EV	EV	EV		VM		VM		VM		VM		
	EV		EV	EV	EV	EV	EV										
	EV		EV	EV	EV	EV	EV										EV
	EV		EV	EV	EV	EV	EV										EV
20S + 6ACP																	

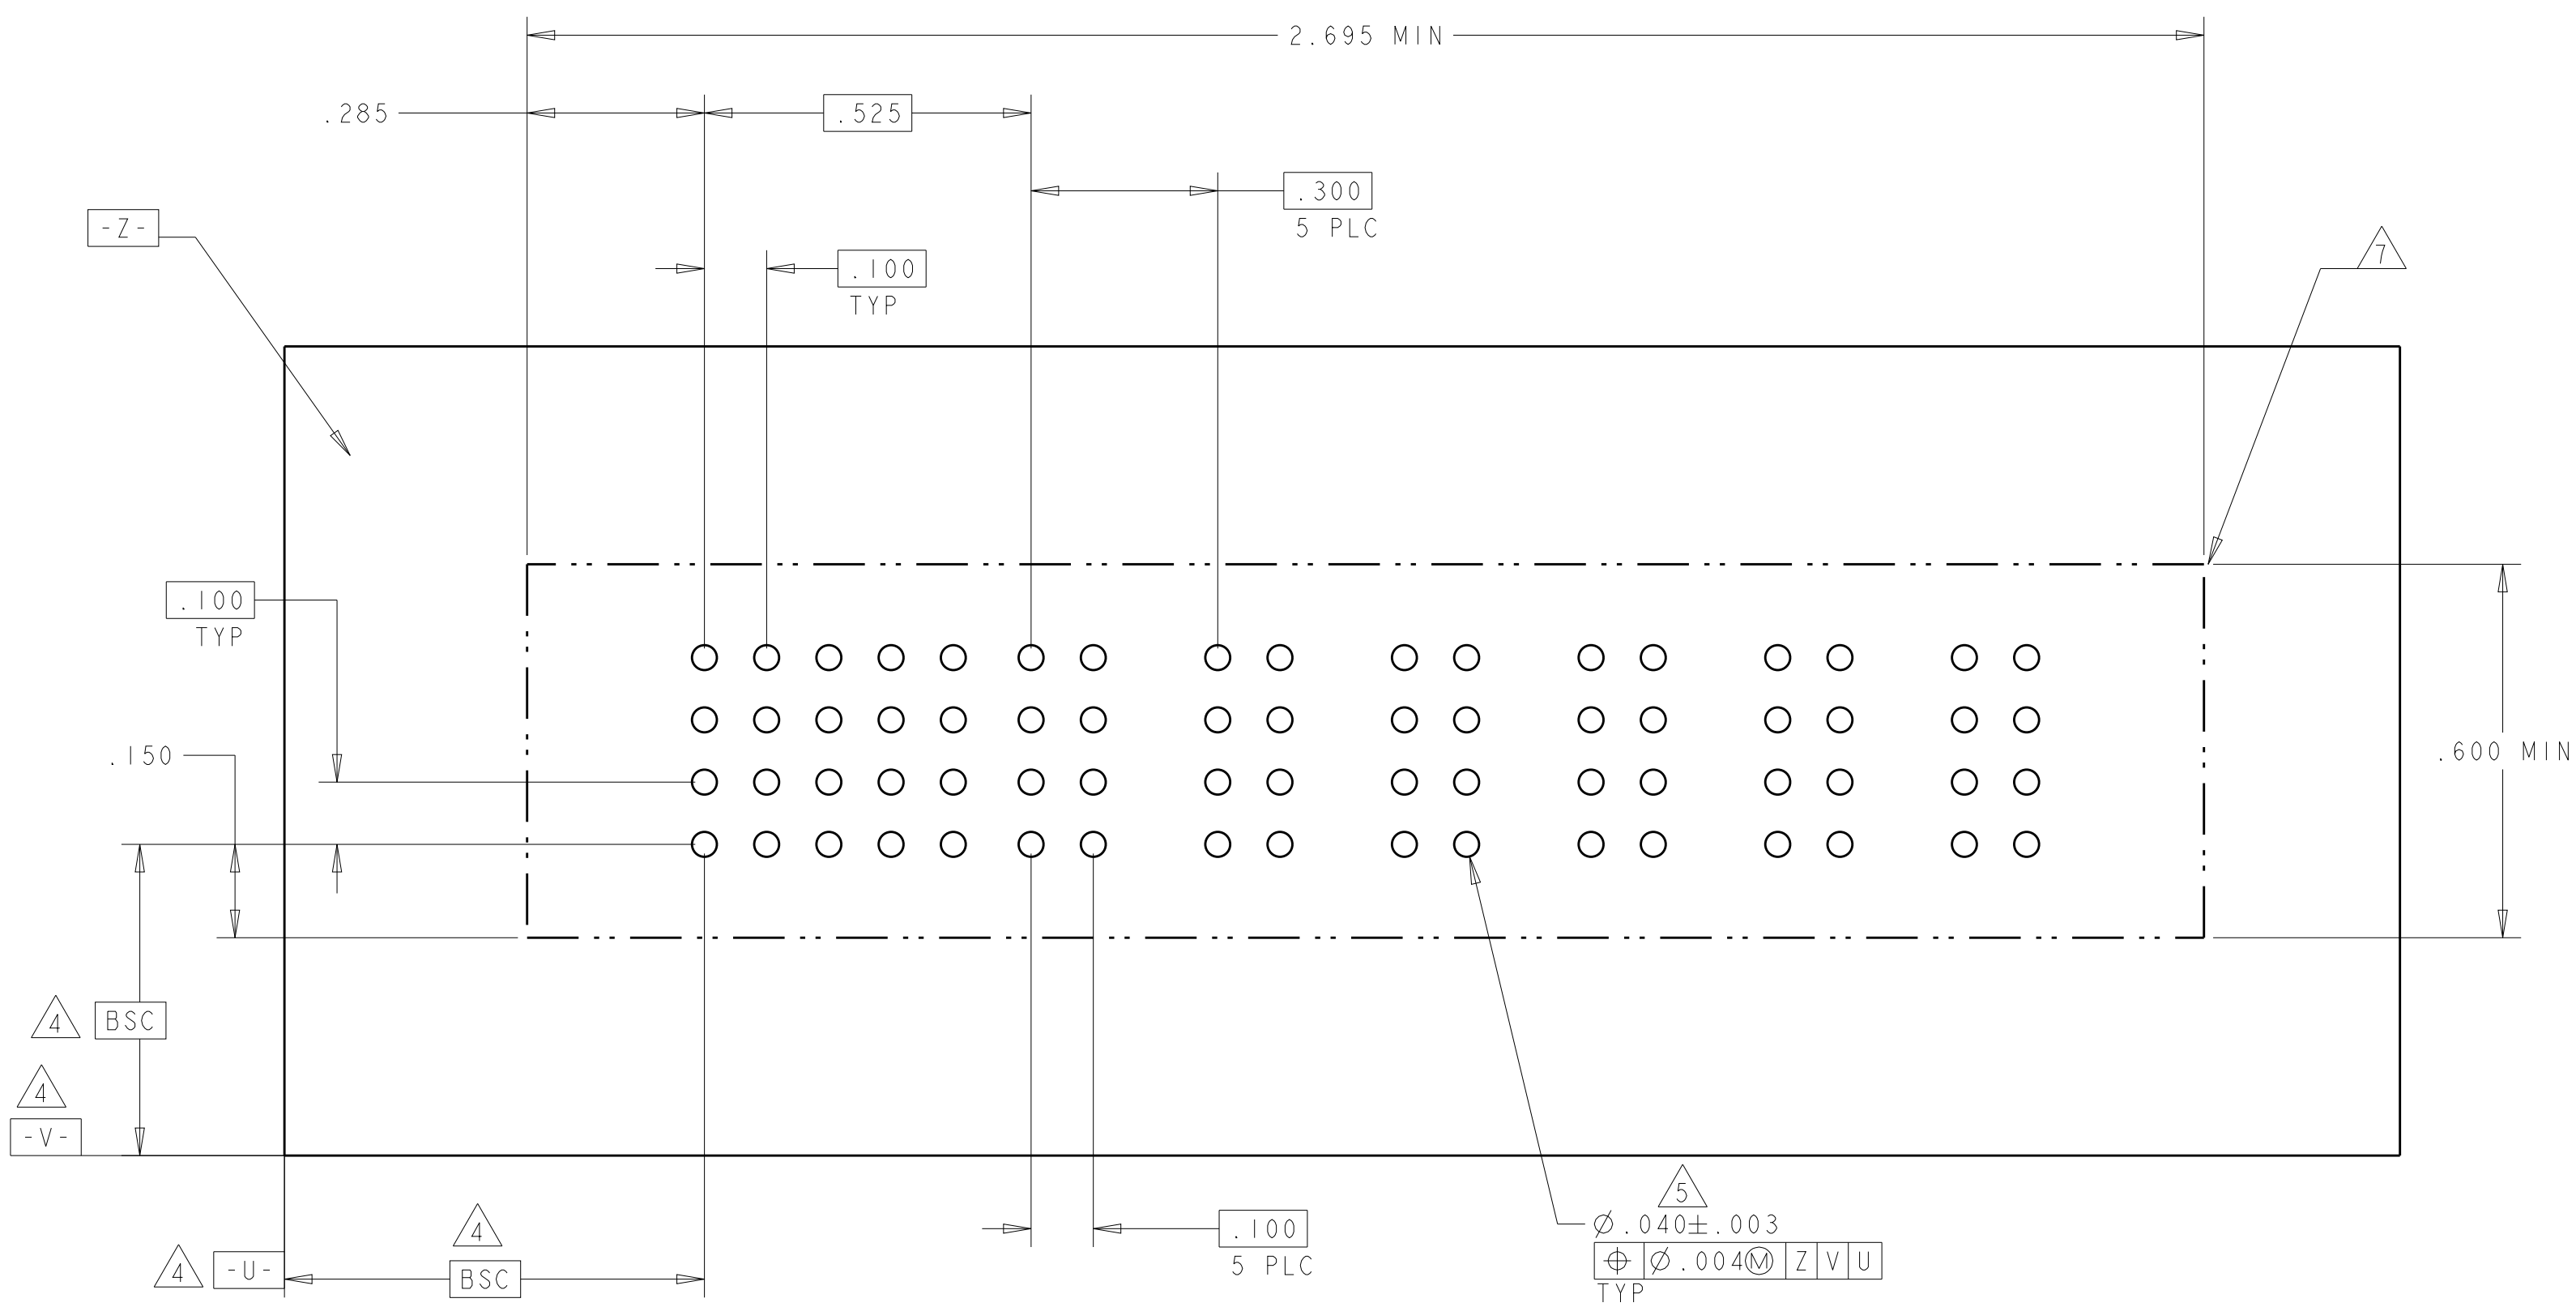



.165"	LOW POWER CONTACT	MFBL	LZF
.165"	LOW POWER CONTACT		LZ
.165"	SIGNAL CONTACT	MFBL	EF
-	HOLD DOWN		HD
.165"	SIGNAL CONTACT	MLBF	ES
.165"	SIGNAL CONTACT	STD	EV
.165"	POWER CONTACT		VM
TAIL LENGTH	DESCRIPTION		CODE

4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P1	1	2	3	4	5	6	P2	
6450820-2	D C B A	 HD									 HD
				EV	EV	EV	EV	EV	EV		
				EV	EV	EV	EV	EV	EV		
				EV	EV	EV	EV	EV	EV		
IP + 24S + IP											


PART NUMBER	ROWS		POWER						SIGNAL						
			P1	P2	P3	P4	P5	P6	1	2	3	4	5		
1-6450820-5	D C B A			VM	VM	VM	VM	VM	VM						
										EV	EV	EV	EV	EV	
										EV	EV	EV	EV	EV	
										EV	EV	EV	EV	EV	
6P + 20S															

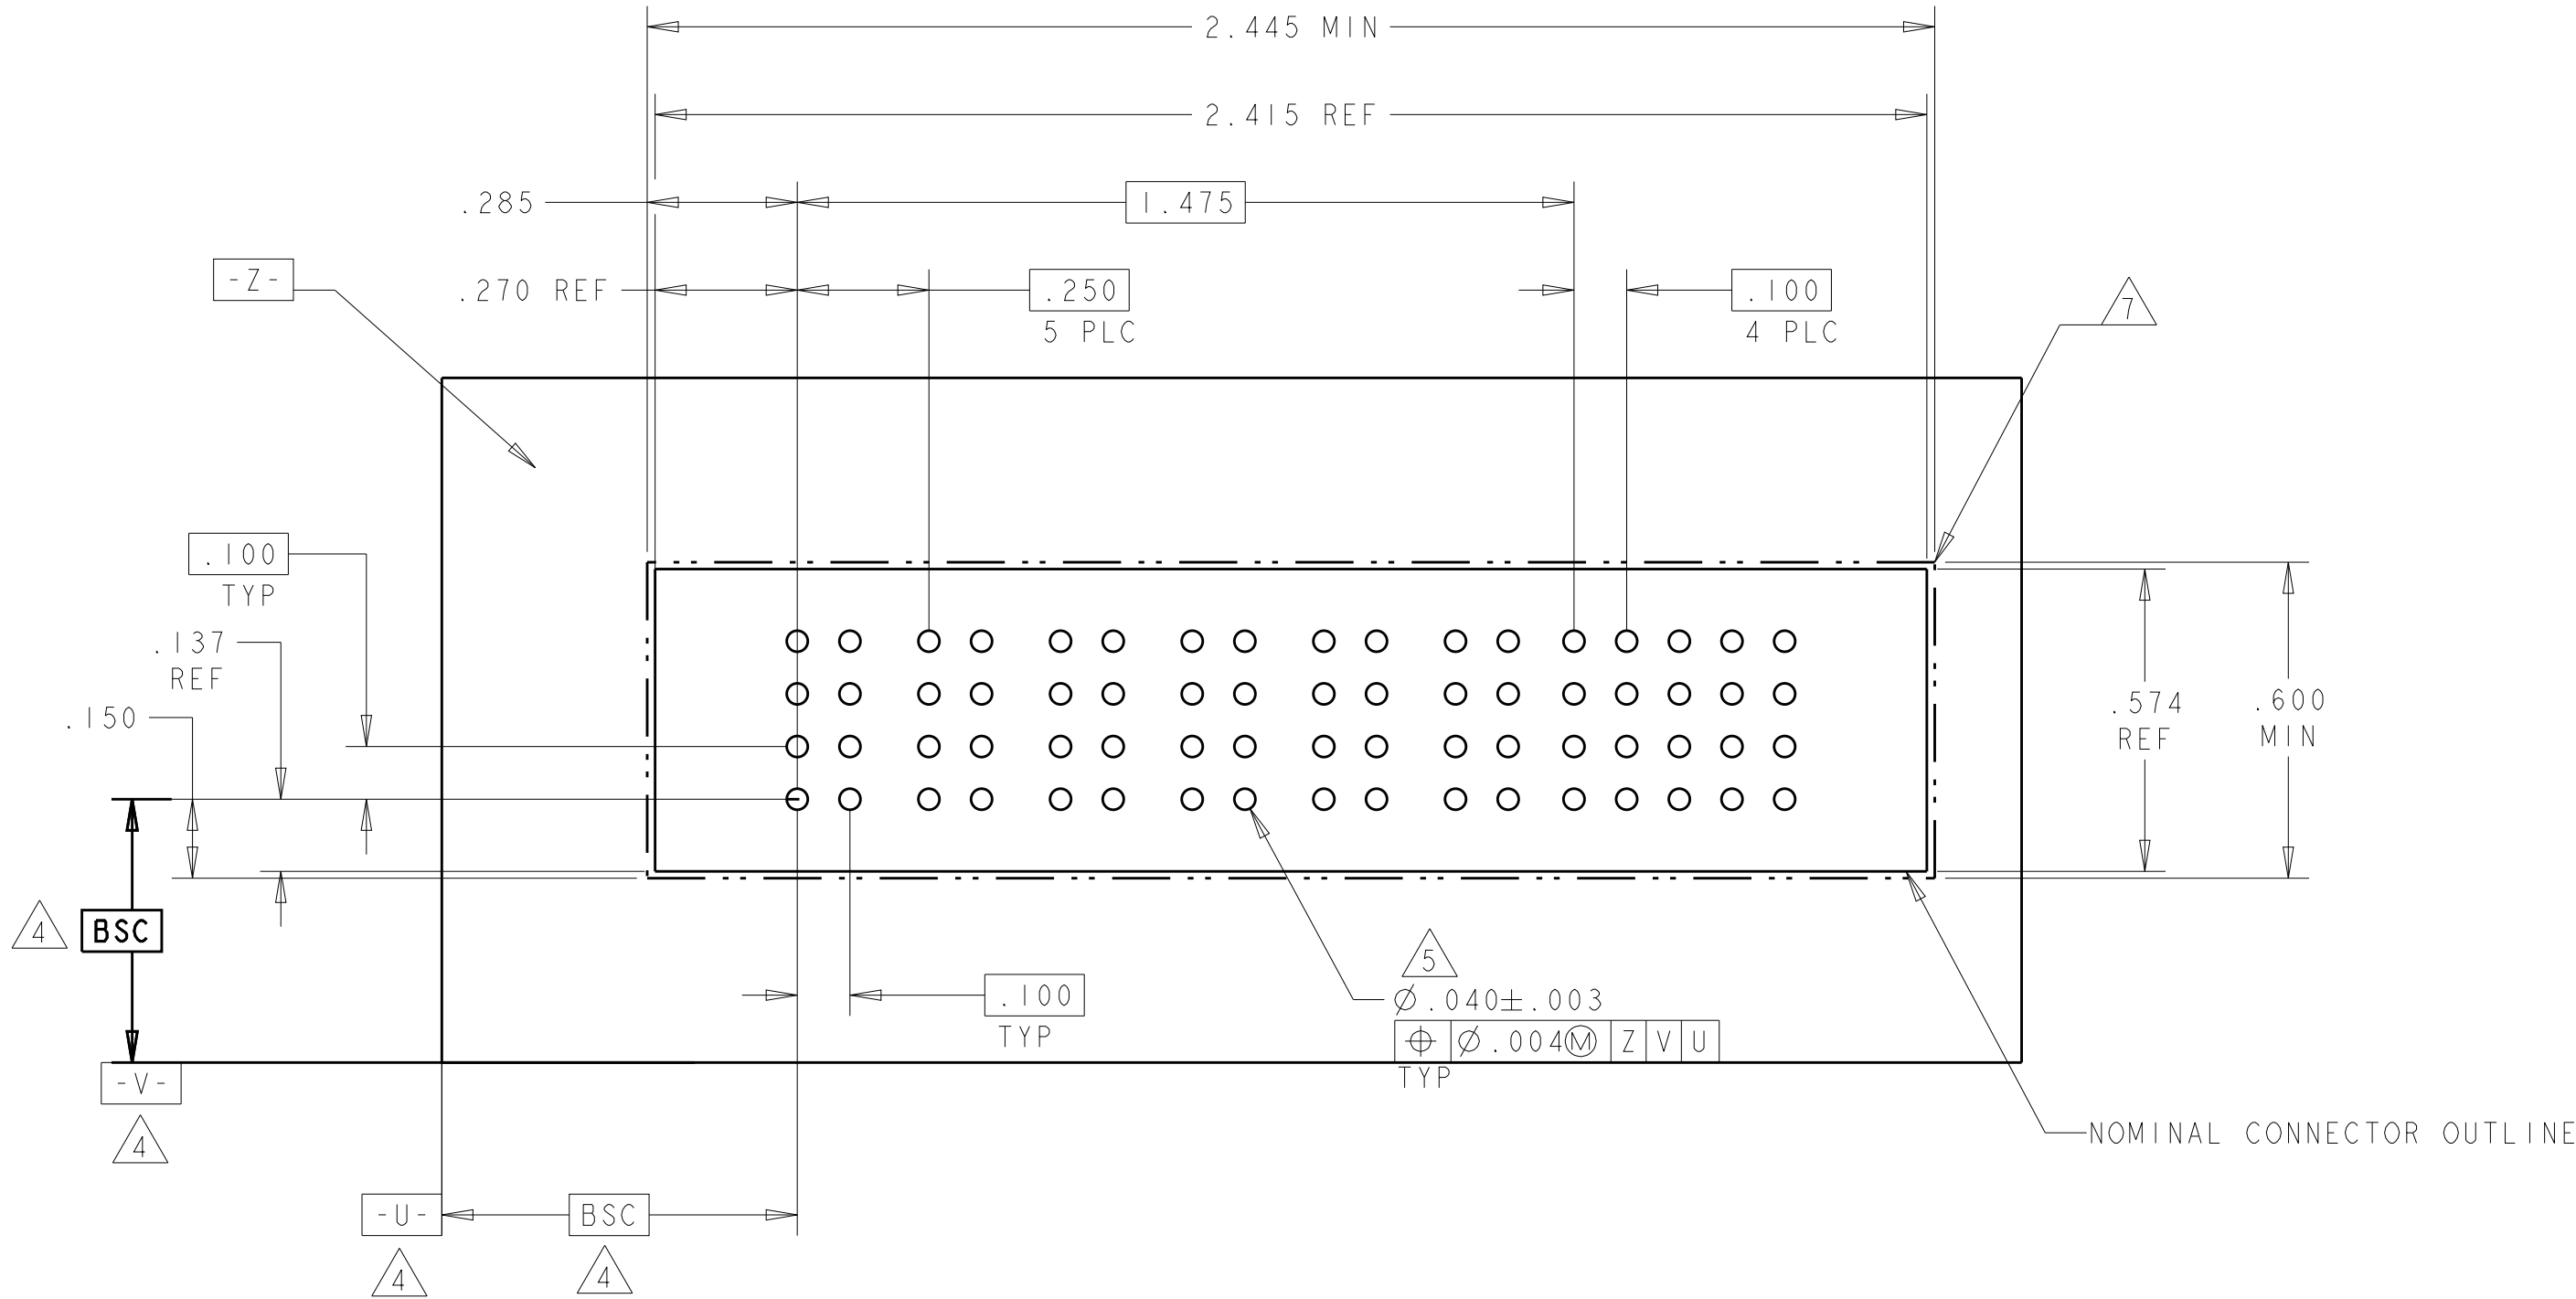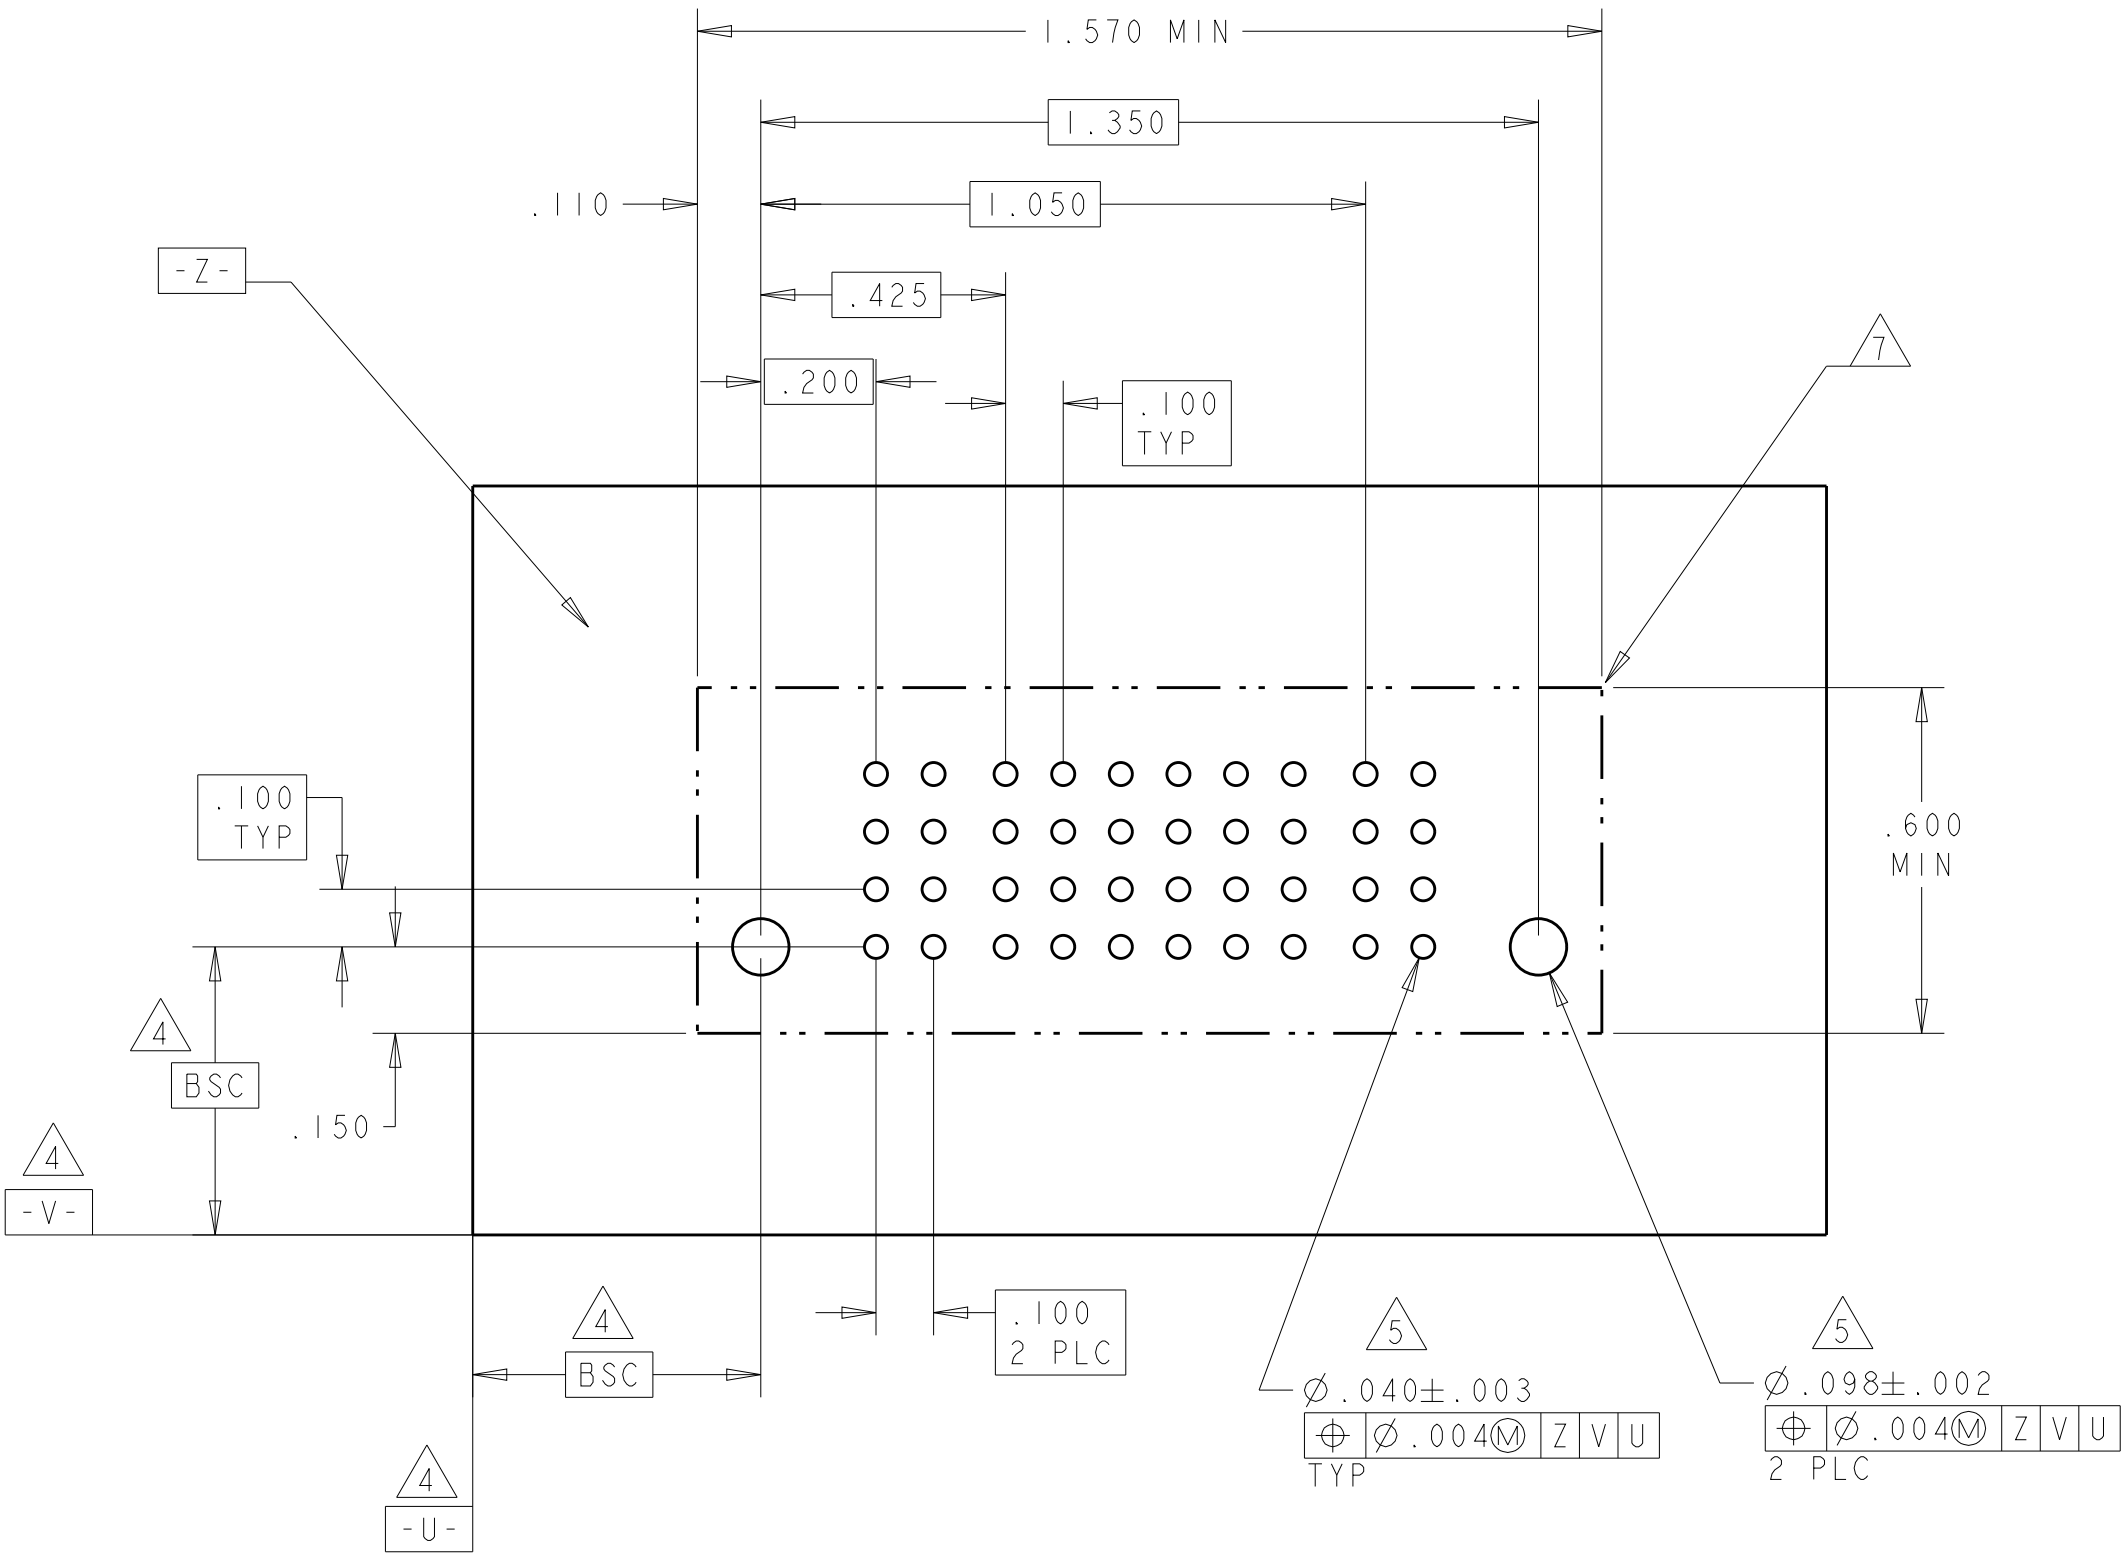


PART NUMBER	ROWS		POWER						SIGNAL		POWER						
			P1	P2	P3	P4	P5	P6	1	2	P7	P8	P9	P10	P11	P12	
6450820-4	D C B A		VM	VM	VM	VM	VM	VM	EV	EV	VM	VM	VM	VM	VM	VM	HD
									EV	EV							
									EV	EV							
									EV	EV							
6P + 8S + 6P																	

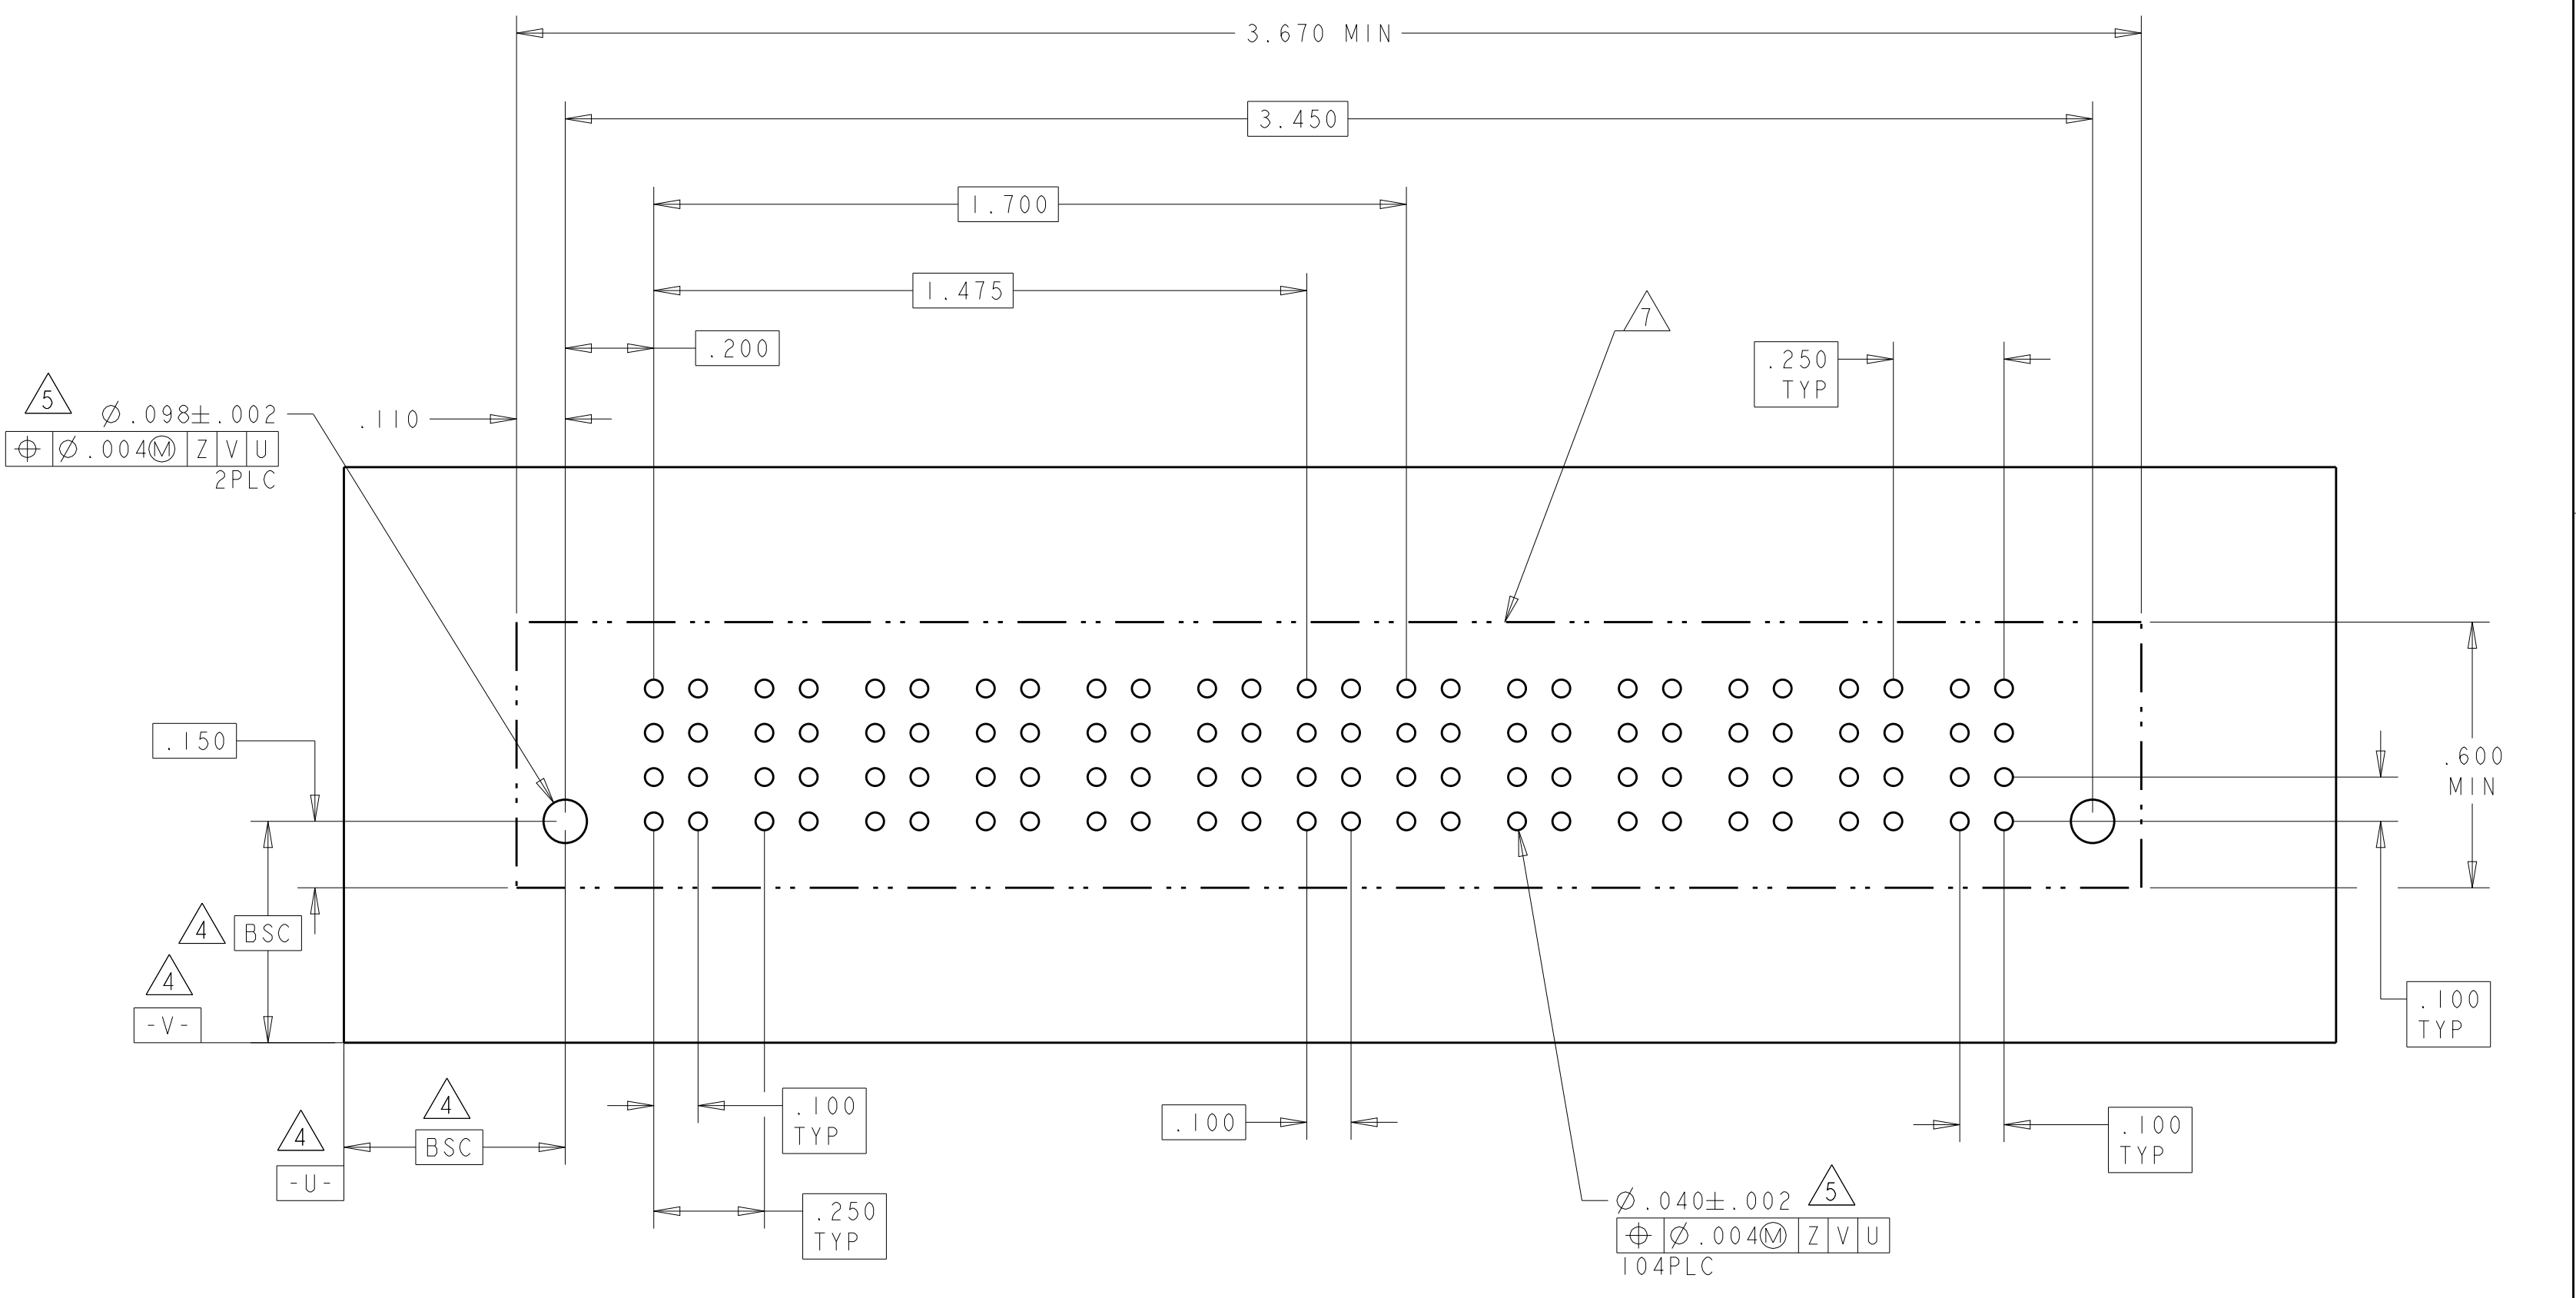4805 (3/11)





LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL		POWER														
			P1	P2	P3	P4	1	2	P5	P6	P7	P8											
6450820-5	D C B A			VM		VM		VM		EV	EV		VM		VM		VM		VM		VM		
4P + 8S + 4P																							

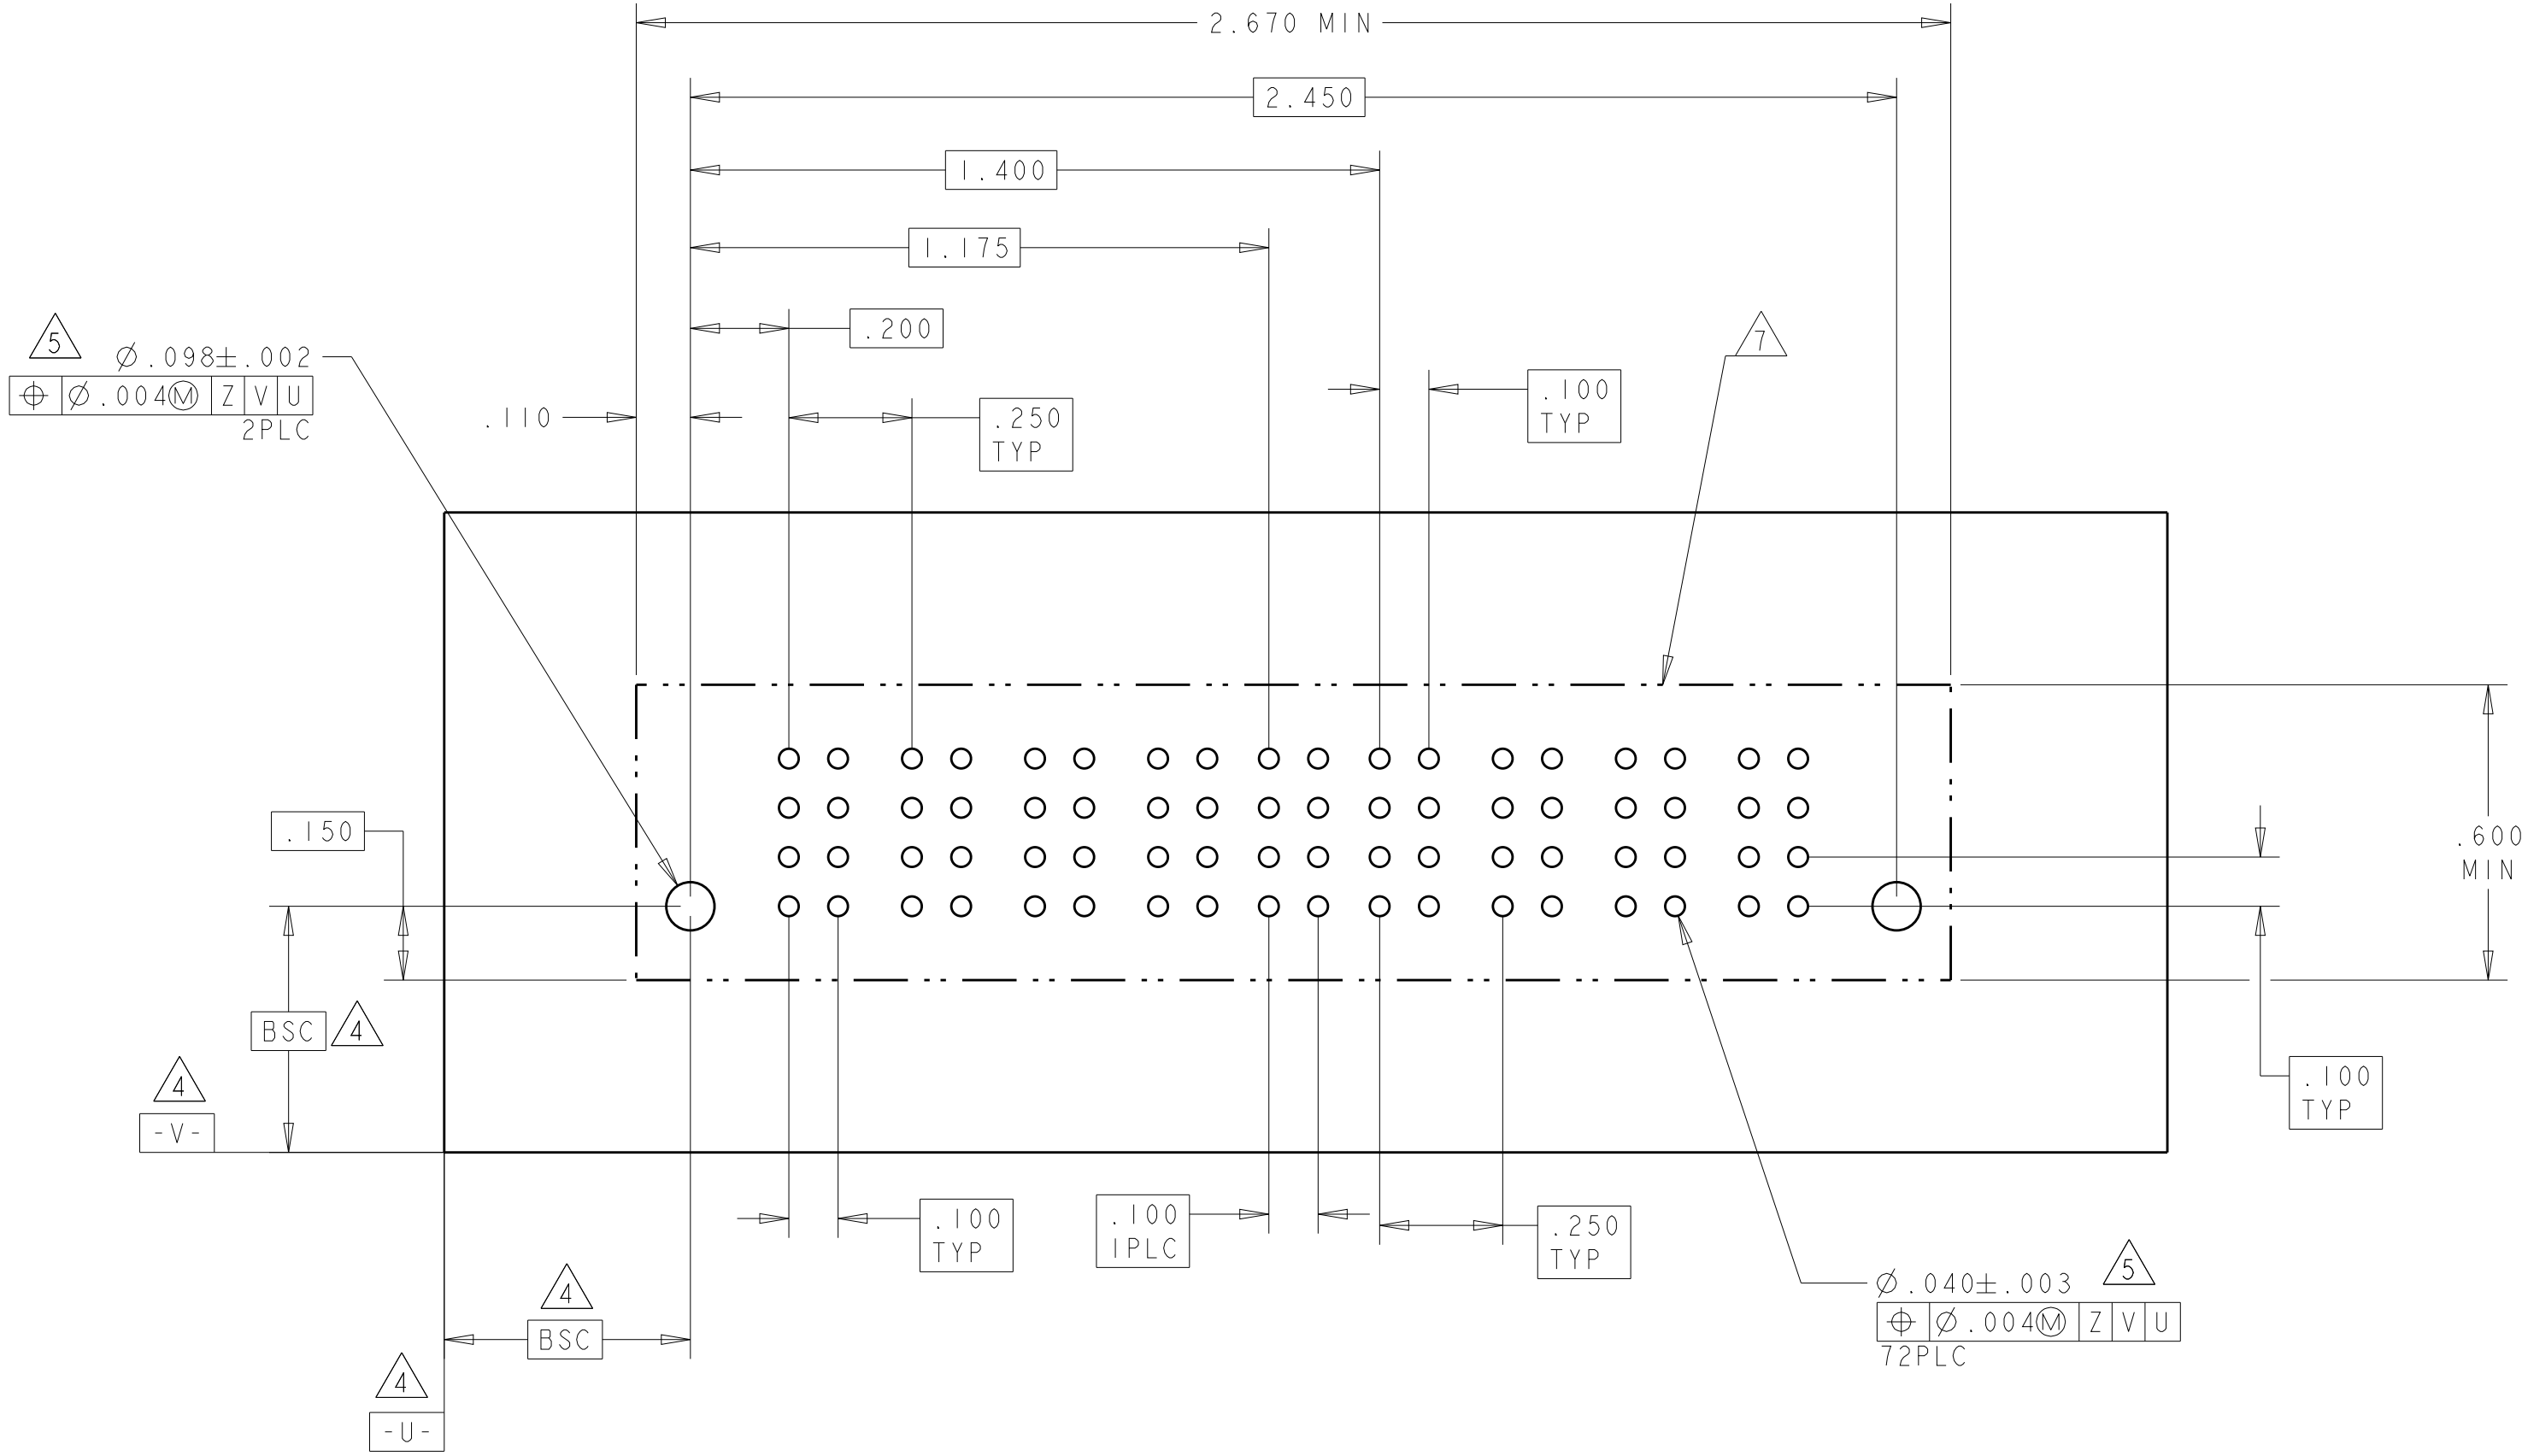


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. ZHU	15NOV2007	 TE Connectivity	
		CHK	S. ZHAO	15NOV2007		
DIMENSIONS:		APVD	S. ZHAO	-	NAME	
INCHES						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:			PRODUCT SPEC	
		0 PLC ±.01				
		1 PLC ±.01			APPLICATION SPEC	
		2 PLC ±.005				
		4 PLC ±.0020			SIZE	
		ANGLES				
		FINISH			CAGE CODE	
MATERIAL		Customer Drawing				
					DRAWING NO	
					RESTRICTED TO	
					SCALE	
					SHEET	
					OF	
					REV	
					G8	


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER													SIGNAL				POWER	SIGNAL		
			P1	P2	1	2	3	4	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	5	6	7	8	P14	9	10			
6450820-6	D C B A		VM		EV	EV	EV	EV		VM	VM		VM	EV	VM		VM	VM		EV	EV	EV	EV		EV	ES			
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV			
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV			
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV			
					ES	EV	EV	EV												EV	EV	EV	EV		EV	EV			
2P+16S+1P+2ACP+5P+2ACP+1P+16S+1P+8S																													

NO CONTACTS LOADED

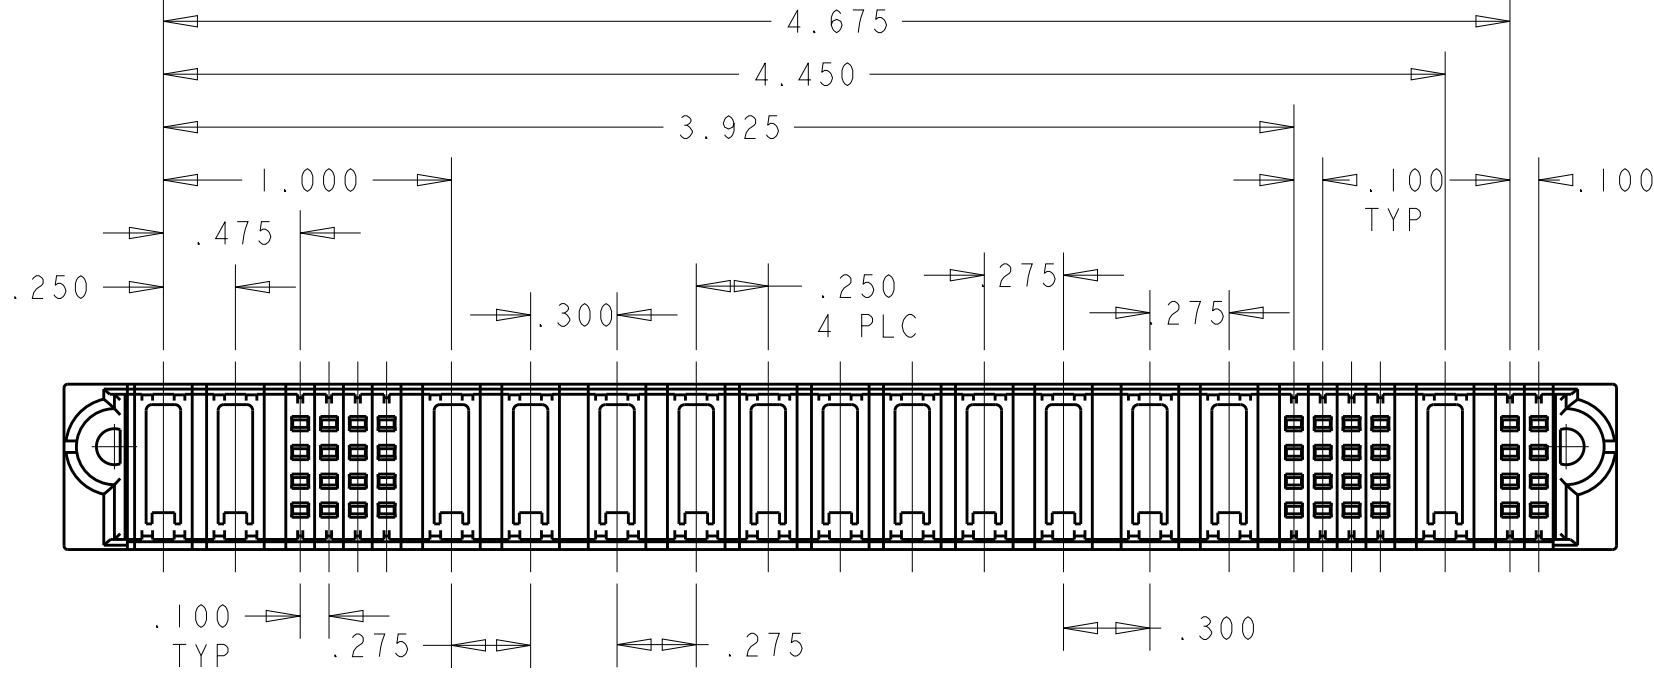

SCALE 3:2
6450820-6

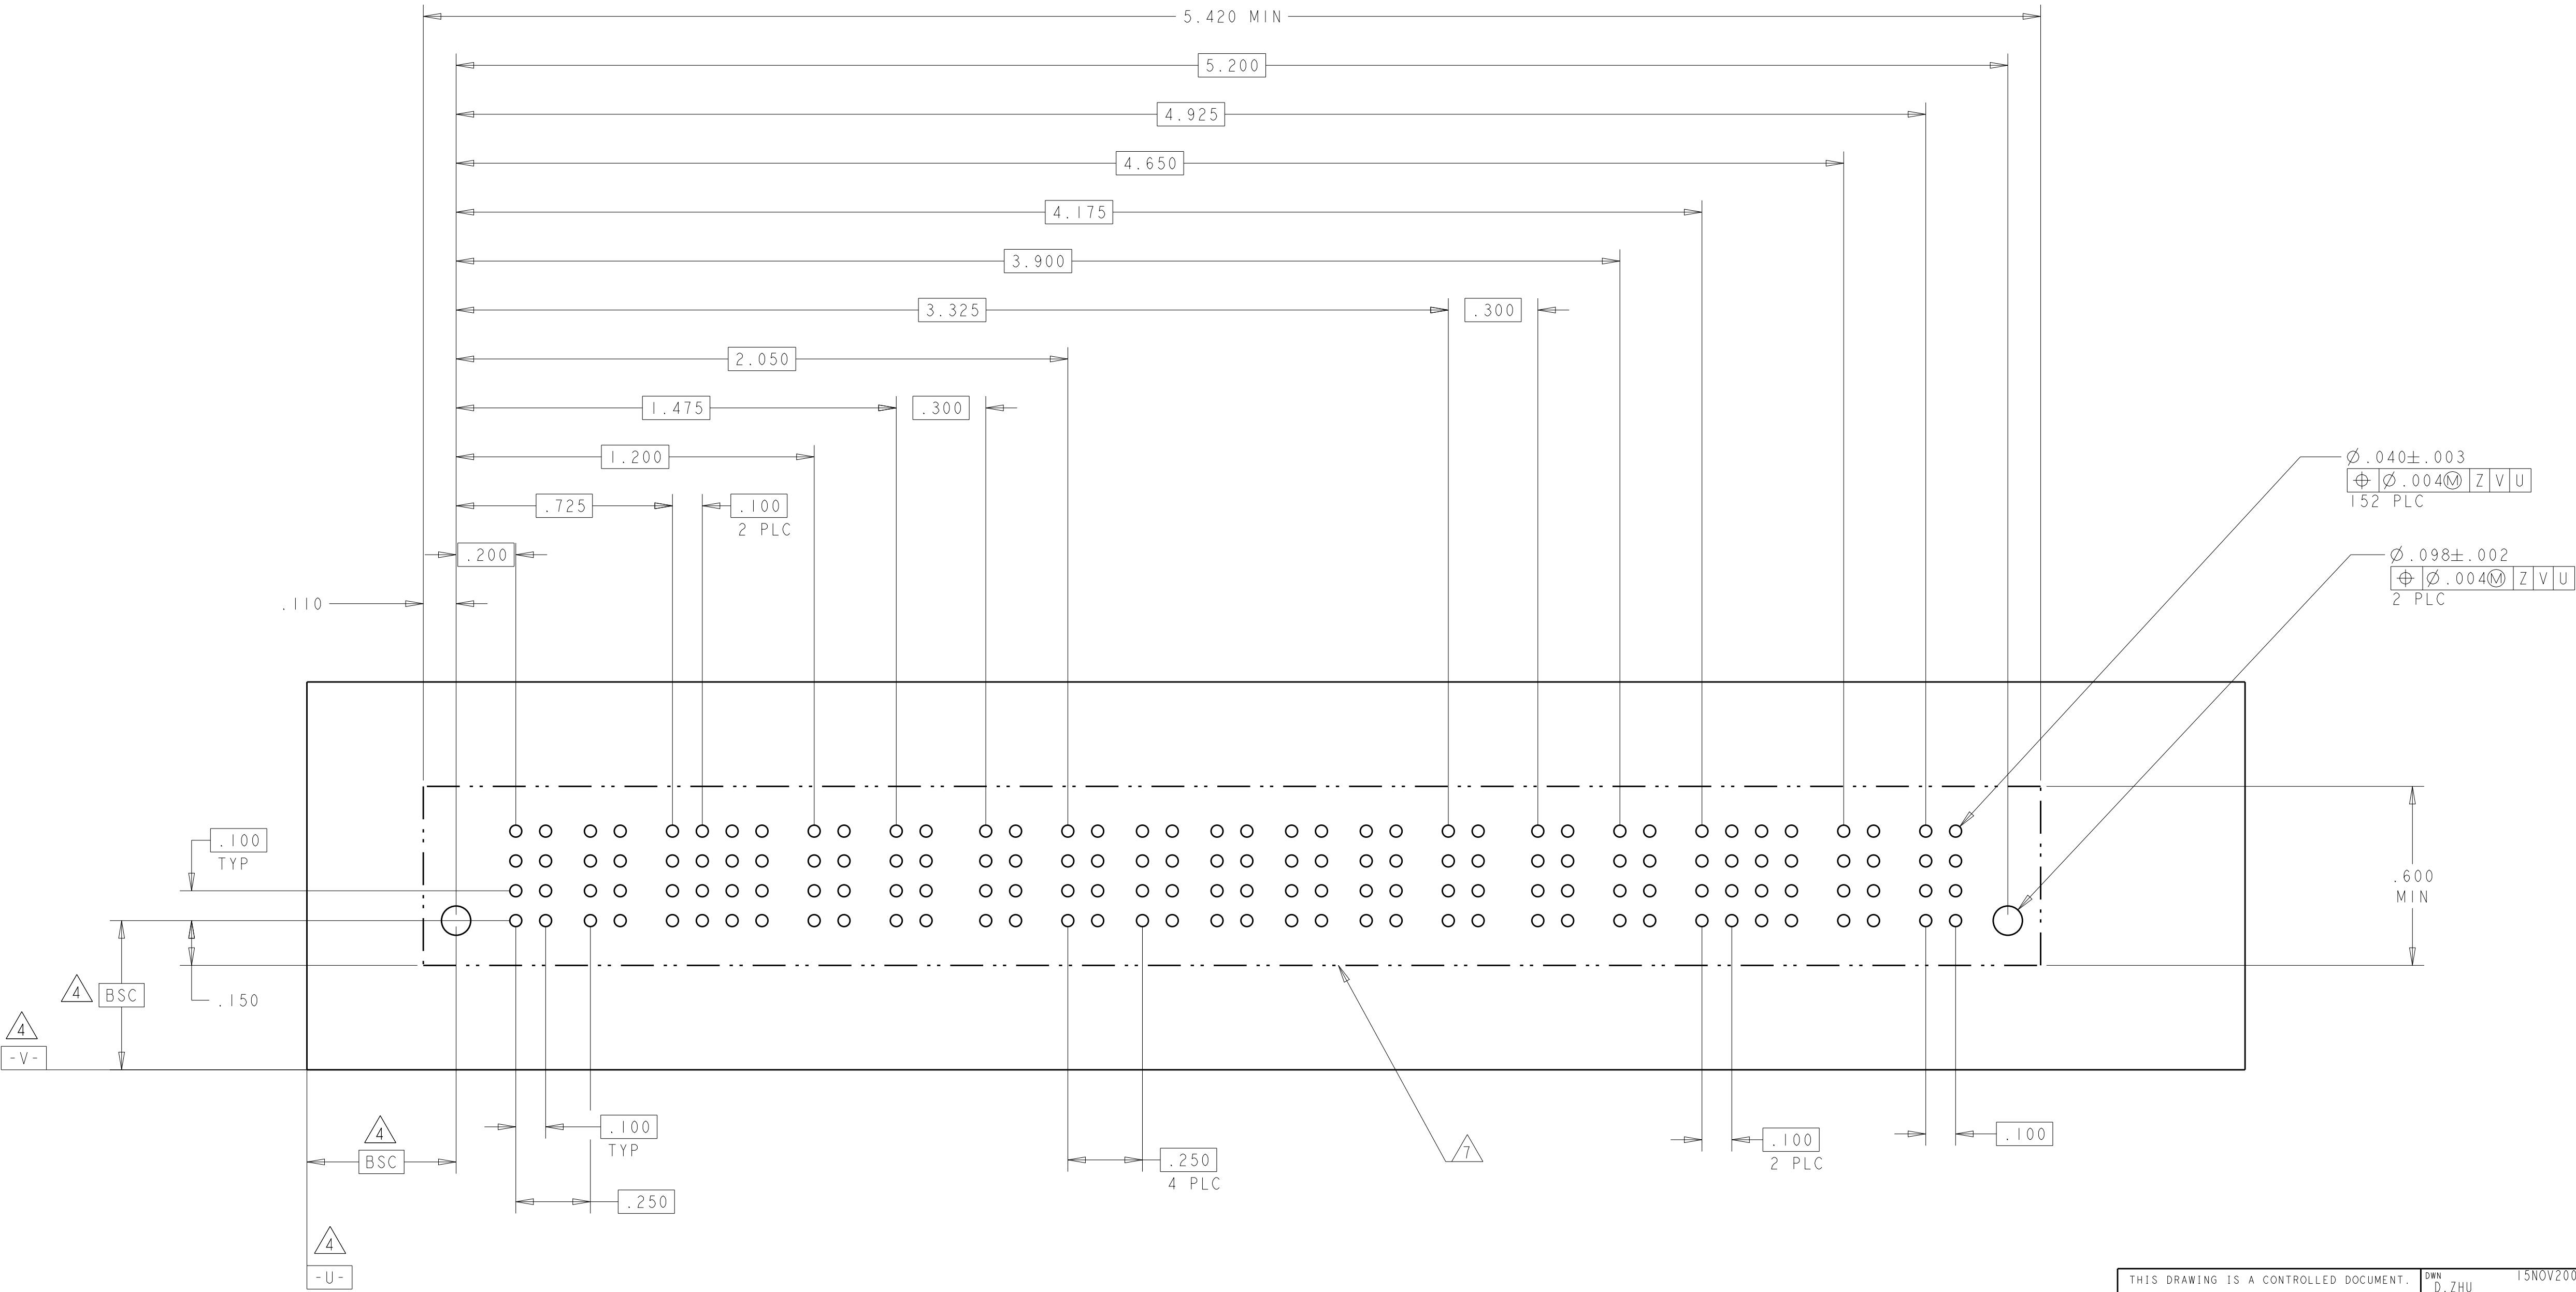

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.005		APPLICATION SPEC	
		3 PLC ±.002		114-13251	
		4 PLC ±.002		WEIGHT	
		ANGLES ±.2°		Customer Drawing	
		FINISH		SCALE	
MATERIAL				SHEET 9 OF 20	
				REV G8	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER										SIGNAL				POWER	SIGNAL																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
			P1	P2	1	2	3	4	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	5	6	7	8	P14	9	10																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
6450820-7	D C B A		VM		EV	EV	EV	EV		VM	VM		VM		VM		VM	VM		EV	EV	EV	EV		EV	ES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV		EV	EV	EF																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
					EF	EV	EV	EV												EV	EV	EV	EV		EV	EV		EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV




NO CONTACTS LOADED


THE PCB LAYOUT IS THE SAME AS 6450820-6.
PLEASE SEE 6450820-6 FOR DETAIL DIM.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. ZHU	15NOV2007	TE Connectivity		
		CHK	S. ZHAO	15NOV2007			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	S. ZHAO	-	NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE
INCHES				PRODUCT SPEC			
		0 PLC ±"		108-2292			
		1 PLC ±.01		APPLICATION SPEC			
		2 PLC ±.01		114-13251			SIZE A100779
		3 PLC ±.005		WEIGHT		-	
		4 PLC ±.0020		Customer Drawing			SCALE -
		ANGLES ±2°		SHEET		10	
		FINISH		OF		20	REV G8
MATERIAL				REV			

[illegible]4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

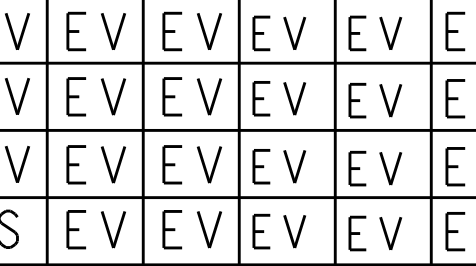
PART NUMBER	ROWS		POWER						SIGNAL						POWER											
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12						
I-6450820-1	D C B A																									
								EV	EV	EV	EV	EV	EV													
								EV	EV	EV	EV	EV	EV													
								ES	EV	EV	EV	EV	EV													
6P + 24S + 6P																										

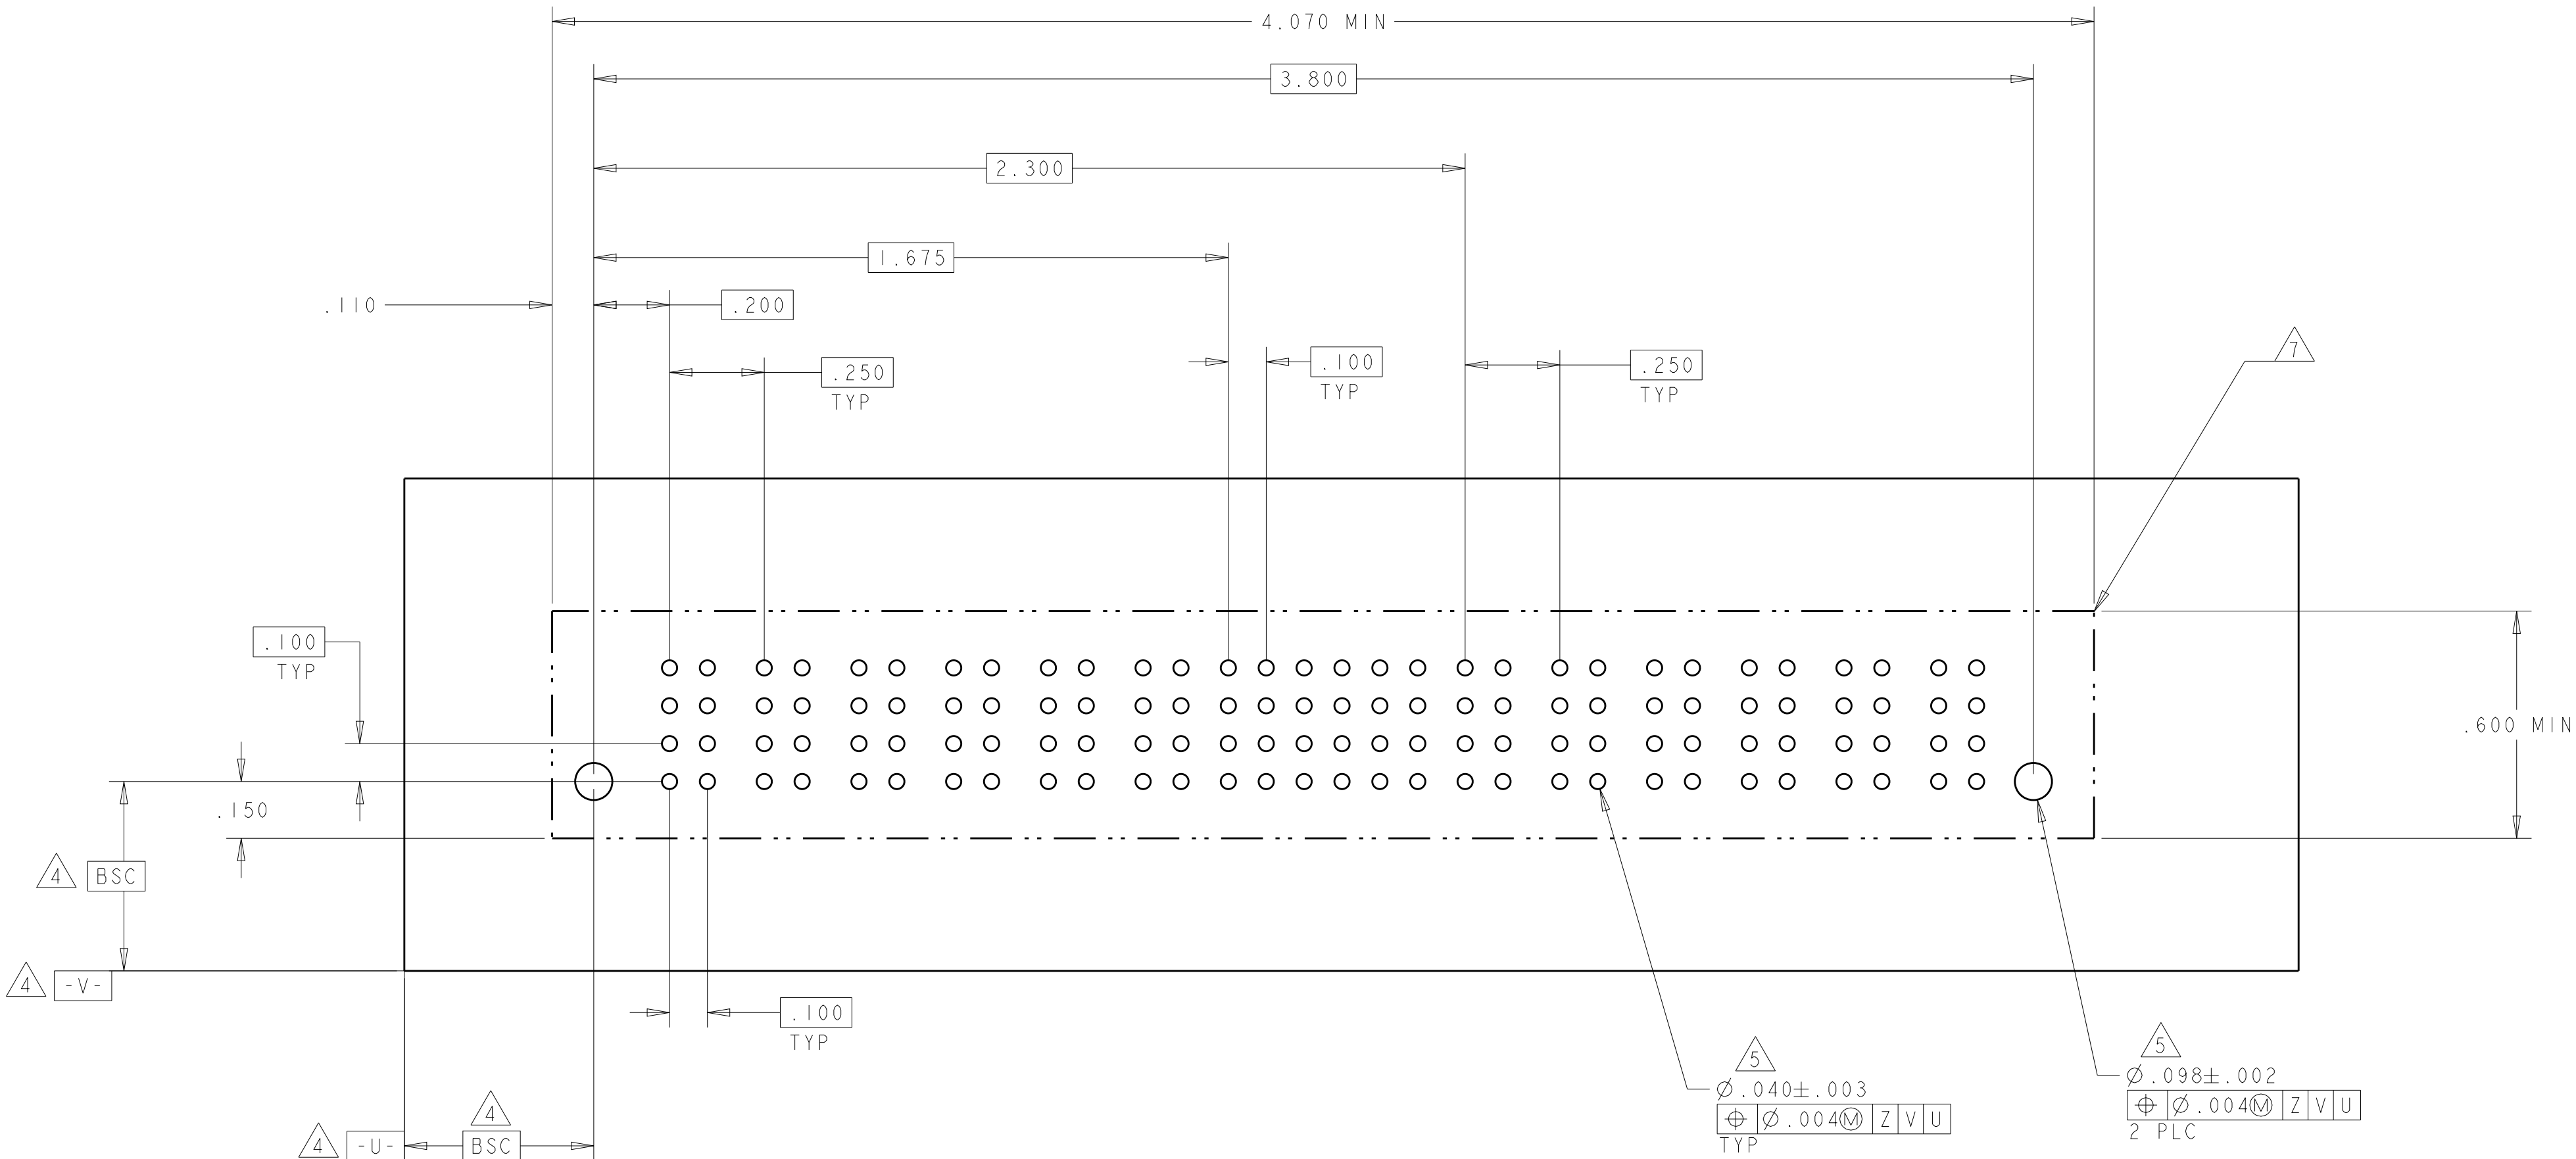

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007		
		CHK S. ZHAO	15NOV2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.005		APPLICATION SPEC	
		3 PLC ±.002		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		Customer Drawing	
MATERIAL		FINISH		SCALE	
-		-		SHEET 12 OF 20	
				REV G8	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
1-6450820-3	D				EV	EV	EV	EV	EV	EV					
	C				EV	EV	EV	EV	EV	EV					
	B				EV	EV	EV	EV	EV	EV					
	A				EV	EV	EV	EV	EV	EV					
	3ACP + 24S + 3ACP														

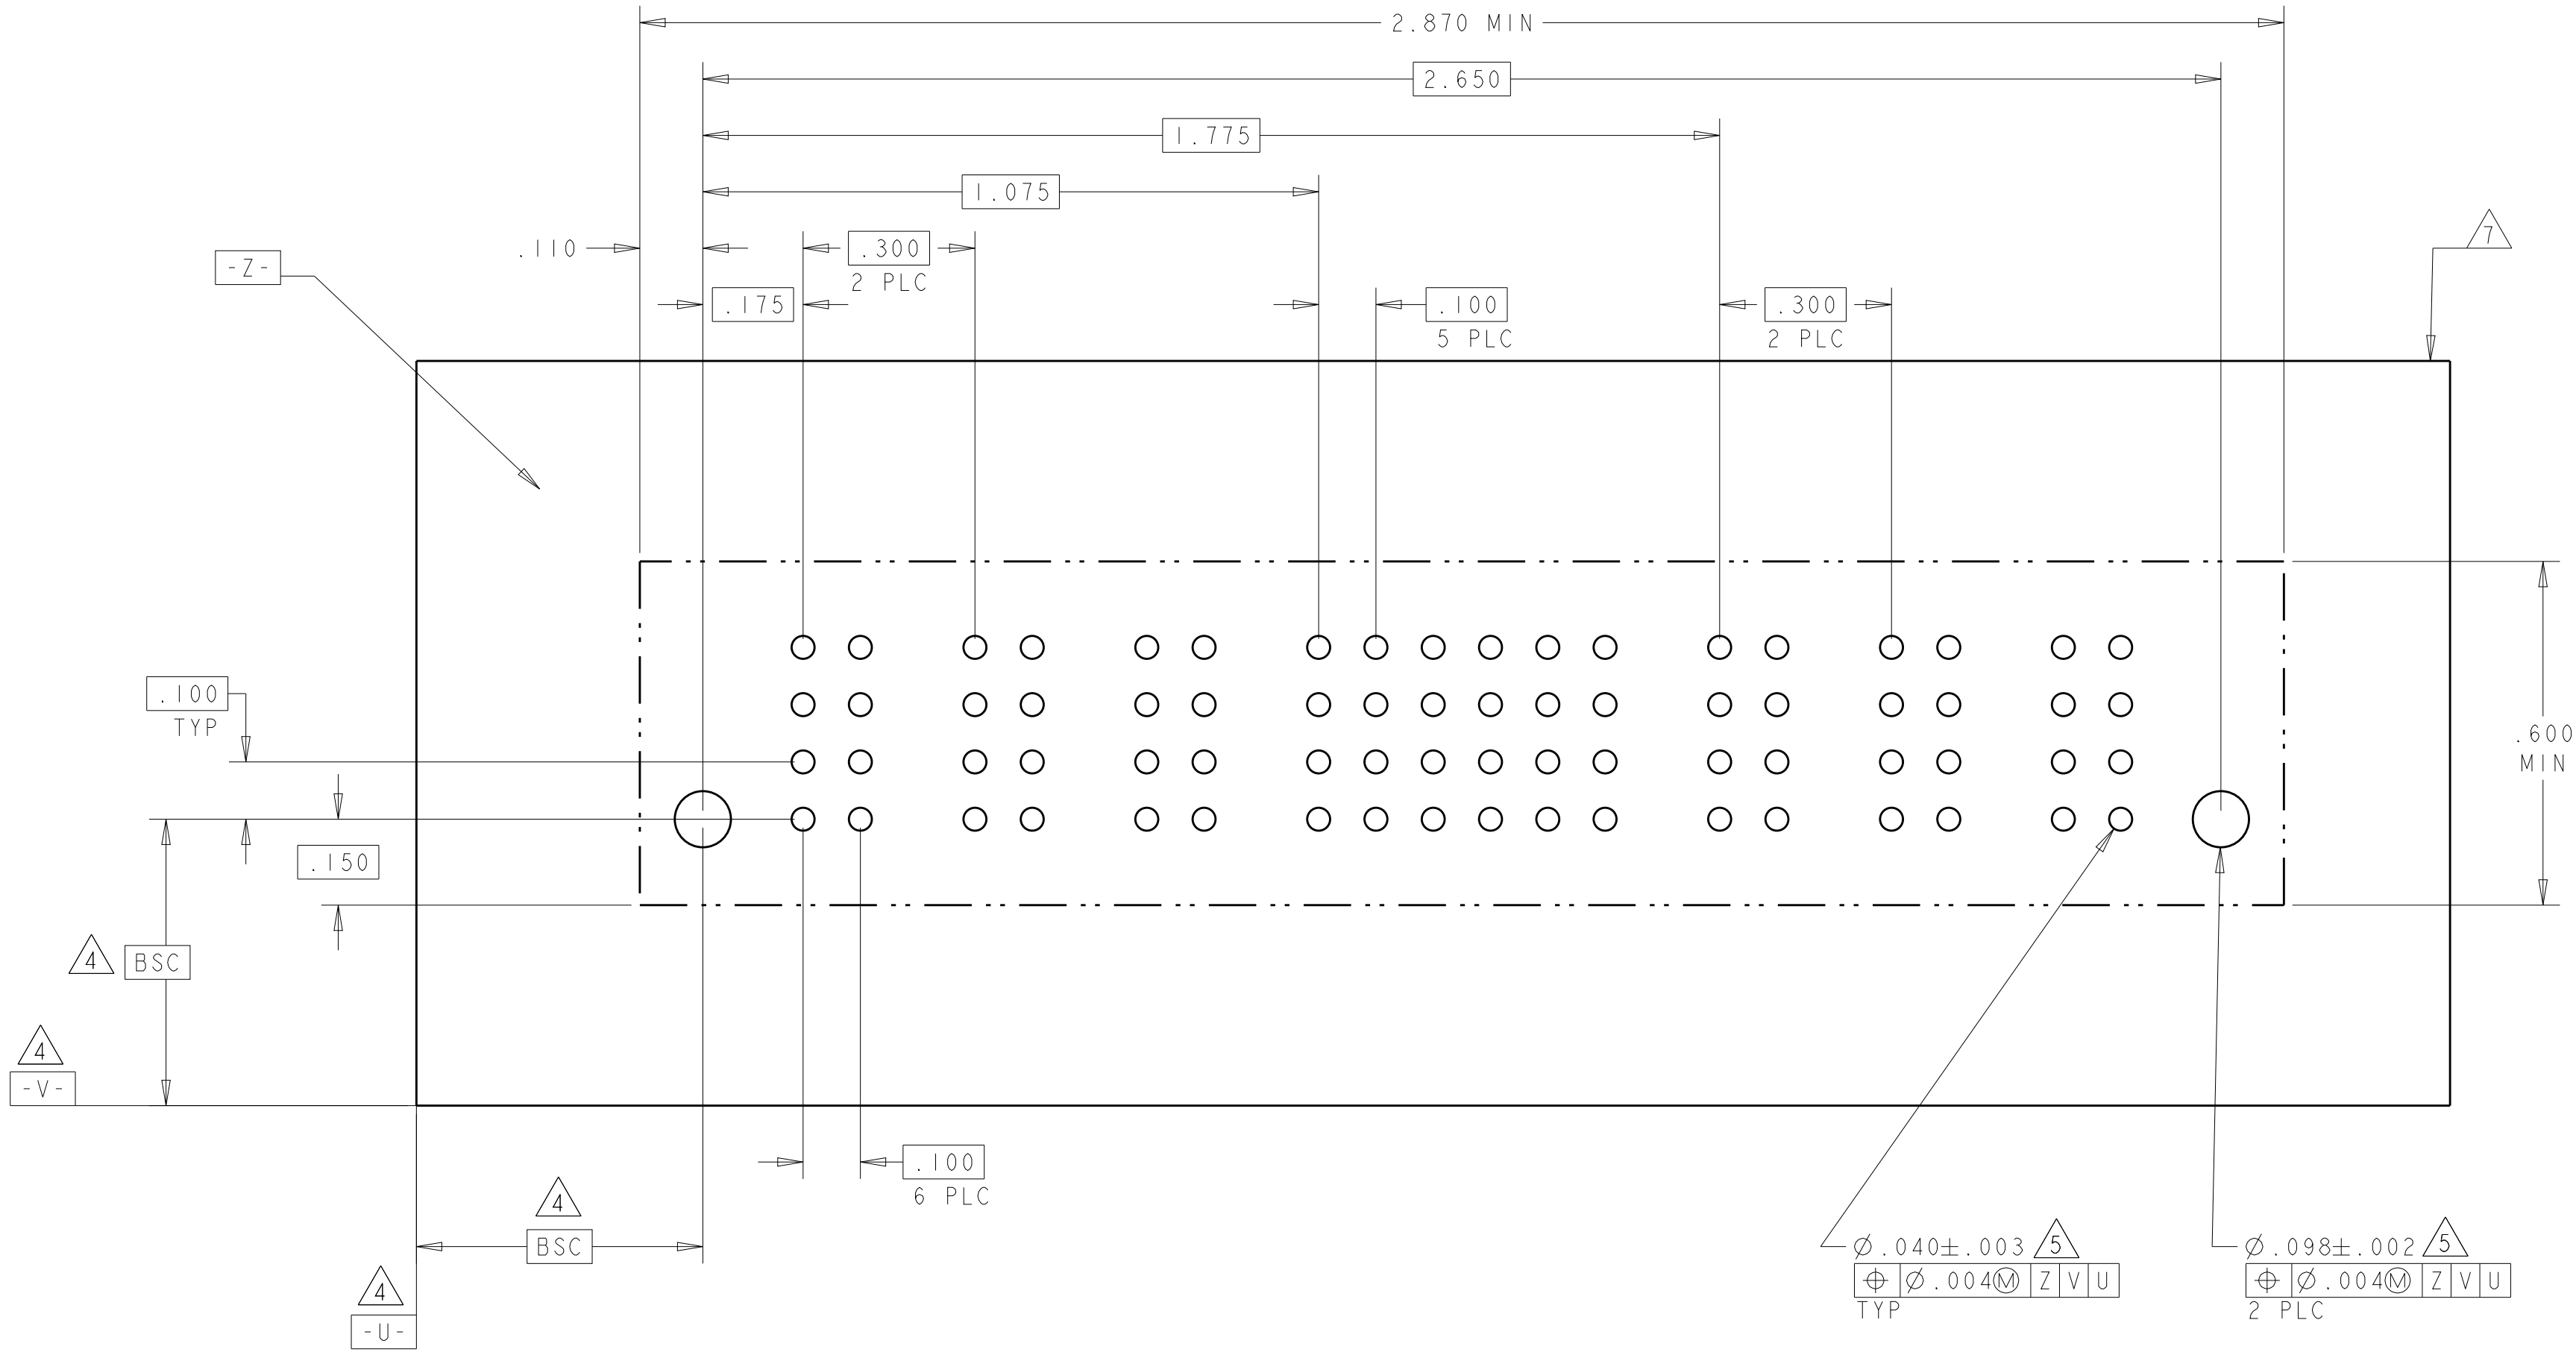


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007		
		CHK S. ZHAO	15NOV2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		Customer Drawing	
MATERIAL		FINISH		SCALE	
-		-		SHEET 13 OF 20	
				REV G8	

Technical drawing of a rectangular plate with a grid of holes. The drawing includes dimensions: overall width 4.670 MIN, overall height .600 MIN, and a central area of 3.175 by 3.175. There are 11 holes along the top and bottom edges, and 11 holes along the left and right edges. The holes are arranged in a grid. The drawing also includes feature control frames for various features: a hole with diameter .040 ± .003, a hole with diameter .098 ± .002, and a hole with diameter .004 ± .002. The drawing is labeled with 'II PLC' and '2 PLC'.

4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER					SIGNAL												POWER									
			P1	P2	P3	P4	P5	1	2	3	4	5	6	7	8	9	10	11	12	P6	P7	P8	P9	P10					
1-6450820-8	D C B A		VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV					
								EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	
								EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
								EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
5P + 48S + 5P																													

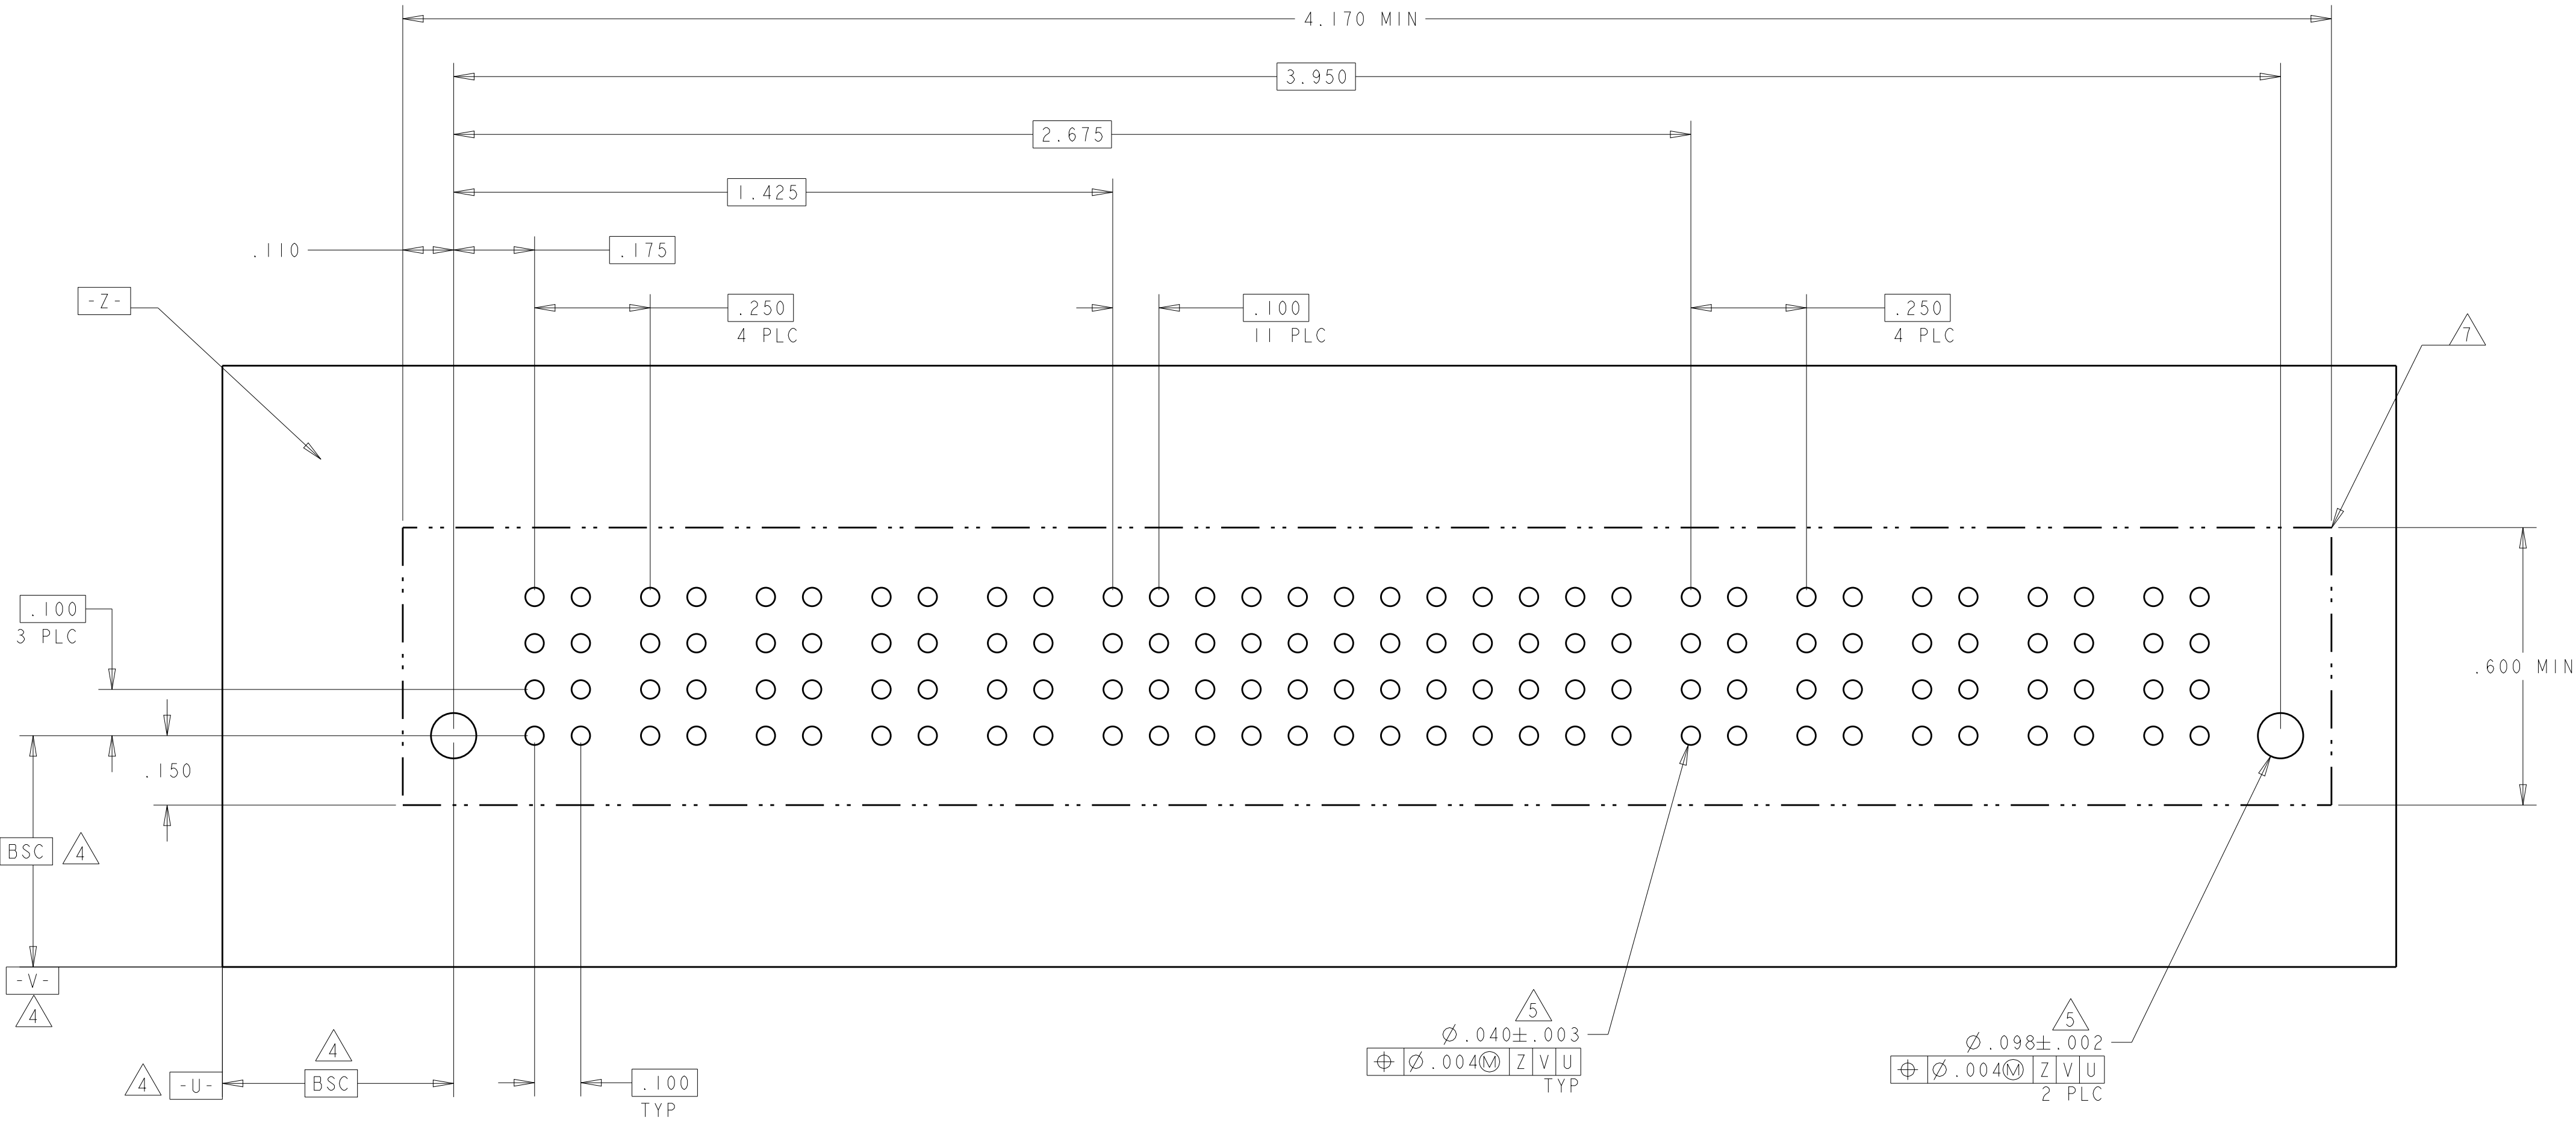

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT -

MATERIAL -

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450820

RESTRICTED TO
-

SCALE
-

SHEET
15


OF
20

REV
G8

TE Connectivity

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER					SIGNAL						POWER					
			P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10	
1-6450820-9	D C B A		VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	
								EV	EV	EV	EV	EV	EV						
								EV	EV	EV	EV	EV	EV						
								EV	EV	EV	EV	EV	EV						
5P + 24S + 5P																			

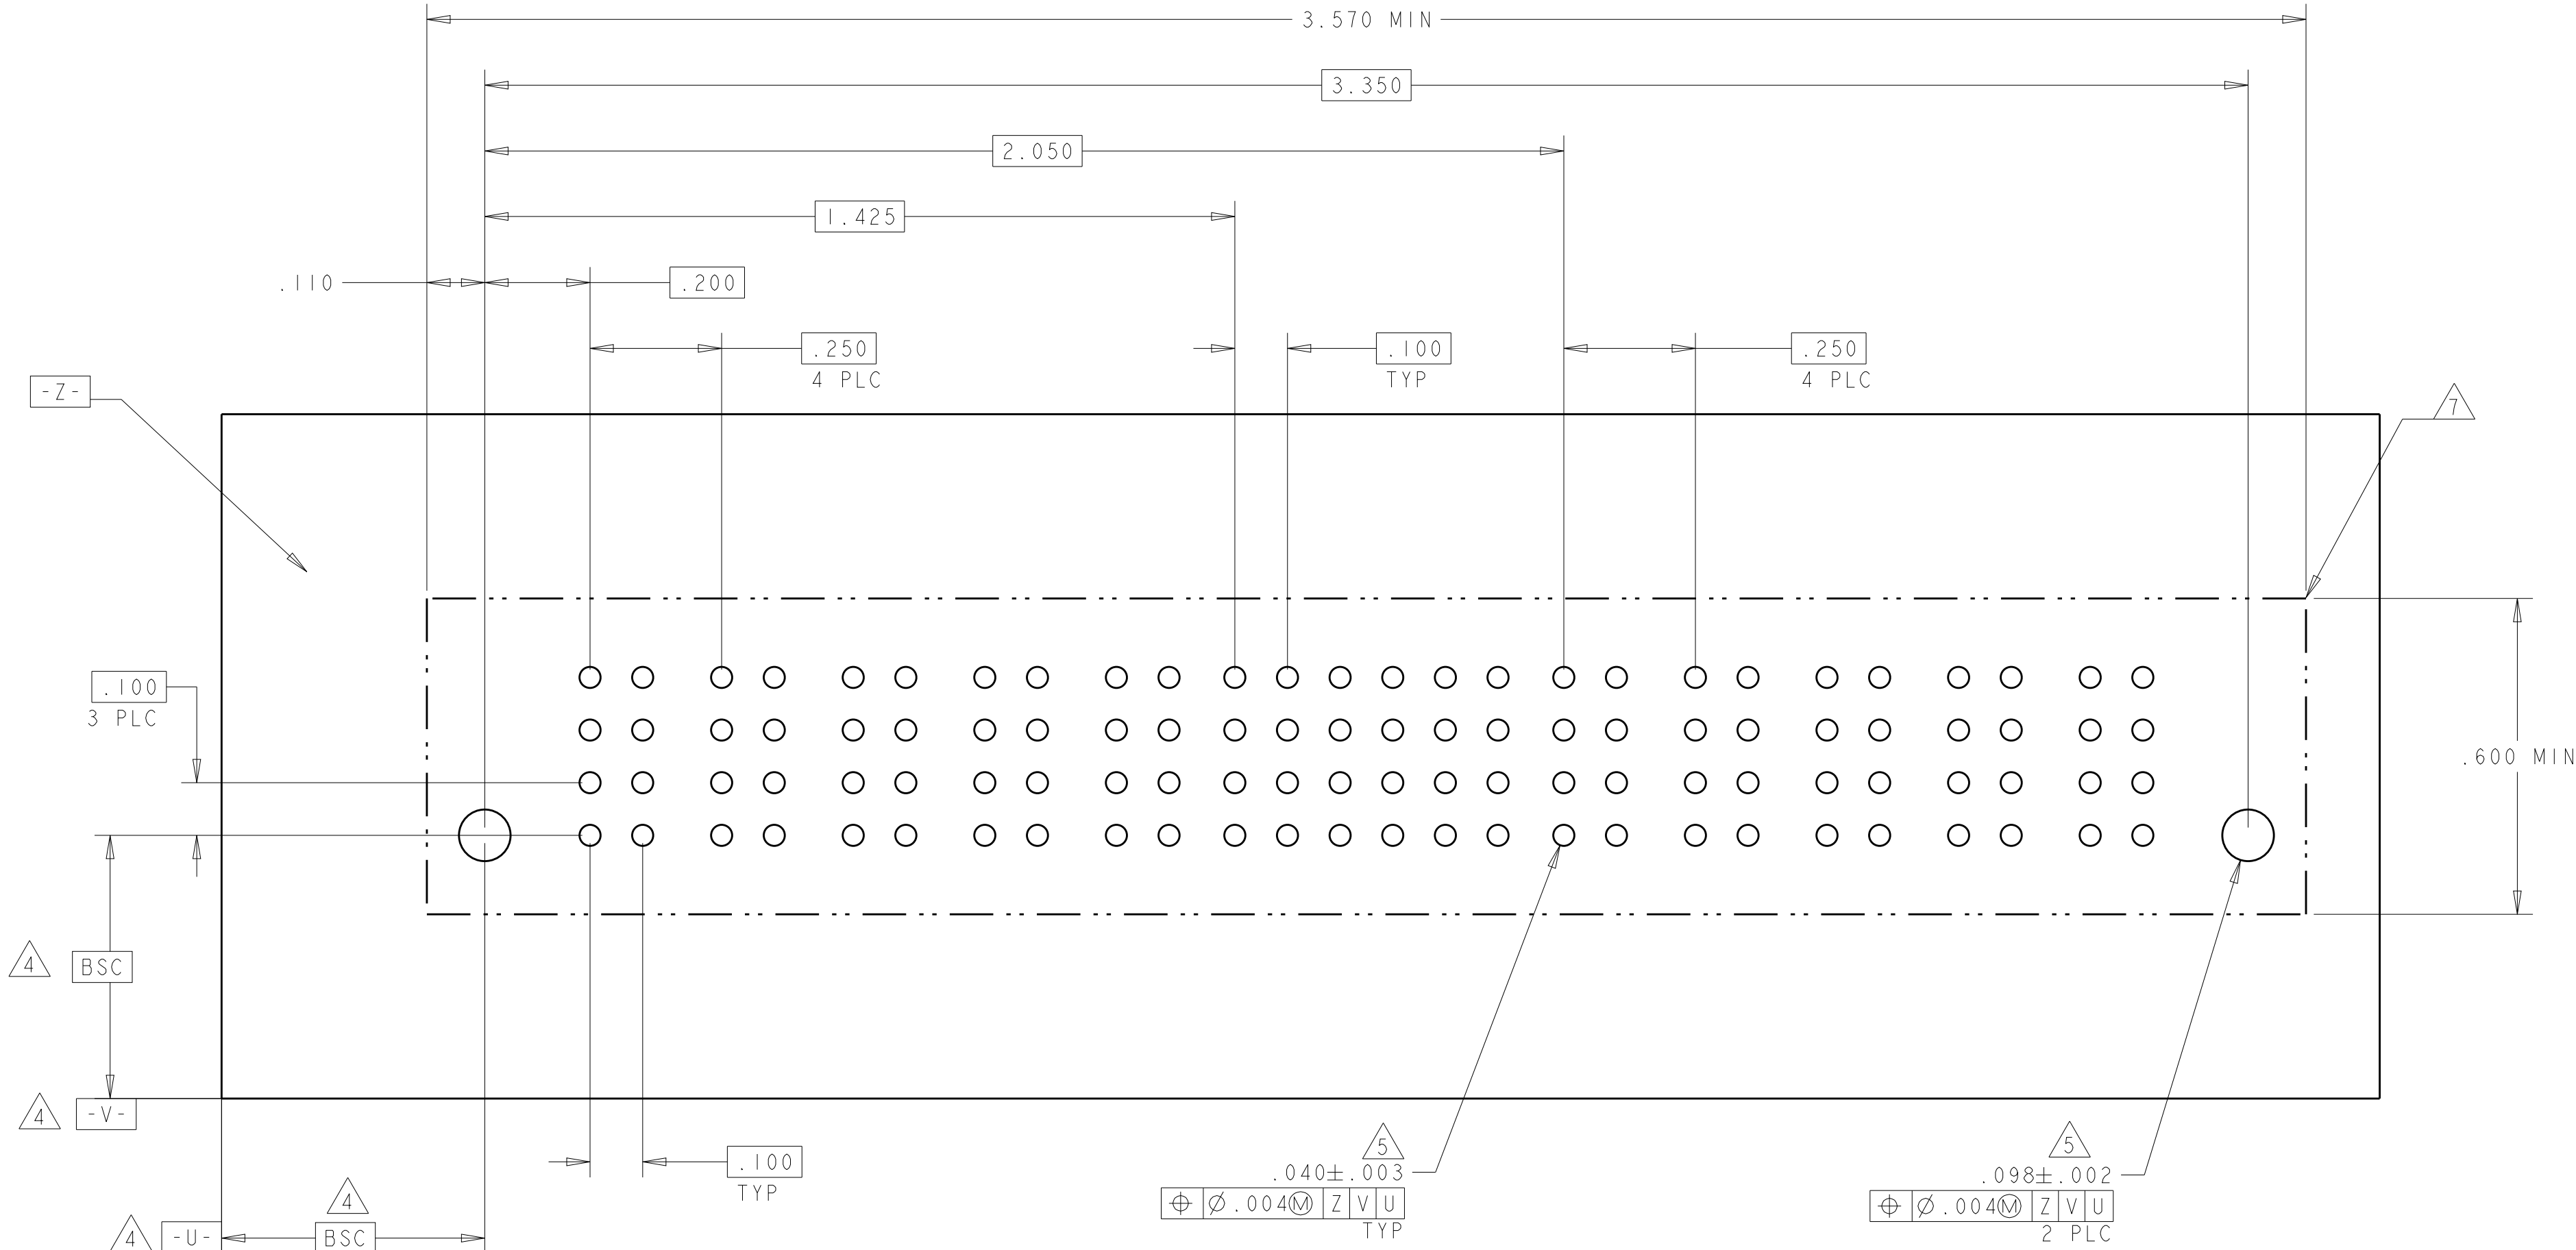

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D.ZHU
CHK
S.ZHAO
APVD
S.ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±"
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT

MATERIAL

-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A100779

CAGE CODE
C=6450820

DRAWING NO

RESTRICTED TO

SCALE

-

SHEET

16

OF


20

REV


G8

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			LP1	1	2	3	4	LP2	
2-6450820-0	D	HD	LZ	EV	EV	EV	EV	LZ	HD
	C			EV	EV	EV	EV		
	B			EV	EV	EV	EV		
	A			EV	EV	EV	EV		
1LP + 16S + 1LP									

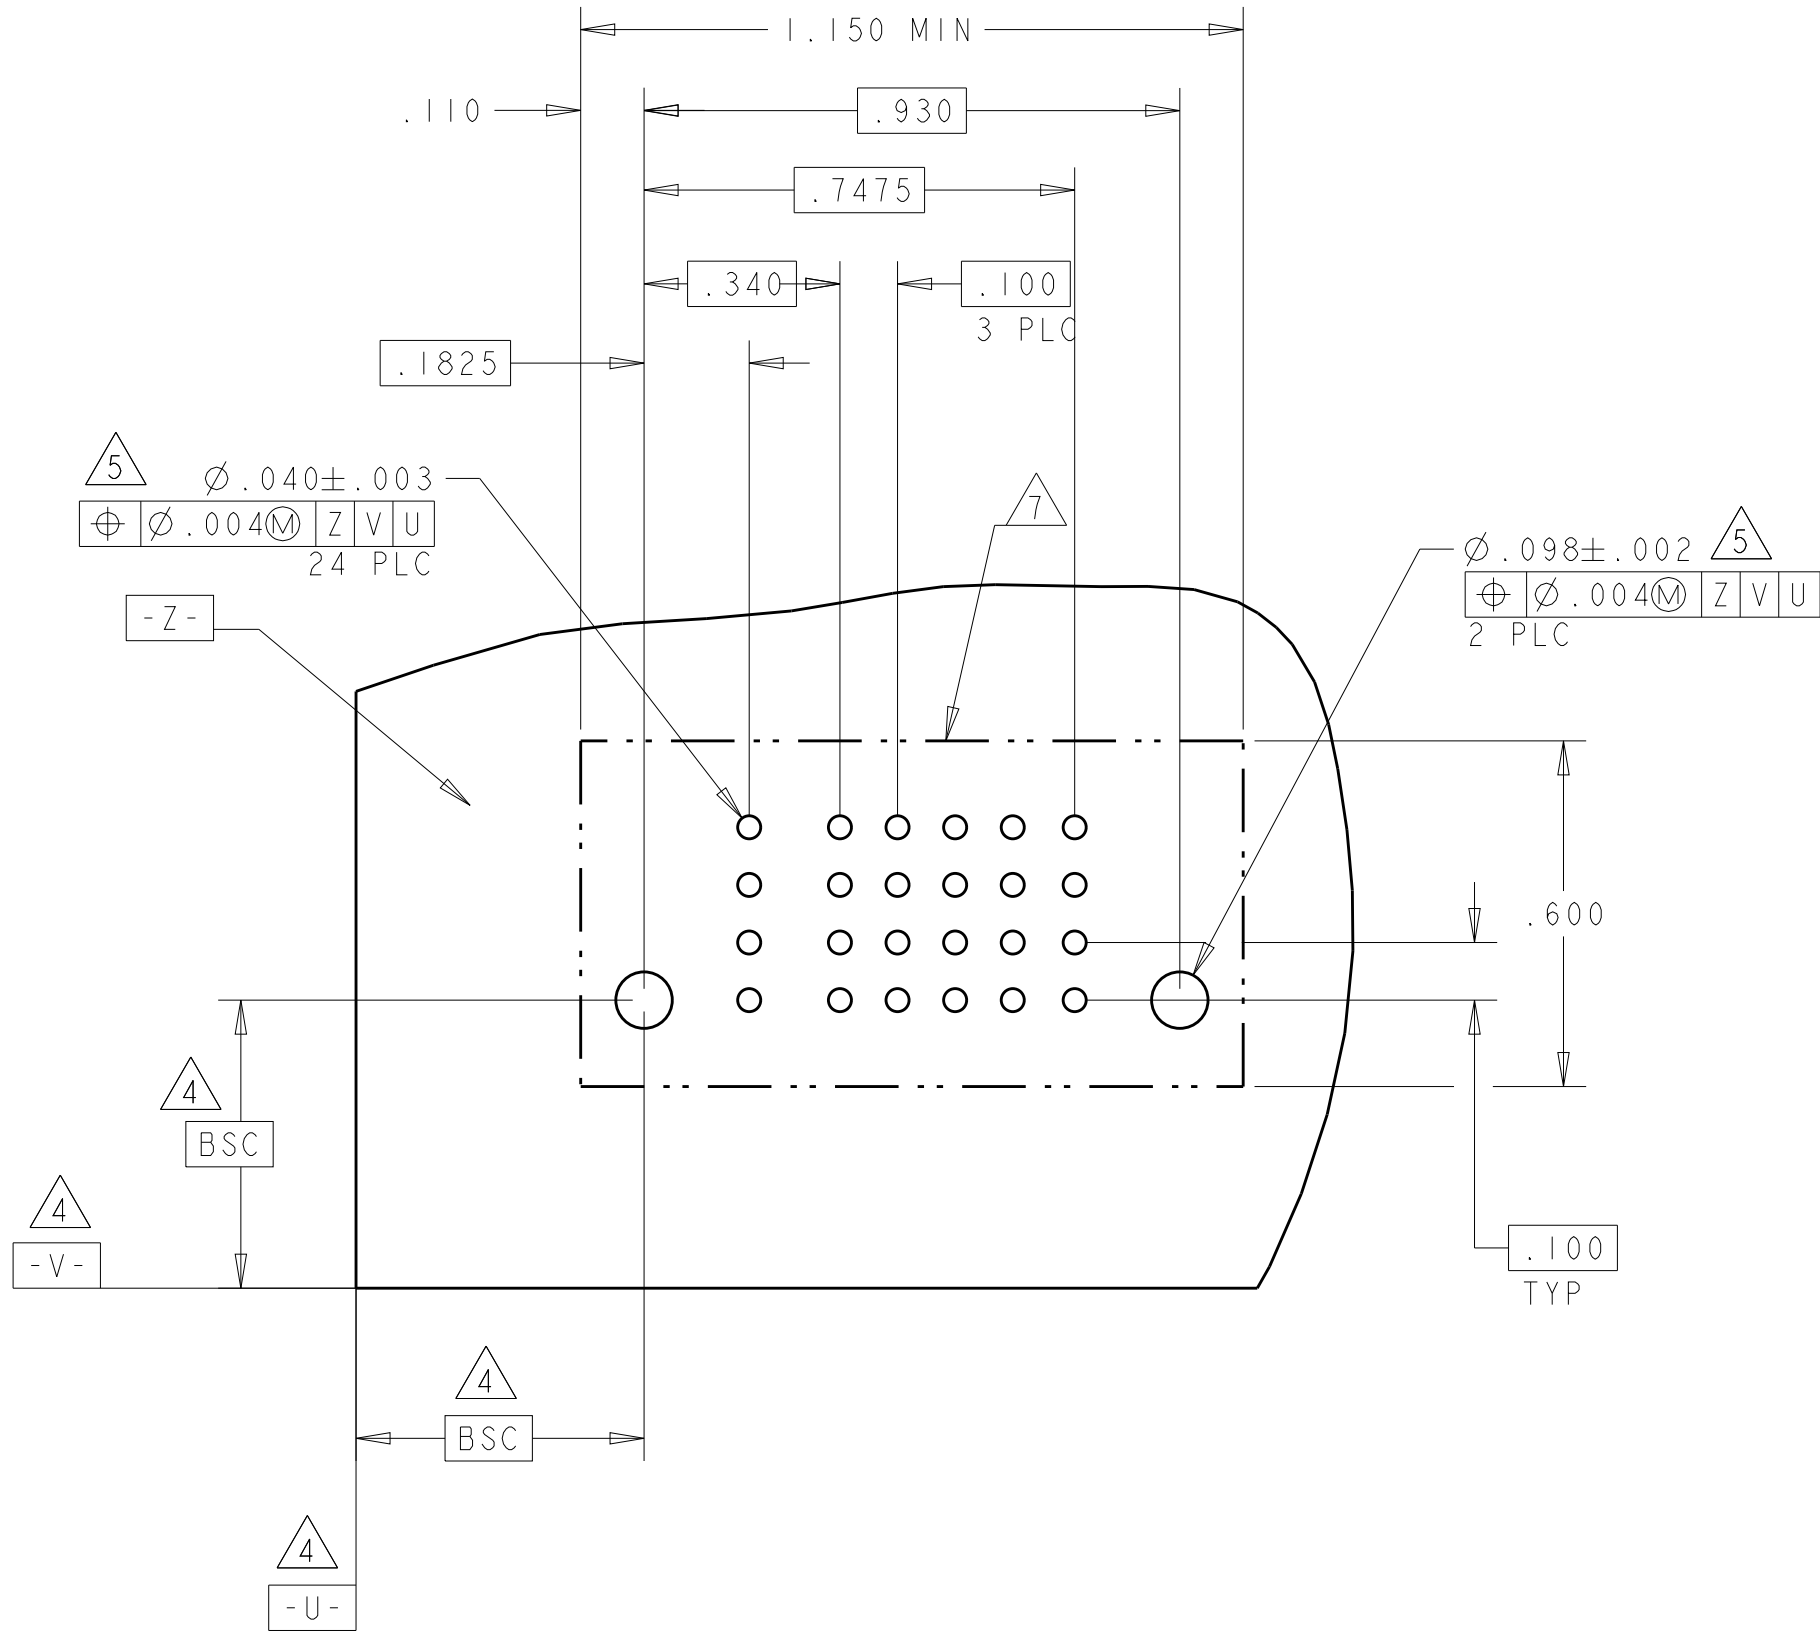

PART NUMBER	ROWS		LOW POWER						SIGNAL						POWER			
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	P1	P2	P3	
2-6450820-1	D	HD	LZ	LZ	LZ	LZ	LZ	LZ	EV	EV	EV	EV	EV	EV	VM	VM	VM	HD
	C								EV	EV	EV	EV	EV	EV				
	B								EV	EV	ES	EV	EV	EV				
	A								EV	EV	EV	EV	EV	EV				
6LP + 24S + 3P																		

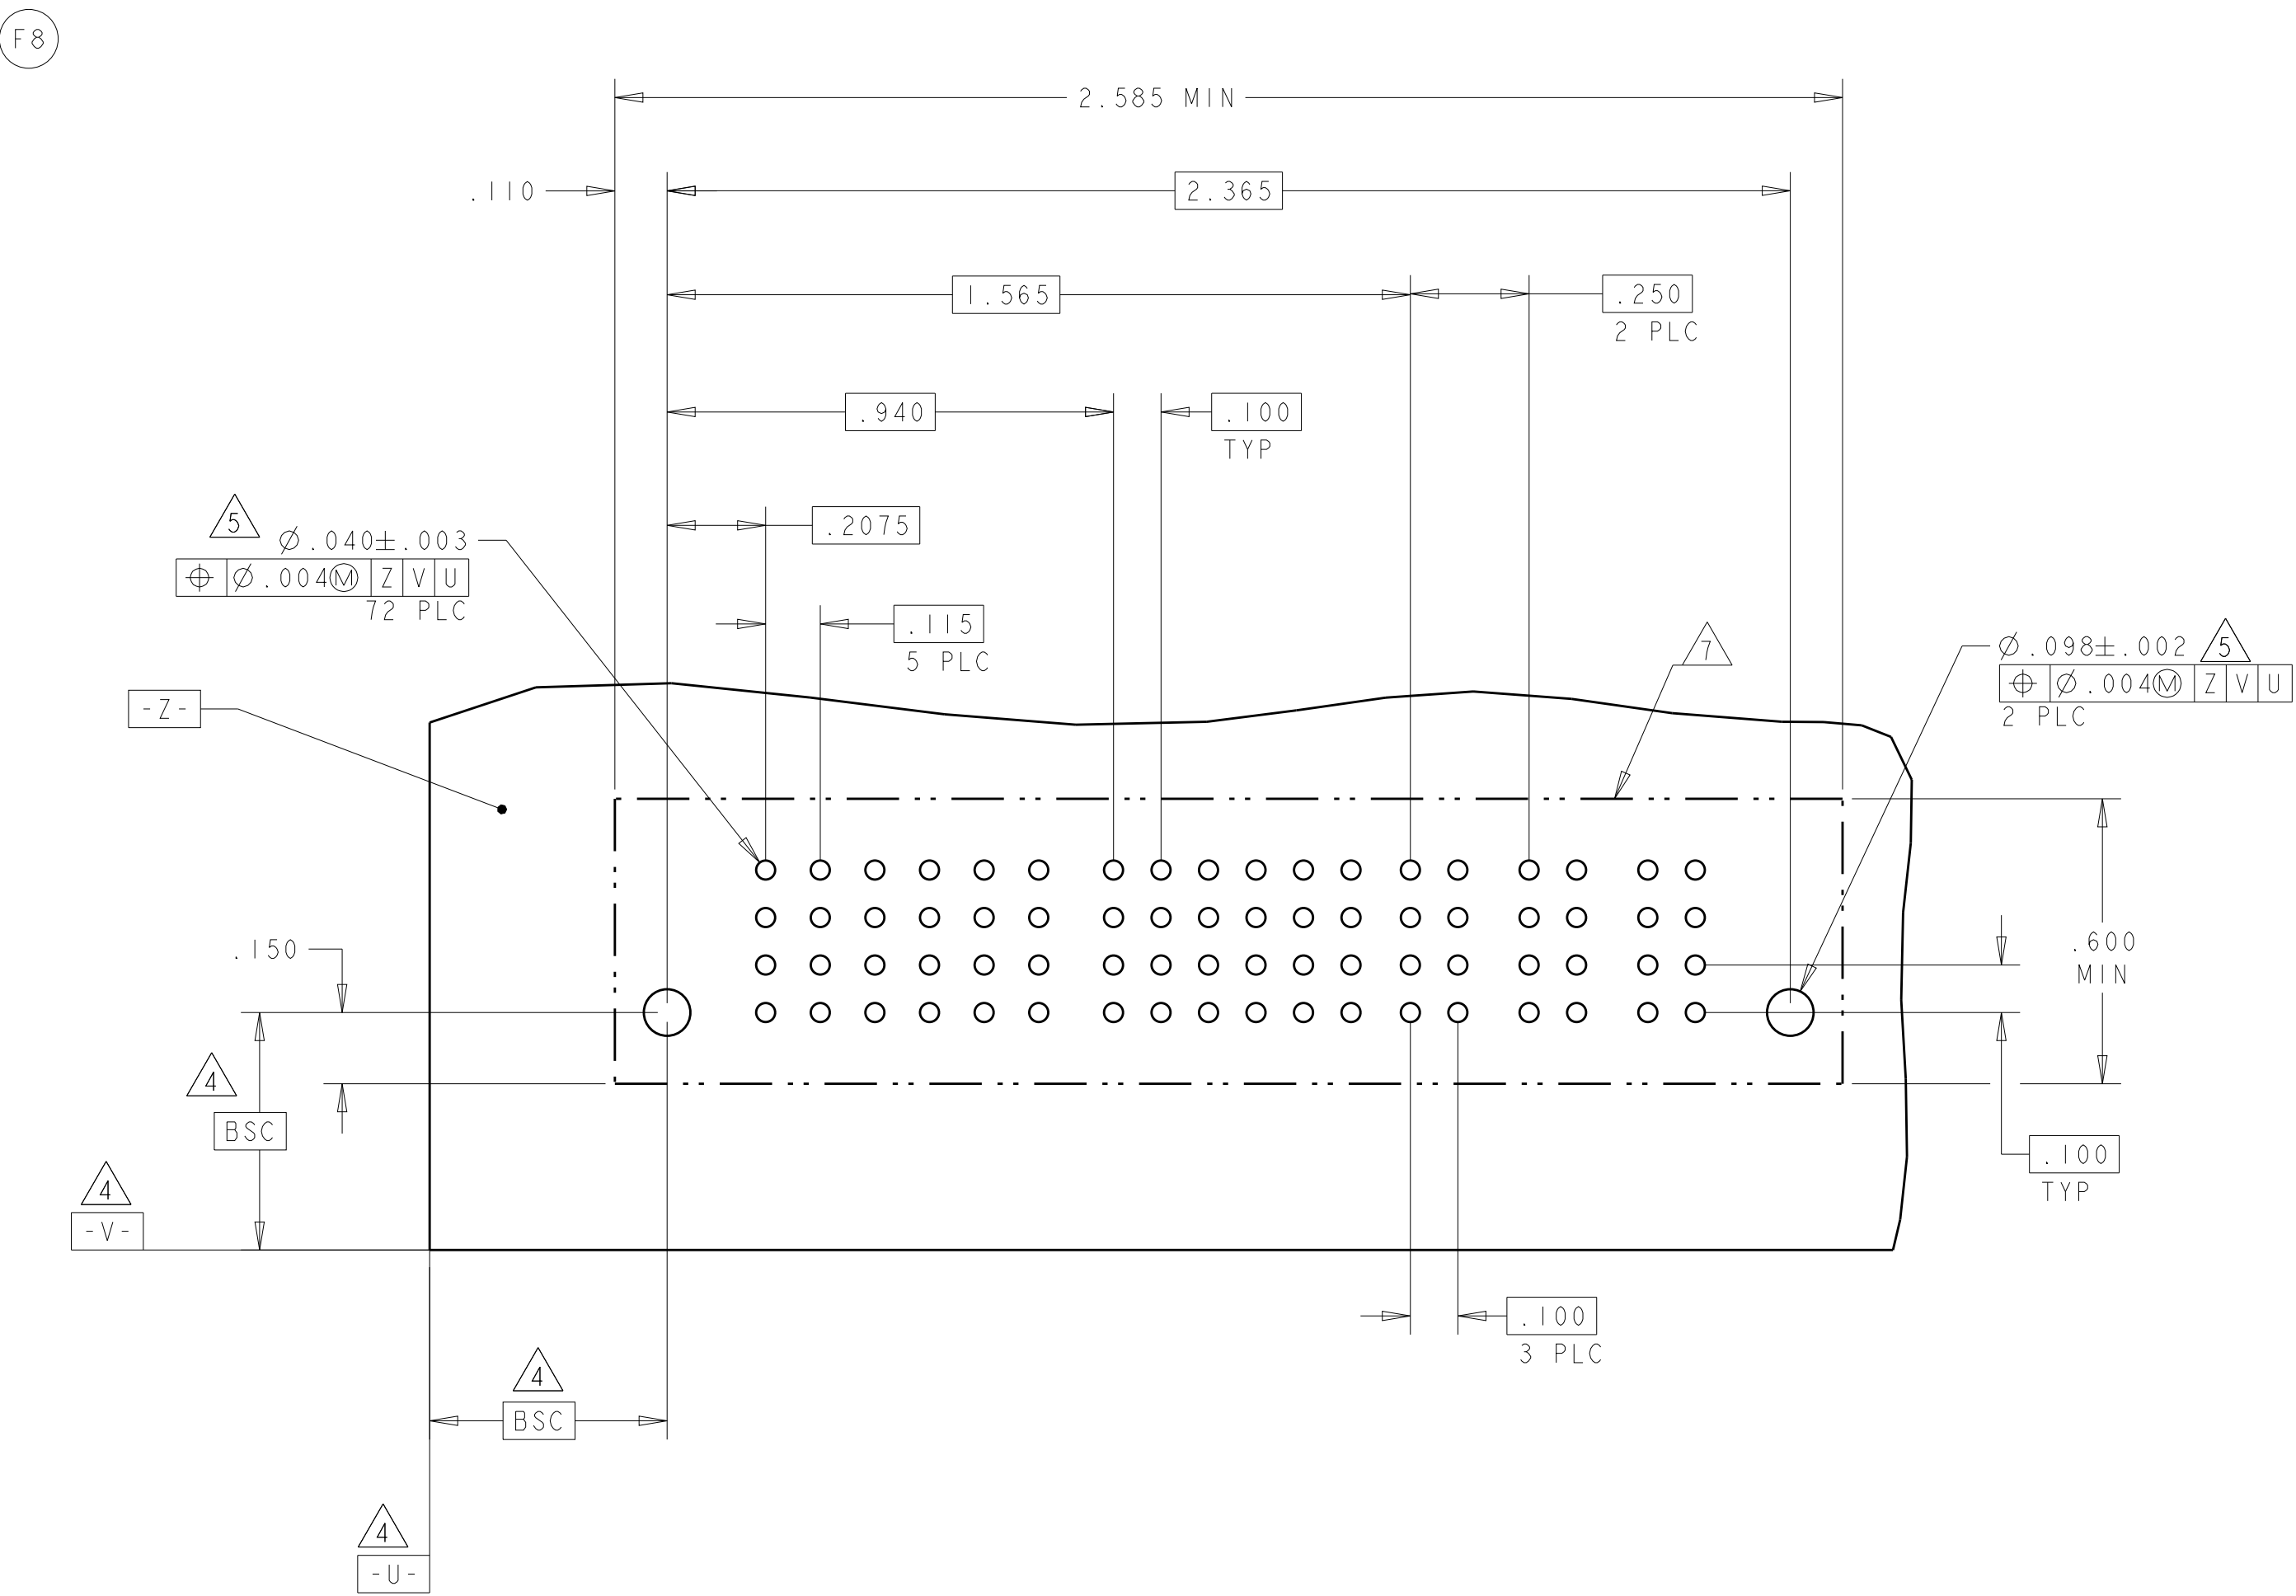


PART NUMBER	ROWS		POWER								SIGNAL																		POWER																							
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	P9	P10	P11	P12	P13	P14	P15	P16																
6450820-9	D C B A		VM	VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	VM	VM											
											EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV									EV	EV	EV	EV	EV	EV	EV	EV	EV		
											EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV									EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
											EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV									EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
8P + 72S + 8P																																																				

4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER										SIGNAL											
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6						
2-6450820-3	D C B A	HD	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM						
																			EV	EV	EV	EV	EV	EV
																			EV	EV	EV	EV	EV	EV
																			EV	EV	EV	EV	EV	EV
																			EV	EV	EV	EV	EV	EV
10HDP + 24S																								

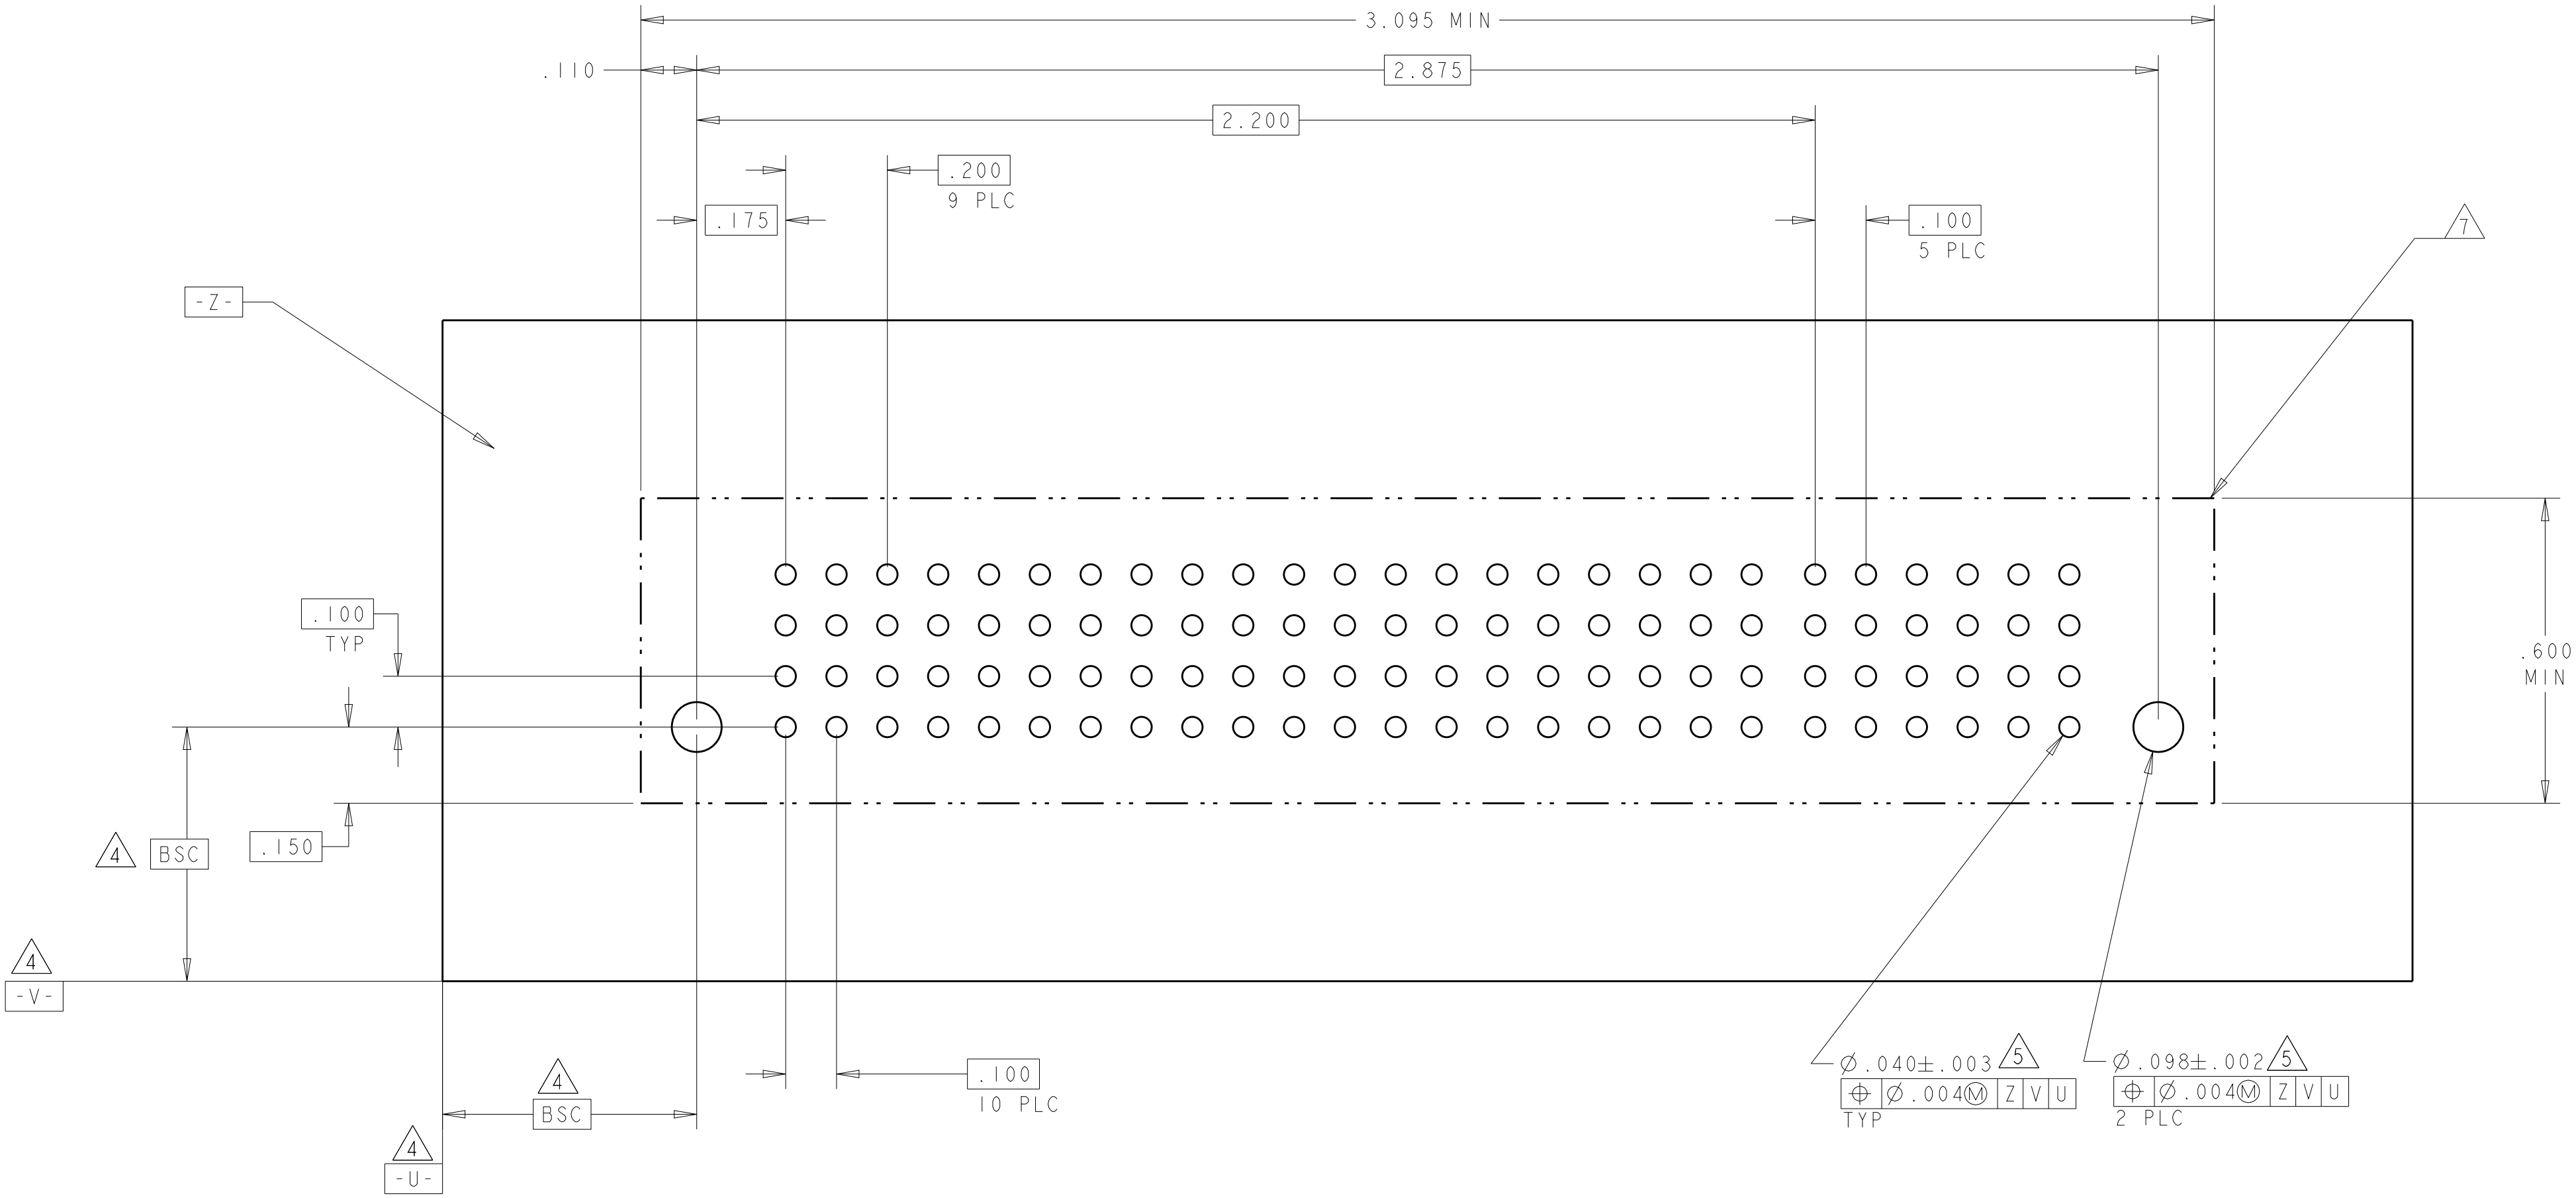

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: D. ZHU
CHK: S. ZHAO
APVD: S. ZHAO

DATE: 15NOV2007

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.
1 PLC ±.
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

PRODUCT SPEC
108-2292

APPLICATION SPEC
114-13251

WEIGHT

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450820

RESTRICTED TO


SCALE

SHEET 19 OF 20

REV G8

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL				POWER				
			LP1	LP2	LP3	1	2	3	4	LP4	LP5	LP6	LP7	
2-6450820-5	D	 HD	 LZ	 LZ	 LZF					 LZ	 LZ	 LZ	 LZ	 HD
	C					EV	EV	EV	ES					
	B					EV	EV	EV	EV					
	A					EV	EV	EV	EV					
	3LP + 16S + 4LP													

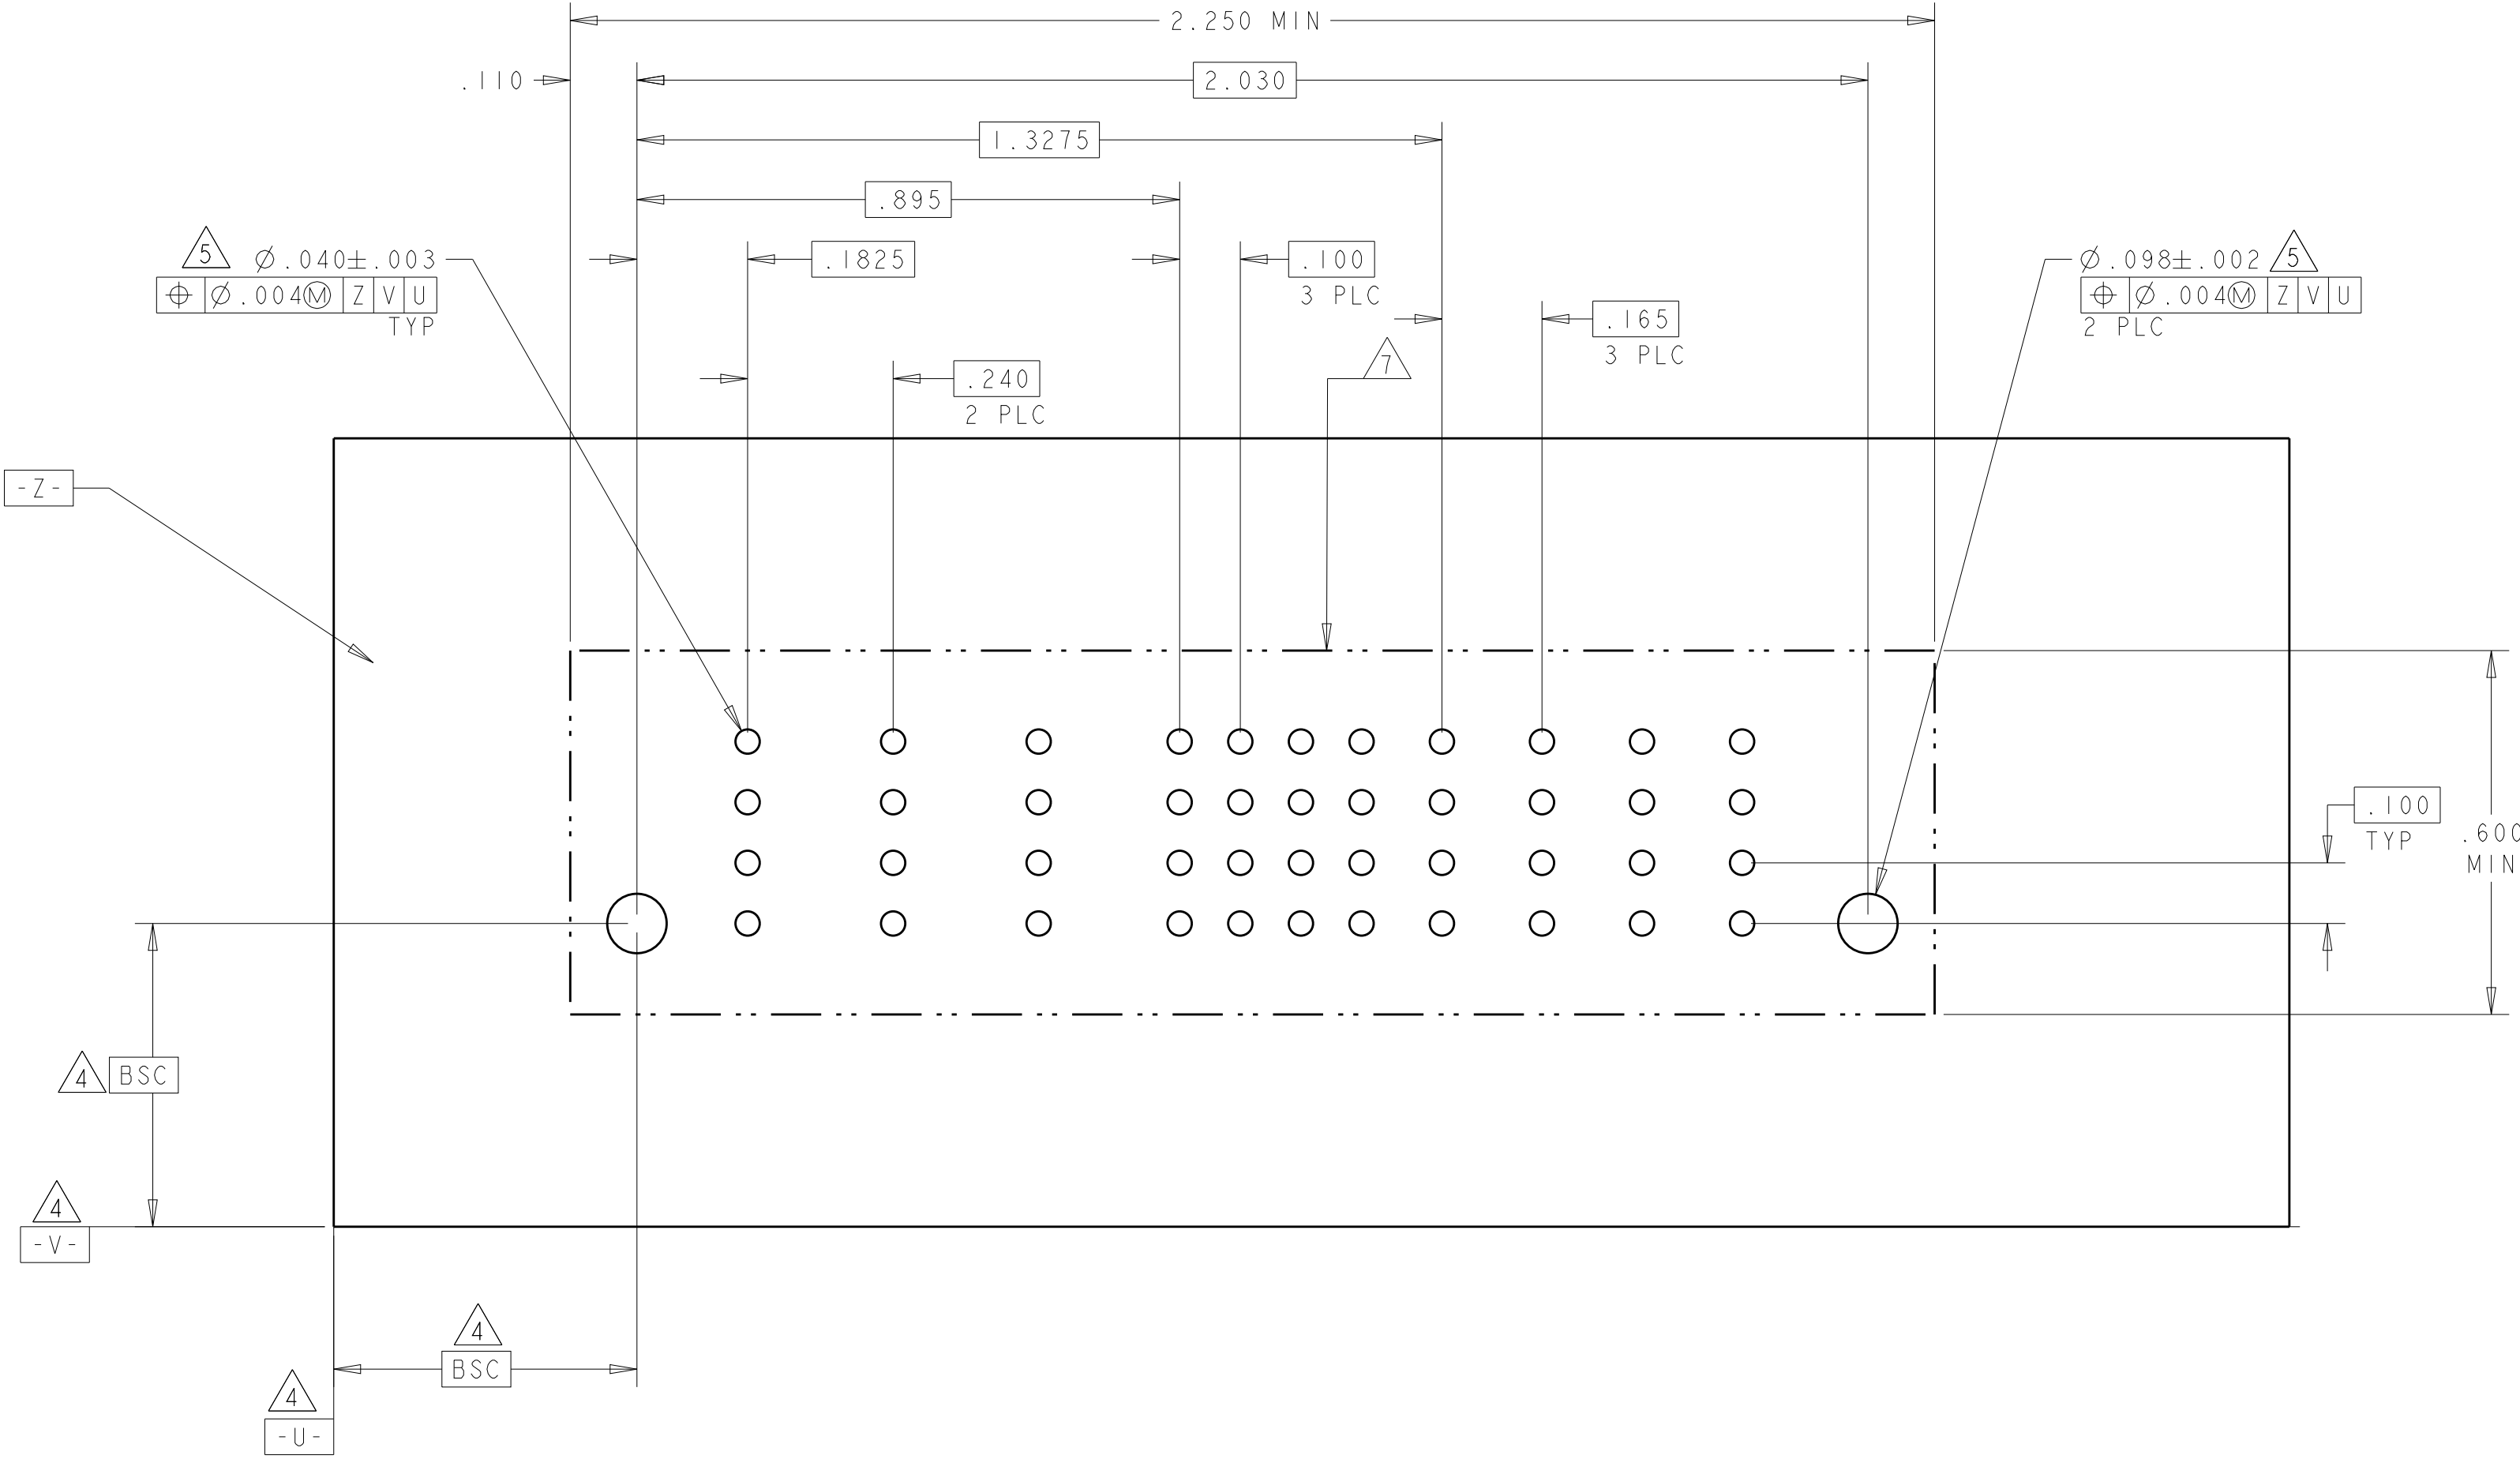

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450820

RESTRICTED TO
-

Customer Drawing

SCALE
-

SHEET
20

OF
20

REV
G8

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9