
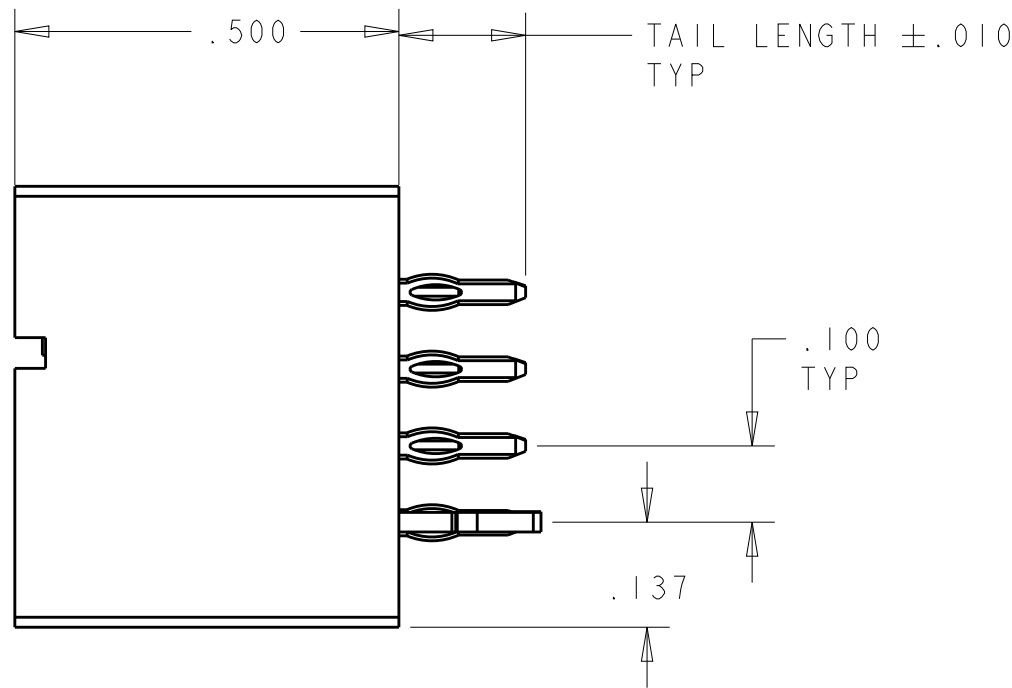
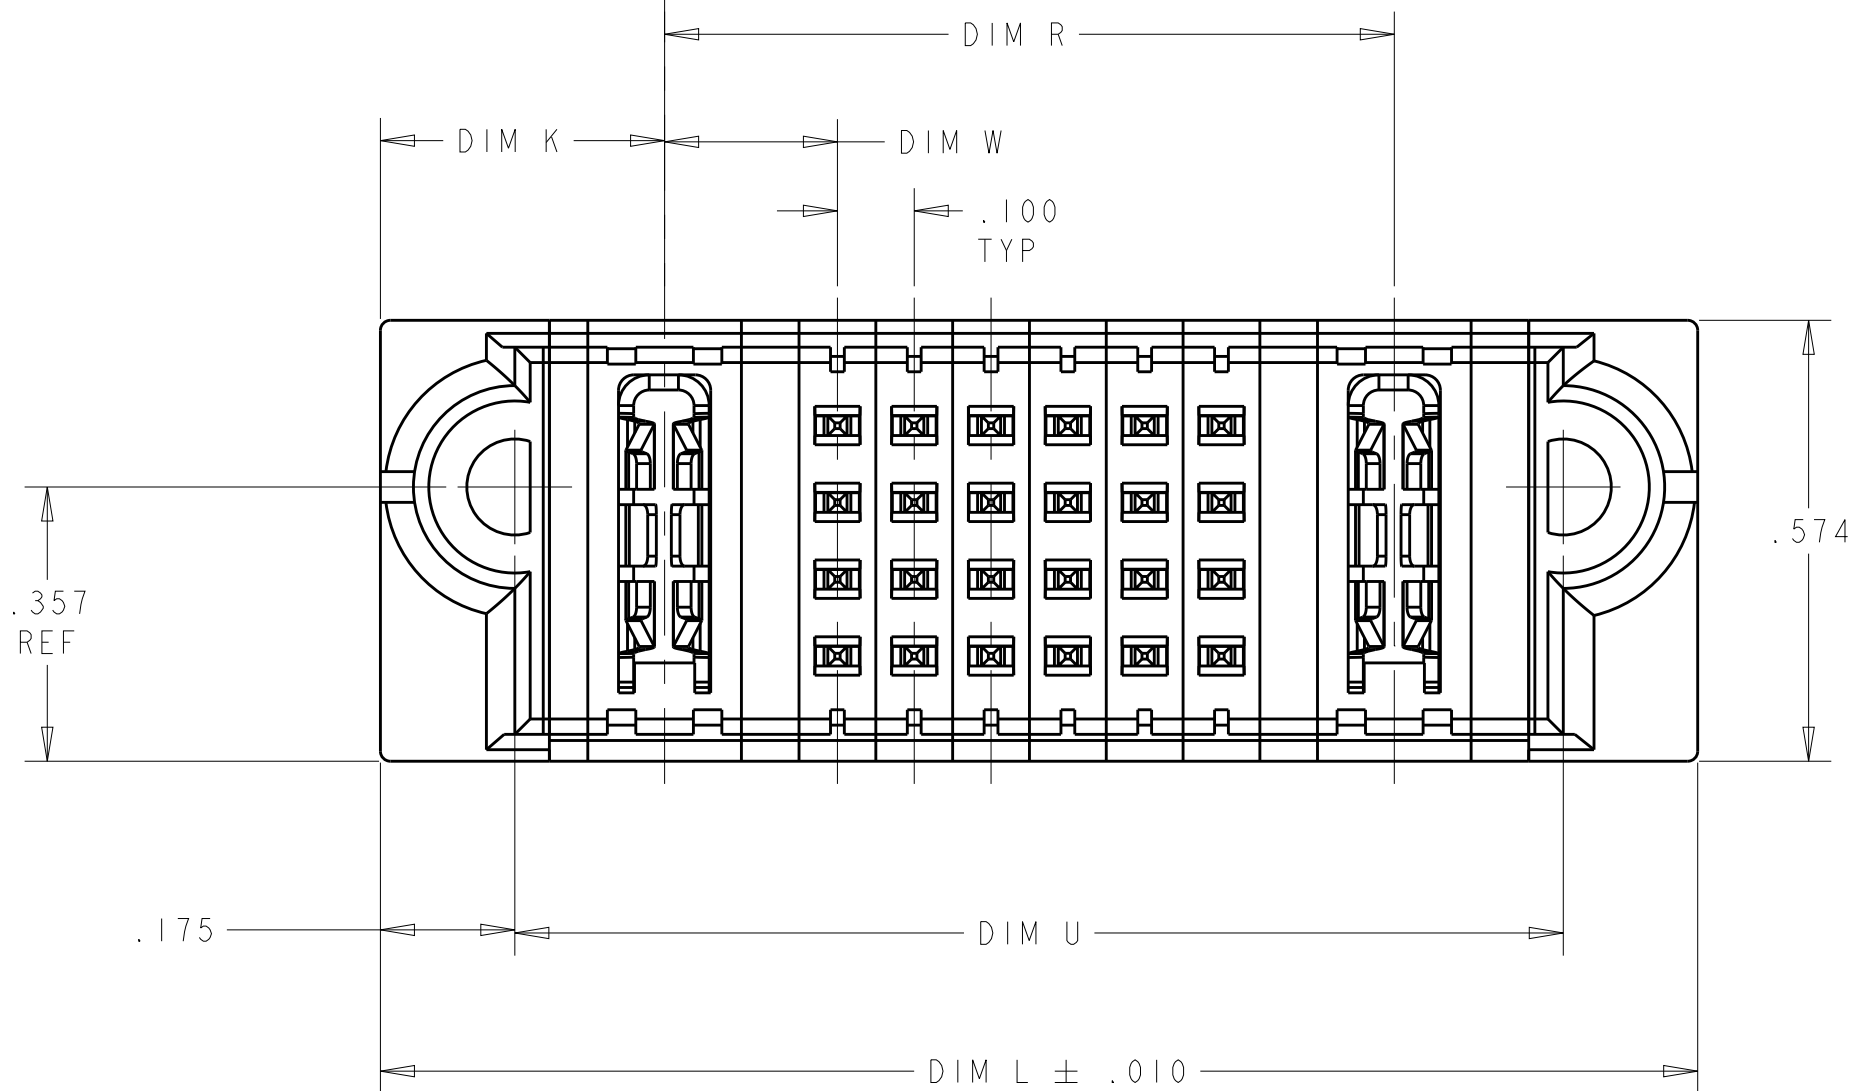
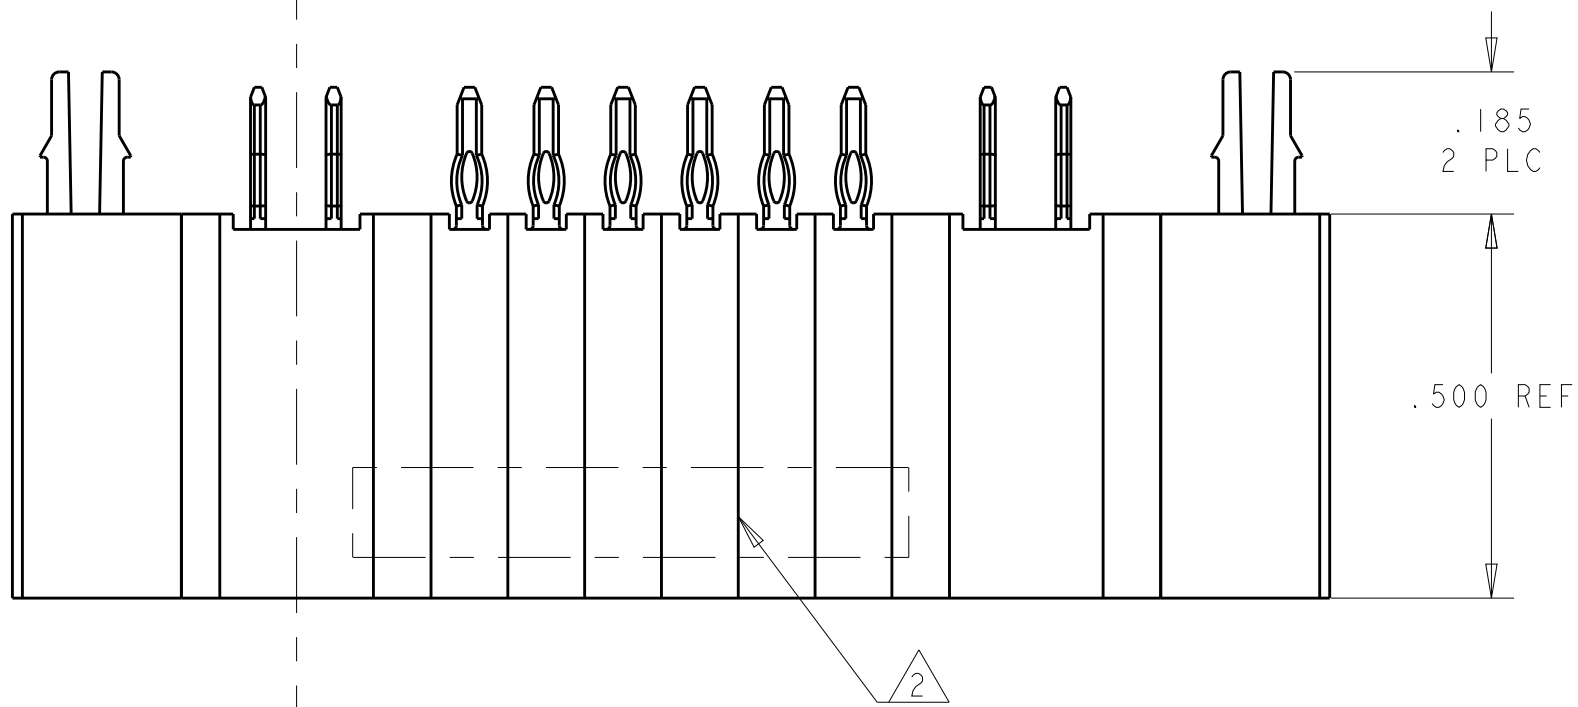


LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			G6	ADD NEW PART -25	19AUG2013	AY	SZ	
			G7	UPDATE -25 MATING SEQUENCE	29AUG2013	AY	SZ	
			G8	UPDATE -25 MATING SEQUENCE	30AUG2013	AY	SZ	

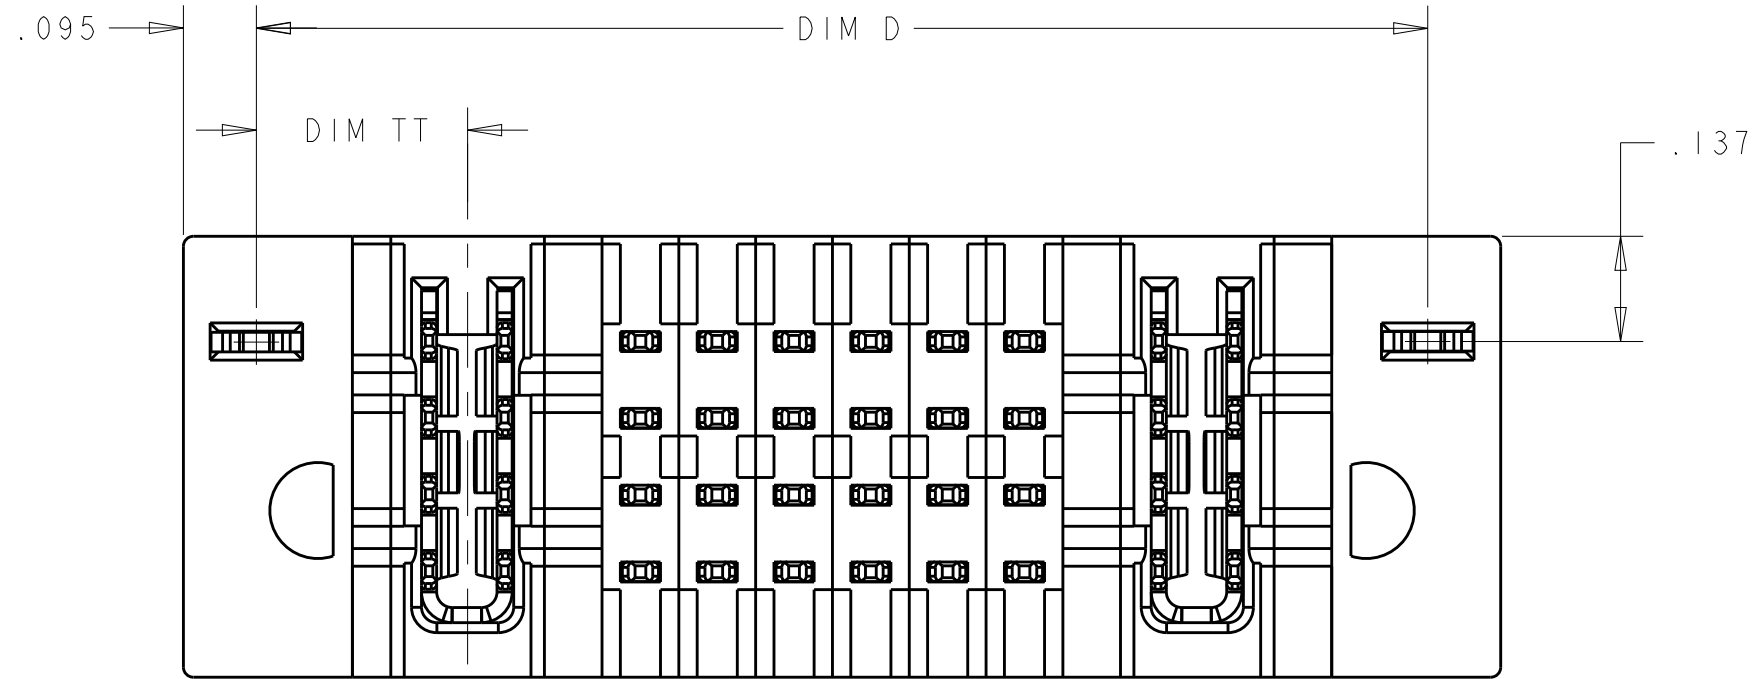

- 1

HEADER HOUSING: THERMO PLASTIC, BLACK, UL94 V-O; CONTACTS AND RETENTION CLIPS: COPPER ALLOY.
- 2

CONTACT PLATING:NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- 3

"AMP", PART NUMBER AND DATE CODE MARKED IN THIS AREA. PARTS UNDER 2.50 LONG MAY BE MARKED ON BOTH SIDES.
- 4

DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5

PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 6

A SEATING TOOL IS REQUIRED TO SEAT THE HEADER ON THE P.C. BOARD. PLEASE REFER TO THE 114-13251 APPLICATION SPEC.
- 7


MECHANICAL CONNECTOR KEEP OUT ZONE.
- 8

DETAIL DIM SEE PART VIEW
- 9

FOR THE CONFIGURATION WITH VENT, PLEASE REFER TO SHEET 2.
- 10

FOR THE CONFIGURATION LP/S/LP WITH VENT, PLEASE REFER TO SHEET 3.
- 11

FOR THE CONFIGURATION LP/S/P, WITH VENT, PLEASE REFER TO SHEET 4.

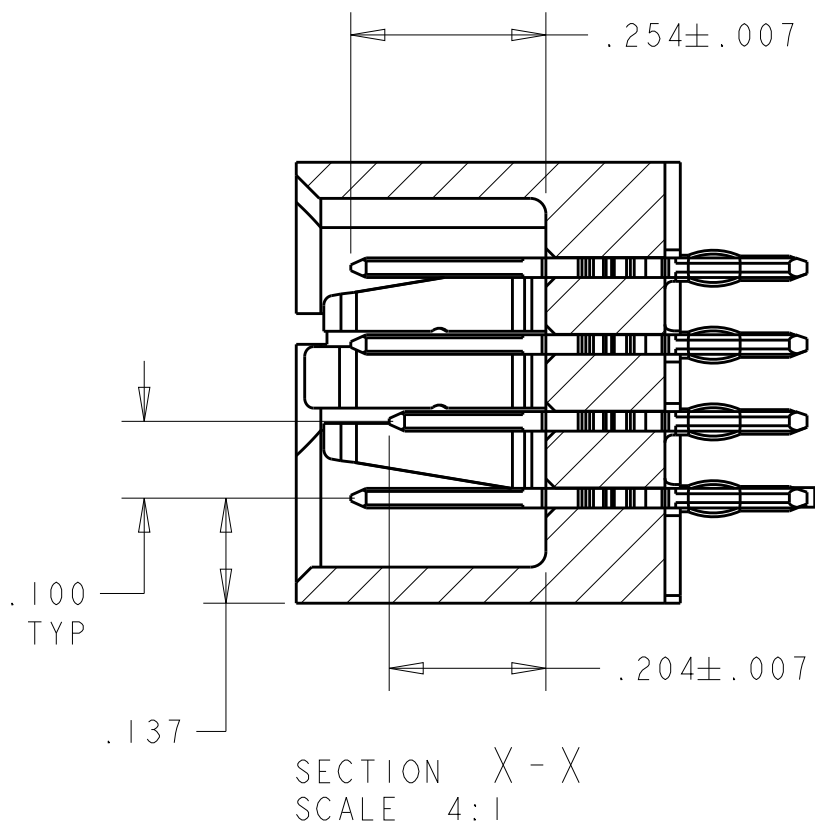

G6	.240	.165	.1825	2.220	1.870	2.030	1.145	.7125	.2775	3LP + 16S + 4LP	2-6450820-5
	.200	-	.225	3.065	2.715	2.875	-	1.975	.320	10HDP + 24S	2-6450820-3
	.300	-	.275	1.790	1.440	1.600	-	1.150	.370	4ACP + 4S	2-6450820-2
	.115	.250	.2075	2.555	2.205	2.365	1.4075	.7325	.3025	6LP + 24S + 3P	2-6450820-1
	-	-	.1825	1.120	.770	.930	.565	.1575	.2775	1LP + 16S + 1LP	2-6450820-0
	.250	.250	.250	3.540	3.190	3.350	1.850	1.175	.345	5P + 24S + 5P	1-6450820-9
	.250	.250	.225	4.140	3.790	3.950	2.500	1.200	.320	5P + 48S + 5P	1-6450820-8
	.250	-	.225	4.640	4.290	4.450	-	2.950	.320	12P + 48S	1-6450820-7
	.250	-	.225	2.415	2.065	2.225	-	1.425	.320	6P + 20S	1-6450820-5
	-	.300	.175	2.665	2.315	2.475	.575	-	.270	20S + 6ACP	1-6450820-4
	.300	.300	.225	2.840	2.490	2.650	1.600	.850	.320	3ACP + 24S + 3ACP	1-6450820-3
	.250	.250	.250	4.040	3.690	3.850	2.100	1.425	.345	6P + 24S + 6P	1-6450820-1
G3	.250	.250	.225	6.240	5.890	6.050	3.850	1.950	.320	8P + 72S + 8P	6450820-9
	.250	.250	.225	6.240	5.890	6.050	3.850	1.950	.320	8P + 72S + 8P	6450820-8
	8	8	.250	5.390	5.040	5.200	8	8	.345	14P + 40S	6450820-7
	8	8	.250	5.390	5.040	5.200	8	8	.345	14P + 40S	6450820-6
	.250	.250	.250	2.640	2.290	2.450	1.200	.925	.345	4P + 8S + 4P	6450820-5
	.250	.250	.250	3.640	3.290	3.450	1.700	1.425	.345	6P + 8S + 6P	6450820-4
	.250	.250	.275	2.790	2.440	2.600	1.550	.675	.370	3P + 32S + 3P	6450820-3
	-	-	.250	1.540	1.190	1.350	.850	.175	.345	1P + 24S + 1P	6450820-2
	-	-	.275	1.715	1.365	1.525	.950	.225	.370	1P + 24S + 1P	6450820-1
DIM S	DIM T	DIM TT	DIM L	DIM U	DIM D	DIM R	DIM W	DIM K	DESCRIPTION	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.020
FINISH

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.020
FINISH

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251

WEIGHT
-

Customer Drawing

NAME
S. ZHAO

TE Connectivity

VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE

SIZE
A100779

CAGE CODE
6450820

DRAWING NO
-

RESTRICTED TO
-




SCALE
-

SHEET
1


OF
20

REV
G8

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-


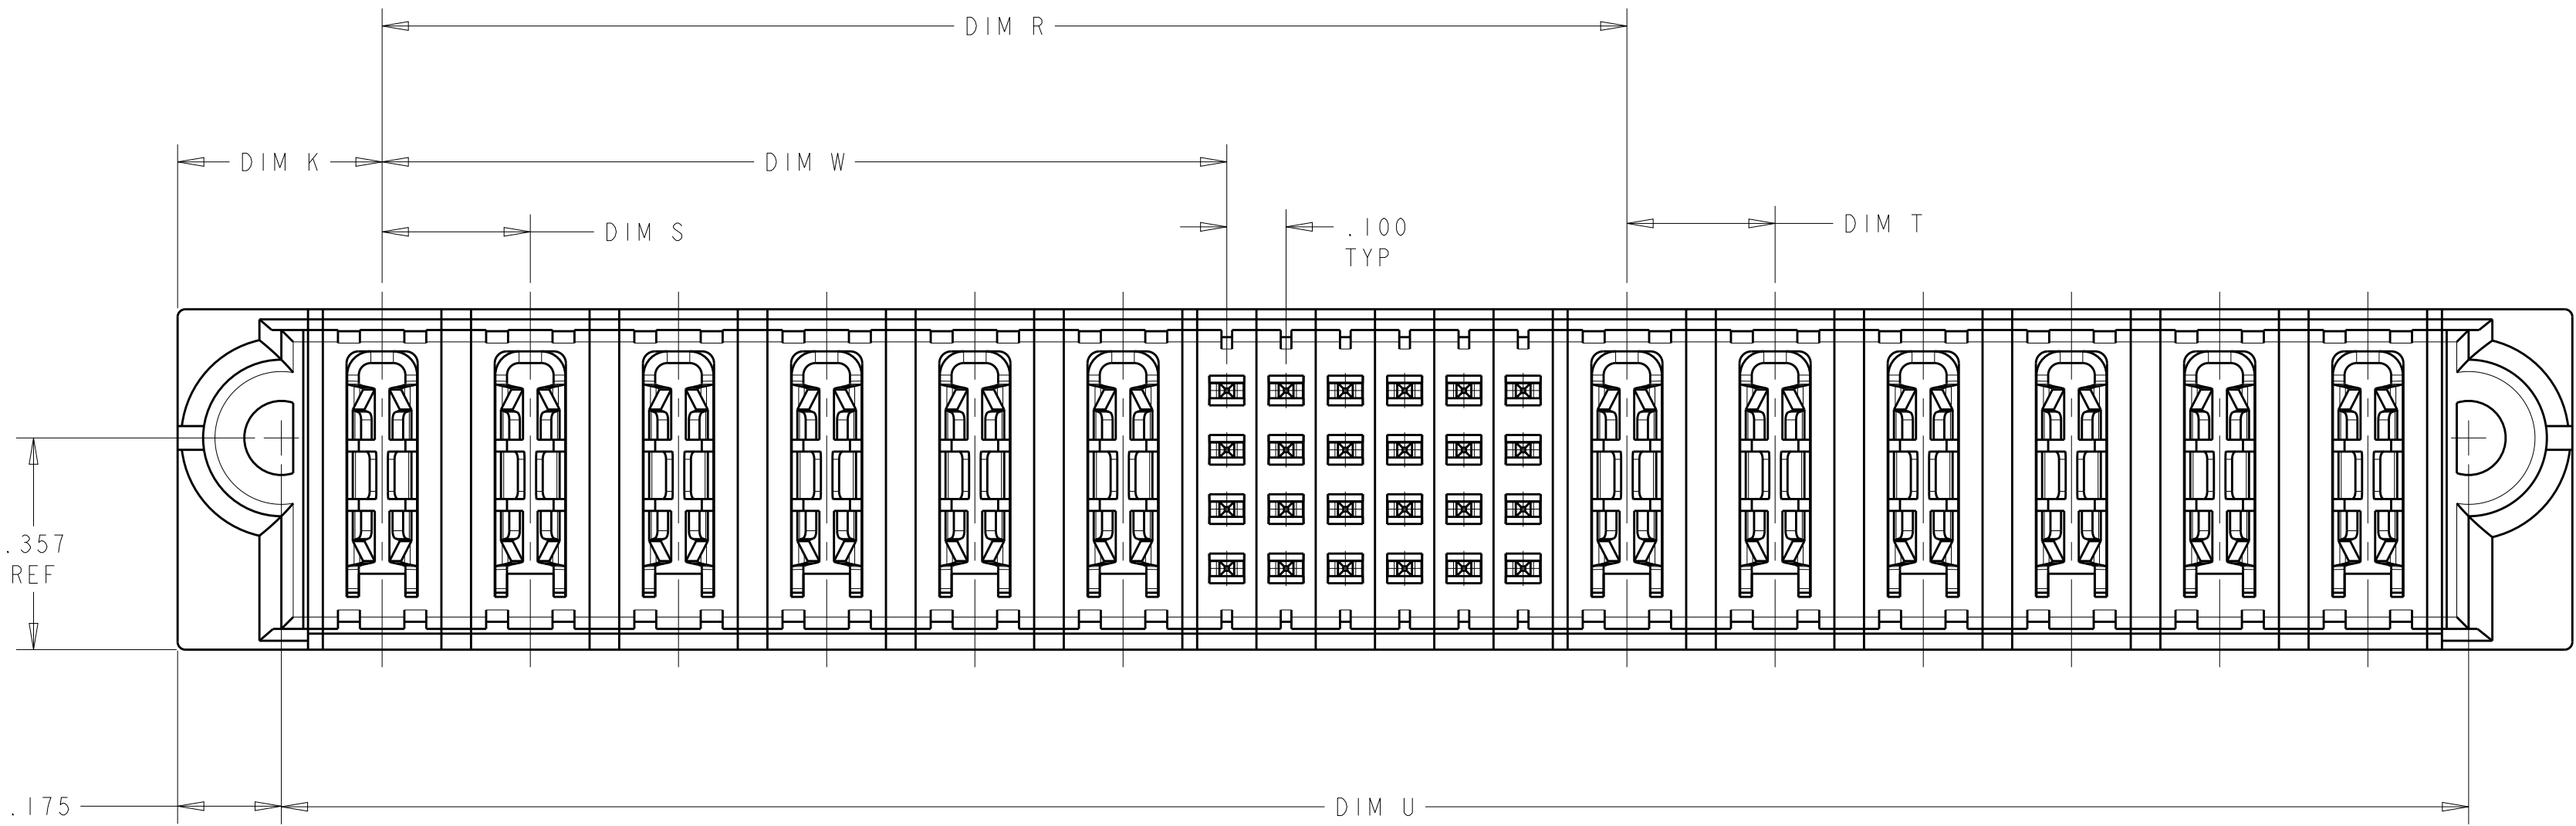
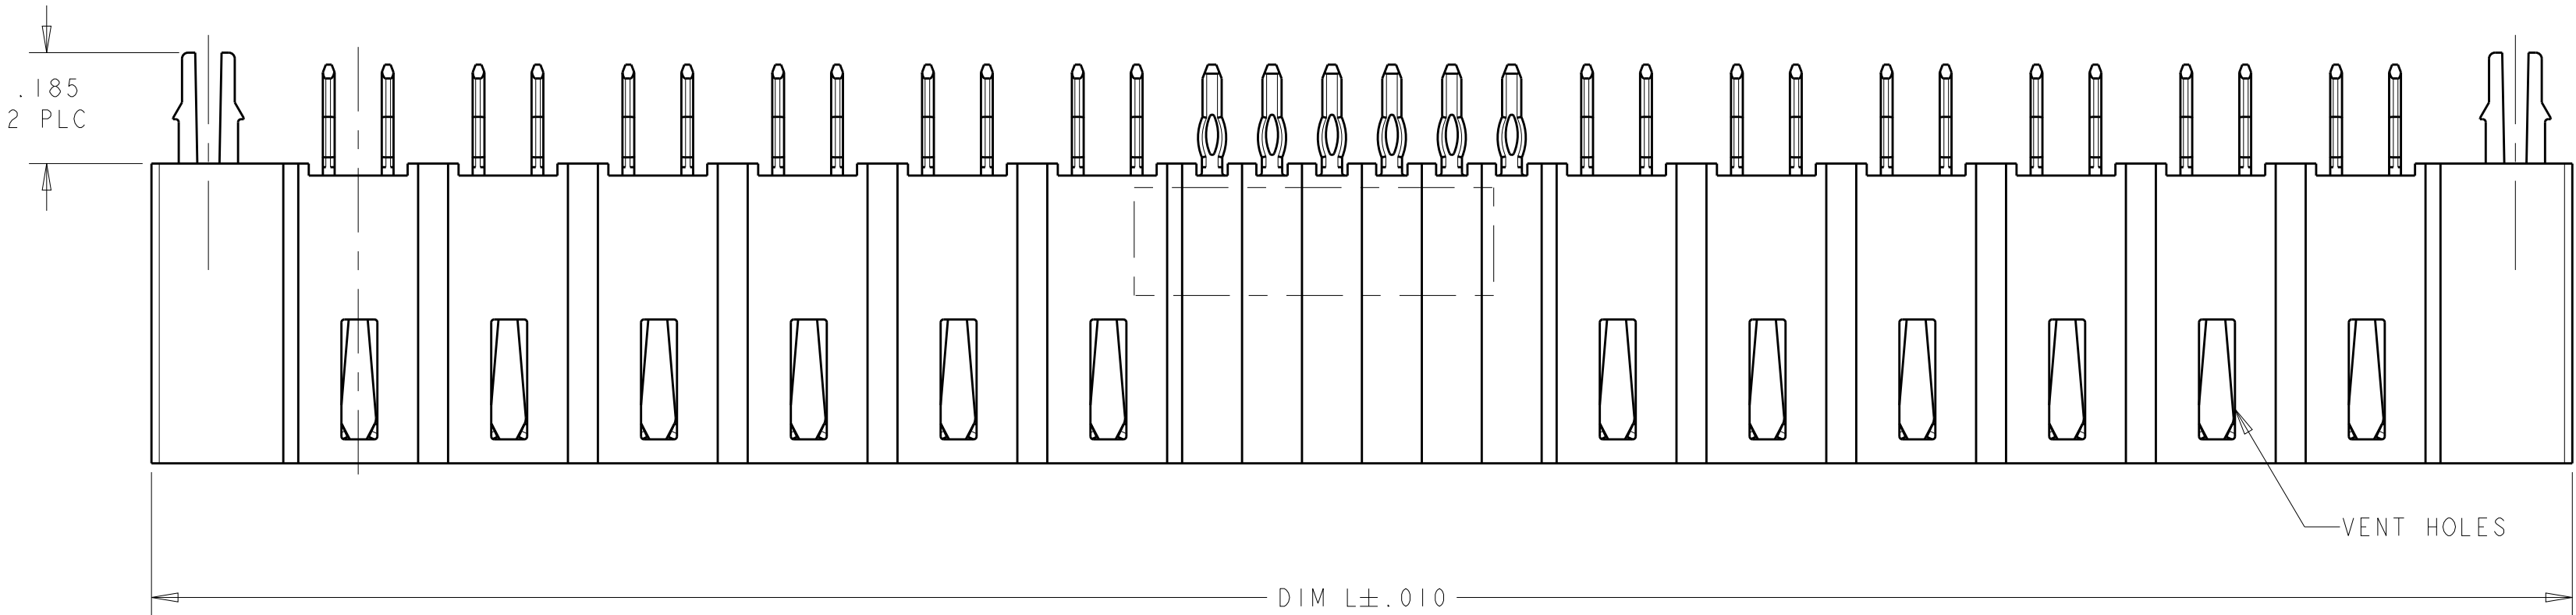
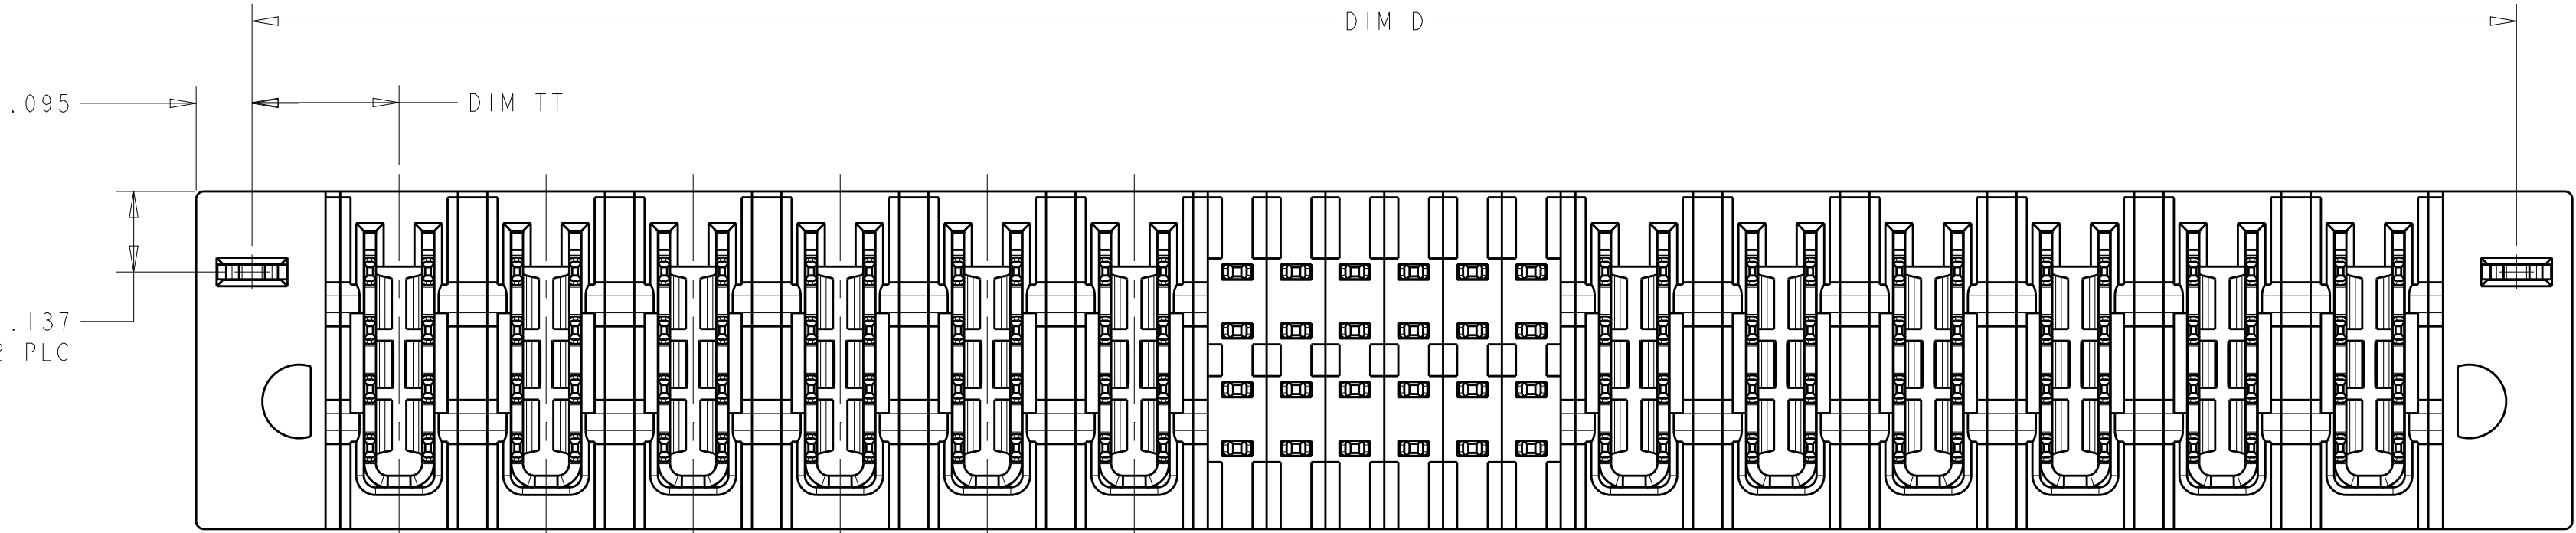


9 FOR THE CONFIGURATION WITH VENT
PART NO. 1-6450820-1

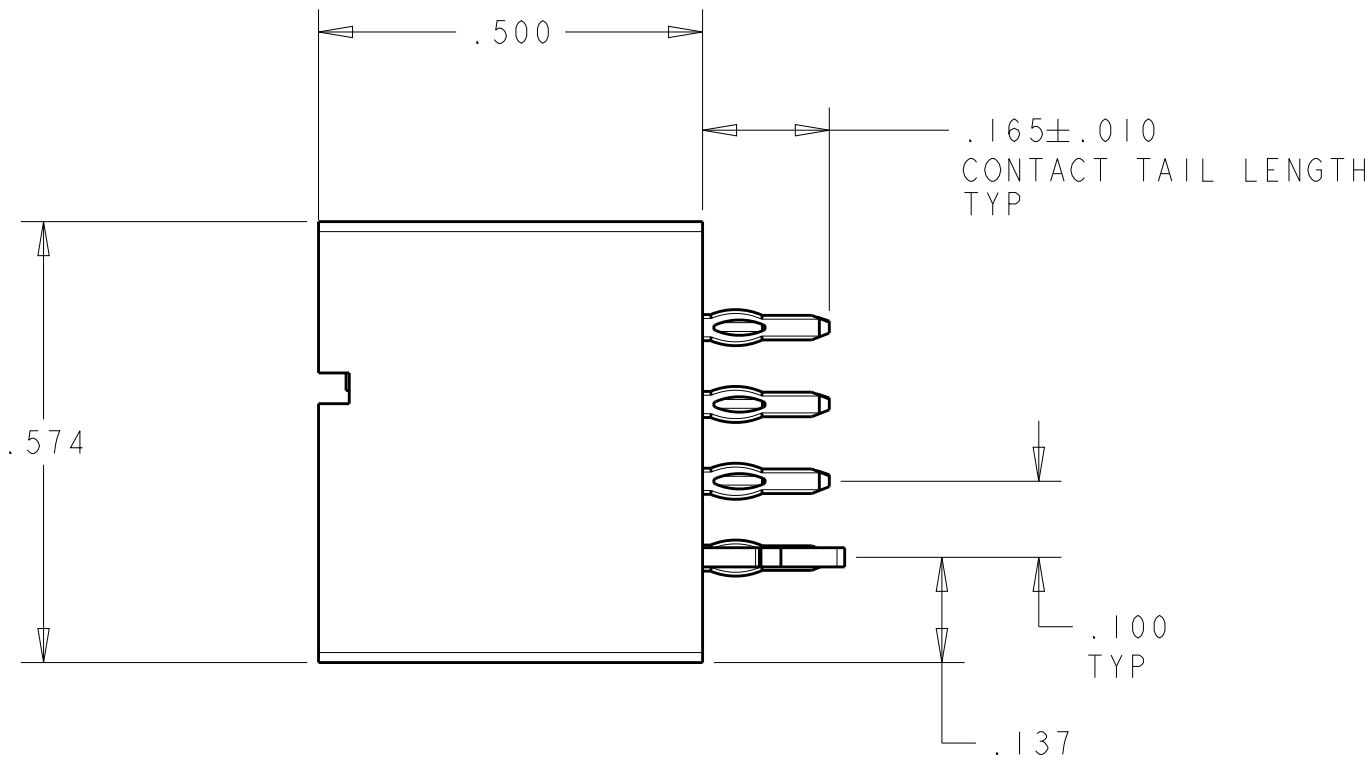


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		Customer Drawing	
MATERIAL		FINISH		SCALE	
-		-		SHEET 2 OF 20	
				REV G8	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

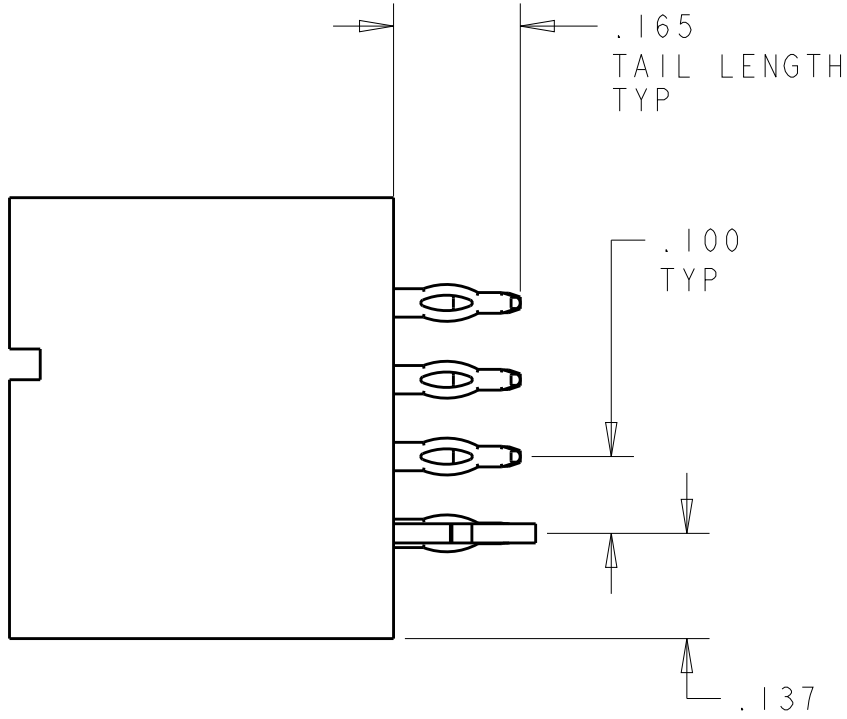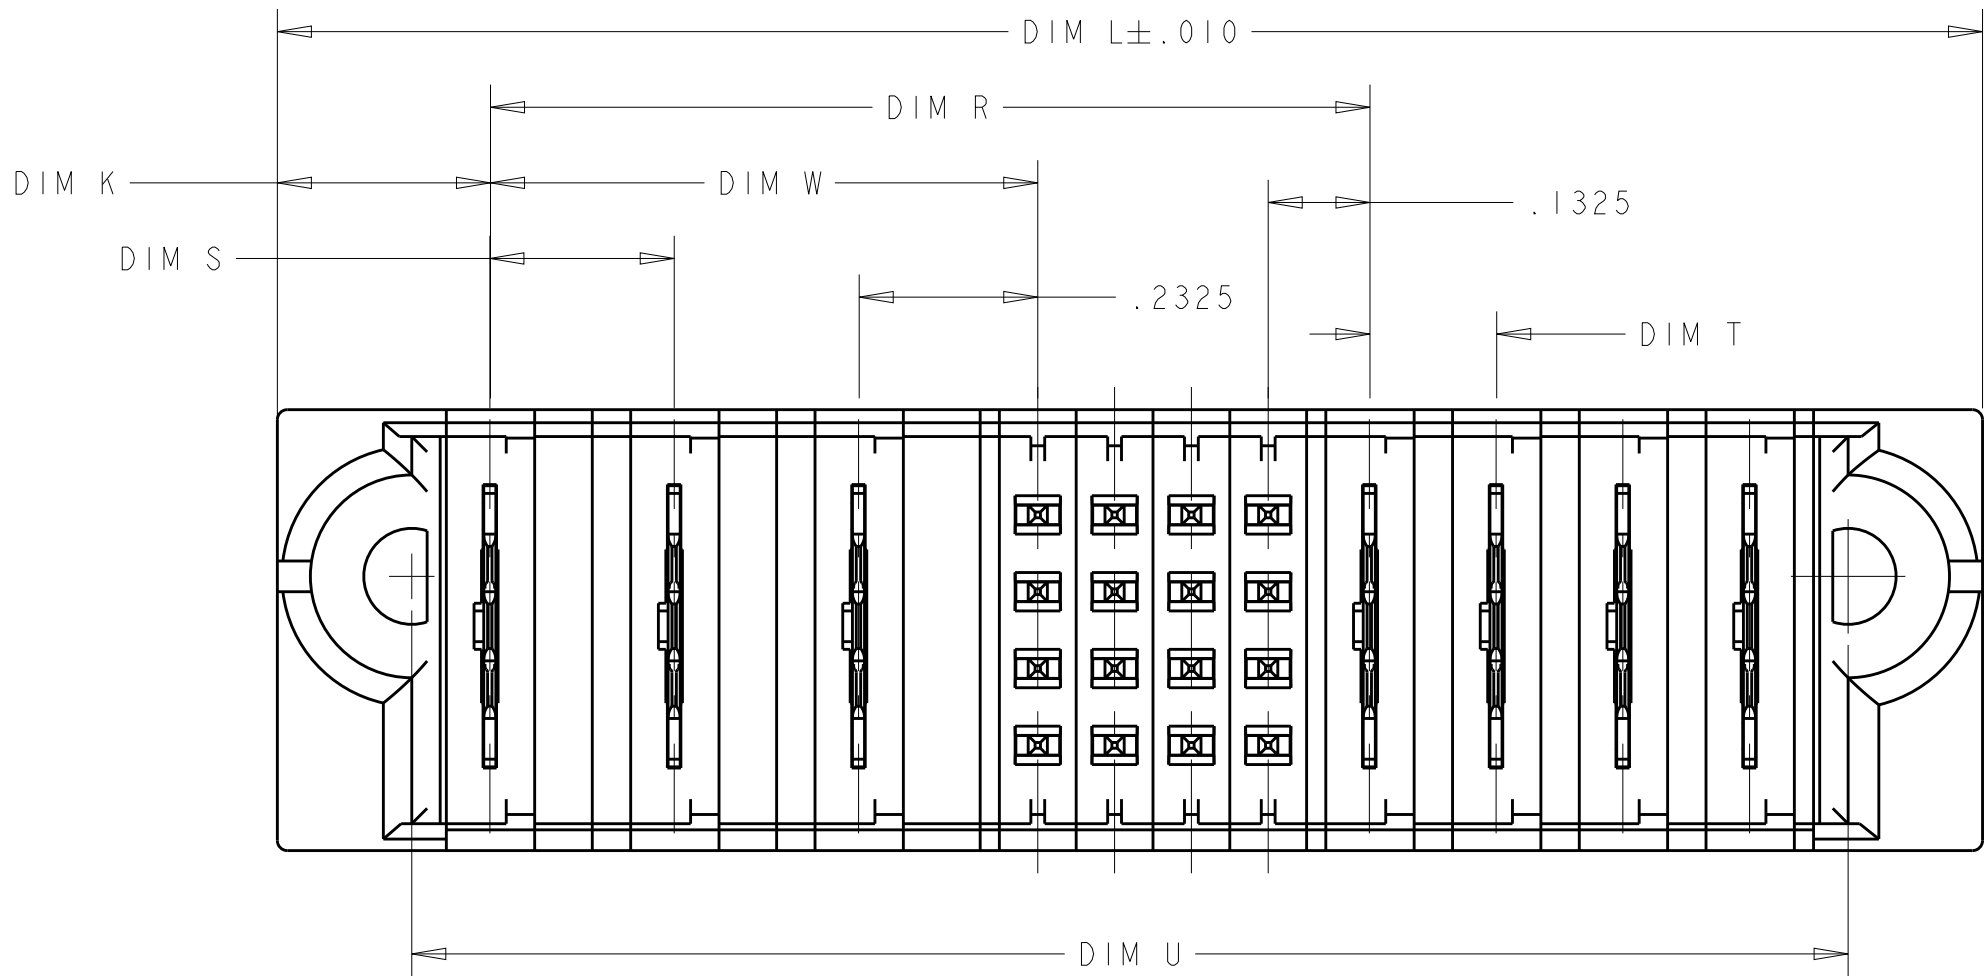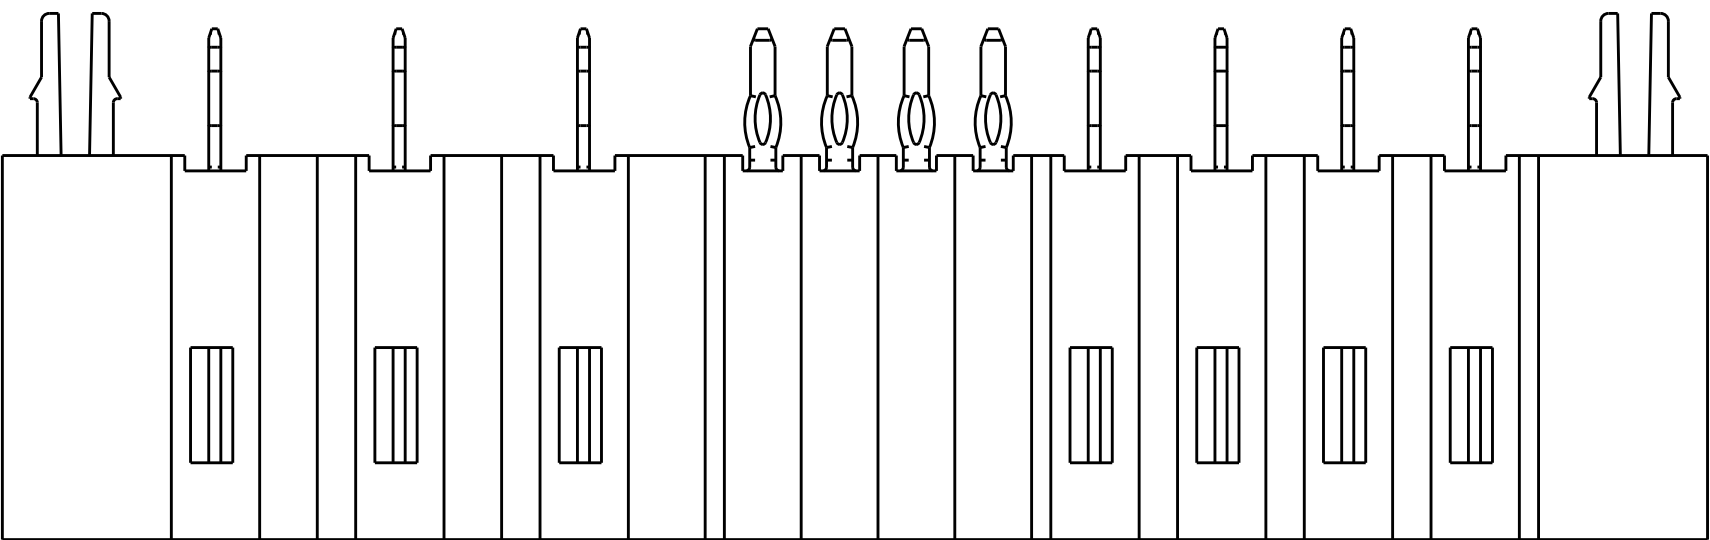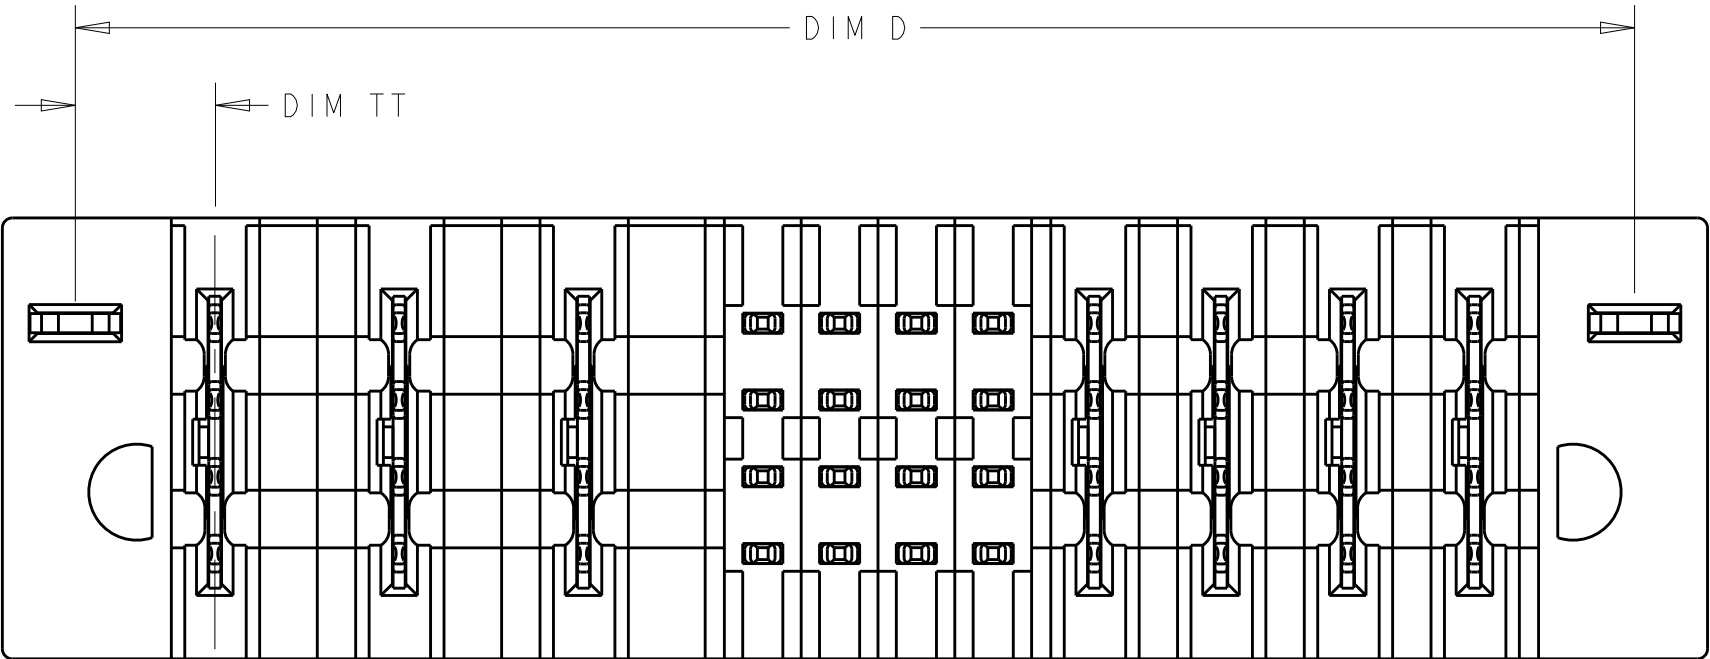

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
INCHES		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES #2° FINISH		PRODUCT SPEC	
				108-2292	
				APPLICATION SPEC	
				114-13251	
MATERIAL		WEIGHT		SIZE	
-		-		A100779	
		Customer Drawing		CAGE CODE	
				DRAWING NO	
				6450820	
				RESTRICTED TO	
				-	
				SCALE	
				-	
				SHEET	
				3	
				OF	
				20	
				REV	
				G8	


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

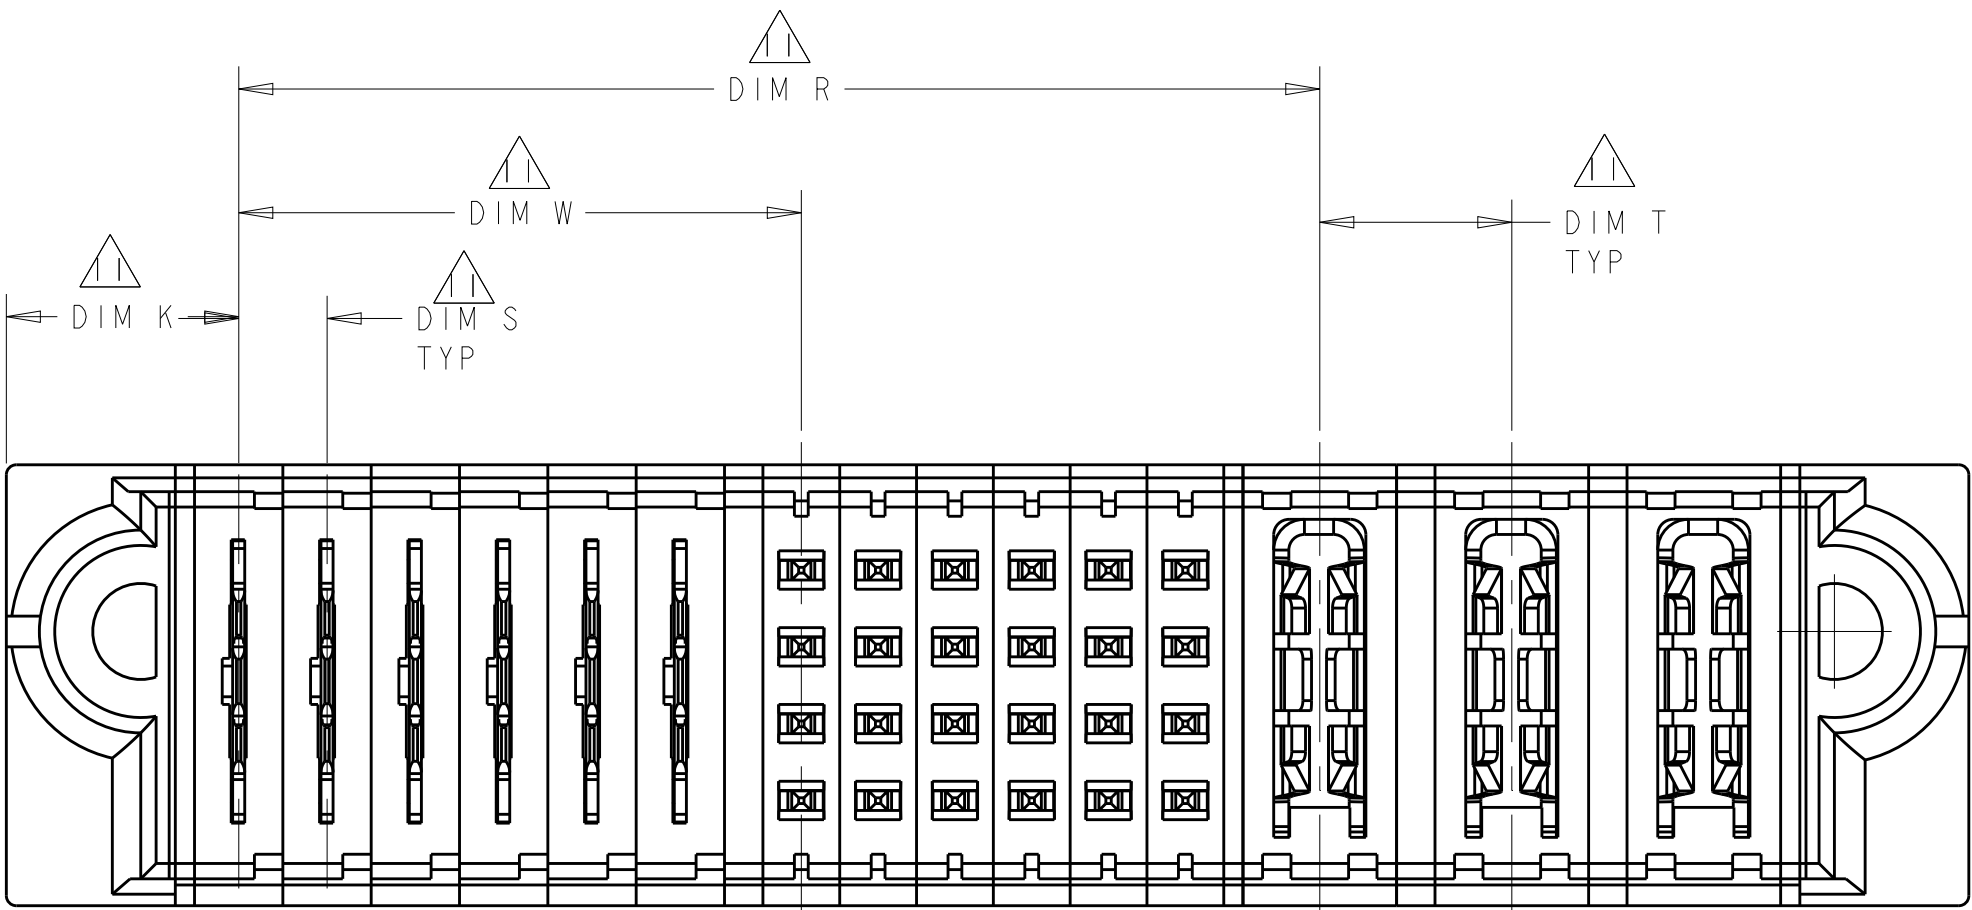

FOR THE CONFIGURATION LP/S/P WITH VENT
OTHER DIMSENSIONS PLEASE REFER TO SHEET 2



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	 TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
INCHES		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH			
		114-13251		RESTRICTED TO	
MATERIAL		WEIGHT		-	
-		-		-	
		Customer Drawing		SCALE	
				SHEET 4 OF 20	
				REV G8	


PART NUMBER	ROWS		SIGNAL					POWER										
			1	2	3	4	5	P1	P2	P3	P4	P5	P6					
1-6450820-4	D		EV	EV	EV	EV	EV		VM		VM		VM					
	EV		EV	EV	EV	EV	VM								VM	VM	VM	VM
	EV		EV	EV	EV	EV	VM								VM	VM	VM	VM
	ES		EV	EV	EV	EV	EV								VM	VM	VM	VM
20S + 6ACP																		

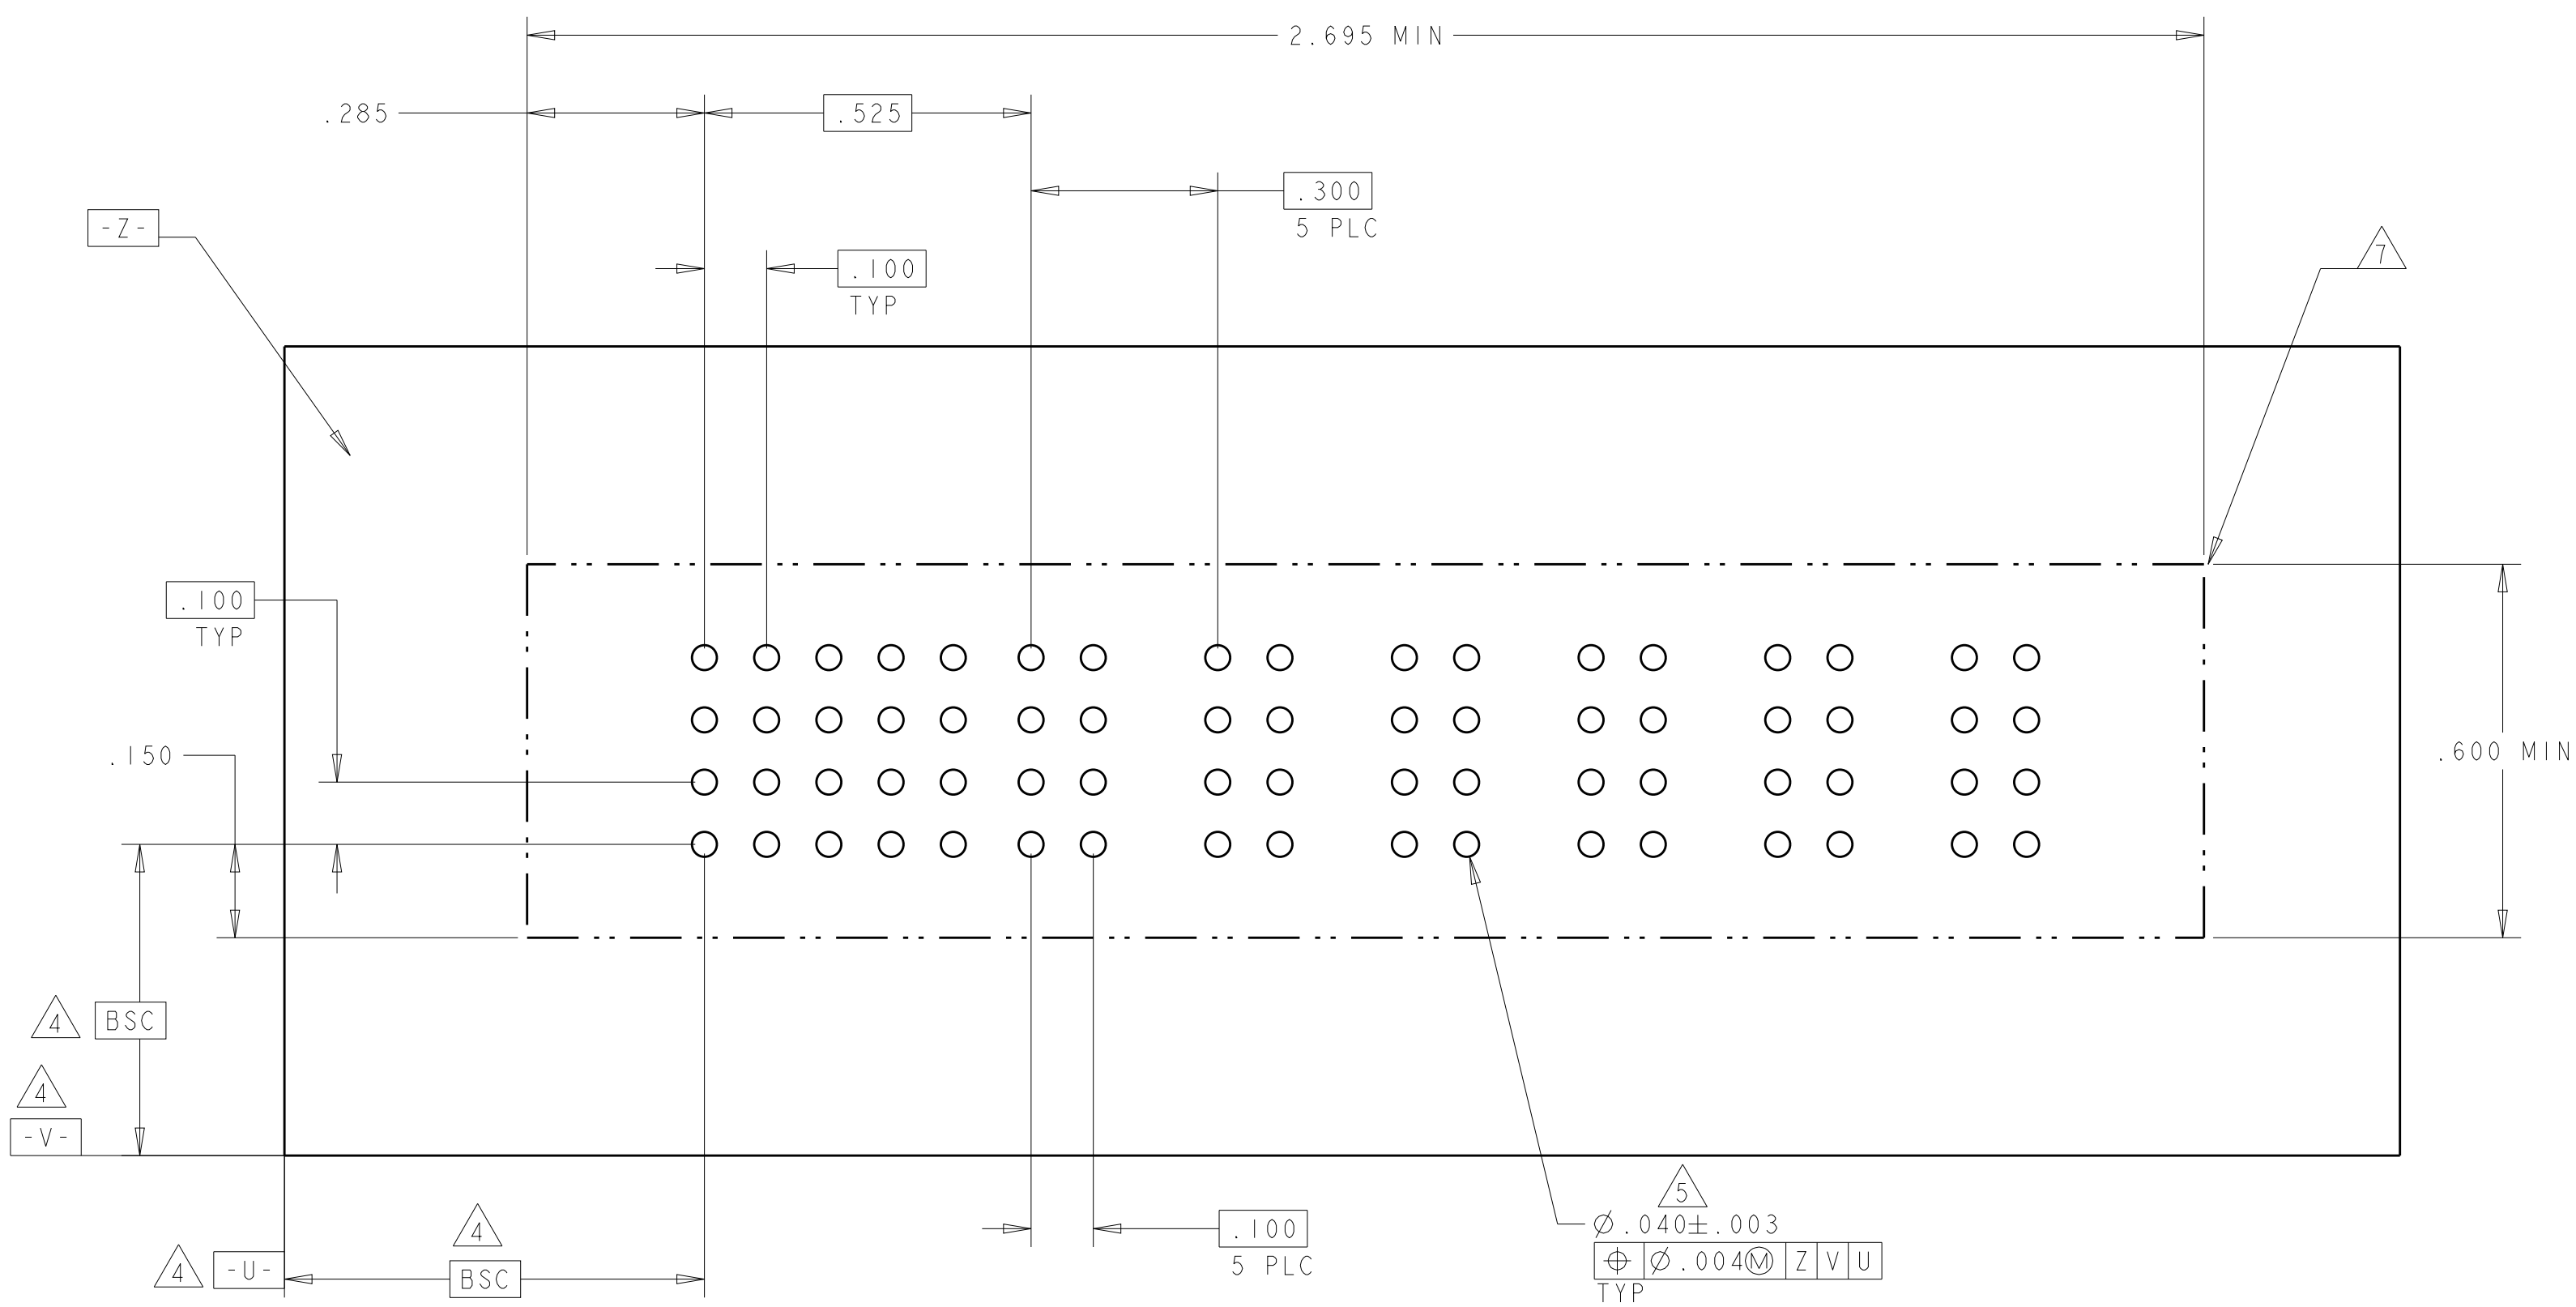

.165"	LOW POWER CONTACT	MFBLL	LZF
.165"	LOW POWER CONTACT		LZ
.165"	SIGNAL CONTACT	MFBLL	EF
-	HOLD DOWN		HD
.165"	SIGNAL CONTACT	MLBF	ES
.165"	SIGNAL CONTACT	STD	EV
.165"	POWER CONTACT		VM
TAIL LENGTH	DESCRIPTION		CODE

4805 (3/11)



PART NUMBER	ROWS		POWER						SIGNAL					
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	
1-6450820-5	D C B A													
6P + 20S														


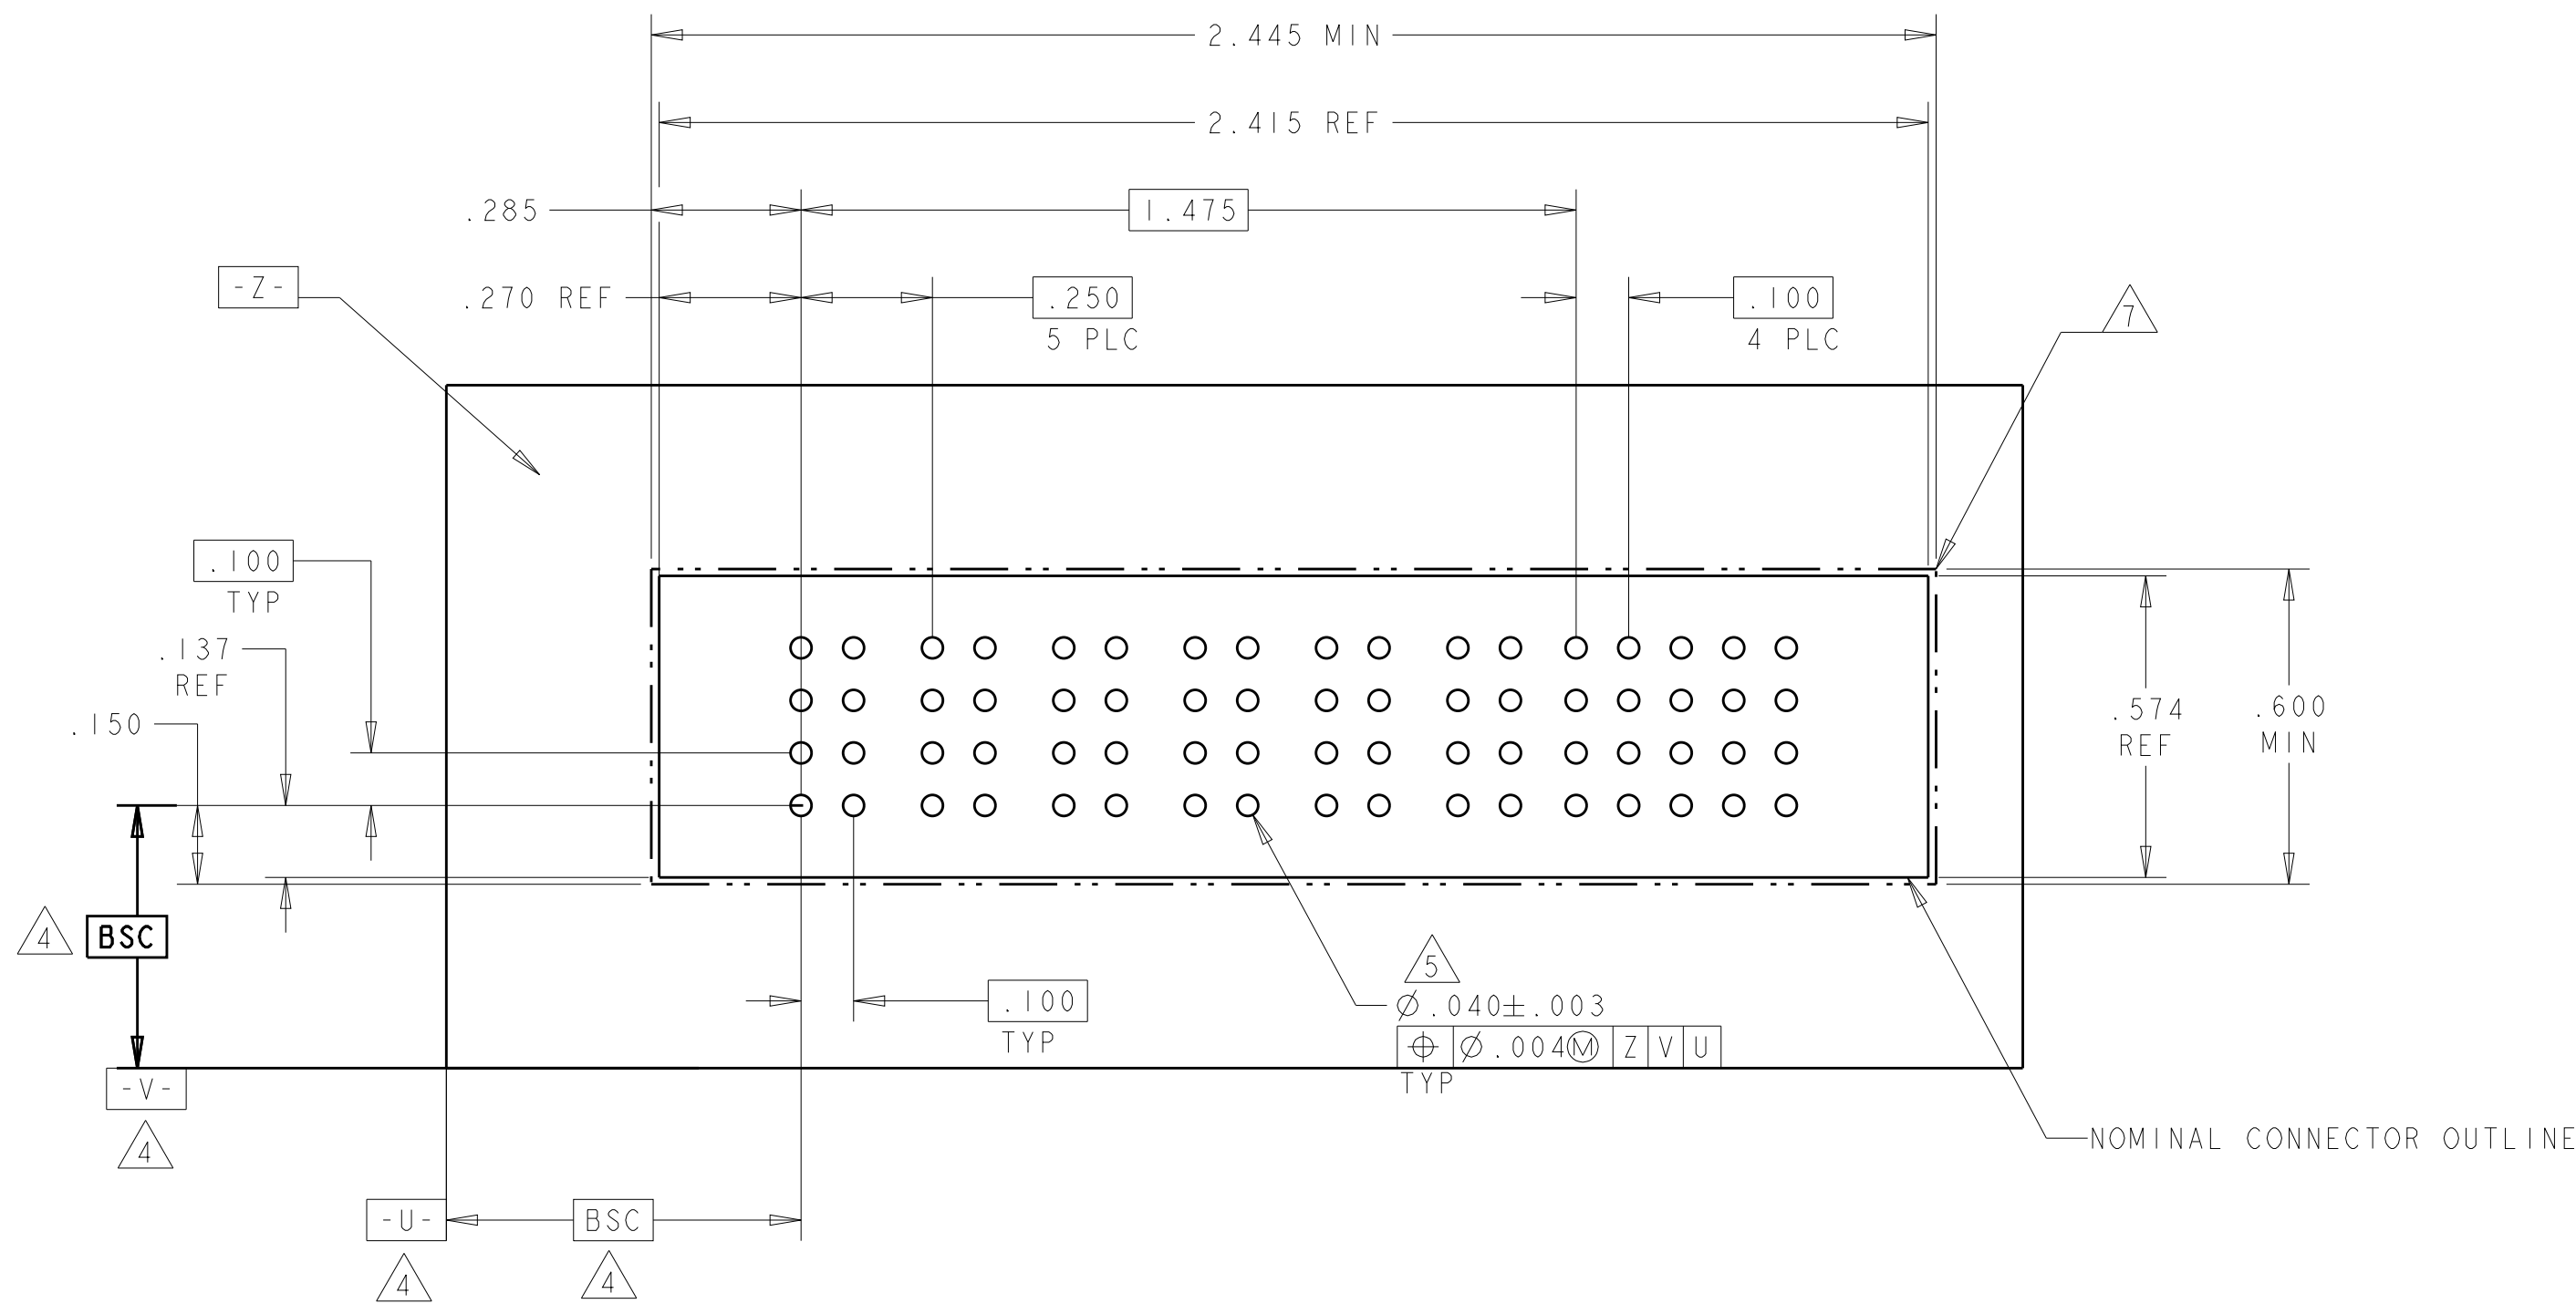
4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER			SIGNAL								POWER			
			P1	P2	P3	1	2	3	4	5	6	7	8	P4	P5	P6	
6450820-3	D C B A		VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM	VM	
						EV	EV	EV	EV	EV	EV	EV	EV				
						EV	EV	EV	EV	EV	EV	EV	EV				
						EV	EV	EV	EV	EV	EV	EV	EV				
3P + 32S + 3P																	

PART NUMBER	ROWS		POWER						SIGNAL		POWER						
			P1	P2	P3	P4	P5	P6	1	2	P7	P8	P9	P10	P11	P12	
6450820-4	D C B A								EV	EV							
									EV	EV							
									EV	EV							
									EV	EV							
6P + 8S + 6P																	



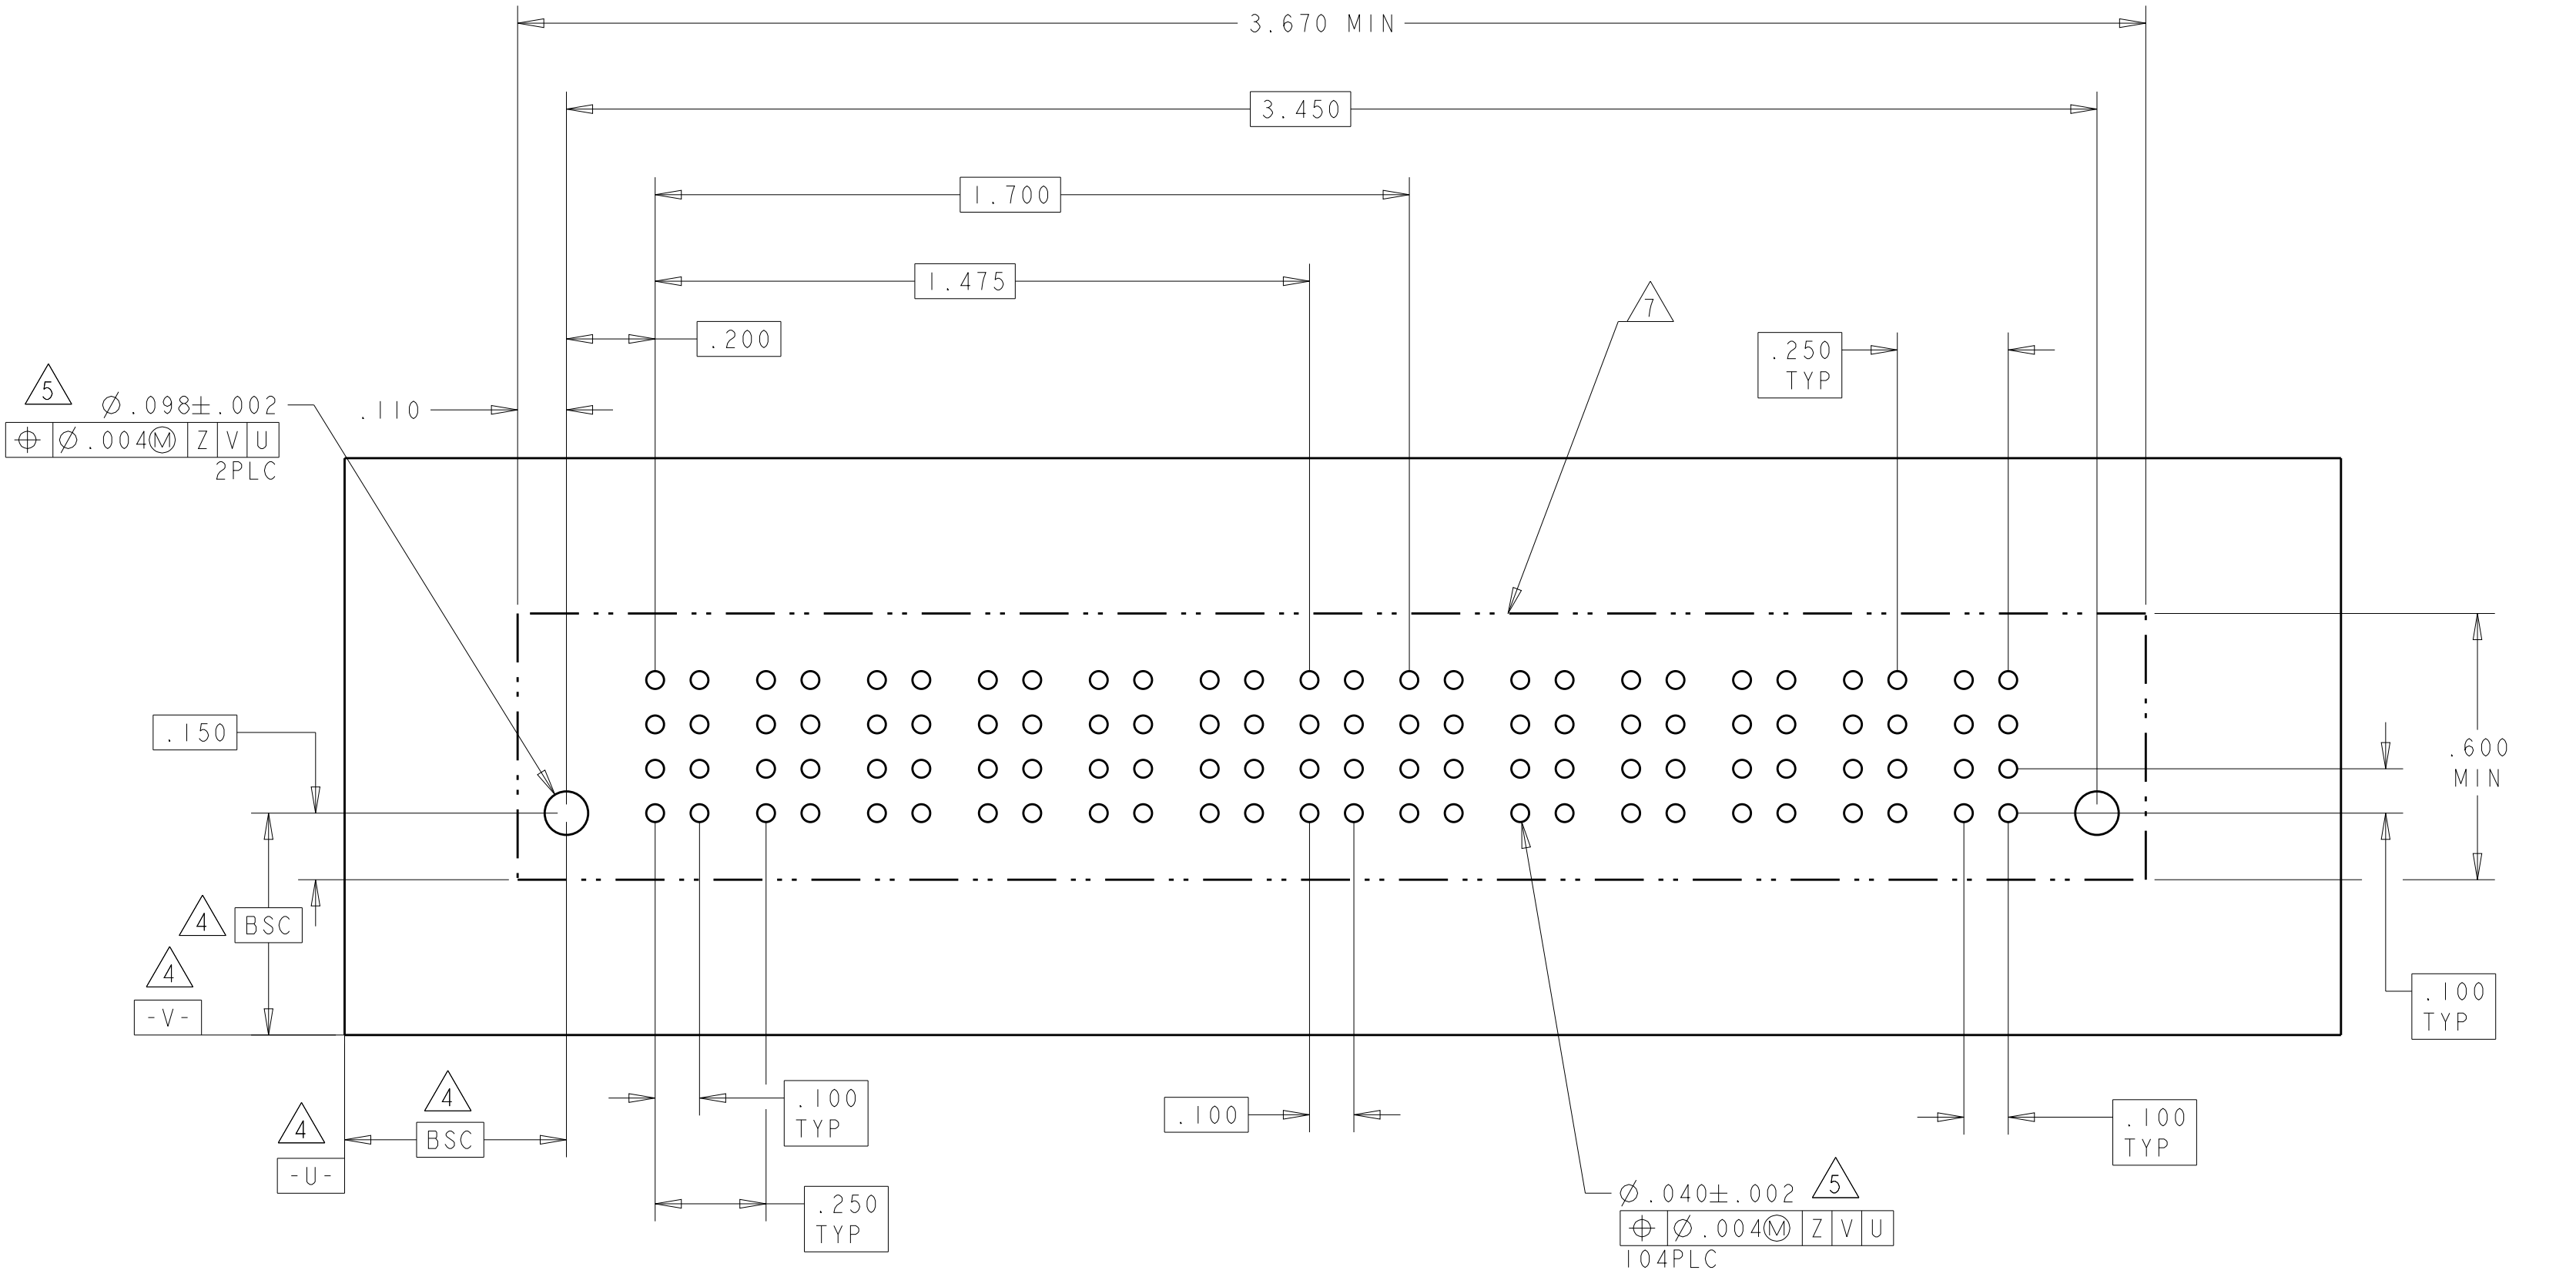
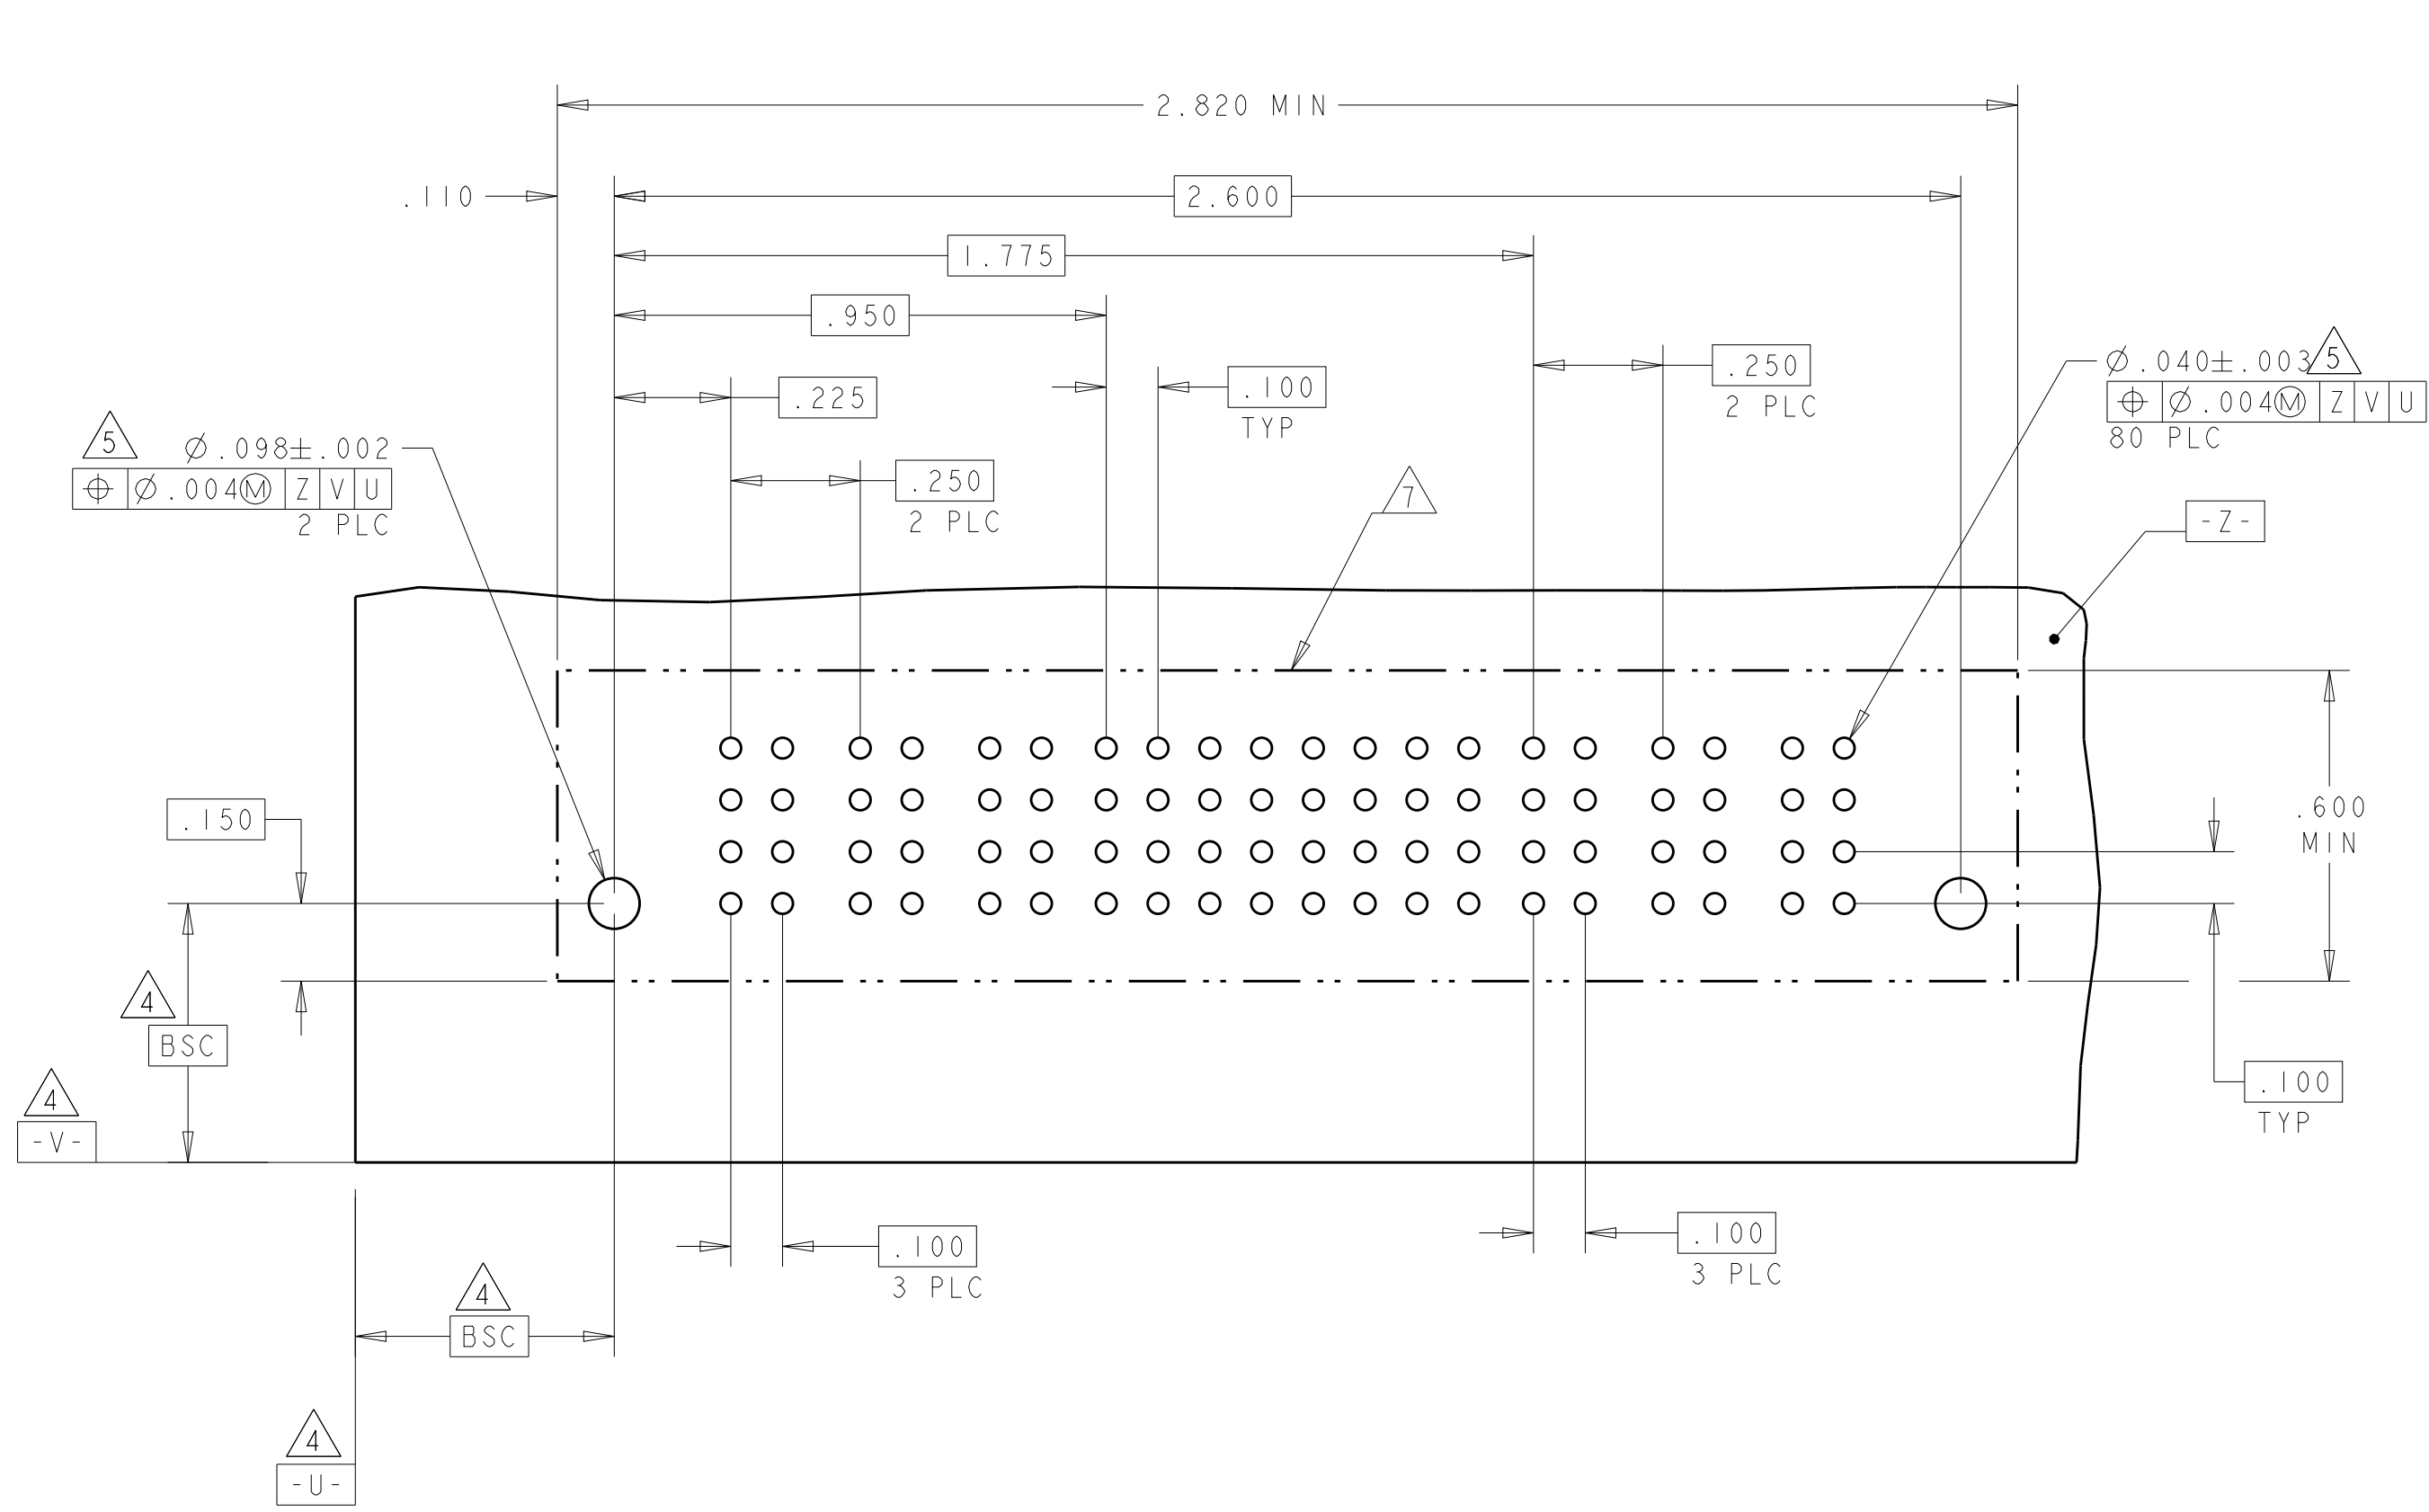


PART NUMBER	ROWS		POWER				SIGNAL		POWER				
			P1	P2	P3	P4	1	2	P5	P6	P7	P8	
6450820-5	D C B A												
4P + 8S + 4P													

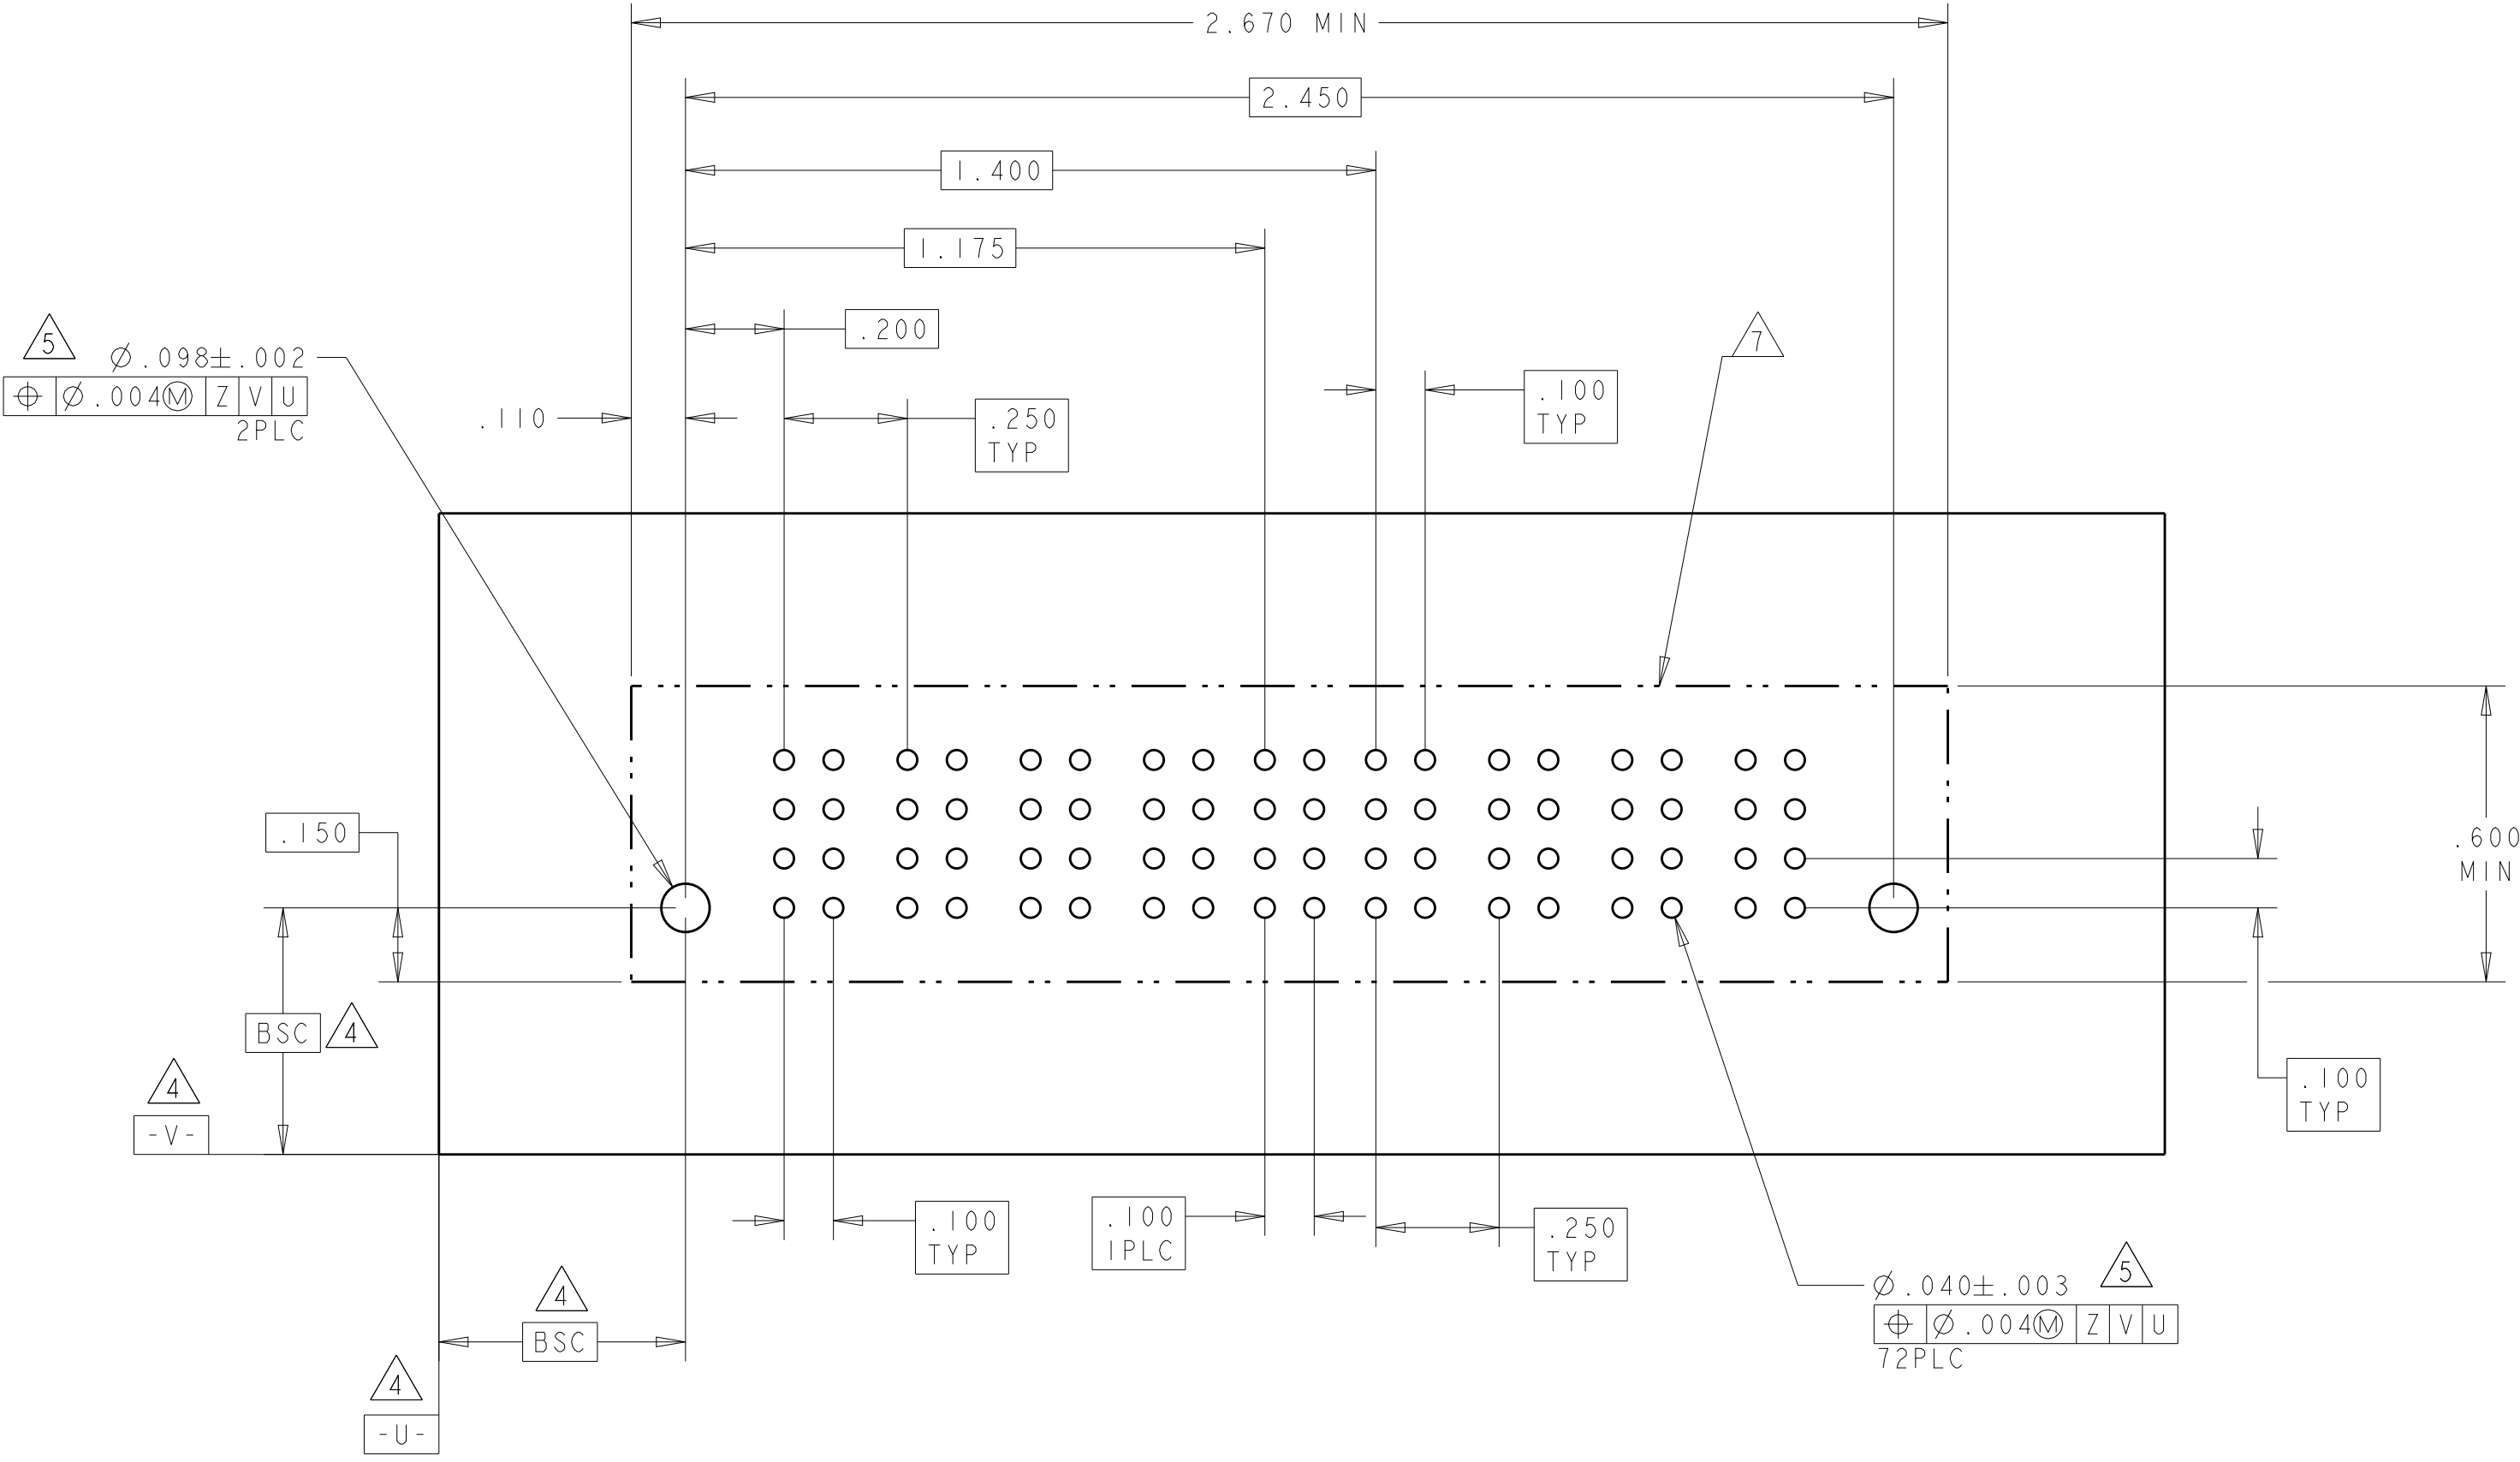


THIS DRAWING IS A CONTROLLED DOCUMENT.						DWN D_ZHU	15NOV2007					TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:				CHK S_ZHAO	15NOV2007						
INCHES						APRD S_ZHAO	-			NAME			
		0 PLC ±.01				PRODUCT SPEC		VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE					
		1 PLC ±.01				108-2292							
		2 PLC ±.01				APPLICATION SPEC							
		4 PLC ±.0020				114-13251							
ANGLES		FINESS				WEIGHT		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL								A1	100779	G6450820			
								SCALE		SHEET	8 OF 20	REV G8	
Customer Drawing													


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER													SIGNAL				POWER	SIGNAL		
			P1	P2	1	2	3	4	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	5	6	7	8	P14	9	10			
6450820-6	D C B A		VM		EV	EV	EV	EV		VM	VM		VM	EV	VM		VM	VM		EV	EV	EV	EV		EV	ES			
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV			
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV			
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV			
					ES	EV	EV	EV												EV	EV	EV	EV		EV	EV			
2P+16S+1P+2ACP+5P+2ACP+1P+16S+1P+8S																													

NO CONTACTS LOADED







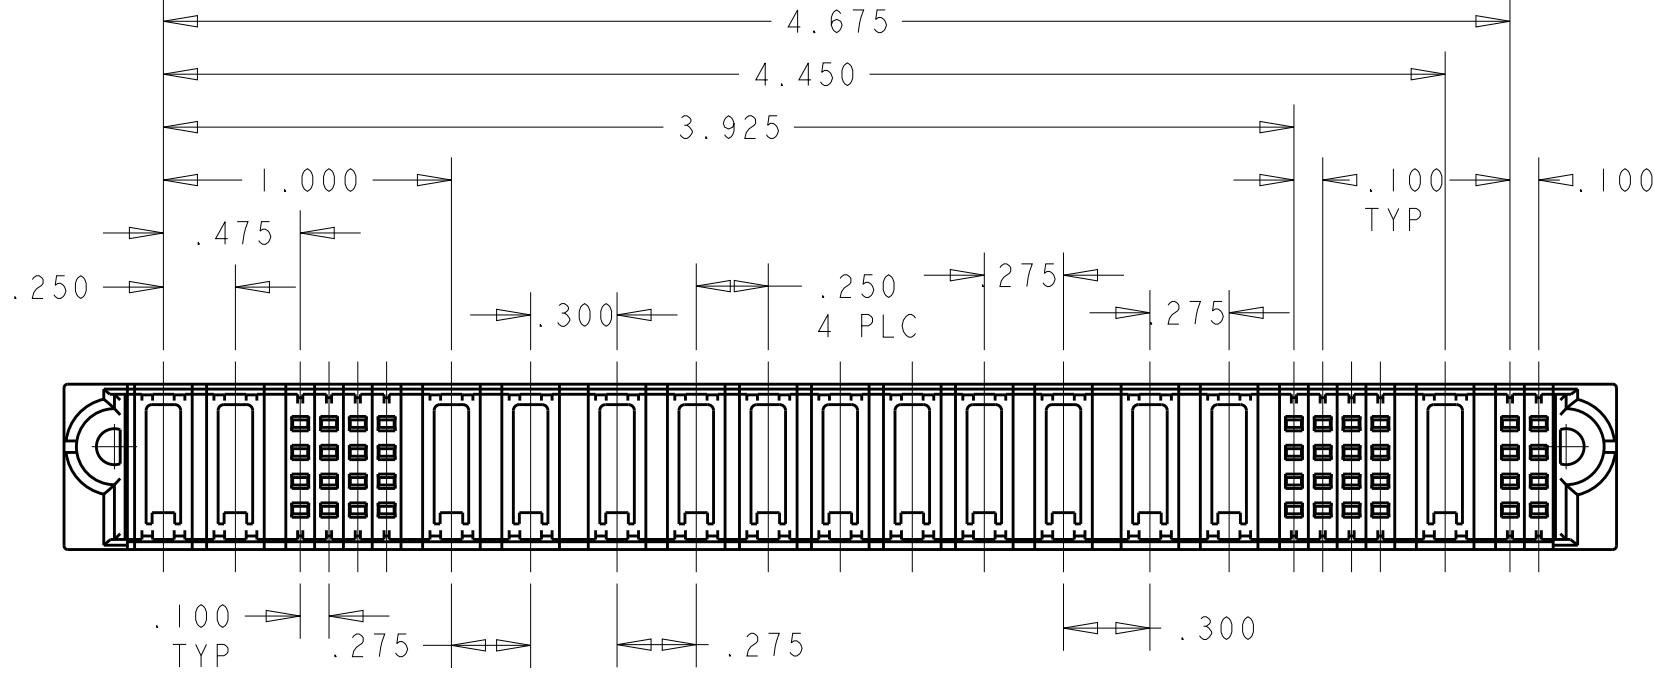


SCALE 3:2
6450820-6

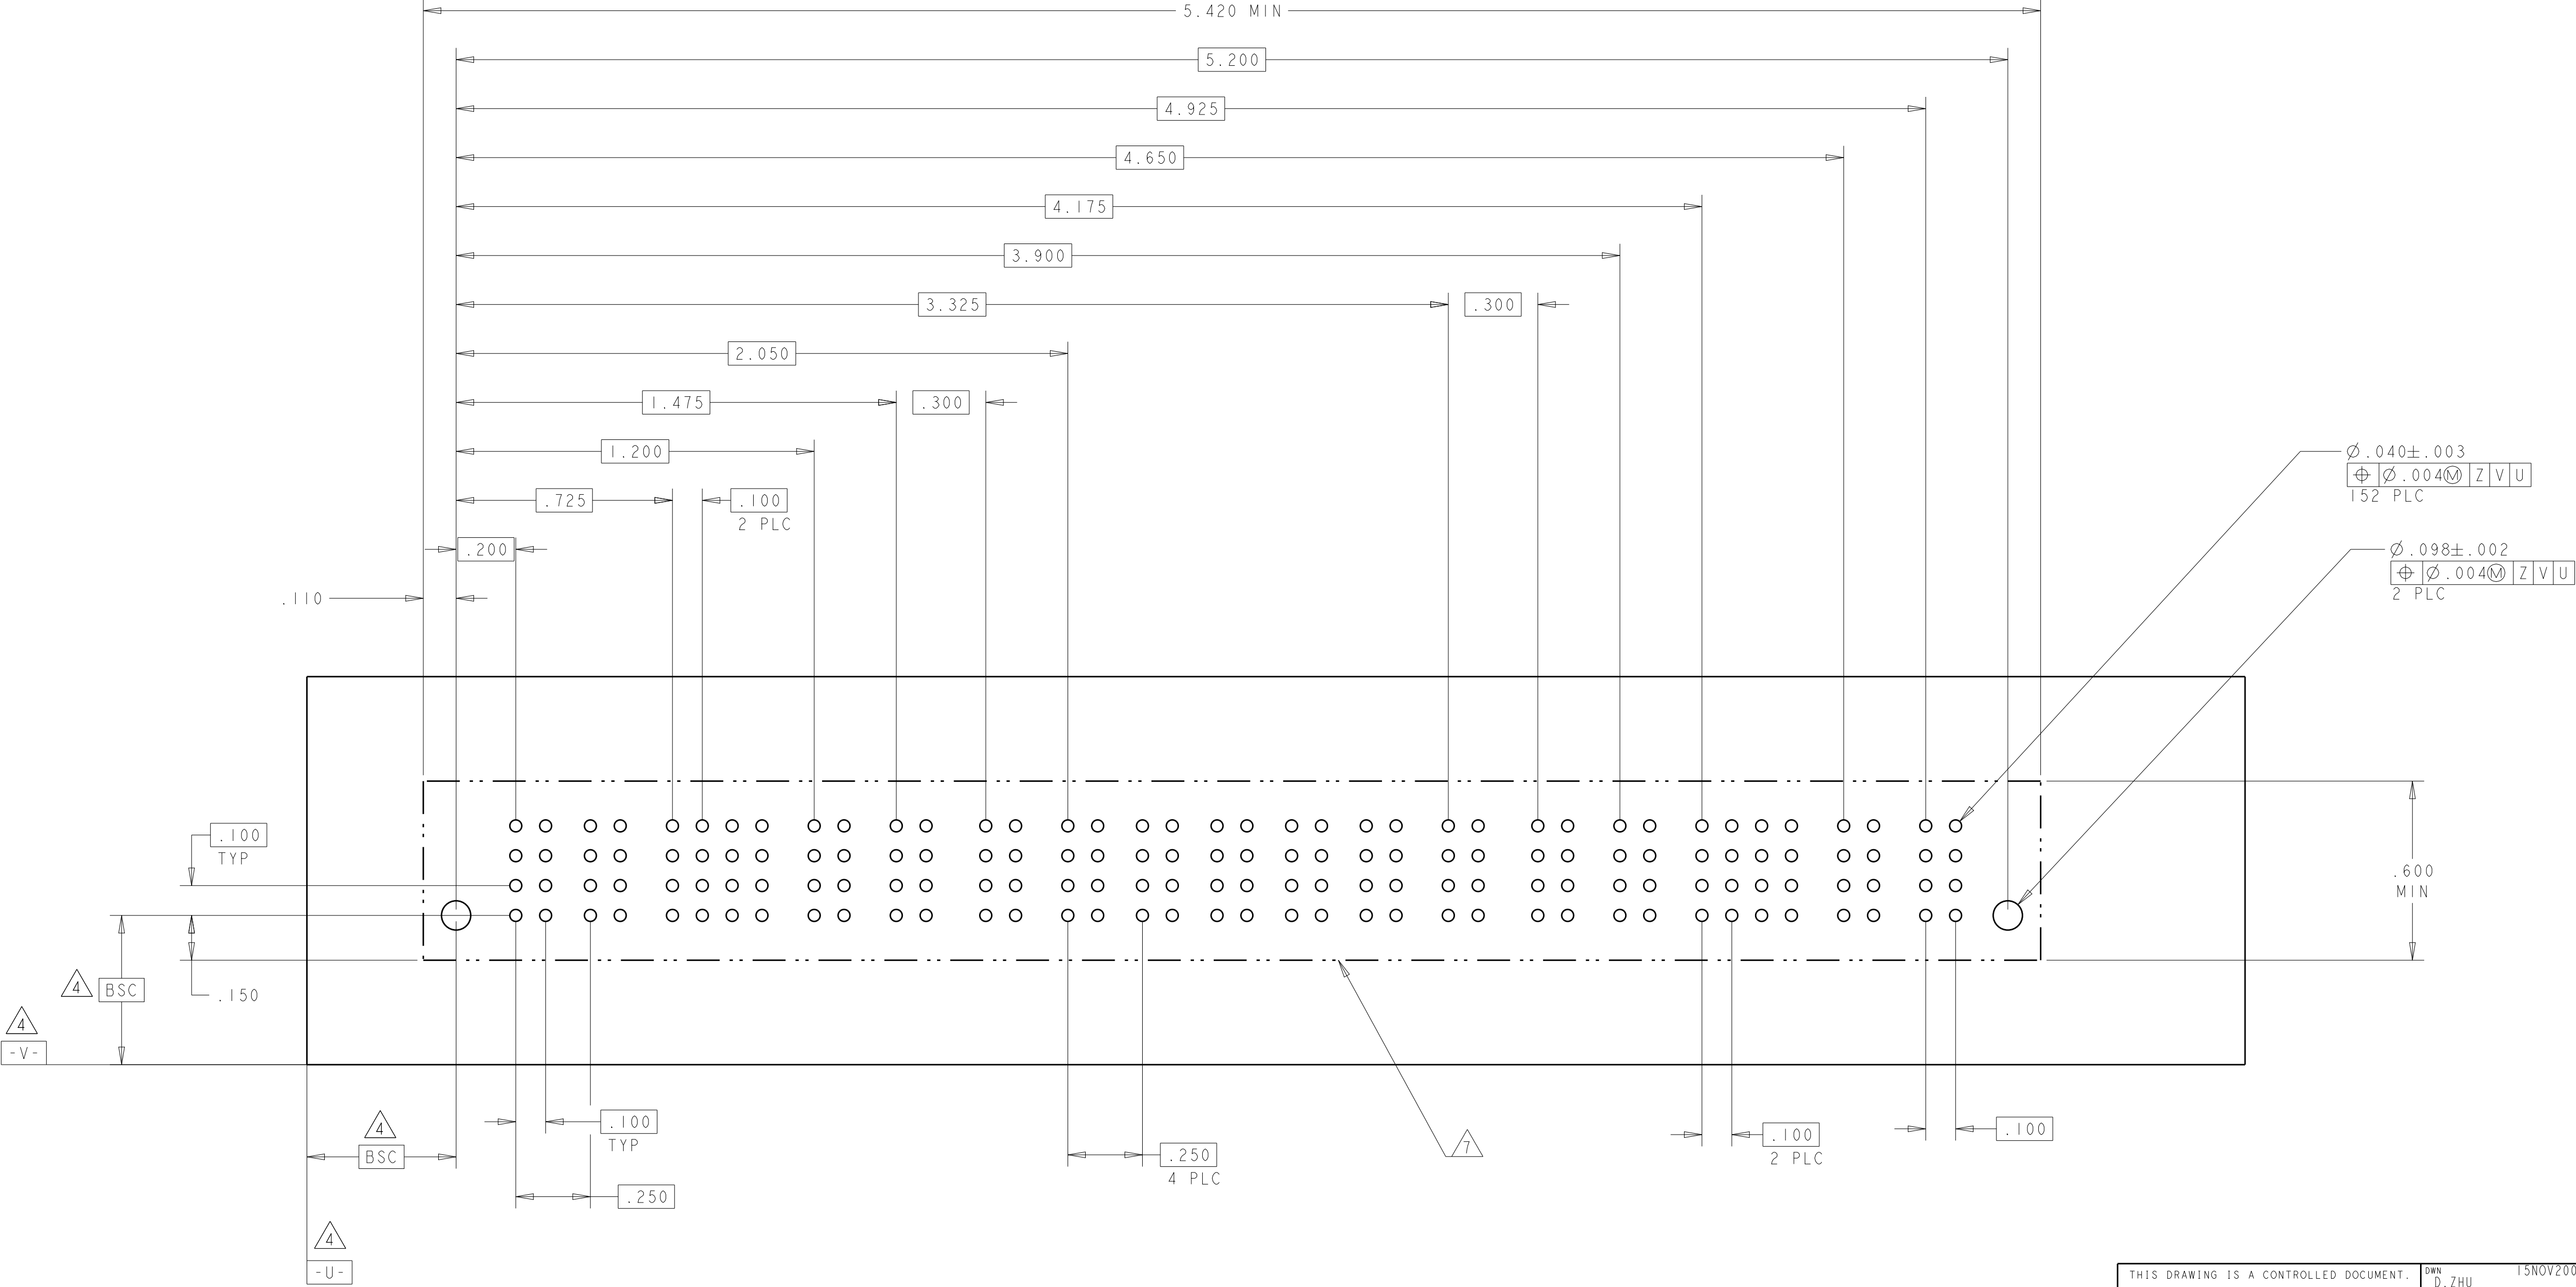

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002 ANGLES ±2° FINISH		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	
MATERIAL		WEIGHT		SIZE A100779	
		Customer Drawing		SCALE -	
				SHEET 9	
				REV G8	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER										SIGNAL				POWER	SIGNAL			
			P1	P2	1	2	3	4	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	5	6	7	8	P14	9	10	
6450820-7	D C B A	 HD	VM		EV	EV	EV	EV		VM	VM		VM		VM		VM	VM		EV	EV	EV	EV		EV	ES	 HD
					EV	EV	EV	EV												EV	EV	EV	EV		EF		
					EF	EV	EV	EV												EV	EV	EV	EV		EV		
					ES	EV	EV	EV												EV	EV	EV	EV		EV		
2P+16S+1P+2ACP+5P+2ACP+1P+16S+1P+8S																											


NO CONTACTS LOADED

THE PCB LAYOUT IS THE SAME AS 6450820-6.
PLEASE SEE 6450820-6 FOR DETAIL DIM.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. ZHU	15NOV2007	 TE Connectivity							
		CHK	S. ZHAO	15NOV2007								
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD	S. ZHAO	-	NAME				
INCHES					PRODUCT SPEC			VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE				
		0 PLC ±"			108-2292							
		1 PLC ±.01			APPLICATION SPEC							
		2 PLC ±.01			114-13251							
		3 PLC ±.005										
4 PLC ±.0020		ANGLES ±2°			SIZE			CAGE CODE	DRAWING NO	RESTRICTED TO		
		FINISH			WEIGHT			A100779C-6450820			-	
MATERIAL					Customer Drawing			SCALE			SHEET 10 OF 20	REV G8

[illegible]4805 (3/11)


PART NUMBER	ROWS		POWER						SIGNAL						POWER						
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	
I-6450820-1	D C B A		VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	
									EV	EV	EV	EV	EV	EV							
									EV	EV	EV	EV	EV	EV							
									ES	EV	EV	EV	EV	EV							
6P + 24S + 6P																					

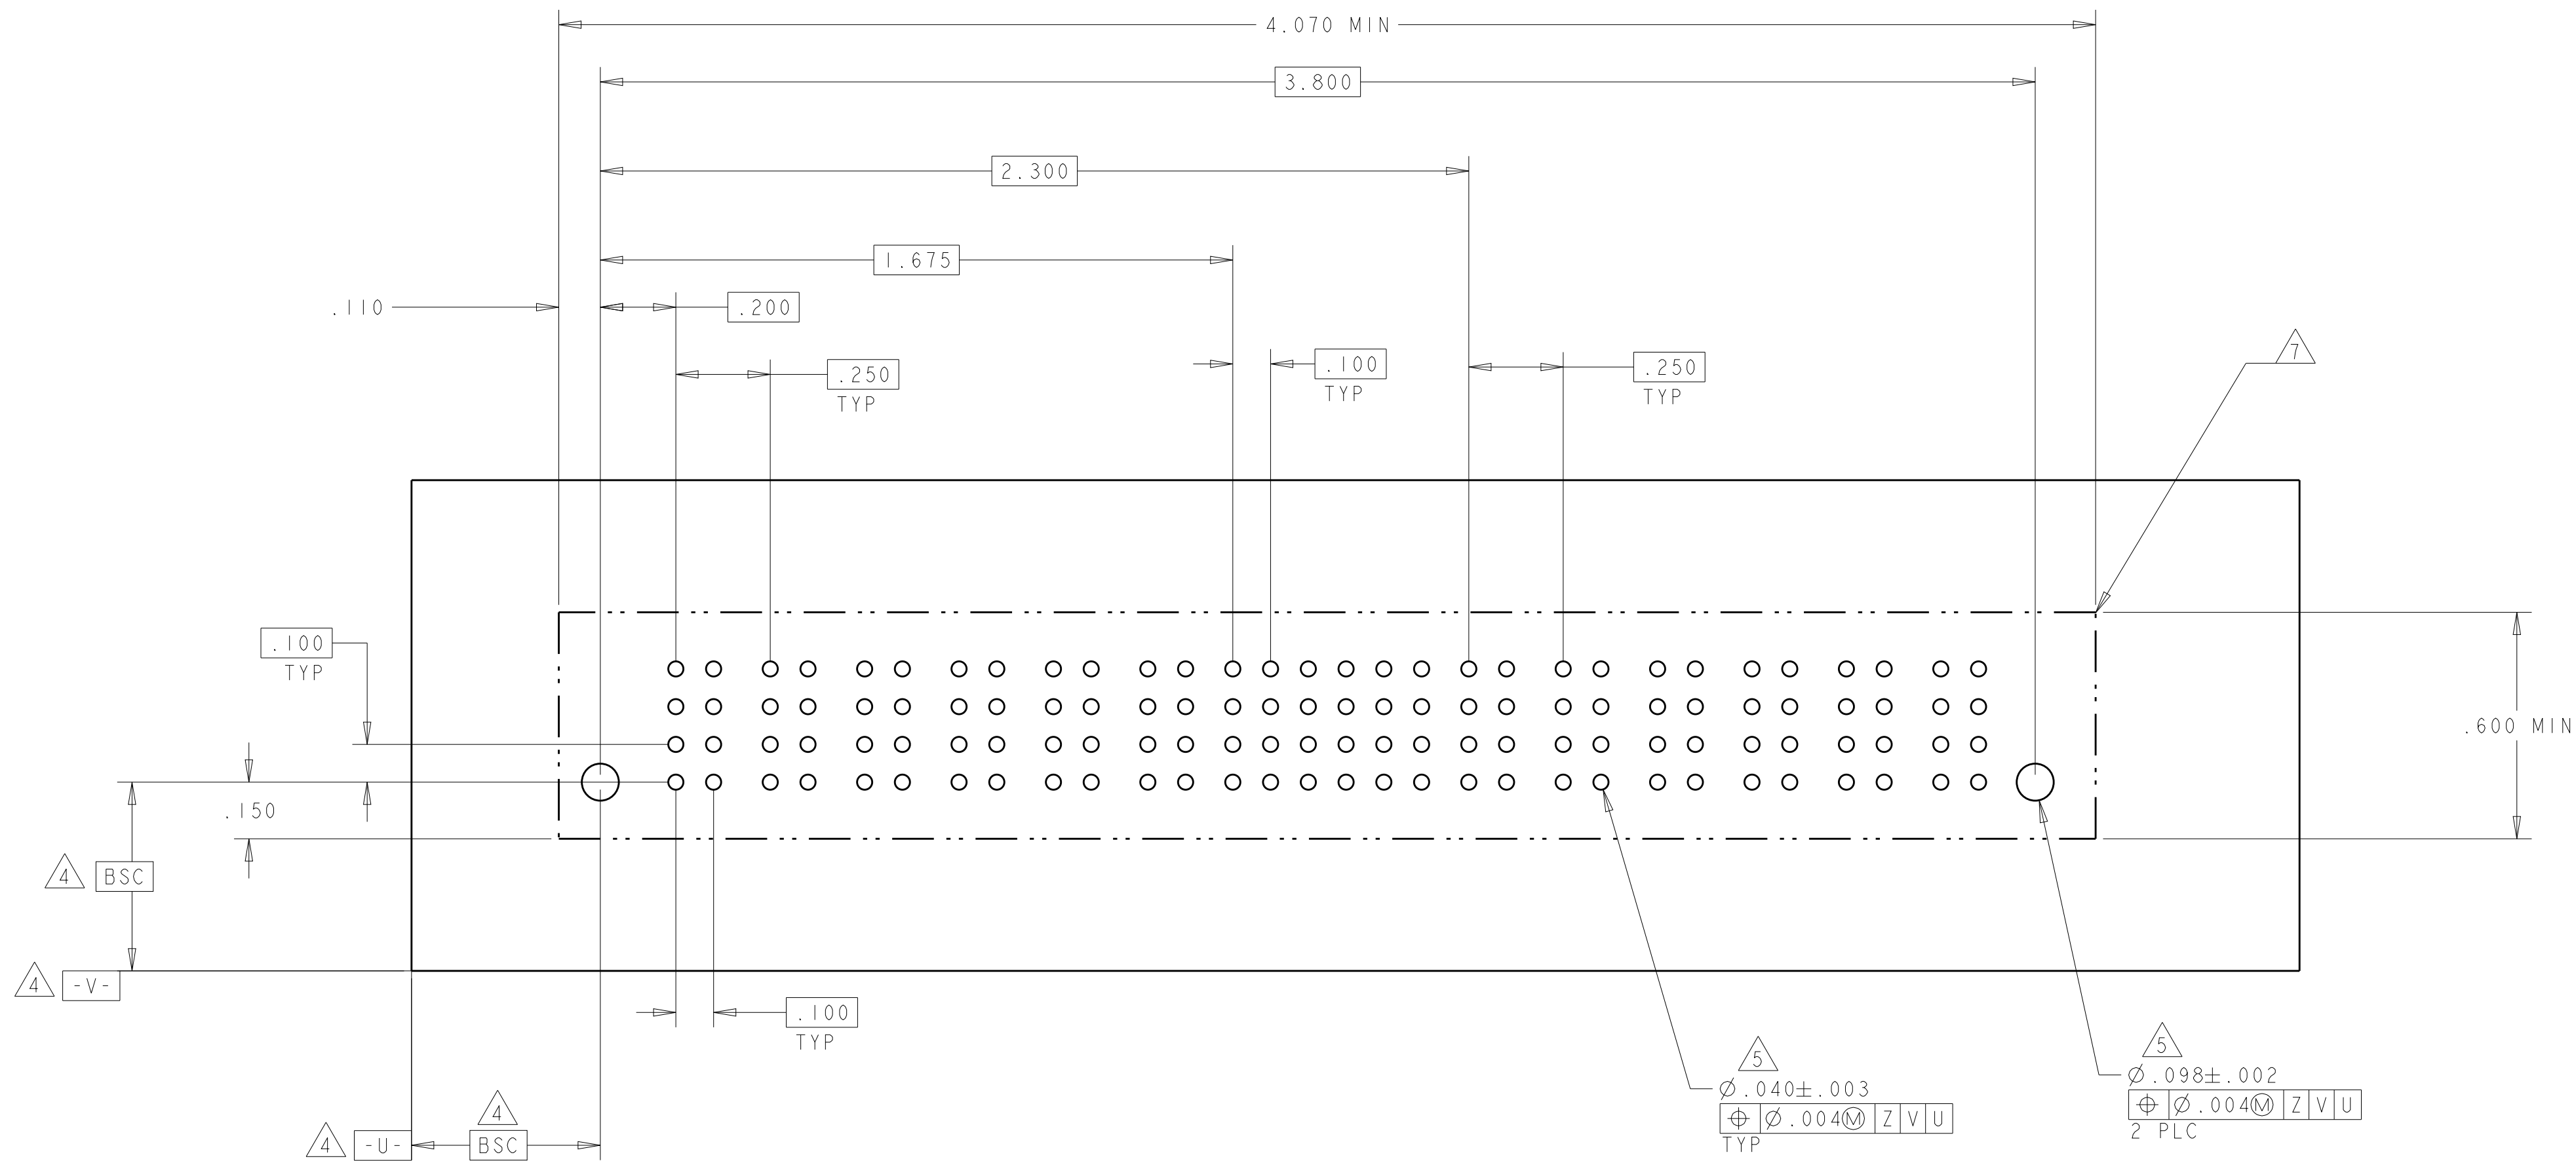

THIS DRAWING IS A CONTROLLED DOCUMENT.						DATE D. ZHU 15NOV2007				TE Connectivity	
						CHK S. ZHAO 15NOV2007					
DIMENSIONS: INCHES		TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:				APPROVED S. ZHAO -		NAME			
		PRODUCT SPEC				VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM LSS					
		108-2292									
		APPLICATION SPEC									
		114-13251									
		WEIGHT									
MATERIAL	-	-	-	-	-	CAGE CODE	DRAWING NO	RESTRICTED TO			
-	-	-	-	-	-	A100779	G6450820	-			
Customer Drawing						SCALE		SHEET	REV		
						-		12	G8		

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
1-6450820-3	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					EV	EV	EV	EV	EV	EV				
3ACP + 24S + 3ACP															







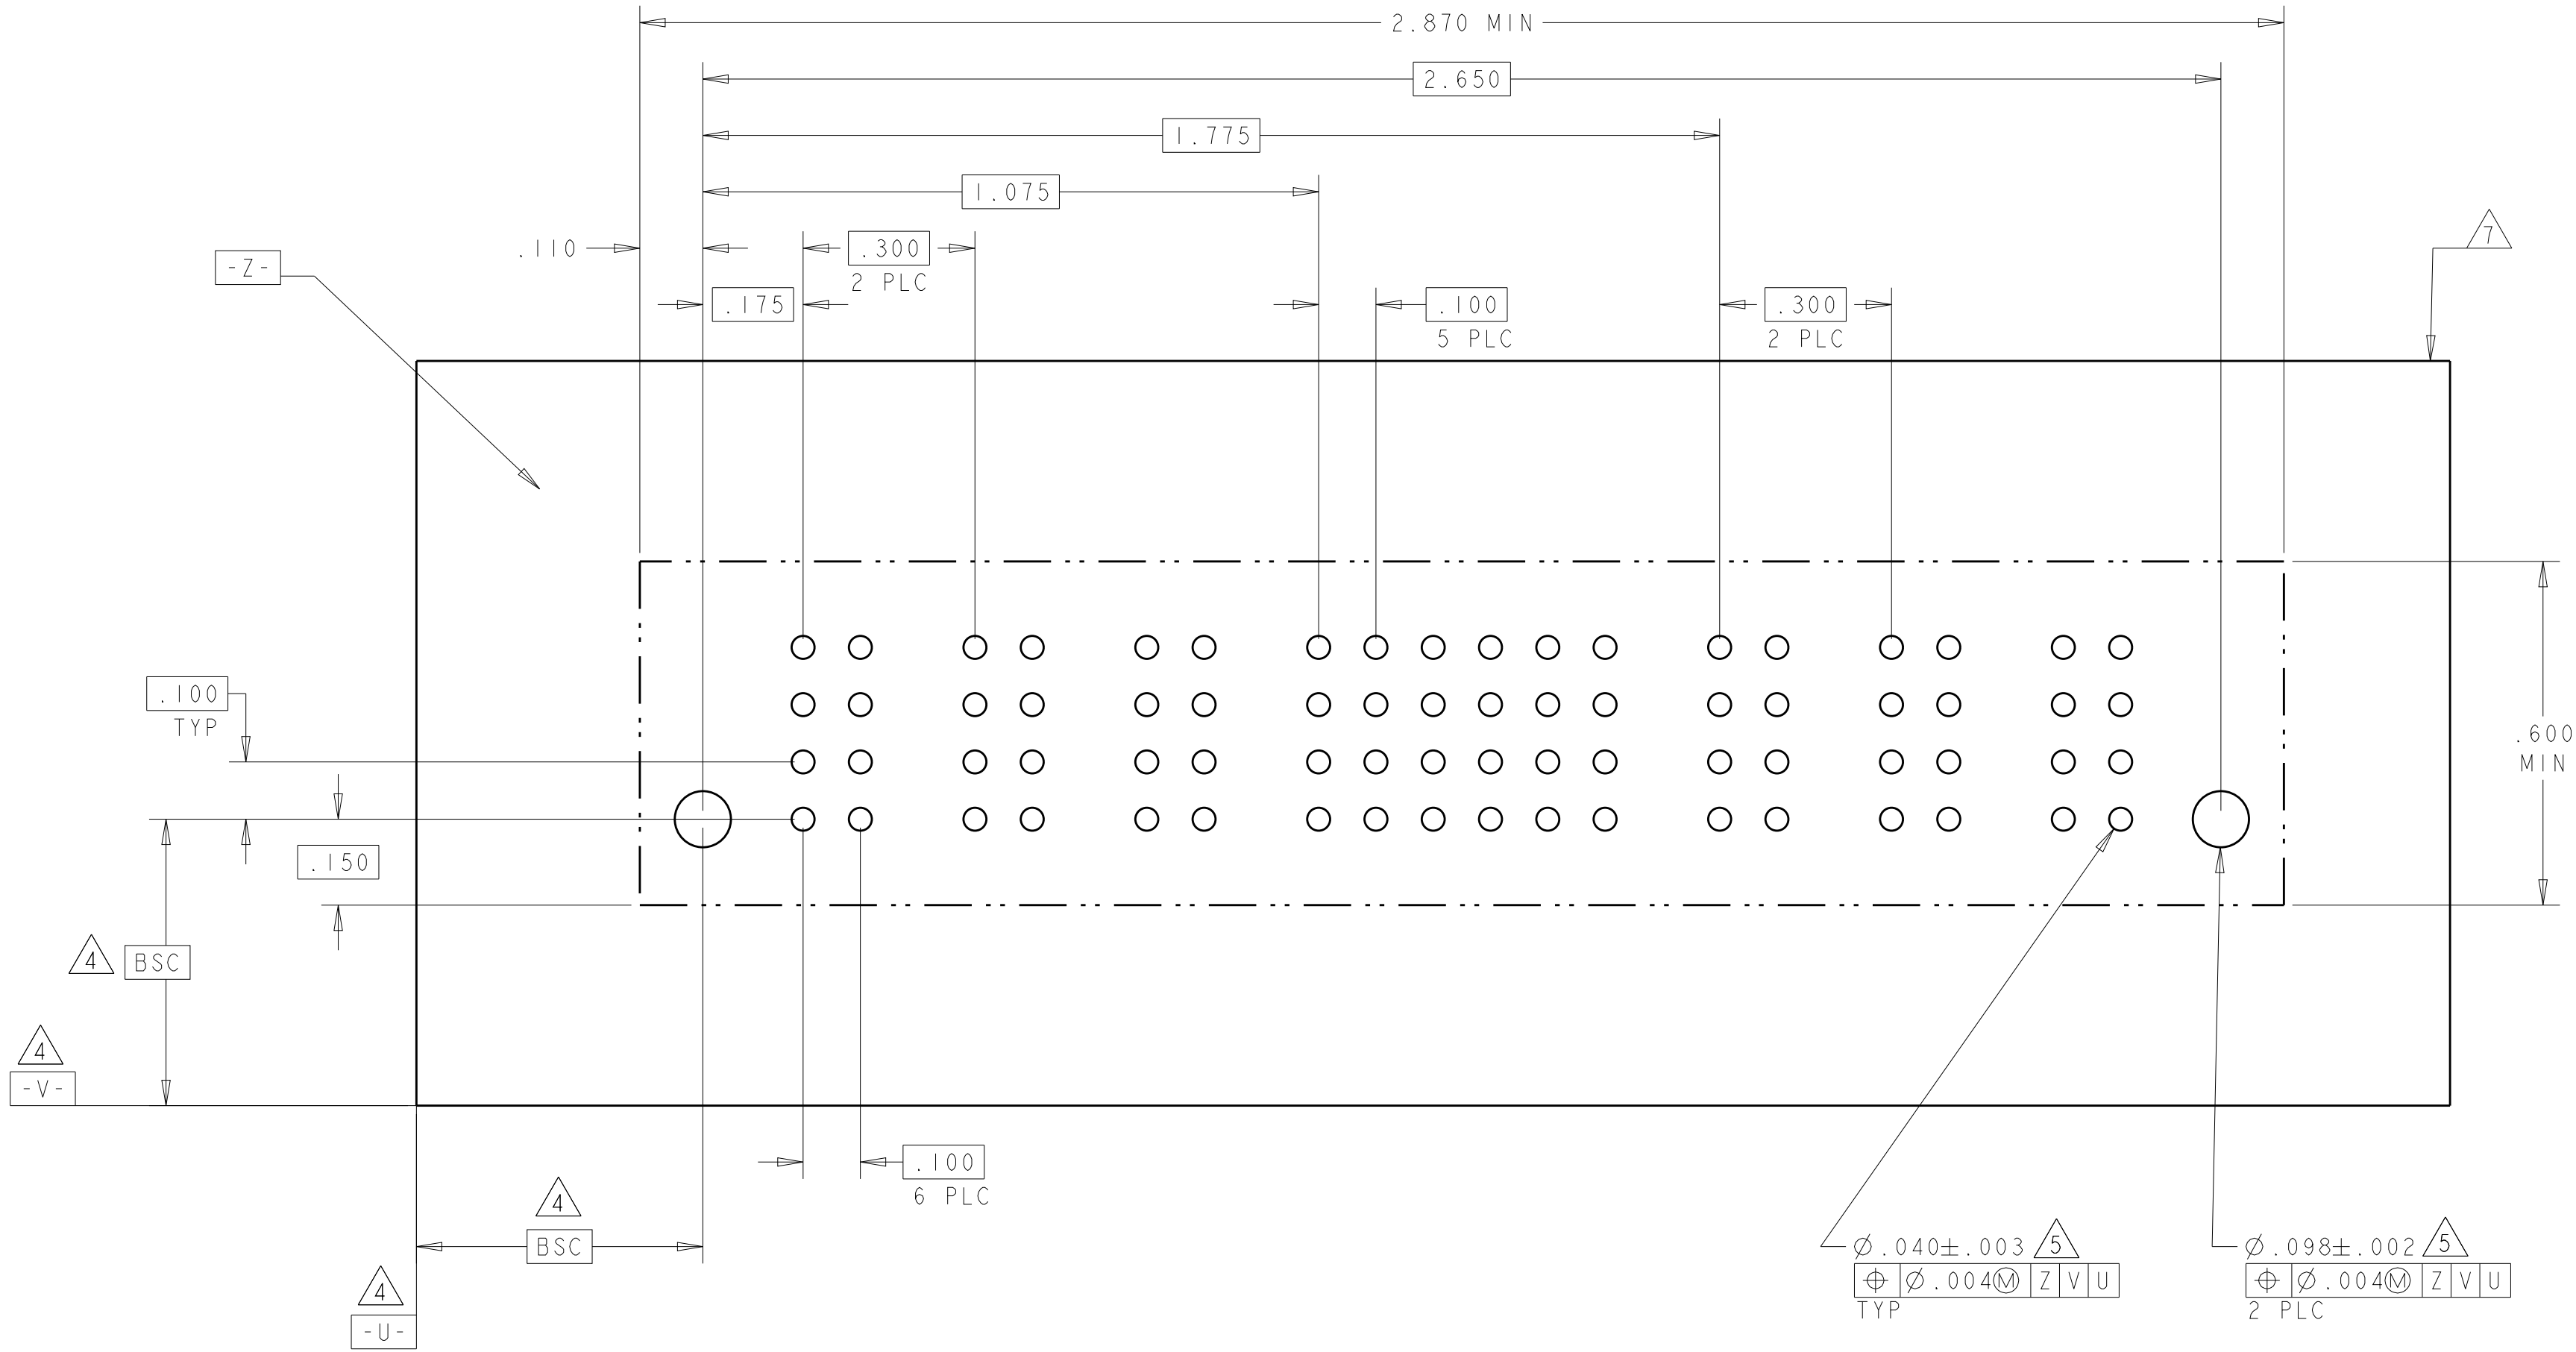



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	15NOV2007		
		CHK	15NOV2007		
DIMENSIONS:		APVD	S. ZHAO	NAME	
INCHES		PRODUCT SPEC	108-2292		
		APPLICATION SPEC	114-13251	SIZE	
		WEIGHT	-		
MATERIAL		Customer Drawing		SCALE	
				SHEET 13 OF 20	
				REV G8	

Technical drawing of a rectangular plate with the following specifications:

- Overall Dimensions:**
 - Length: 4.670 MIN
 - Width: .600 MIN
- Internal Features and Dimensions:**
 - Top edge feature: .110
 - Top edge feature: .175
 - Top edge feature: .250 II PLC
 - Bottom edge feature: .100 TYP
 - Left edge feature: .100 TYP
 - Left edge feature: .150
 - Right edge feature: .100 II PLC
- Surface Finish and Material Specifications:**
 - Top surface: BSC 4
 - Bottom surface: -V- 4
 - Left side: -U- 4
 - Right side: BSC 4
 - Material: 5
 - Material: 7
- Geometric Tolerances:**
 - Feature 1: $\phi .040 \pm .003$
 - Feature 2: $\phi .098 \pm .002$
 - Feature 3: $\phi .004 \text{ M}$
 - Feature 4: $\phi .004 \text{ M}$
- Other Notes:**
 - Z-
 - U-
 - BSC
 - TYP
 - II PLC
 - Z | V | U
 - 2 PLC

4805 (3/11)


PART NUMBER	ROWS		POWER					SIGNAL												POWER					
			P1	P2	P3	P4	P5	1	2	3	4	5	6	7	8	9	10	11	12	P6	P7	P8	P9	P10	
I-6450820-8	D C B A																								
																									
																									
																									
5P + 48S + 5P																									

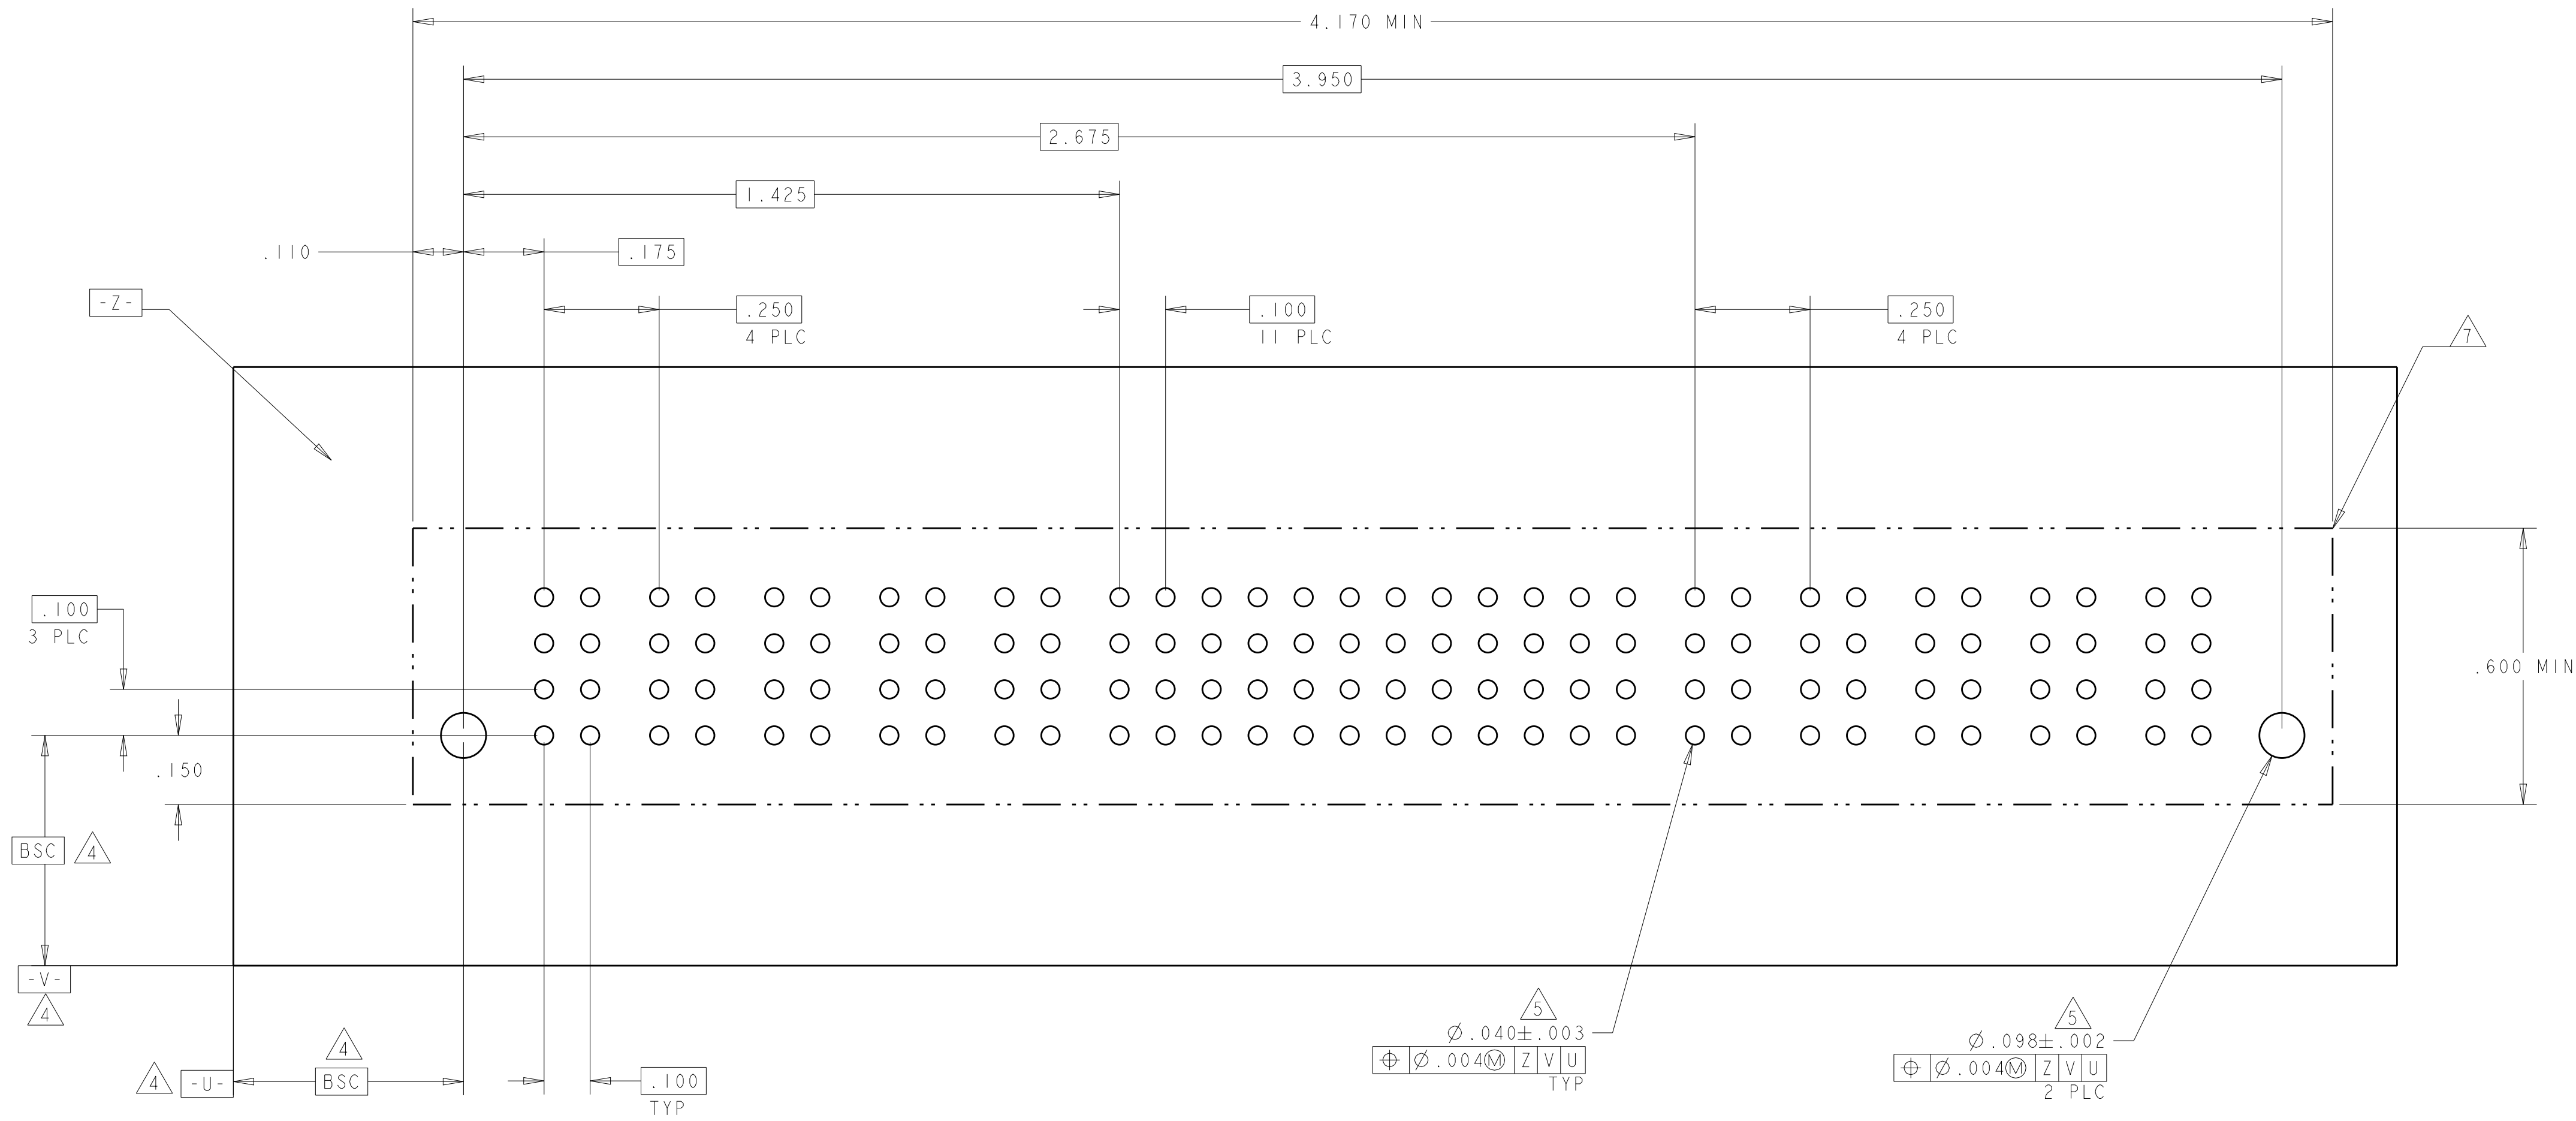

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D_ZHU 15NOV2007		TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		S_ZHAO APVD S_ZHAO		VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
		PRODUCT SPEC		SIZE	
		108-2292		CAGE CODE	
		APPLICATION SPEC		DRAWING NO	
		114-13251		RESTRICTED TO	
MATERIAL		FINISH		A100779 ©6450820	
				Customer Drawing	
				SCALE	
				SHEET 15 of 20	
				REV G8	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER					SIGNAL						POWER					
			P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10	
1-6450820-9	D C B A		VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	
								EV	EV	EV	EV	EV	EV						
								EV	EV	EV	EV	EV	EV						
								EV	EV	EV	EV	EV	EV						
5P + 24S + 5P																			

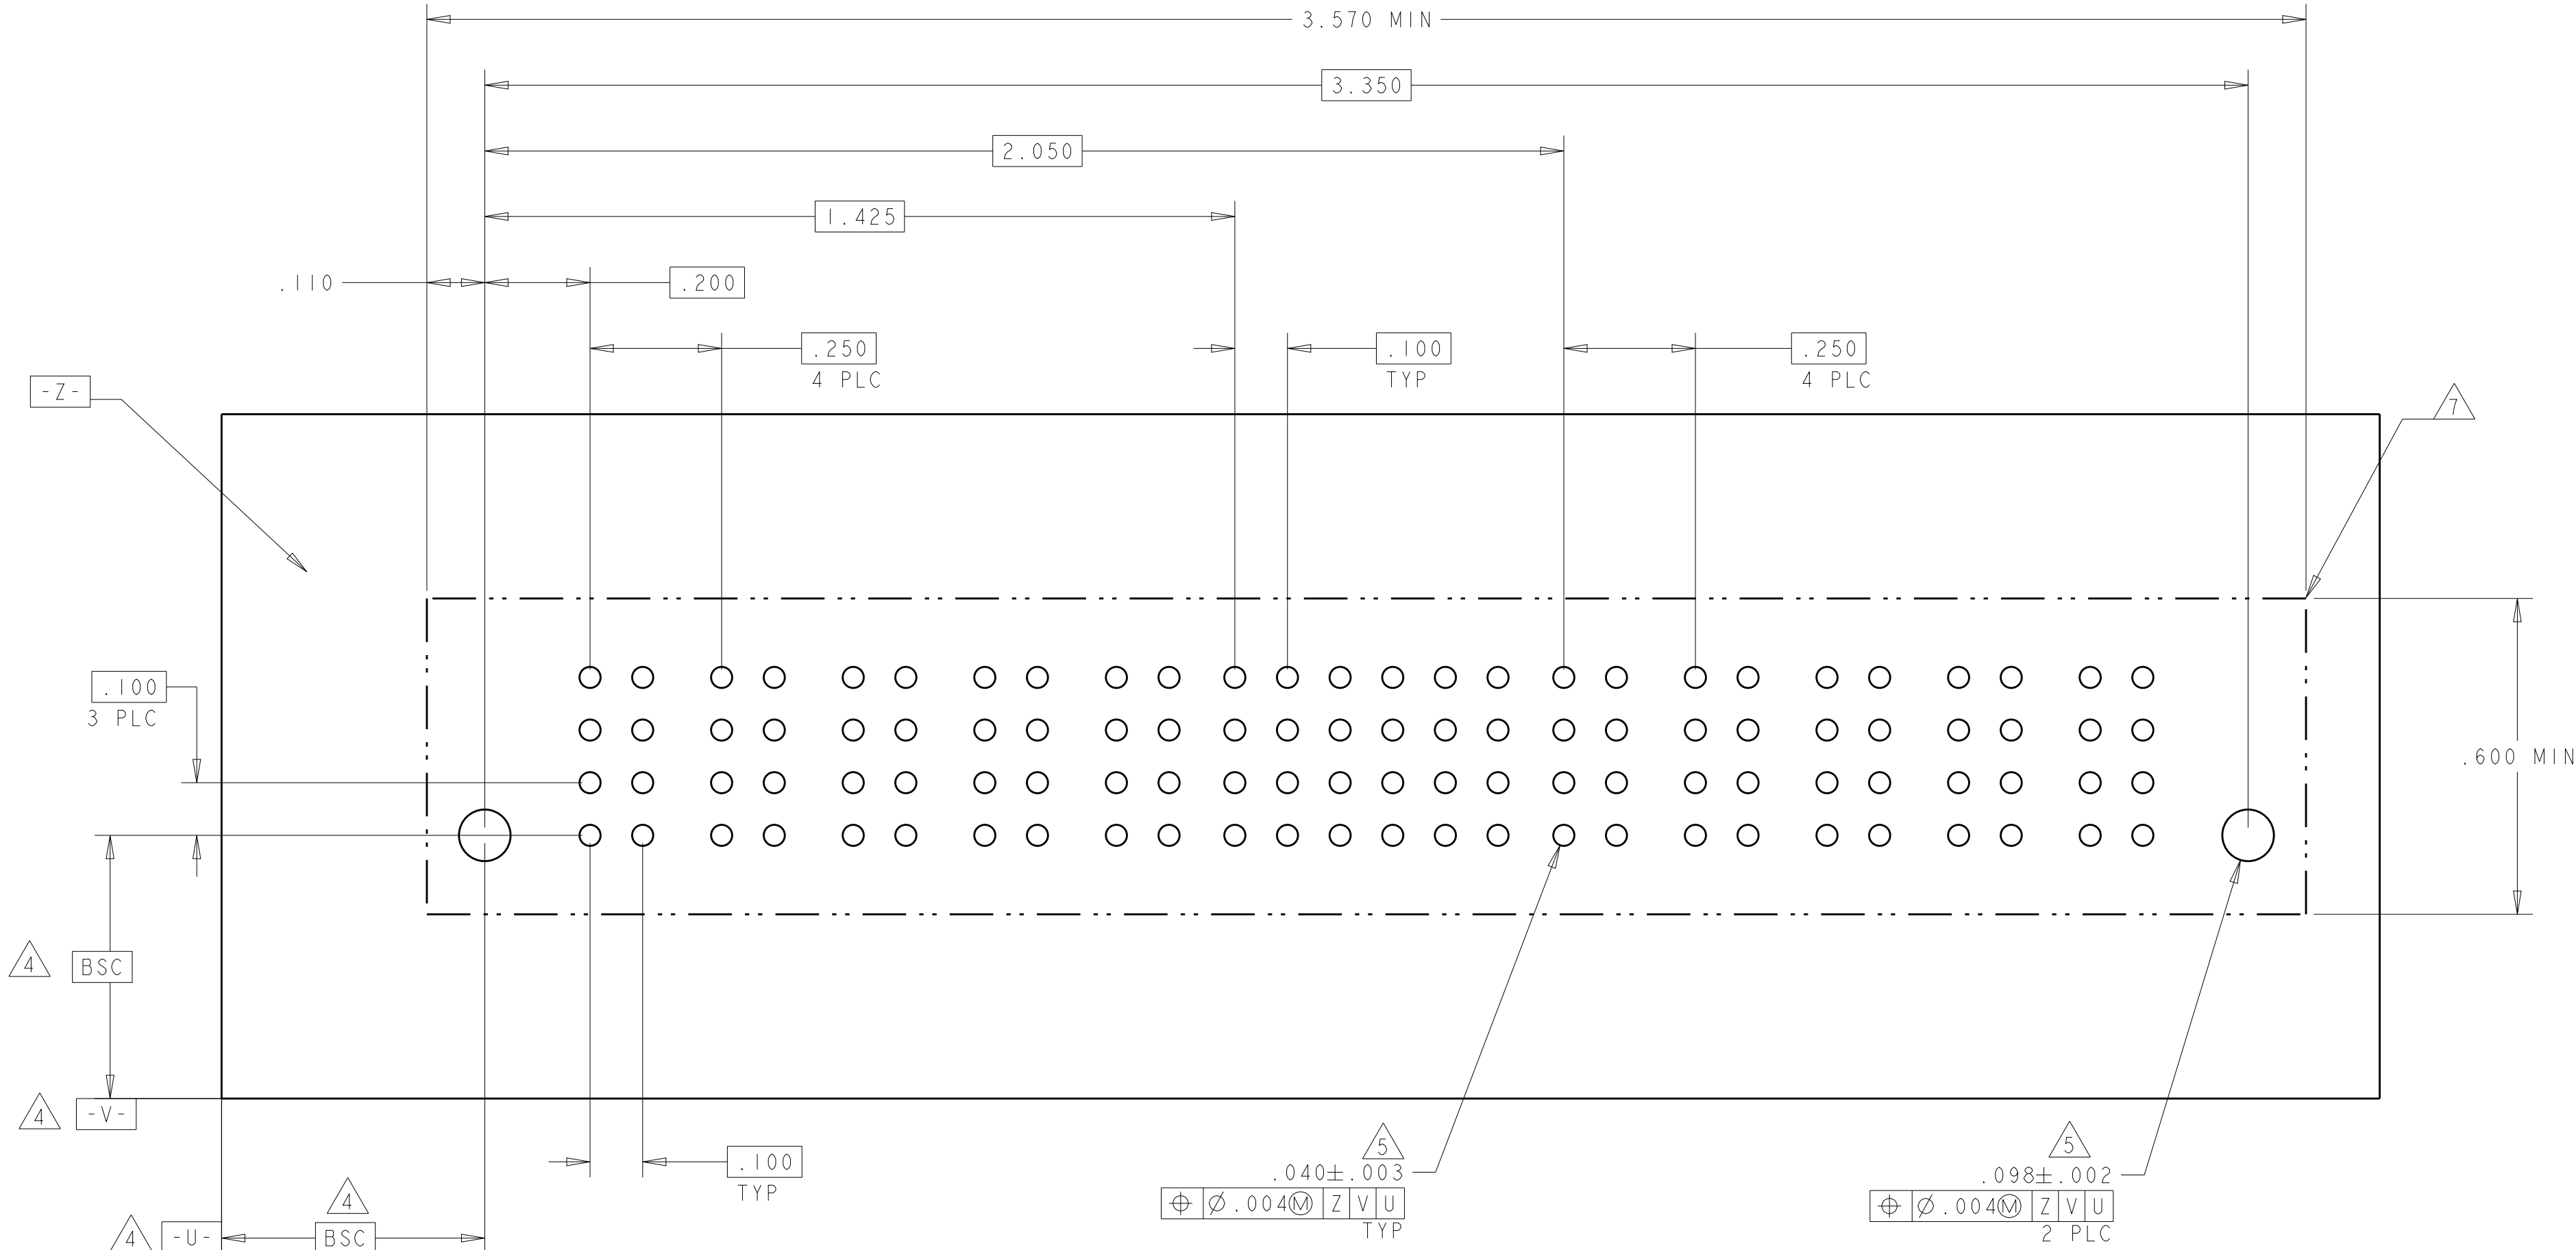

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D.ZHU
CHK
S.ZHAO
APVD
S.ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±"
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

108-2292
APPLICATION SPEC
114-13251

WEIGHT -

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450820

RESTRICTED TO
-

SCALE
-

SHEET
16


OF
20

REV
G8


TE Connectivity


LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-		SEE SHEET 1	-	-	-	

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			LP1	1	2	3	4	LP2	
2-6450820-0	D	HD	LZ	EV	EV	EV	EV	LZ	HD
	C			EV	EV	EV	EV		
	B			EV	EV	EV	EV		
	A			EV	EV	EV	EV		
1LP + 16S + 1LP									

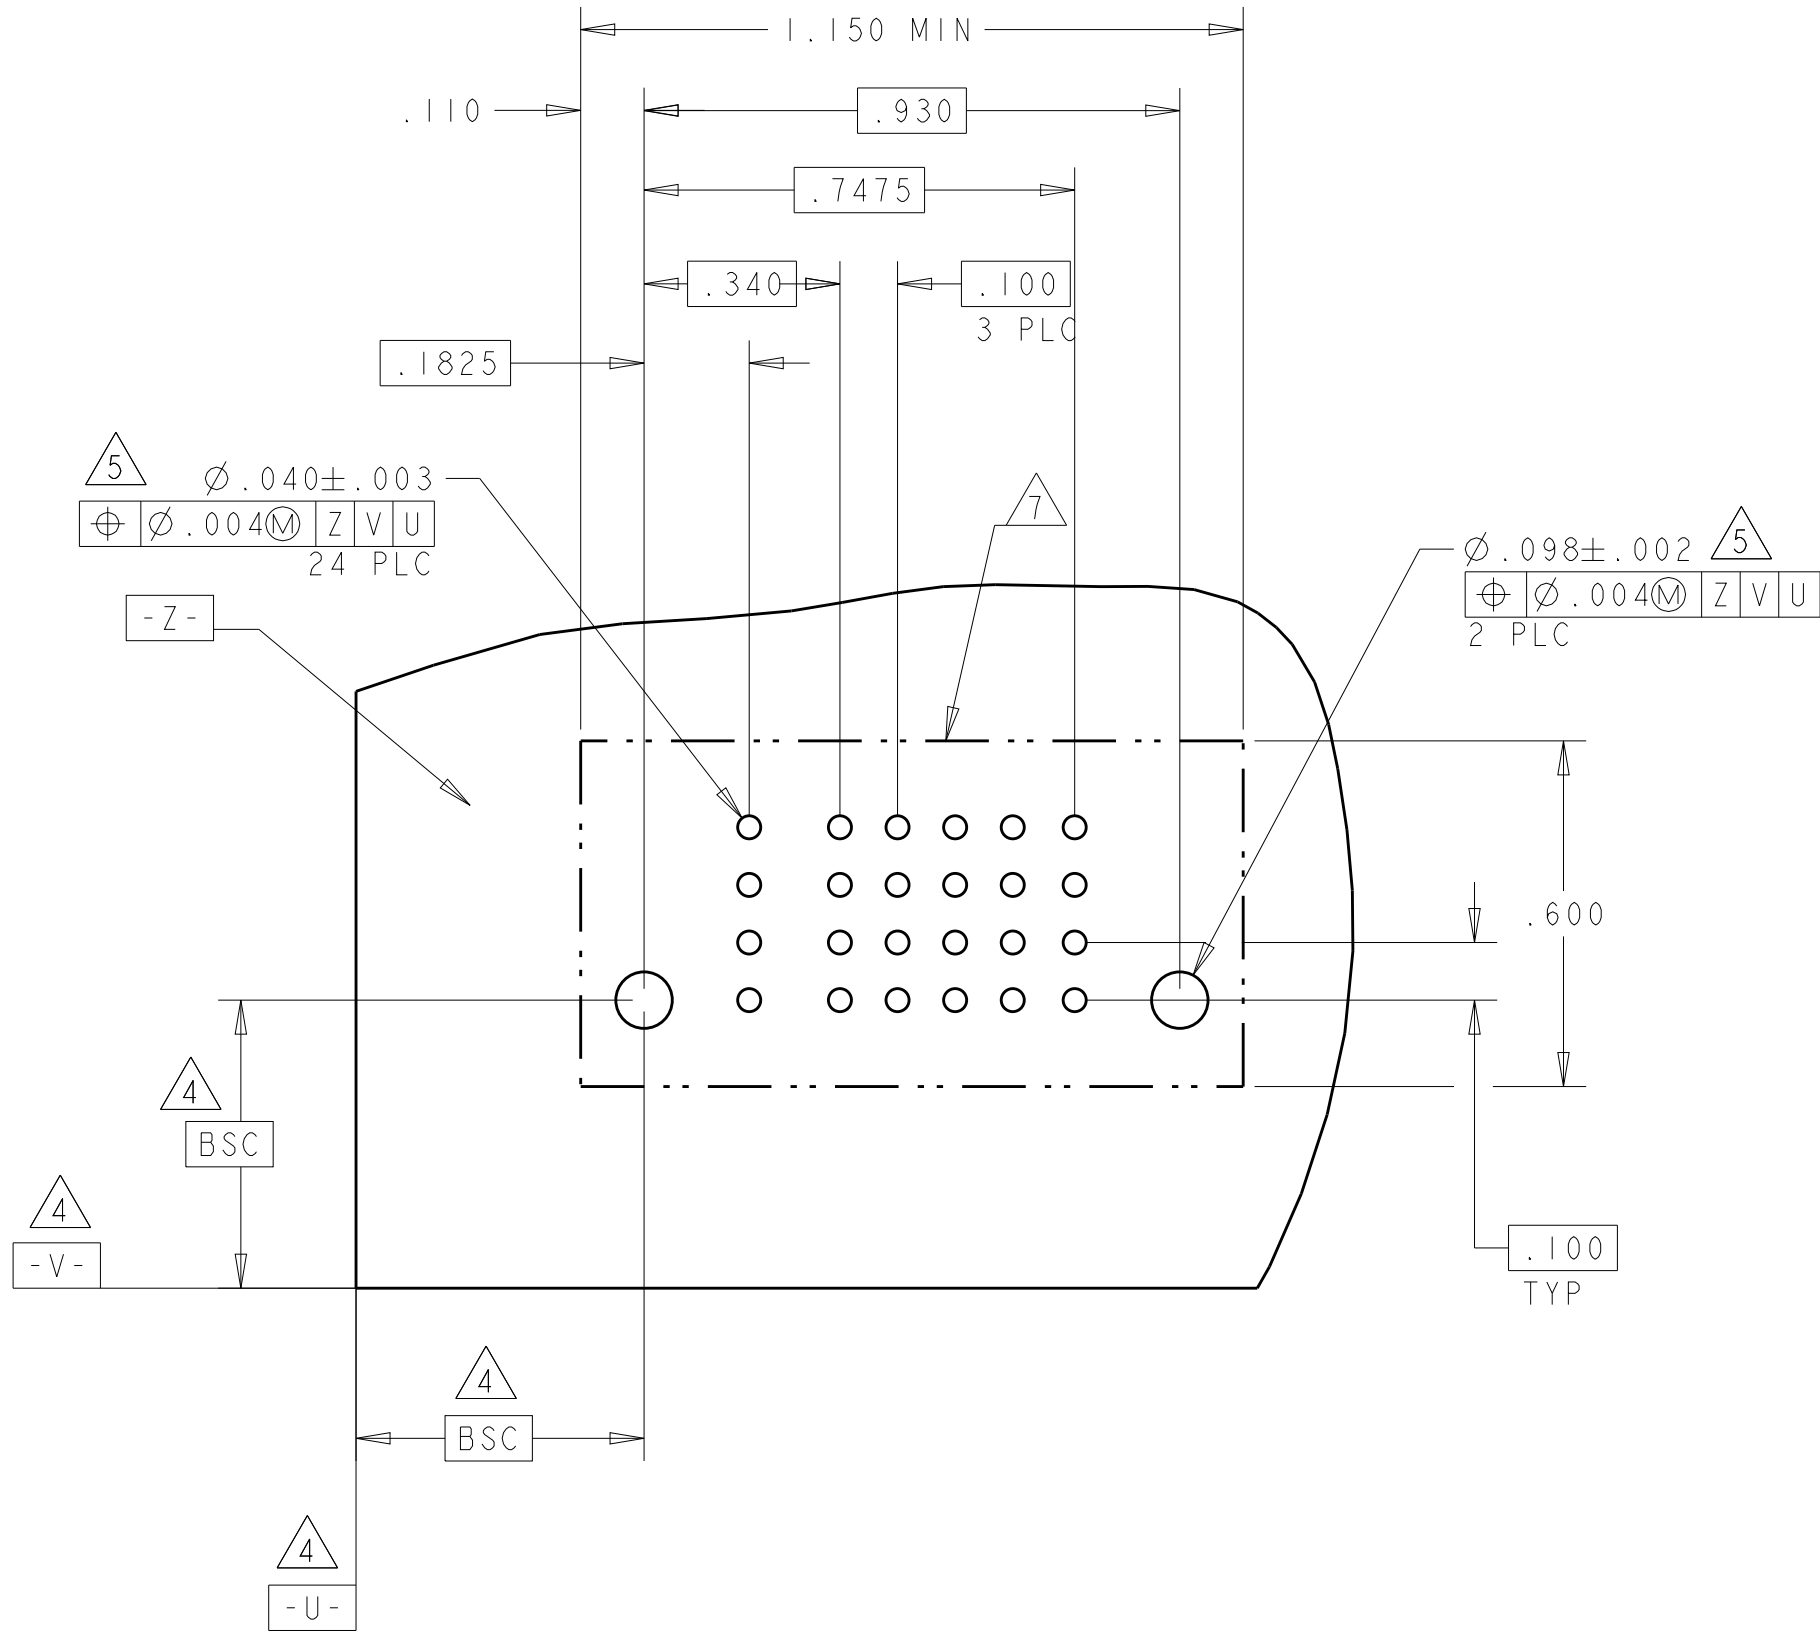

PART NUMBER	ROWS		LOW POWER						SIGNAL						POWER			
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	P1	P2	P3	
2-6450820-1	D	HD	LZ	LZ	LZ	LZ	LZ	LZ	EV	EV	EV	EV	EV	EV	VM	VM	VM	HD
	C								EV	EV	EV	EV	EV	EV				
	B								EV	EV	ES	EV	EV	EV				
	A								EV	EV	EV	EV	EV	EV				
6LP + 24S + 3P																		

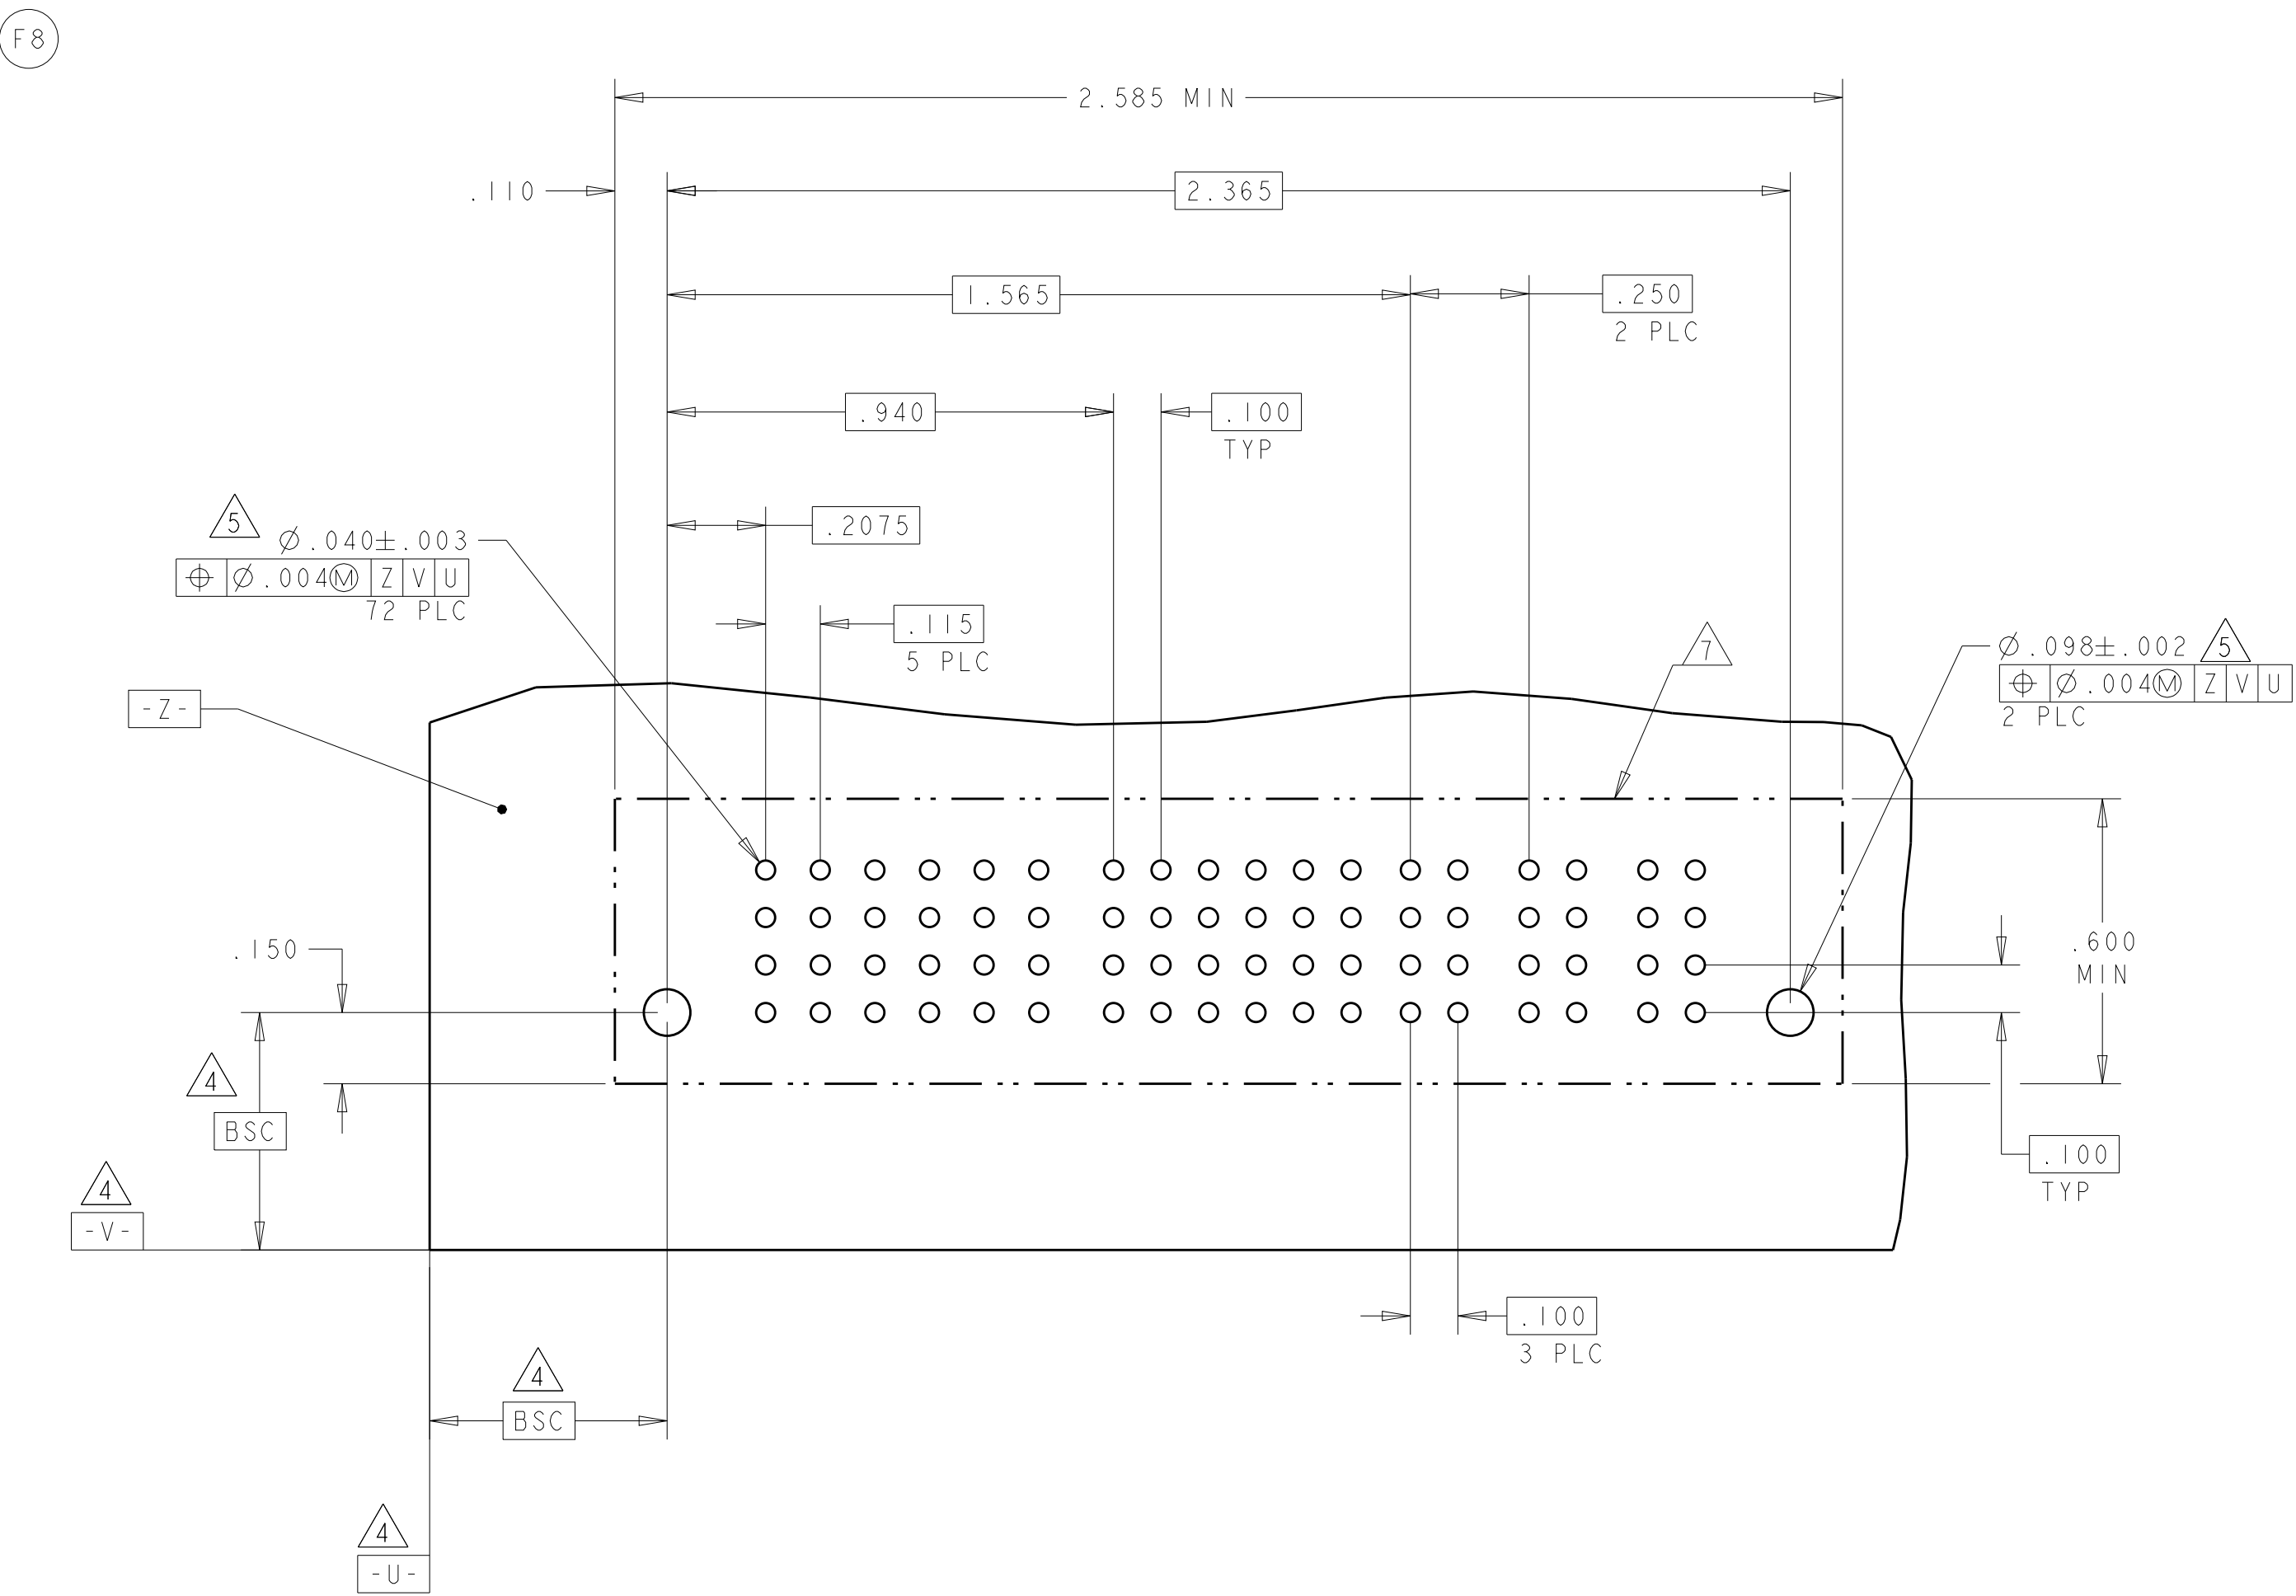


PART NUMBER	ROWS		POWER								SIGNAL																		POWER																				
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	P9	P10	P11	P12	P13	P14	P15	P16													
6450820-9	D C B A		VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	VM	VM													
										EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV									EV	EV	EV	EV	EV	EV	EV	EV	EV				
										EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV									EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
										EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV									EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
8P + 72S + 8P																																																	

4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER										SIGNAL												
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6							
2-6450820-3	D C B A	HD	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM						
																				EV	EV	EV	EV	EV	EV
																				EV	EV	EV	EV	EV	EV
																				EV	EV	EV	EV	EV	EV
																				EV	EV	EV	EV	EV	EV
10HDP + 24S																									

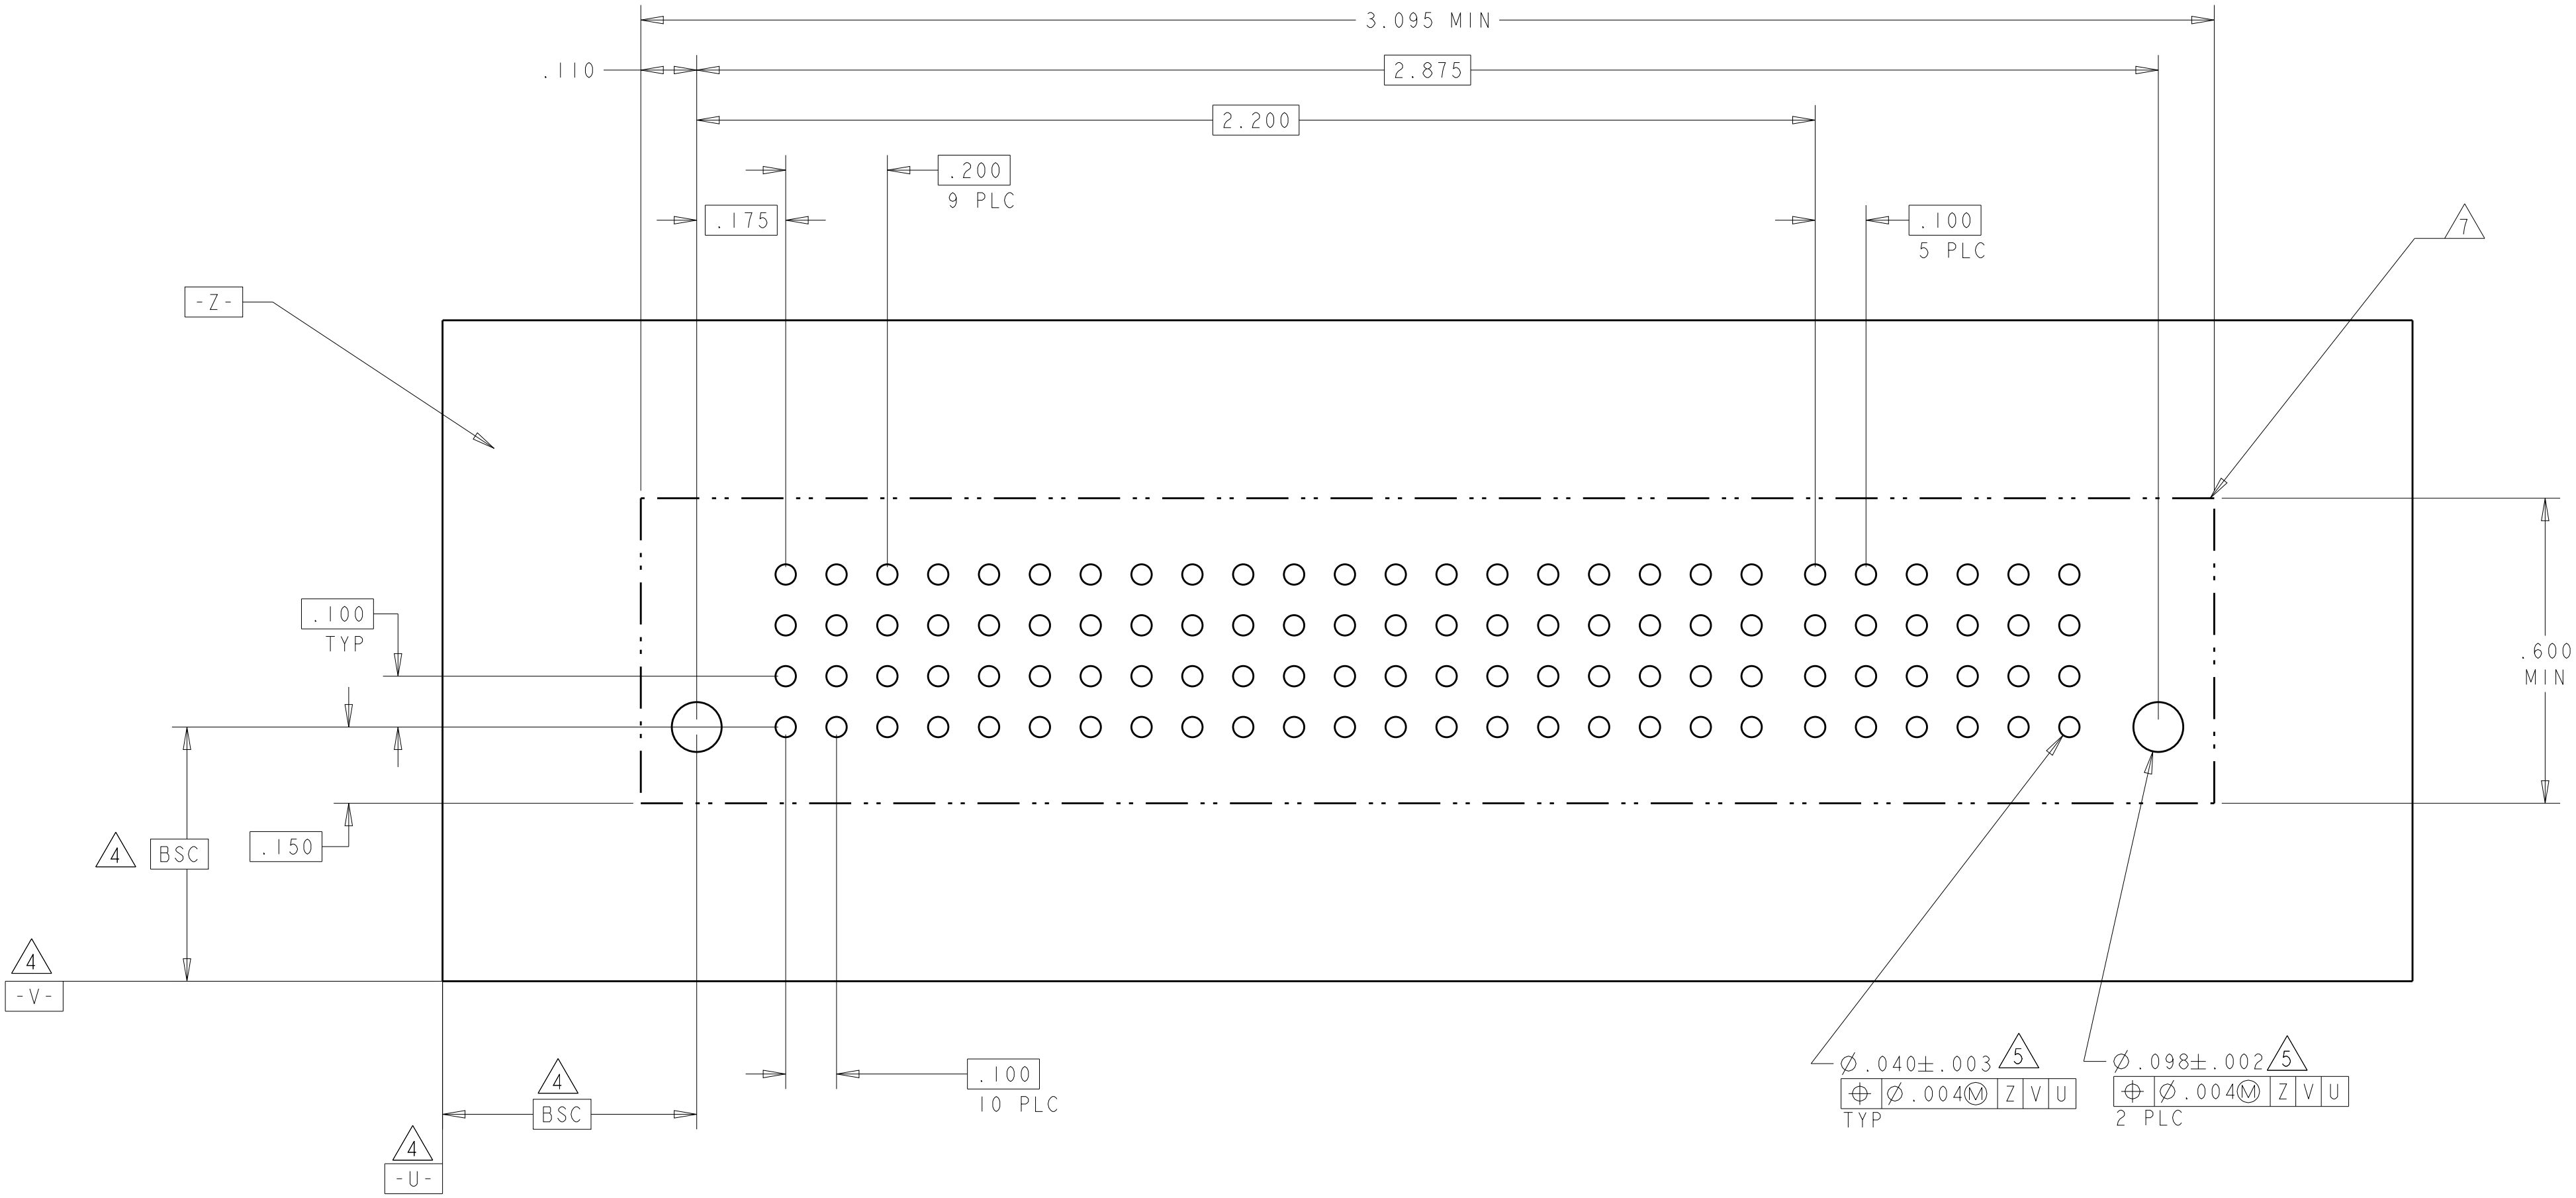

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: D. ZHU
CHK: S. ZHAO
APVD: S. ZHAO

DATE: 15NOV2007

DIMENSIONS: INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC: 108-2292
APPLICATION SPEC: 114-13251
WEIGHT: -

MATERIAL: -

Customer Drawing

NAME: VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE



SIZE: A1
CAGE CODE: 00779
DRAWING NO: 6450820

RESTRICTED TO: -

TE Connectivity

SCALE: -
SHEET: 19 OF 20
REV: G8

68

4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9