

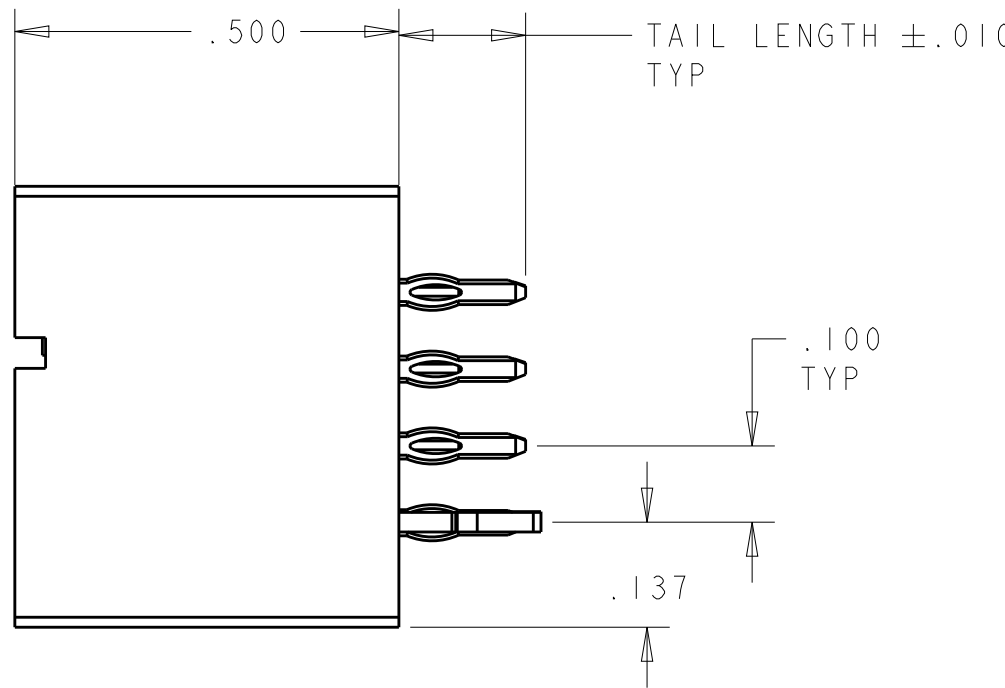
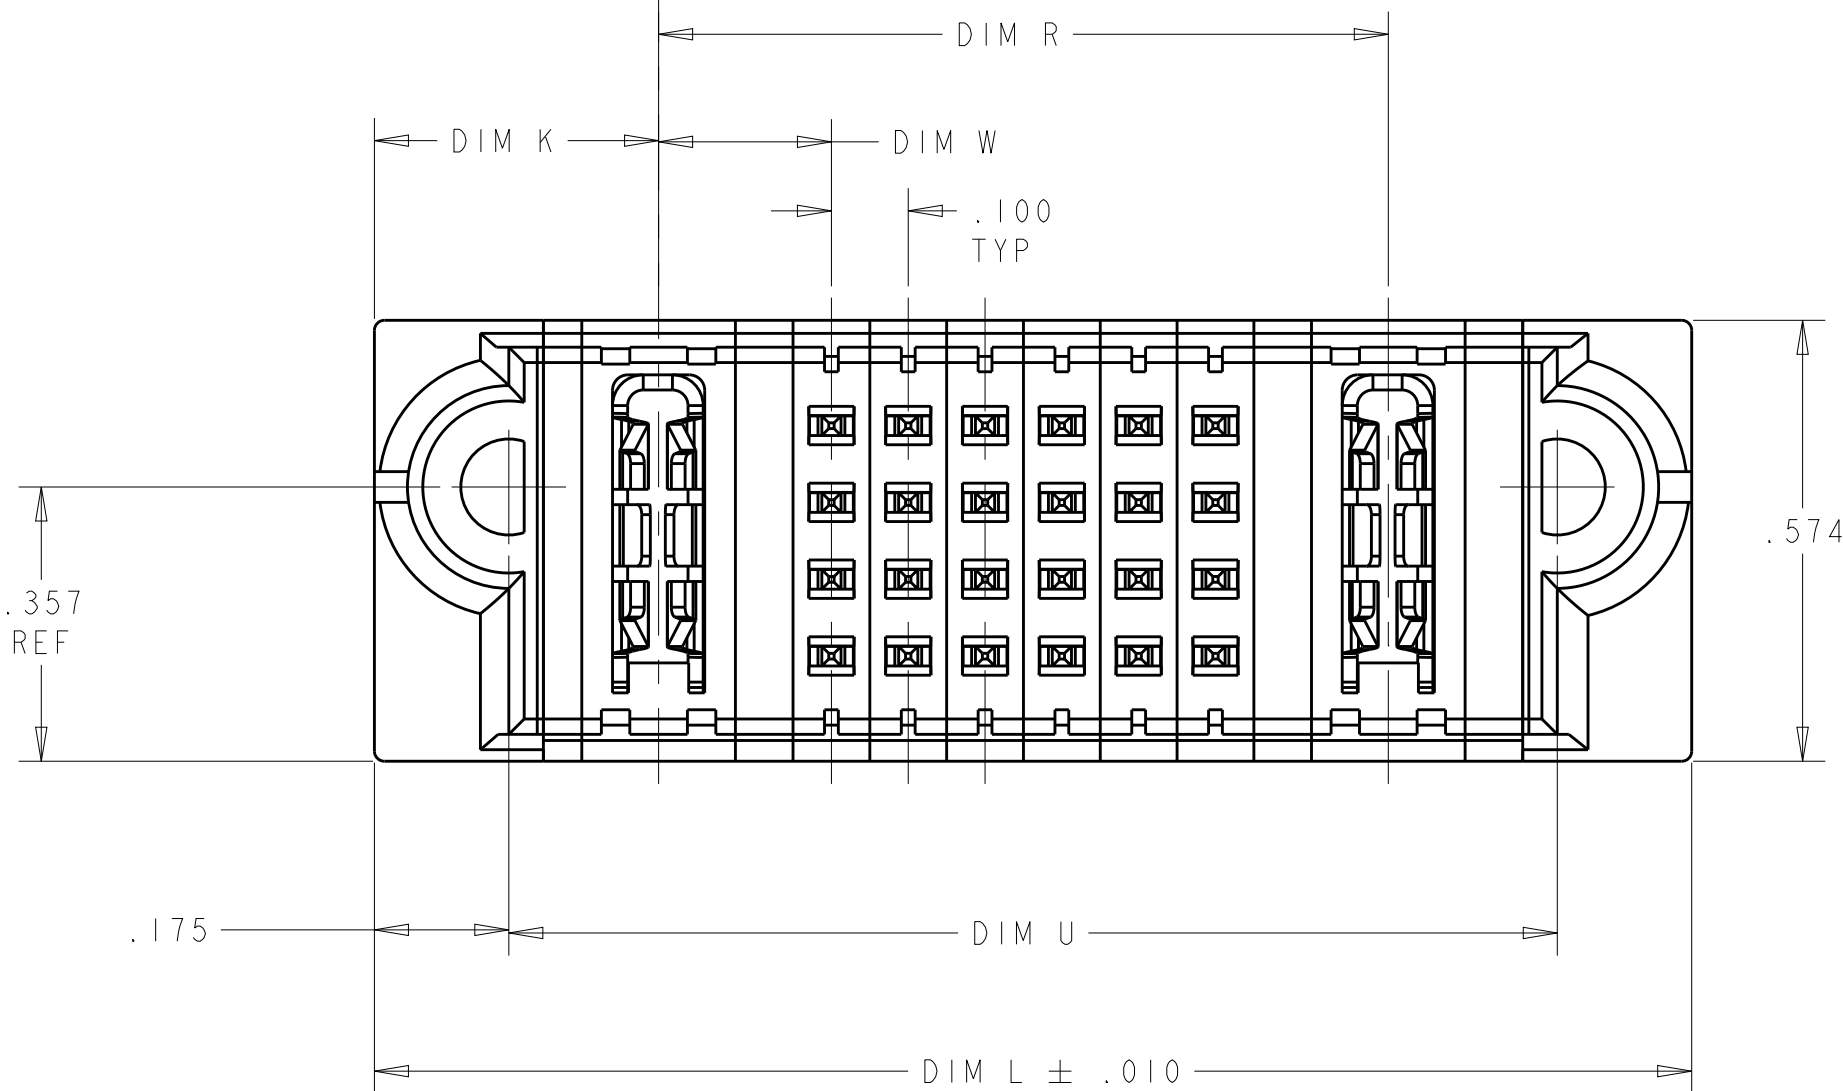
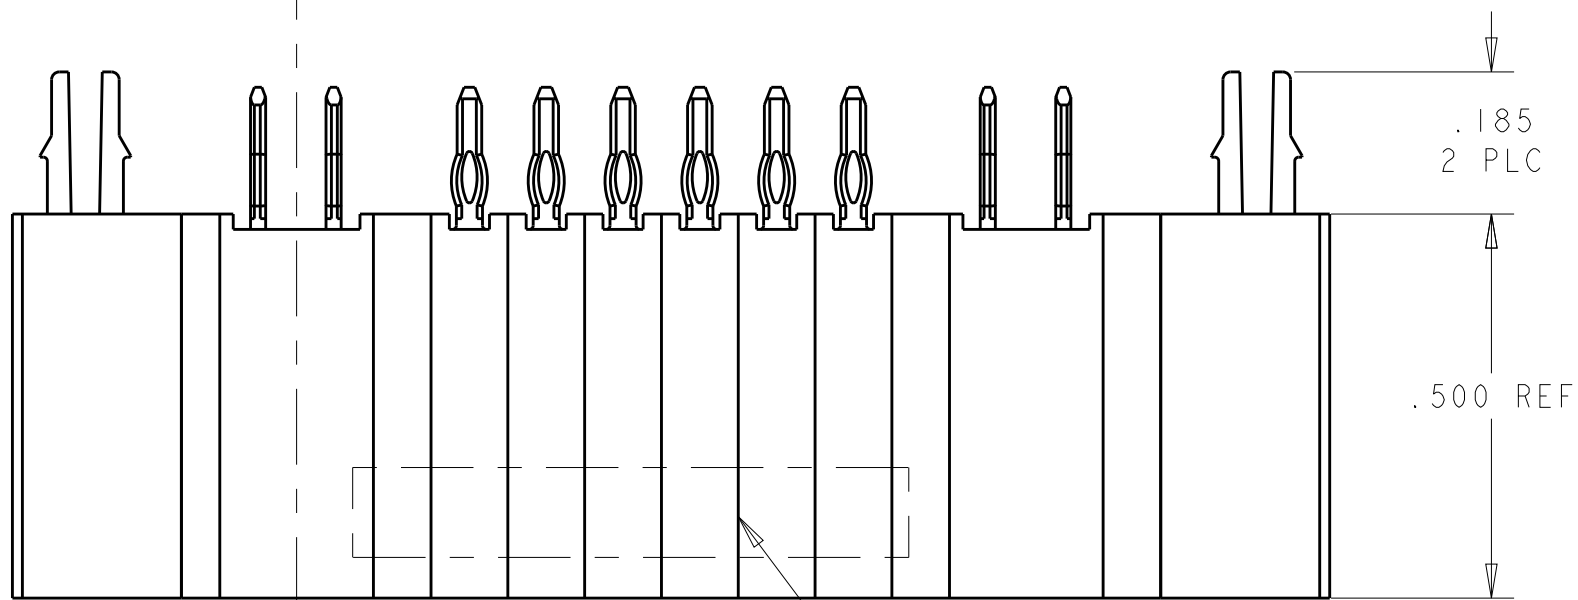


LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			G6	ADD NEW PART -25	19AUG2013	AY	SZ	
			G7	UPDATE -25 MATING SEQUENCE	29AUG2013	AY	SZ	
			G8	UPDATE -25 MATING SEQUENCE	30AUG2013	AY	SZ	

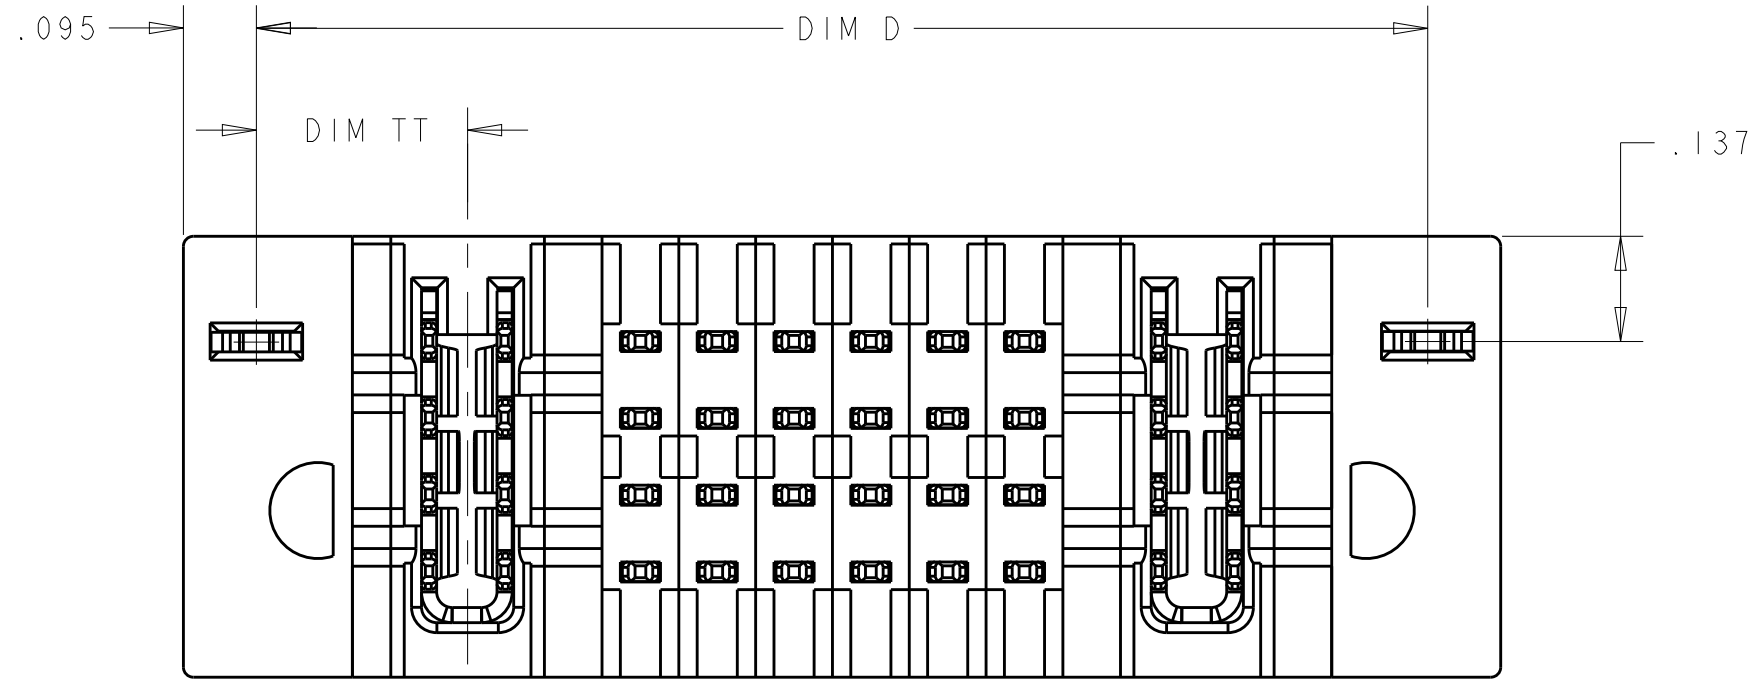

- 1
- HEADER HOUSING: THERMO PLASTIC, BLACK, UL94 V-O; CONTACTS AND RETENTION CLIPS: COPPER ALLOY.
- 2
- CONTACT PLATING:NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- 3
- "AMP", PART NUMBER AND DATE CODE MARKED IN THIS AREA. PARTS UNDER 2.50 LONG MAY BE MARKED ON BOTH SIDES.
- 4
- DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5
- PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 6
- A SEATING TOOL IS REQUIRED TO SEAT THE HEADER ON THE P.C. BOARD. PLEASE REFER TO THE 114-13251 APPLICATION SPEC.
- 7
- MECHANICAL CONNECTOR KEEP OUT ZONE.
- 8
- DETAIL DIM SEE PART VIEW
- 9
- FOR THE CONFIGURATION WITH VENT, PLEASE REFER TO SHEET 2.
- 10
- FOR THE CONFIGURATION LP/S/LP WITH VENT, PLEASE REFER TO SHEET 3.
- 11
- FOR THE CONFIGURATION LP/S/P, WITH VENT, PLEASE REFER TO SHEET 4.

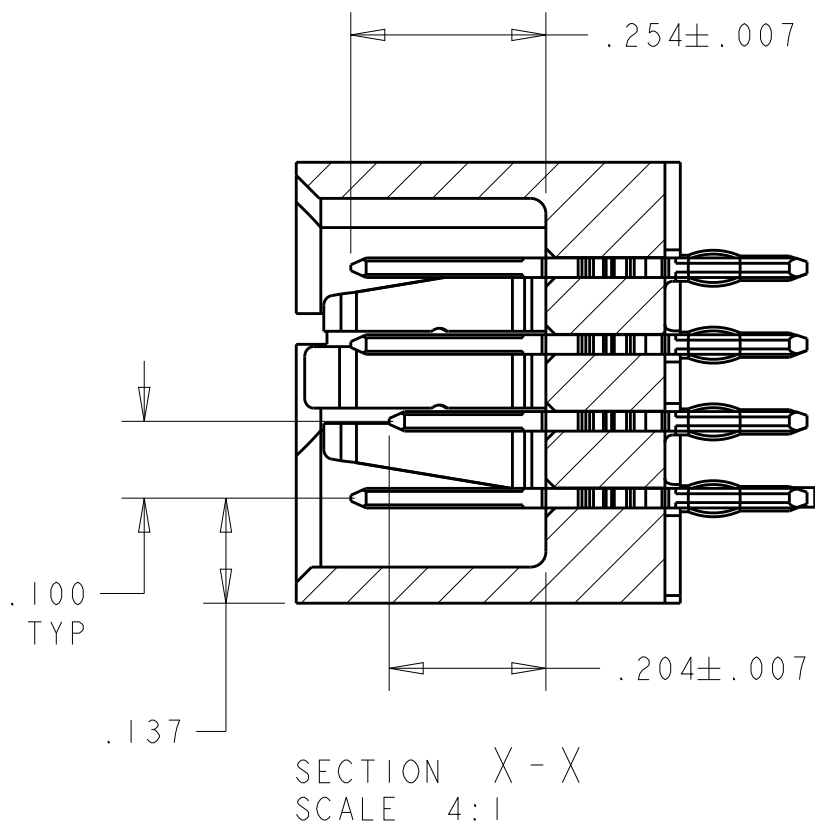

G6	.240	.165	.1825	2.220	1.870	2.030	1.145	.7125	.2775	3LP + 16S + 4LP	2-6450820-5
	.200	-	.225	3.065	2.715	2.875	-	1.975	.320	10HDP + 24S	2-6450820-3
	.300	-	.275	1.790	1.440	1.600	-	1.150	.370	4ACP + 4S	2-6450820-2
	.115	.250	.2075	2.555	2.205	2.365	1.4075	.7325	.3025	6LP + 24S + 3P	2-6450820-1
	-	-	.1825	1.120	.770	.930	.565	.1575	.2775	1LP + 16S + 1LP	2-6450820-0
	.250	.250	.250	3.540	3.190	3.350	1.850	1.175	.345	5P + 24S + 5P	1-6450820-9
	.250	.250	.225	4.140	3.790	3.950	2.500	1.200	.320	5P + 48S + 5P	1-6450820-8
	.250	-	.225	4.640	4.290	4.450	-	2.950	.320	12P + 48S	1-6450820-7
	.250	-	.225	2.415	2.065	2.225	-	1.425	.320	6P + 20S	1-6450820-5
	-	.300	.175	2.665	2.315	2.475	.575	-	.270	20S + 6ACP	1-6450820-4
	.300	.300	.225	2.840	2.490	2.650	1.600	.850	.320	3ACP + 24S + 3ACP	1-6450820-3
	.250	.250	.250	4.040	3.690	3.850	2.100	1.425	.345	6P + 24S + 6P	1-6450820-1
G3	.250	.250	.225	6.240	5.890	6.050	3.850	1.950	.320	8P + 72S + 8P	6450820-9
	.250	.250	.225	6.240	5.890	6.050	3.850	1.950	.320	8P + 72S + 8P	6450820-8
	8	8	.250	5.390	5.040	5.200	8	8	.345	14P + 40S	6450820-7
	8	8	.250	5.390	5.040	5.200	8	8	.345	14P + 40S	6450820-6
	.250	.250	.250	2.640	2.290	2.450	1.200	.925	.345	4P + 8S + 4P	6450820-5
	.250	.250	.250	3.640	3.290	3.450	1.700	1.425	.345	6P + 8S + 6P	6450820-4
	.250	.250	.275	2.790	2.440	2.600	1.550	.675	.370	3P + 32S + 3P	6450820-3
	-	-	.250	1.540	1.190	1.350	.850	.175	.345	1P + 24S + 1P	6450820-2
	-	-	.275	1.715	1.365	1.525	.950	.225	.370	1P + 24S + 1P	6450820-1
	DIM S	DIM T	DIM TT	DIM L	DIM U	DIM D	DIM R	DIM W	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.0020
FINISH

-

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251

WEIGHT
-

Customer Drawing

NAME
S. ZHAO

TE Connectivity

VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE

SIZE
A100779

CAGE CODE
-

DRAWING NO
6450820

RESTRICTED TO
-




SCALE
-

SHEET
1


OF
20

REV
G8

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


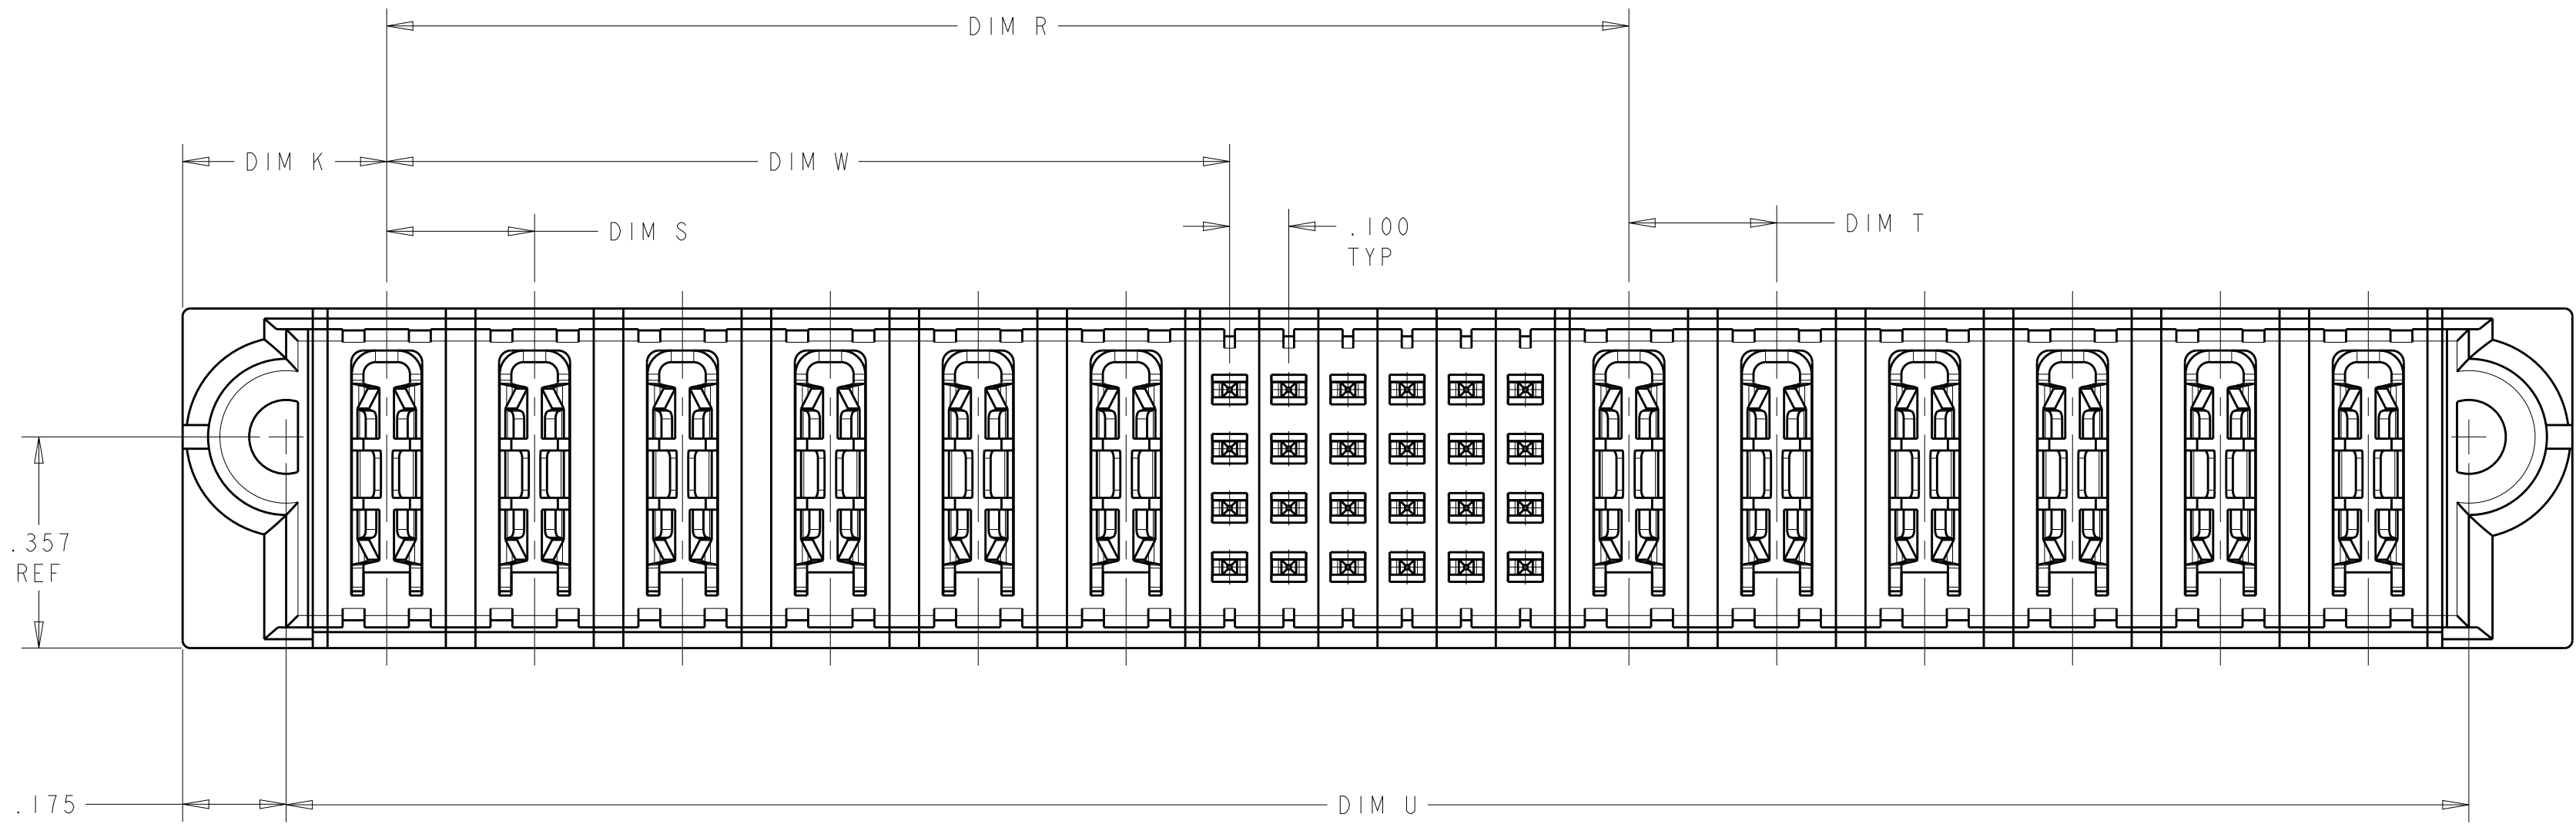
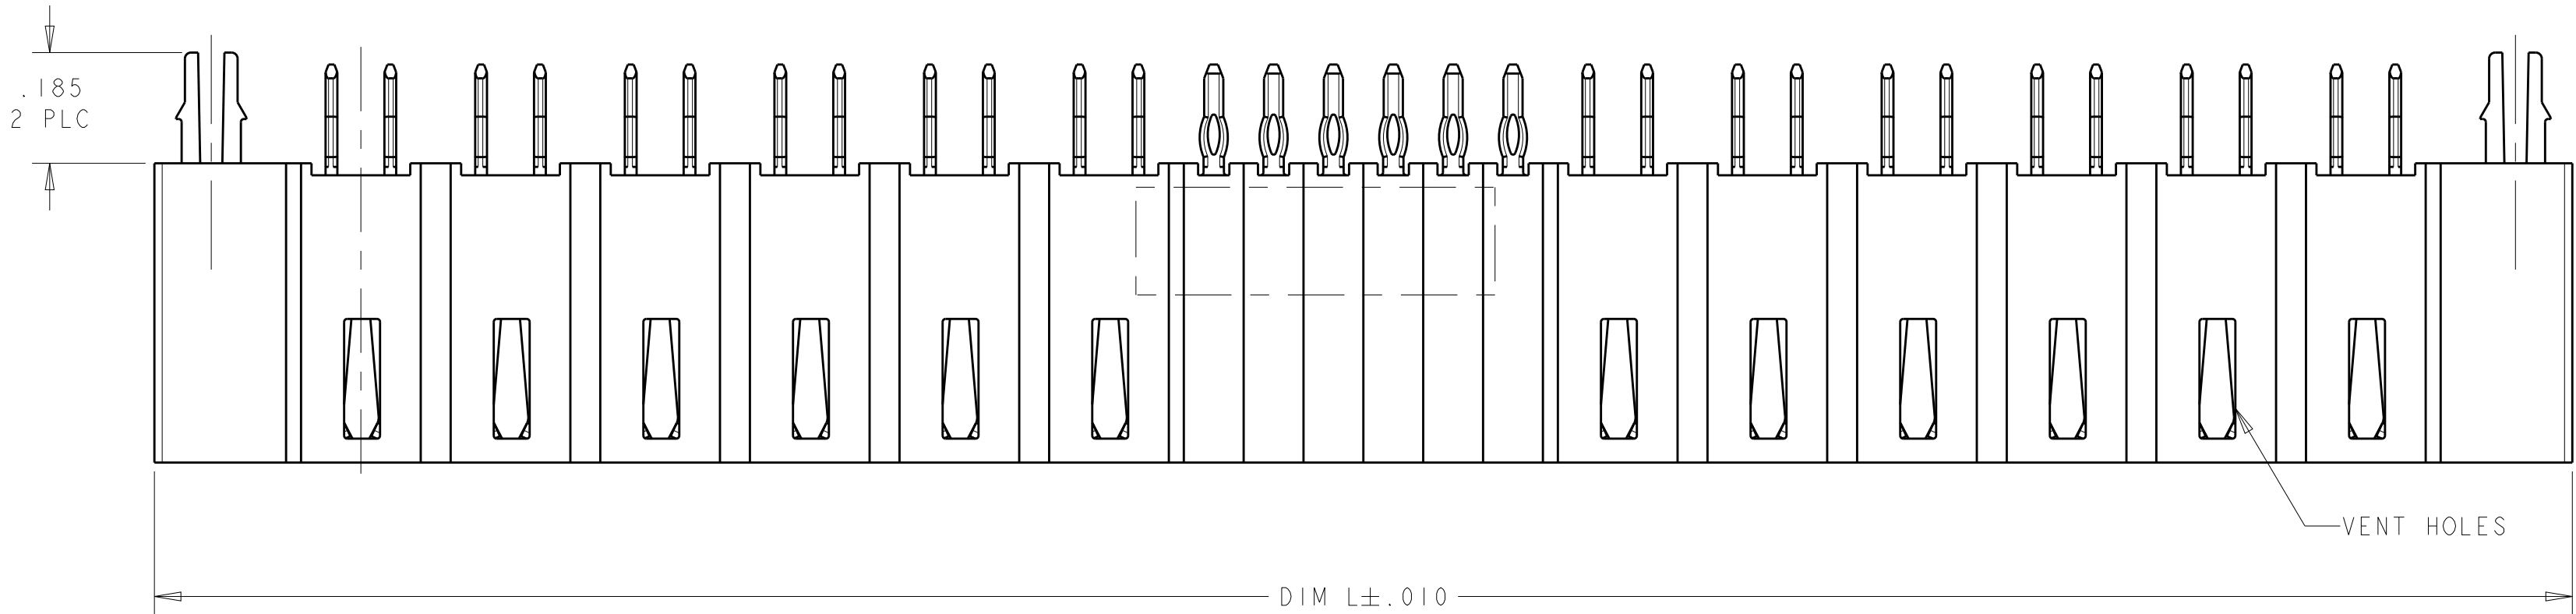
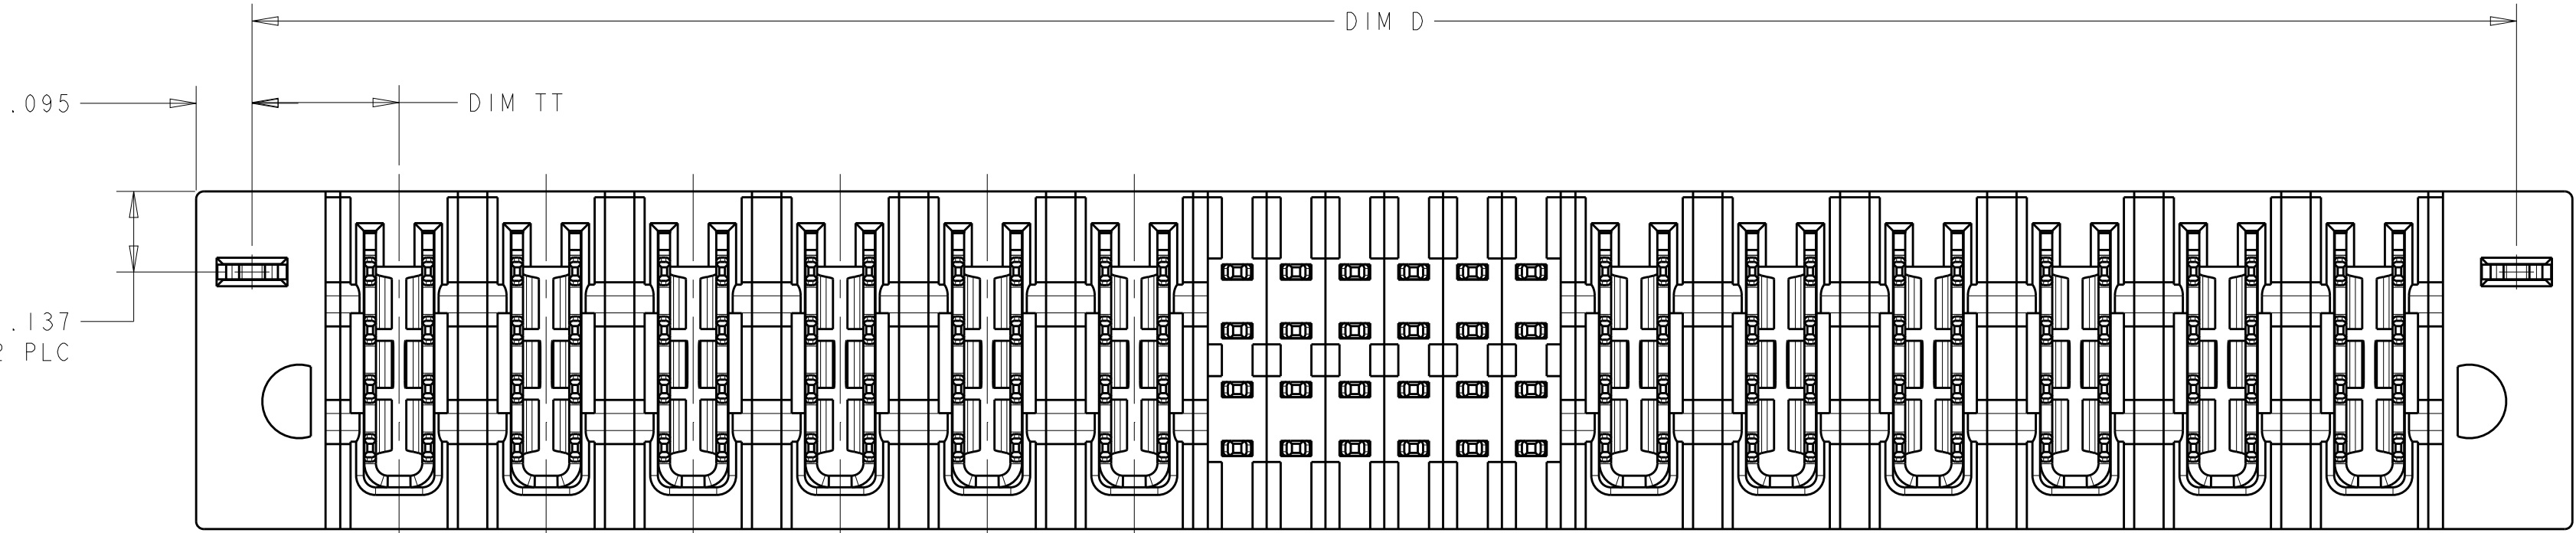


9 FOR THE CONFIGURATION WITH VENT
PART NO. 1-6450820-1

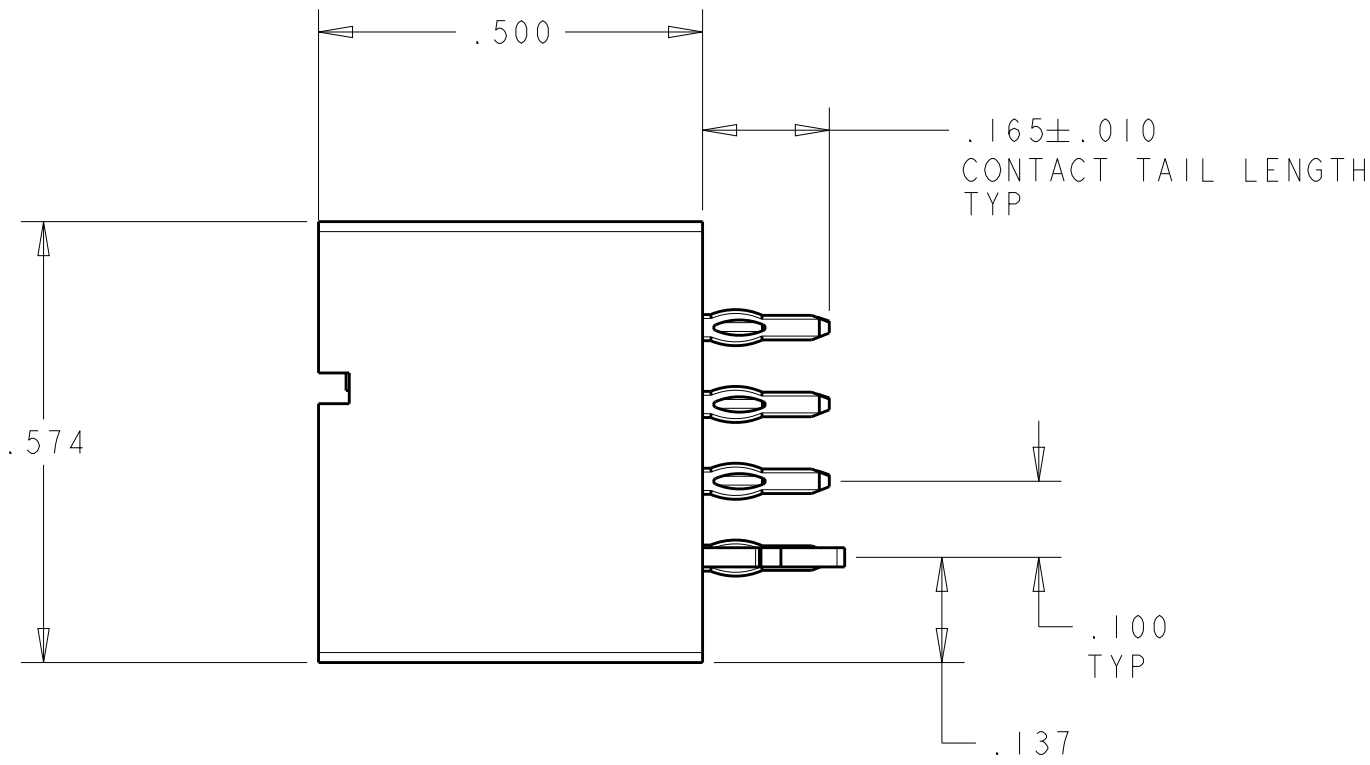


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		Customer Drawing	
MATERIAL		FINISH		SCALE	
-		-		SHEET 2 OF 20	
				REV G8	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

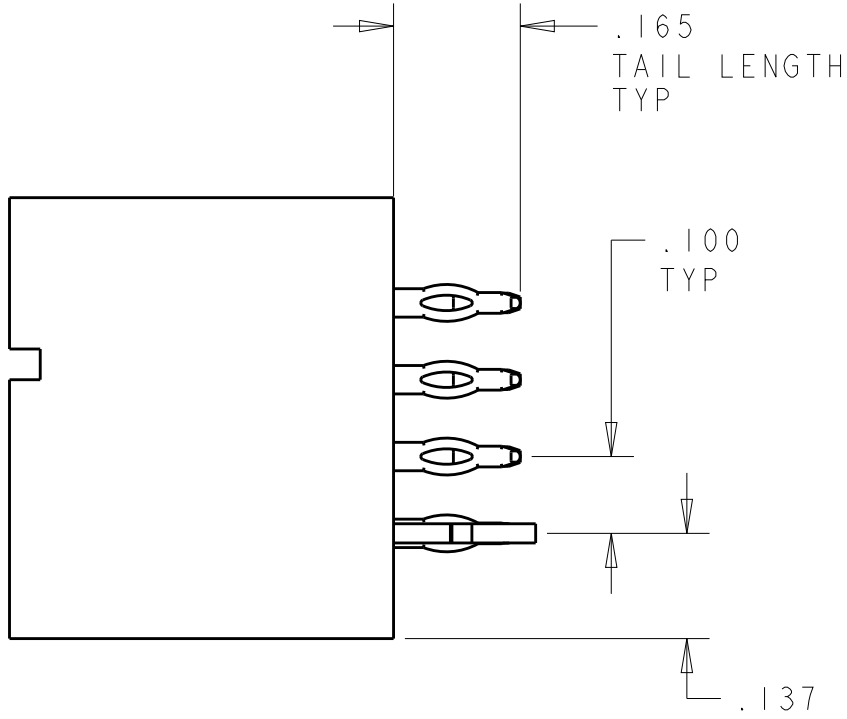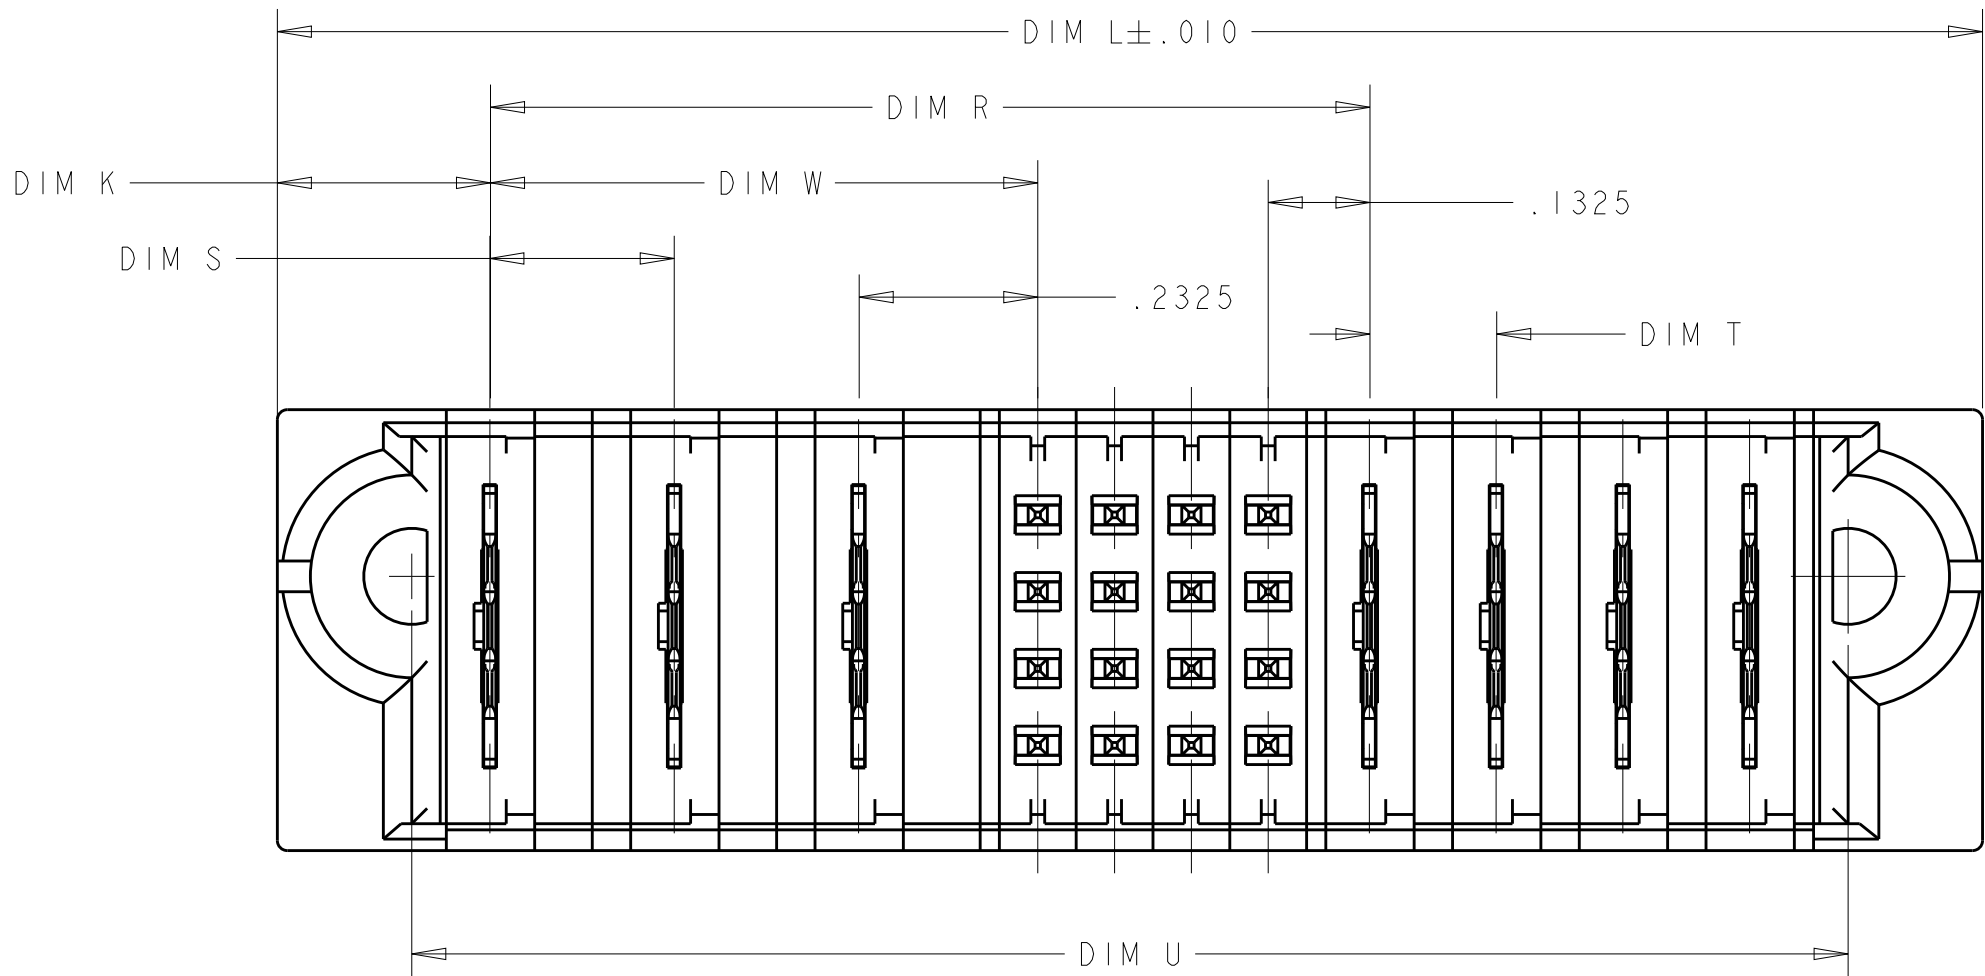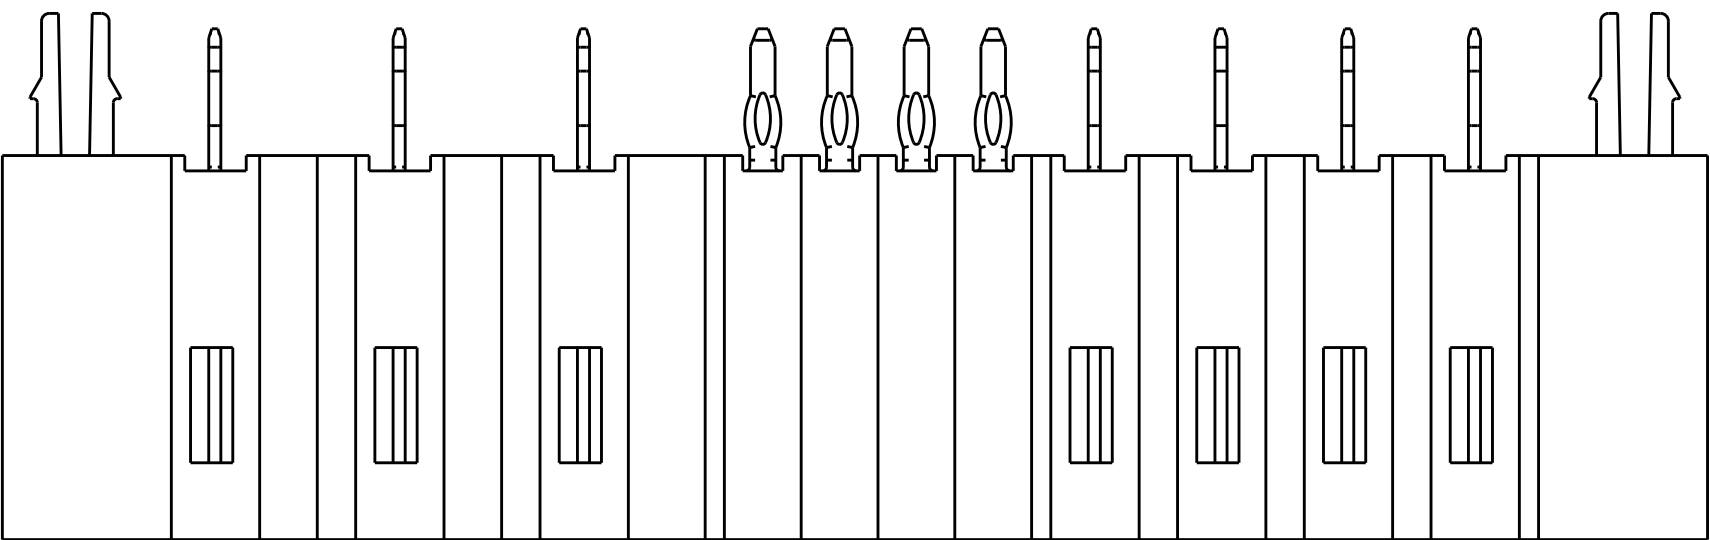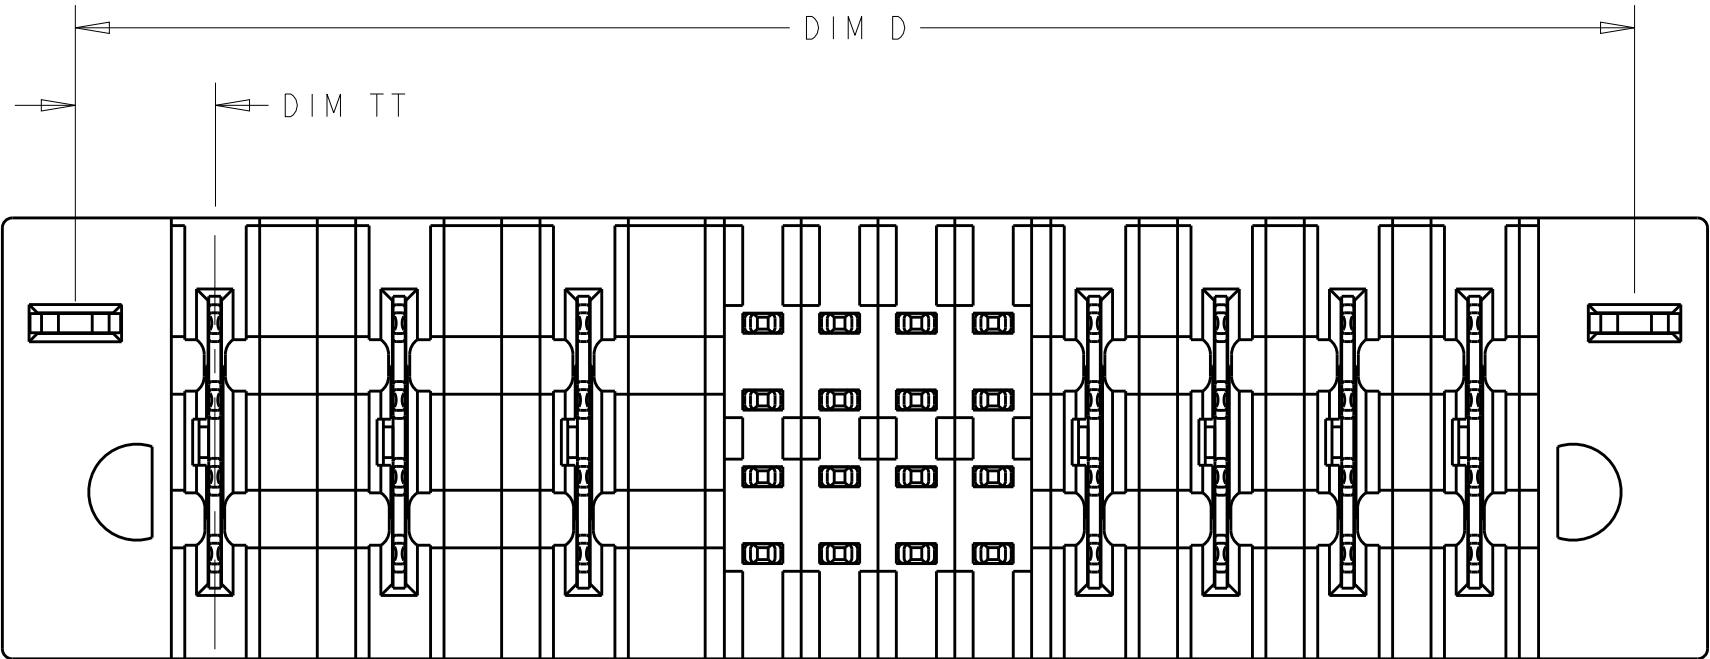


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	TE Connectivity	
		CHK S. ZHAO	15NOV2007		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
INCHES		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES #2° FINISH		PRODUCT SPEC	
				APPLICATION SPEC	
MATERIAL		WEIGHT		SIZE	
-		-		A100779C=6450820	
		Customer Drawing		RESTRICTED TO	
				SCALE	
				SHEET 3 OF 20	
				REV G8	


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

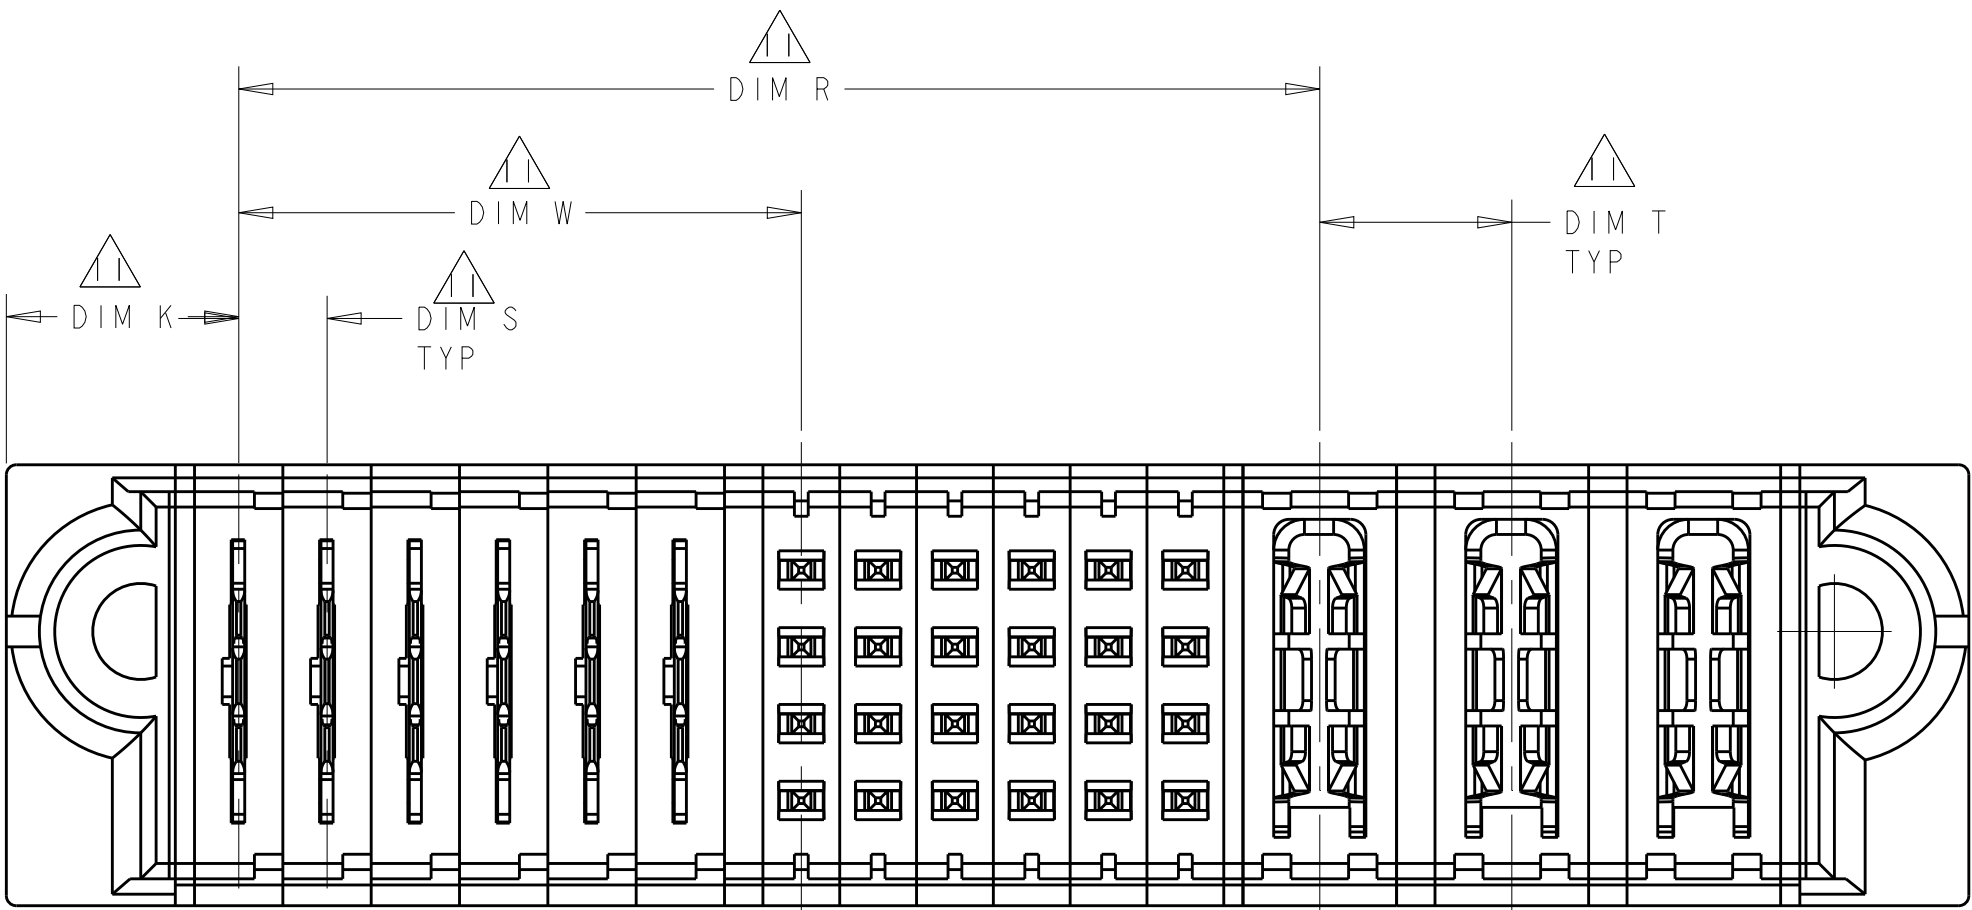

FOR THE CONFIGURATION LP/S/P WITH VENT
OTHER DIMSENSIONS PLEASE REFER TO SHEET 2



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	 TE Connectivity	
DIMENSIONS: INCHES		CHK S. ZHAO	15NOV2007		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH		VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
MATERIAL -		WEIGHT -		SIZE A1	
		Customer Drawing		CAGE CODE 00779	
				DRAWING NO 6450820	
				RESTRICTED TO -	
				SCALE -	
				SHEET 4	
				OF 20	
				REV G8	

LOC		DIST		REVISONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P1	1	2	3	4	5	6	P2	
6450820-1	D			EV	EV	EV	EV	EV	EV		
	EV			EV	EV	EV	EV	EV			
	EV			EV	EV	EV	EV	EV			
	EV			EV	EV	ES	EV	EV			
	EV			EV	EV	EV	EV	EV			
IP + 24S + IP											



PART NUMBER	ROWS		SIGNAL					POWER						
			1	2	3	4	5	P1	P2	P3	P4	P5	P6	
1-6450820-4	D		EV	EV	EV	EV	EV							
	EV		EV	EV	EV	EV								
	EV		EV	EV	EV	EV								
	EV		EV	EV	EV	EV								
20S + 6ACP														


E9

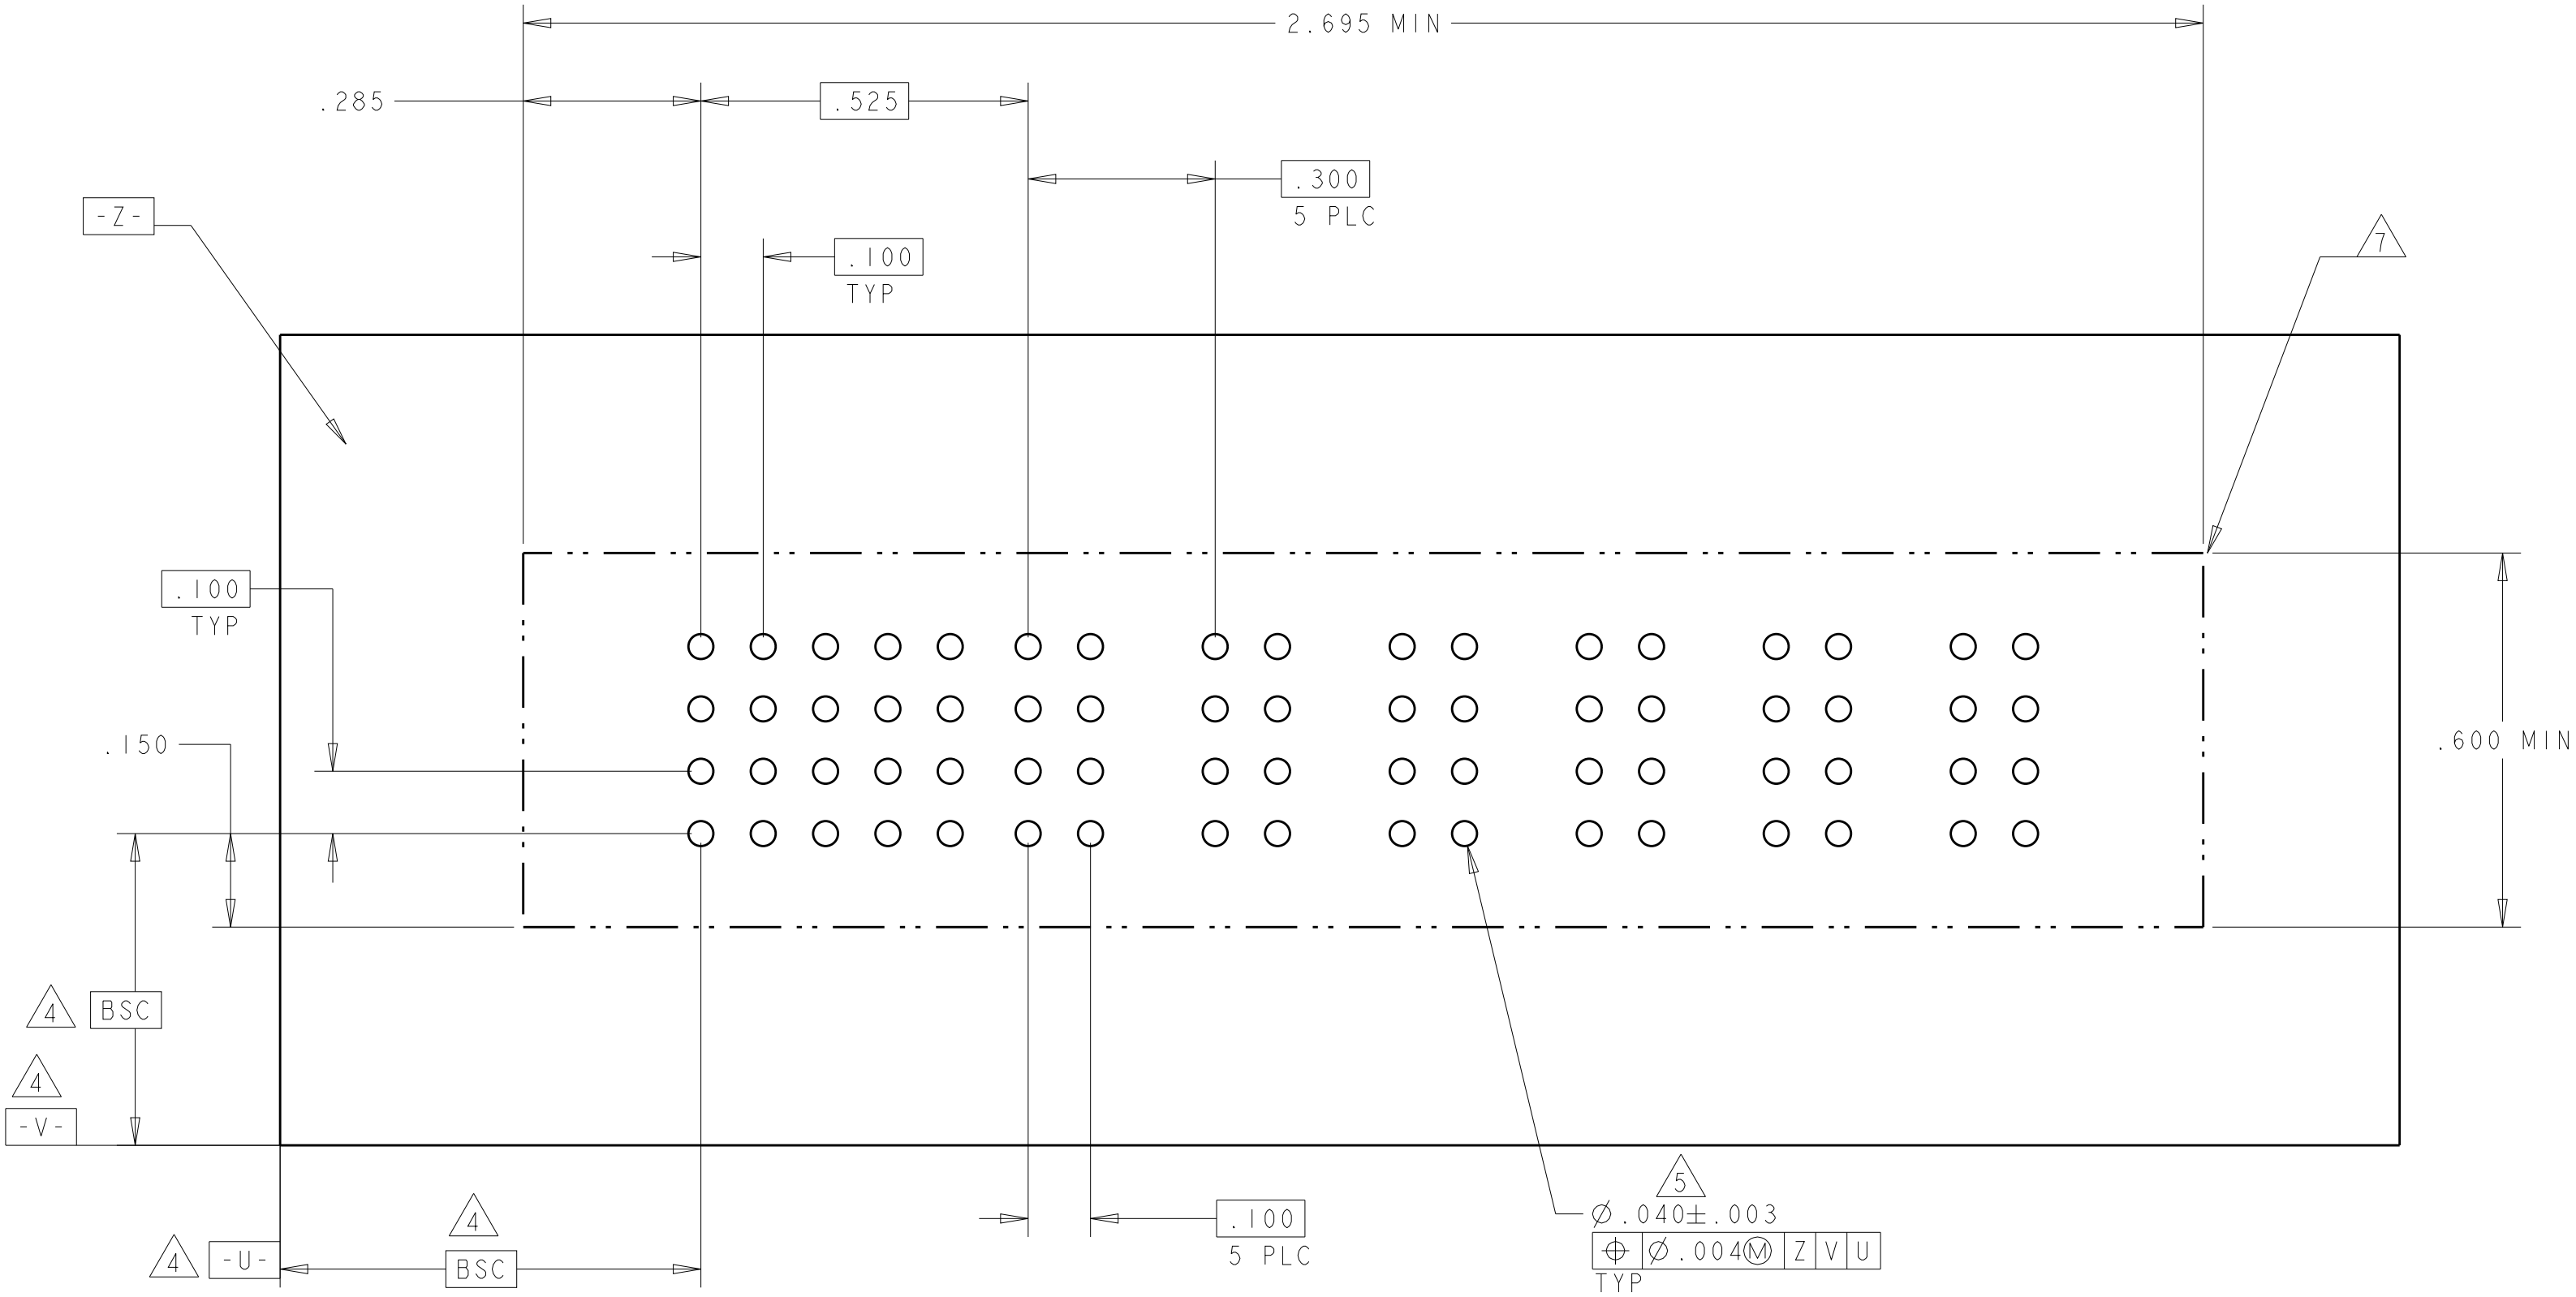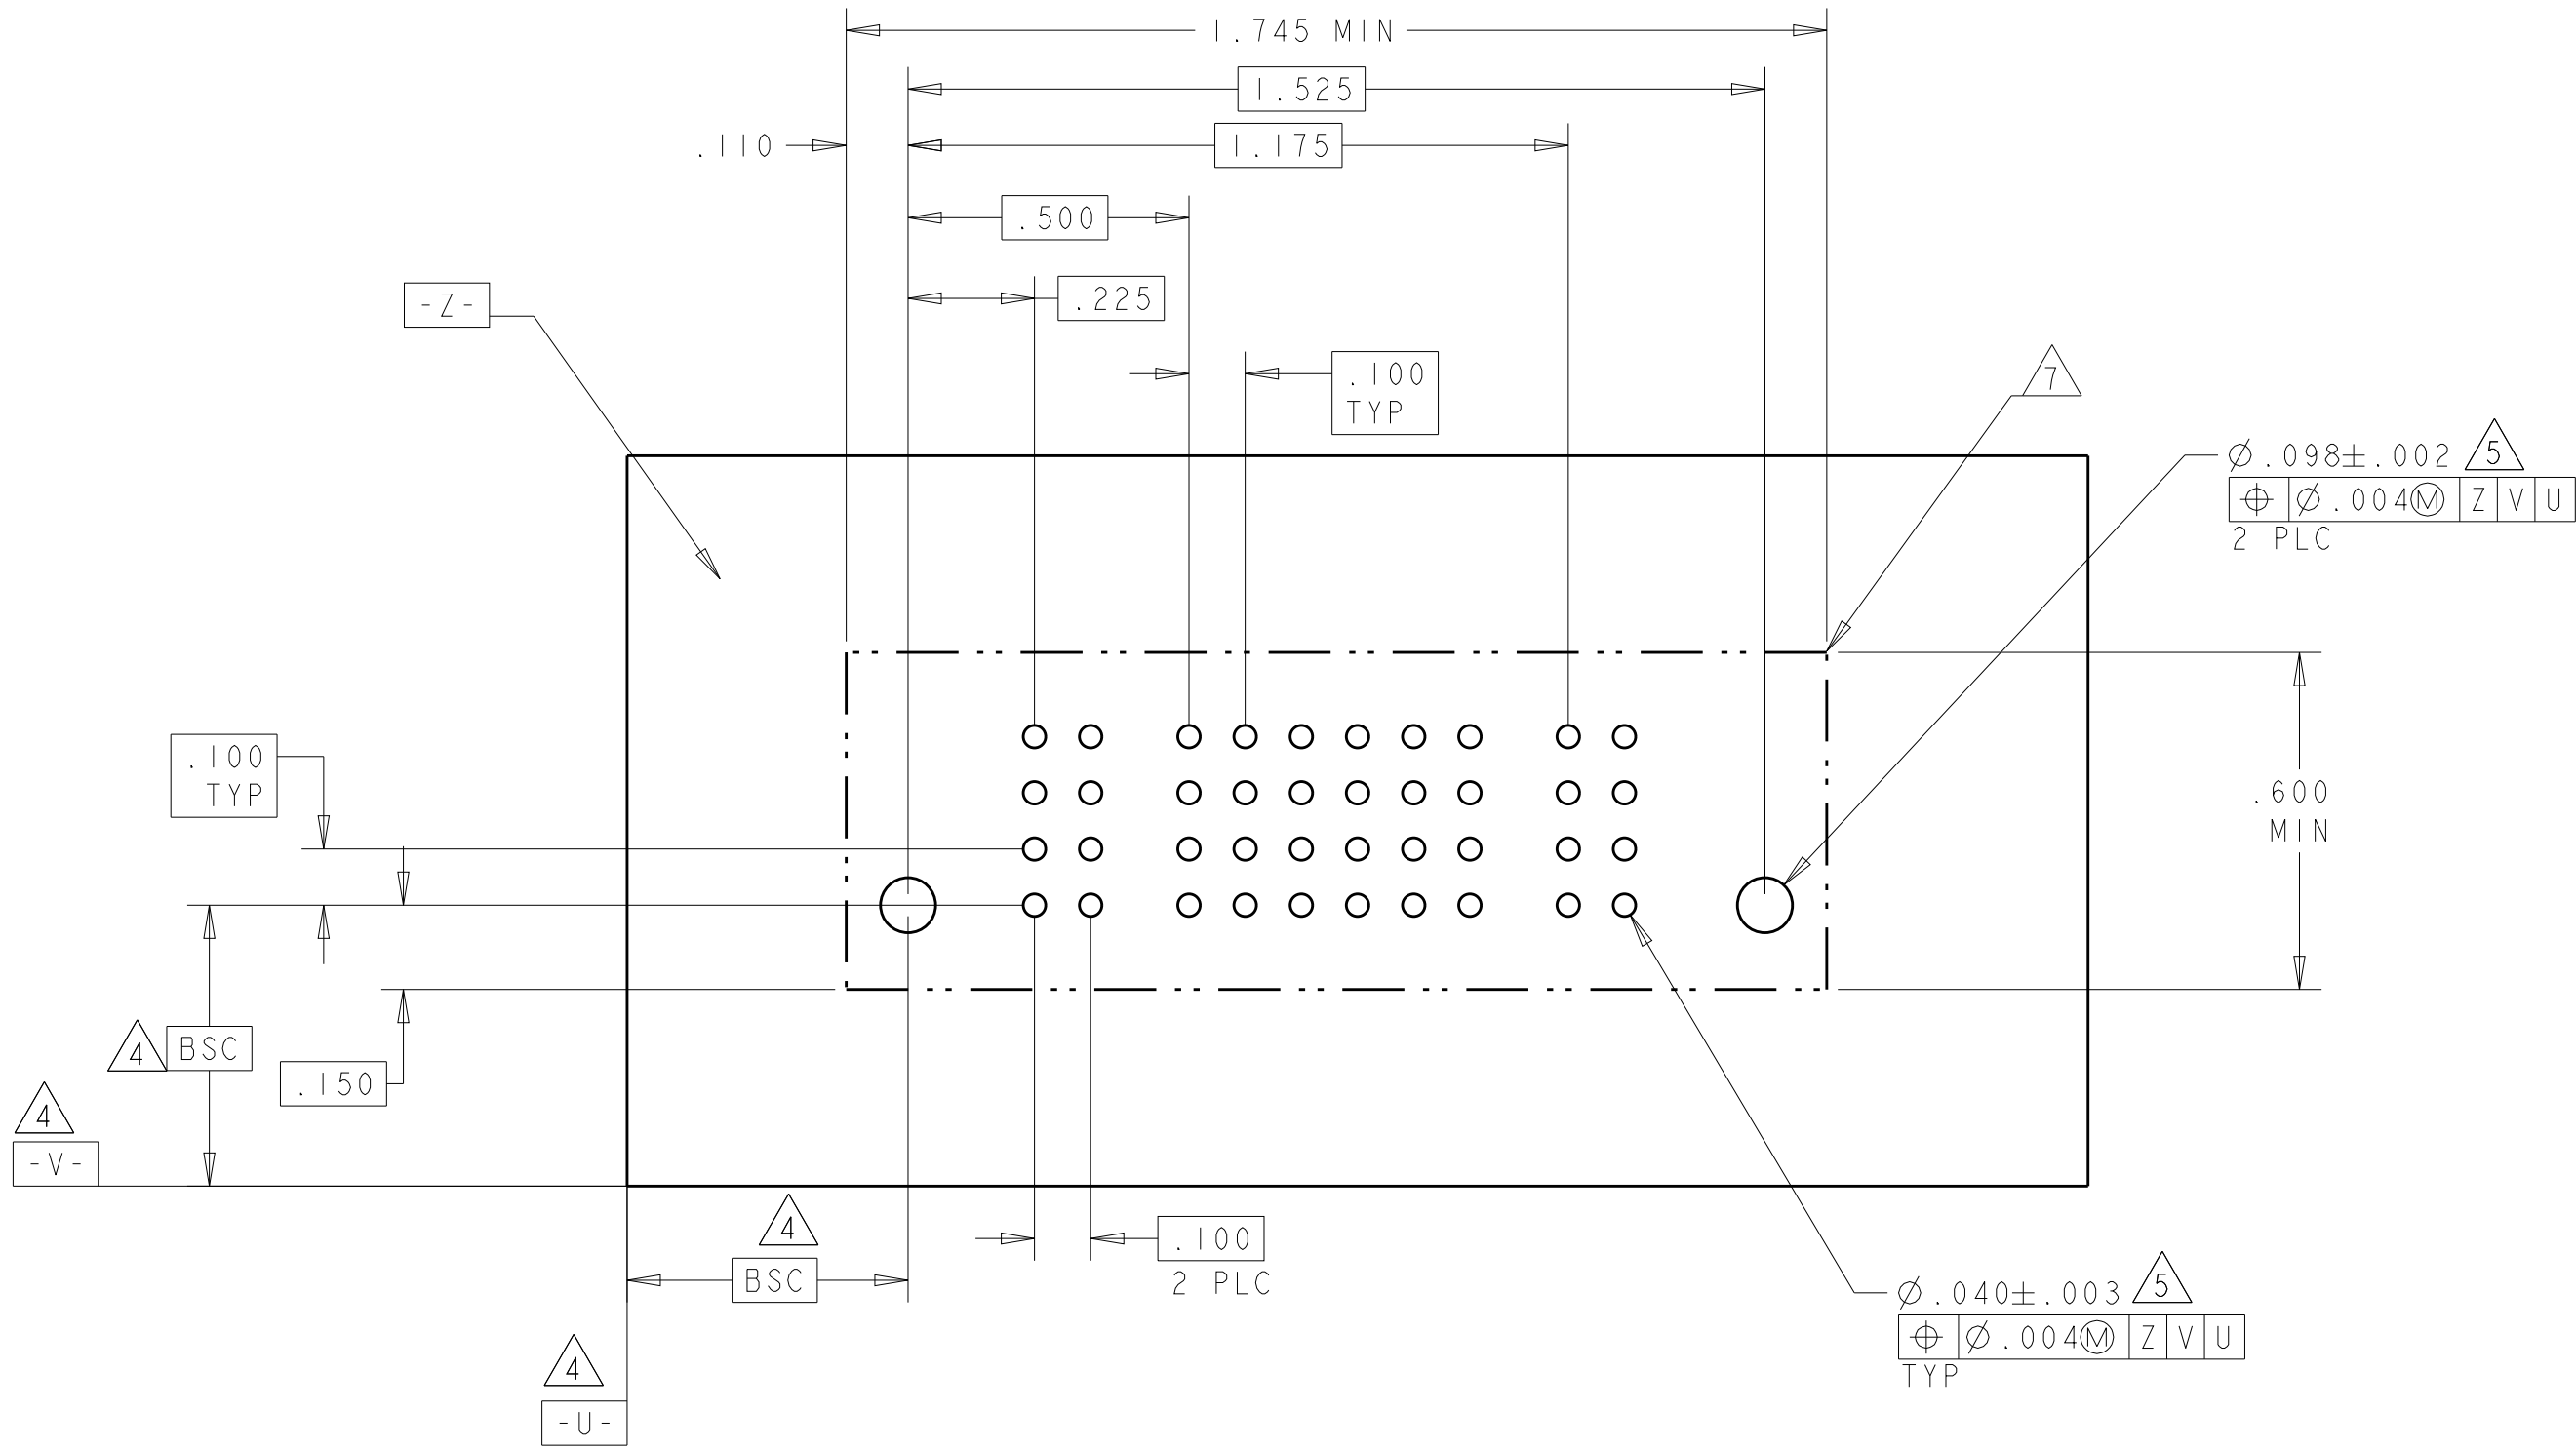


.165"	LOW POWER CONTACT MFBL	LZF
.165"	LOW POWER CONTACT	LZ
.165"	SIGNAL CONTACT MFBL	EF
-	HOLD DOWN	HD
.165"	SIGNAL CONTACT MLBF	ES
.165"	SIGNAL CONTACT STD	EV
.165"	POWER CONTACT	VM
TAIL LENGTH	DESCRIPTION	CODE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	15NOV2007	NAME	
		CHK	15NOV2007		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
INCHES				APPLICATION SPEC	
				114-13251	
				WEIGHT	
				Customer Drawing	
				SCALE	
				SHEET 5 OF 20	
				REV G8	

PART NUMBER	ROWS		POWER						SIGNAL					
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	
I-6450820-5	D													
	C													
	B													
	A													
6P + 20S														

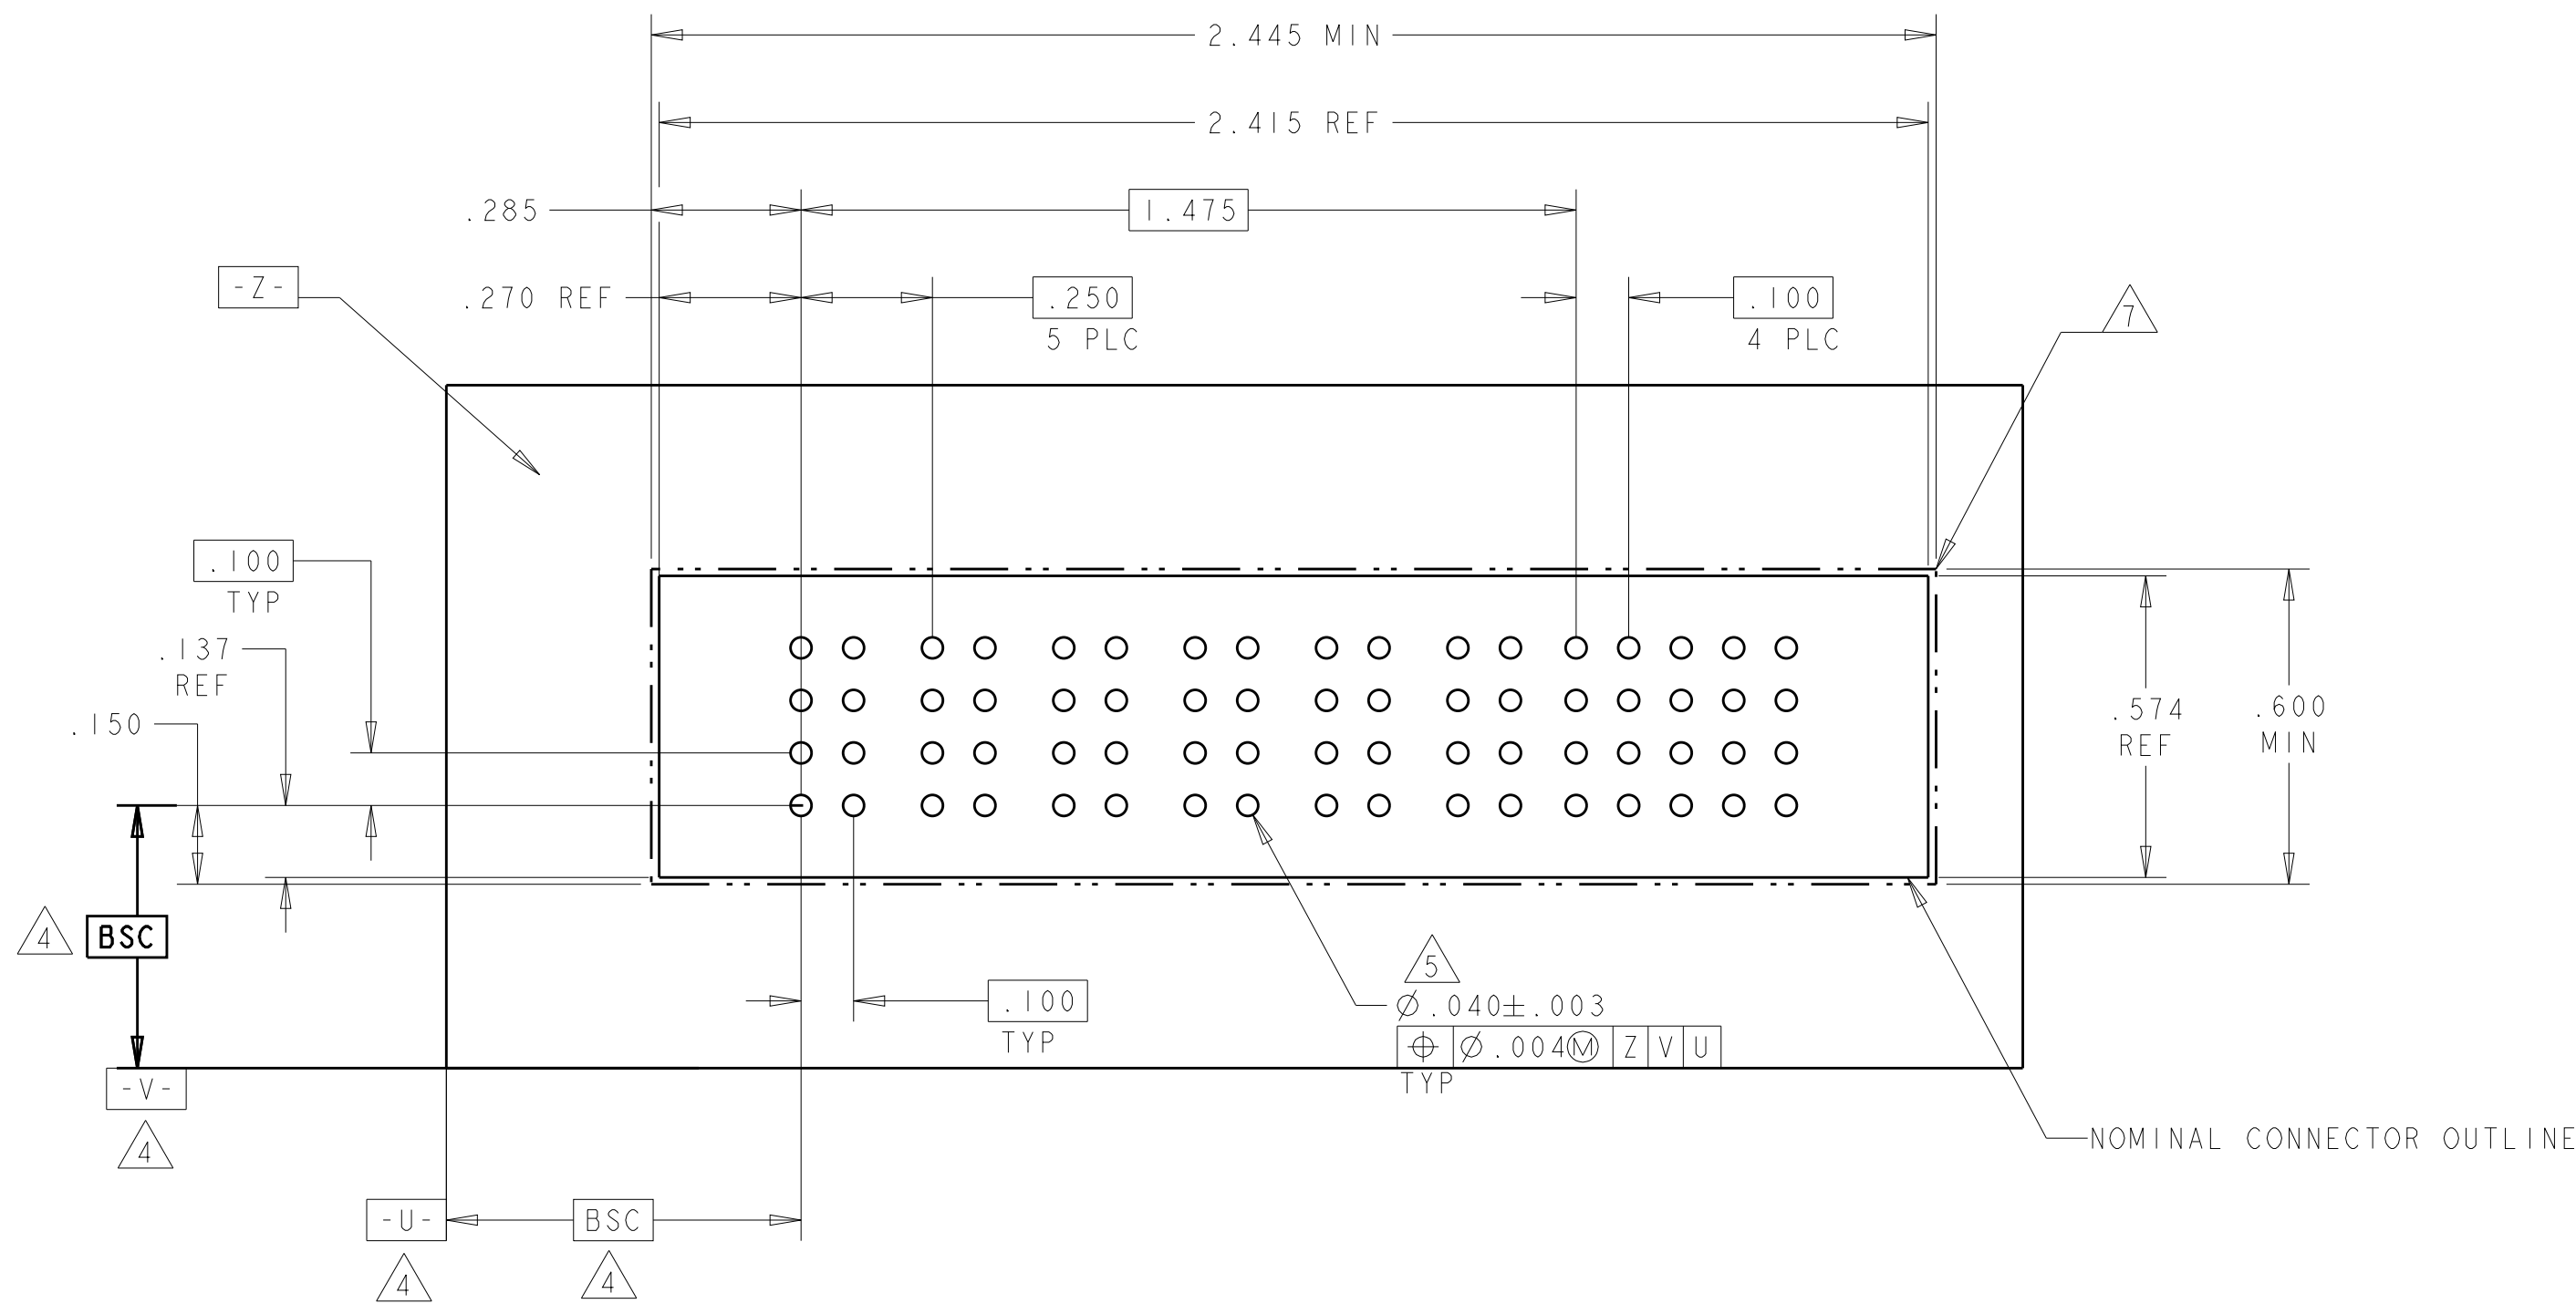
4805 (3/11)

PART NUMBER	ROWS		POWER						SIGNAL		POWER						
			P1	P2	P3	P4	P5	P6	1	2	P7	P8	P9	P10	P11	P12	
6450820-4	D C B A		VM	VM	VM	VM	VM	VM	EV	EV	VM	VM	VM	VM	VM	VM	
									EV	EV							
									EV	EV							
									EV	EV							
6P + 8S + 6P																	

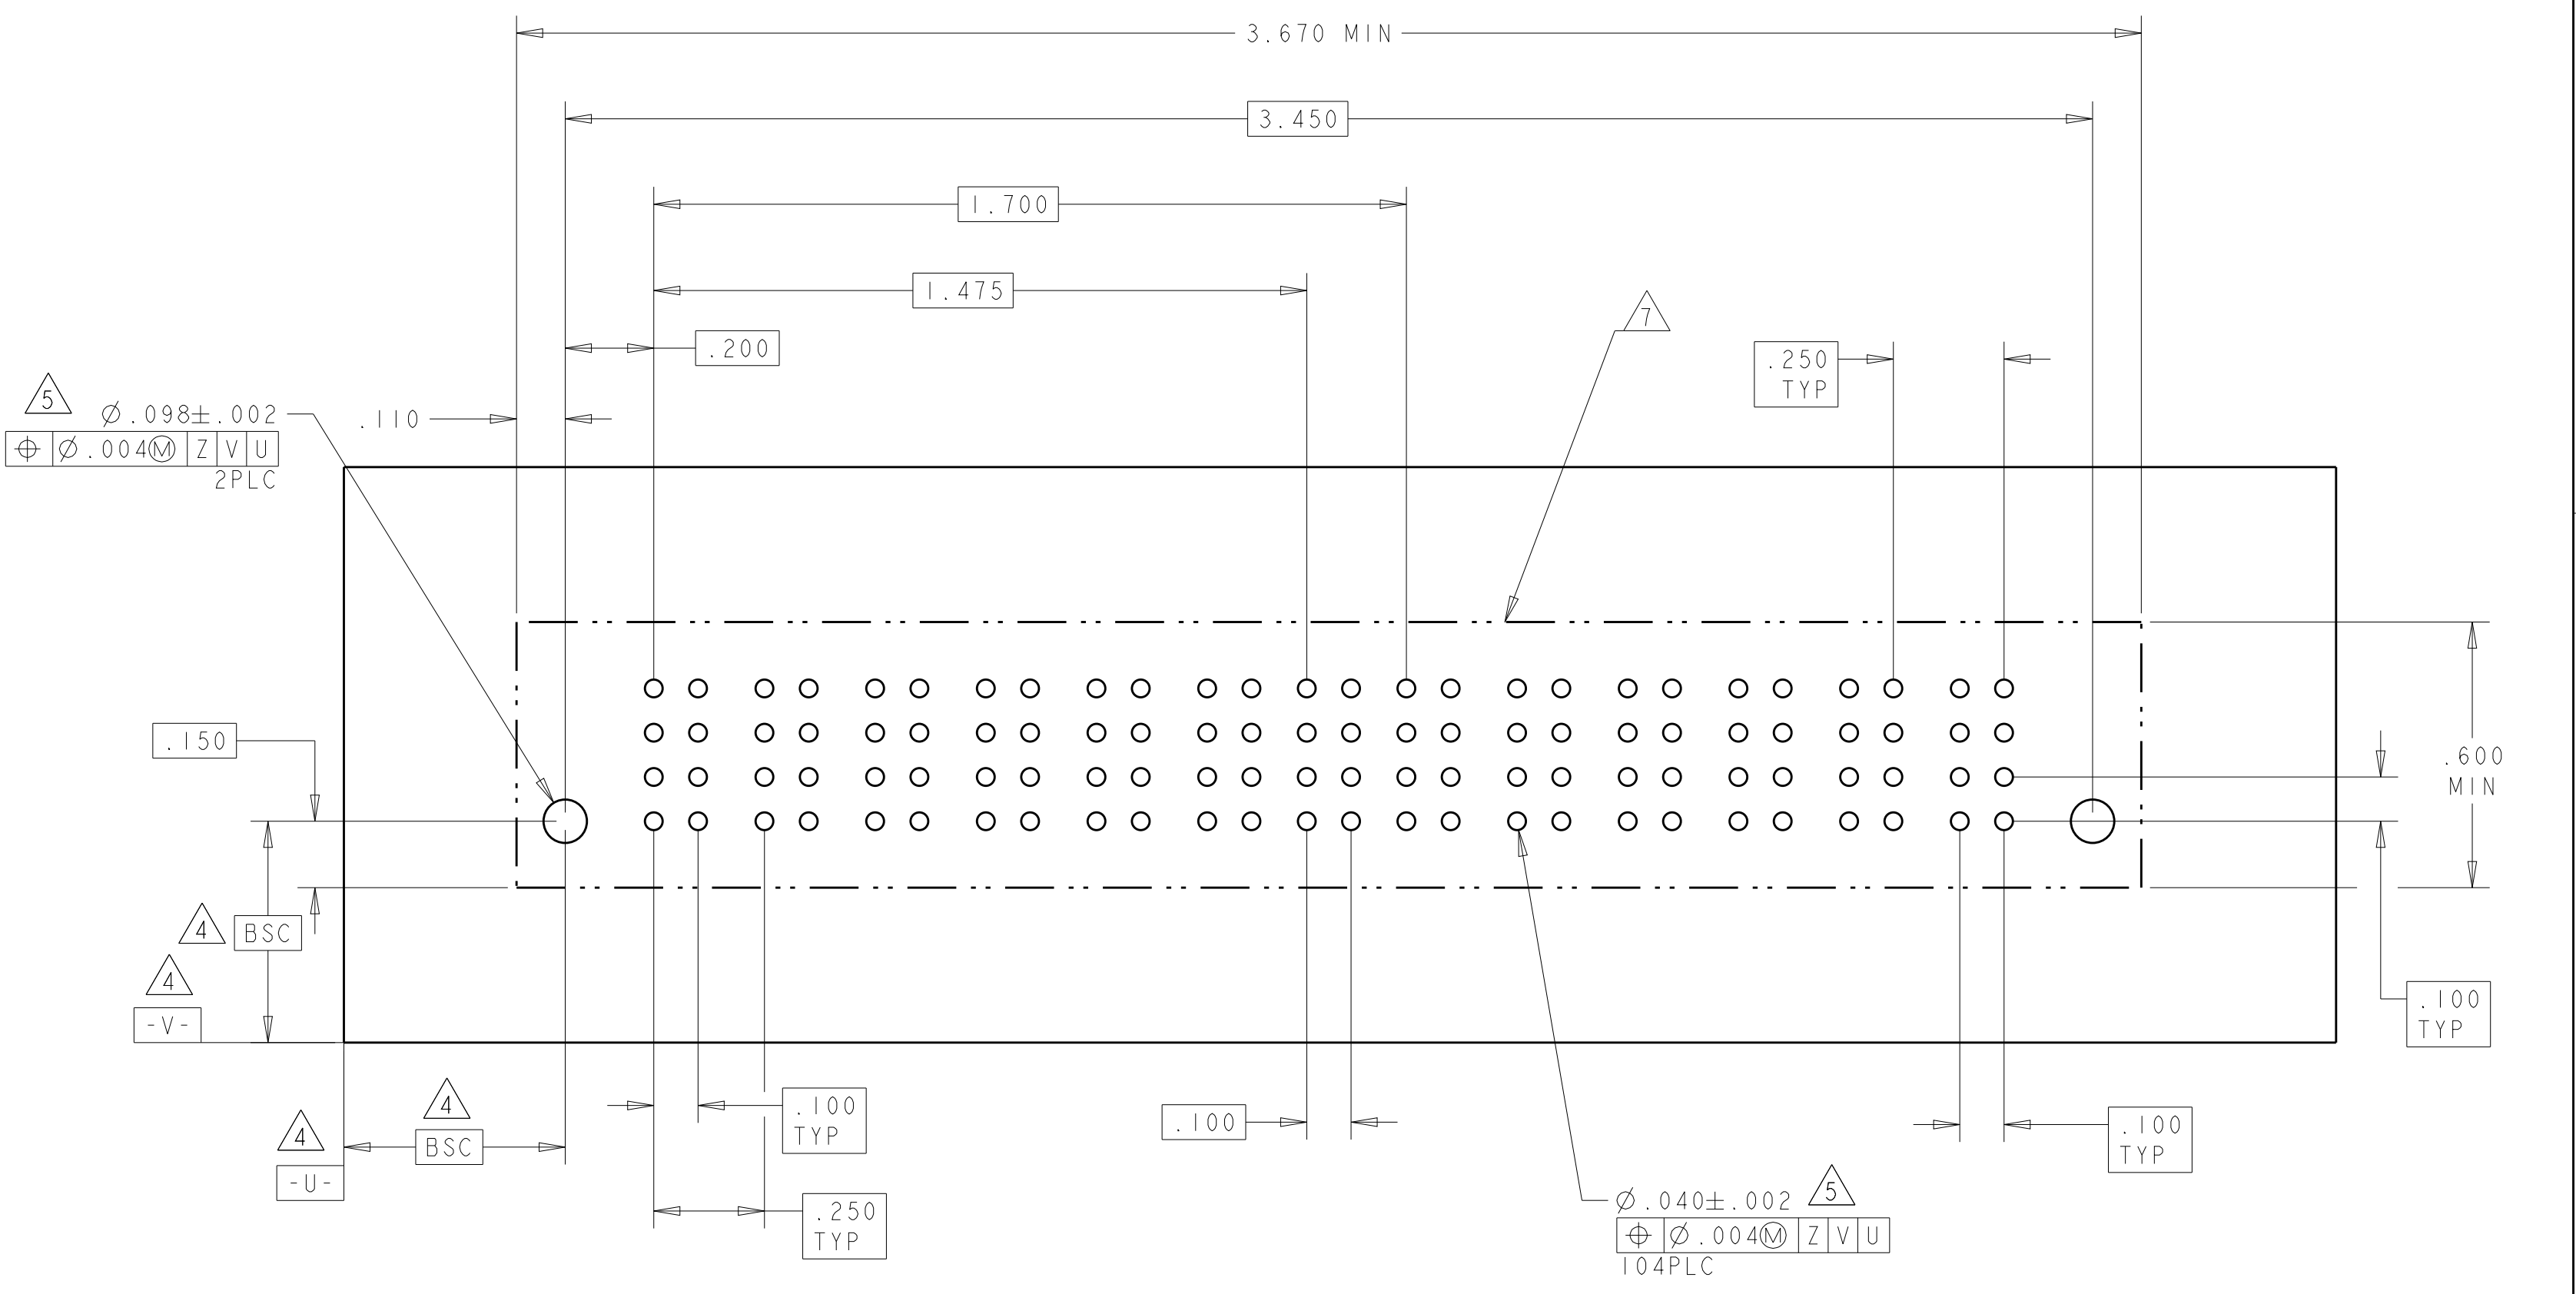4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL		POWER					
			P1	P2	P3	P4	1	2	P5	P6	P7	P8		
6450820-5	D C B A			VM	VM	VM	VM	EV	EV	VM	VM	VM	VM	
								EV	EV					
								EV	EV					
								EV	EV					
4P + 8S + 4P														

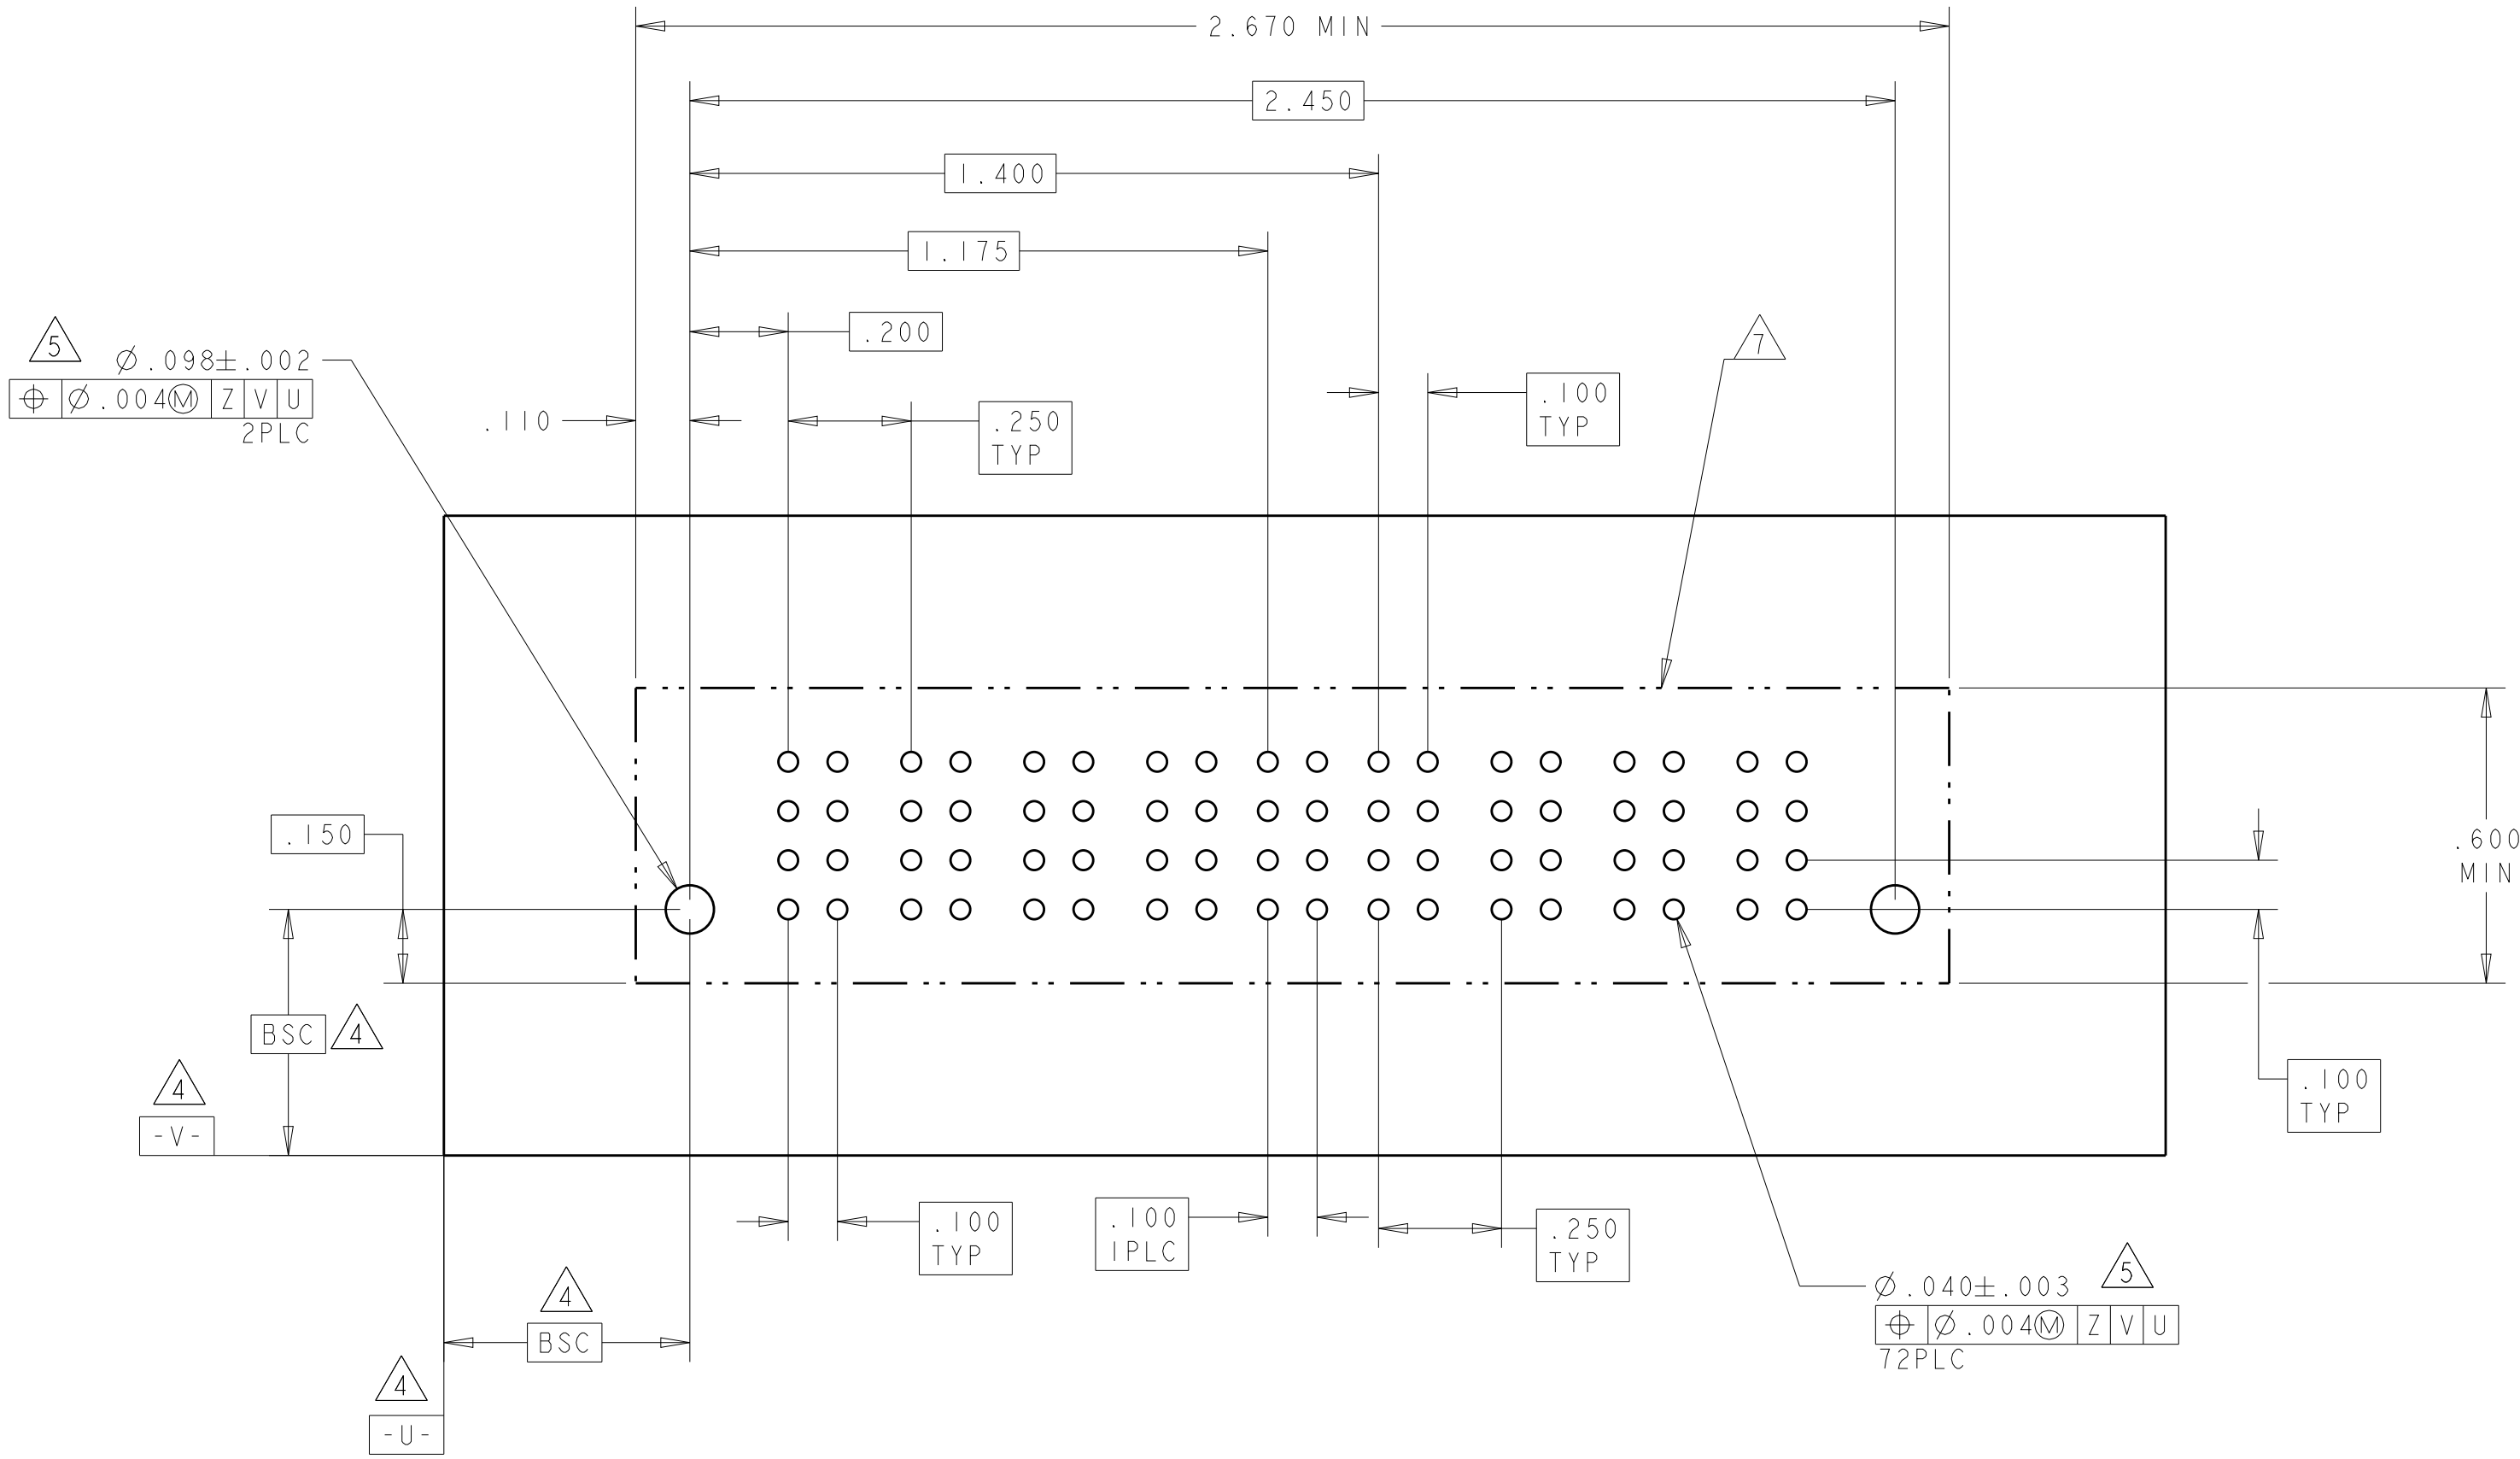

Technical drawing of a 4-PLC rack showing dimensions and component layout. The drawing includes a side view of the rack with dimensions in millimeters (mm) and a top view showing the internal layout of components. Dimensions include 4.675, 4.450, 3.925, 1.000, .475, .250, .300, .250, 4 PLC, .275, .275, .100 TYP, and .100. The top view shows a series of slots for components, with a central section labeled '4 PLC'.








~~NO CONTACTS LOADED~~



$\varnothing .098 \pm .002$
 $\varnothing .004 \text{ (M)}$ Z V U
 2 PLC


4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER													SIGNAL				POWER	SIGNAL															
			P1	P2	1	2	3	4	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	5	6	7	8	P14	9	10																
6450820-7	D C B A	 HD	VM		EV	EV	EV	EV		VM	VM		VM		VM		VM	VM		EV	EV	EV	EV		EV	ES	 HD															
					EV	EV	EV	EV												EV	EV	EV	EV		EV	EV		EF														
					EF	EV	EV	EV												EV	EV	EV	EV		EV	EV		EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
					ES	EV	EV	EV												EV	EV	EV	EV		EV	EV		EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
2P+16S+1P+2ACP+5P+2ACP+1P+16S+1P+8S																																										

NO CONTACTS LOADED

THE PCB LAYOUT IS THE SAME AS 6450820-6.
PLEASE SEE 6450820-6 FOR DETAIL DIM.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	15NOV2007	 TE Connectivity	
DIMENSIONS: INCHES		CHK S. ZHAO	15NOV2007		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. ZHAO	NAME VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE	
	0 PLC ±.01		PRODUCT SPEC		SIZE A1
	1 PLC ±.005		108-2292		
	2 PLC ±.0020		APPLICATION SPEC		
	4 PLC ±.0020		114-13251		
	ANGLES #2°				
MATERIAL -	FINISH -	WEIGHT -	DRAWING NO C=6450820		RESTRICTED TO -
Customer Drawing			SCALE -	SHEET 10	OF 20
			REV G8		

Technical drawing of a rectangular plate with a grid of holes. The drawing includes dimensions for overall size, hole spacing, and hole diameter. Key dimensions include: overall width 6.270 MIN, overall height .600 MIN, hole spacing 2.175, hole diameter .040 ± .030, and hole pitch .004. The drawing also shows a grid of 20 columns and 10 rows of holes. A note indicates that the hole diameter is .040 ± .030 and the hole pitch is .004. A section line A-A is shown on the right side of the drawing.

4805 (3/11)

Technical drawing of a rectangular plate with dimensions and tolerances. The drawing includes a top view and a side view. The top view shows a rectangular plate with a grid of holes. The dimensions are as follows:

- Overall width: 4.070 MIN
- Overall height: .600 MIN
- Distance from left edge to first hole: .110
- Distance between holes: .200
- Distance from last hole to right edge: .100 TYP
- Distance from left edge to center of first hole: .250 TYP
- Distance from center of last hole to right edge: .250 TYP
- Distance from left edge to center of first hole: .100 TYP
- Distance from center of last hole to right edge: .100 TYP

The side view shows the plate with a thickness of .040 ± .003. The drawing also includes a section line and a section view. The section view shows the plate with a thickness of .040 ± .003. The drawing includes a title block with the following information:

- Part Name: PLATE
- Material: 304 STAINLESS STEEL
- Quantity: 1
- Drawing Number: 100-000000
- Revision: 1
- Drawn By: J. D. Smith
- Checked By: J. D. Smith
- Approved By: J. D. Smith

4805 (3/11)


Technical drawing of a rectangular plate with dimensions and features. The drawing includes the following specifications:

- Overall Dimensions:**
 - Length: 2.870 MIN
 - Width: .600 MIN
- Internal Features and Dimensions:**
 - Top edge features: .110, .175, .300 (2 PLC), 1.075, 1.775, .100 (5 PLC), .300 (2 PLC).
 - Bottom edge features: .100 (6 PLC), .100 TYP, .150, .100 (4 BSC), .100 (4 BSC), .100 (4 BSC).
 - Right edge features: .100 (4 BSC), .100 (4 BSC), .100 (4 BSC).
- Internal Structure:**
 - A central rectangular area defined by dashed lines, containing a grid of 10 columns and 4 rows of circular holes.
 - Two circular holes are located on the left and right sides of the central area, each with a diameter of $\varnothing .040 \pm .003$ (5).
- Material and Surface Finish:**
 - Material: 304 STAINLESS STEEL
 - Surface Finish: 125
- Notes:**
 - 1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
 - 2. DIMENSIONS ARE TO CENTER UNLESS OTHERWISE SPECIFIED.
 - 3. DIMENSIONS ARE TO CENTER UNLESS OTHERWISE SPECIFIED.
 - 4. DIMENSIONS ARE TO CENTER UNLESS OTHERWISE SPECIFIED.
 - 5. DIMENSIONS ARE TO CENTER UNLESS OTHERWISE SPECIFIED.
 - 6. DIMENSIONS ARE TO CENTER UNLESS OTHERWISE SPECIFIED.
 - 7. DIMENSIONS ARE TO CENTER UNLESS OTHERWISE SPECIFIED.

4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER												SIGNAL												
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	1	2	3	4	5	6	7	8	9	10	11	12	
1-6450820-7	D C B A																										
			VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	
			VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	
			VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	
12P + 48S																											HD

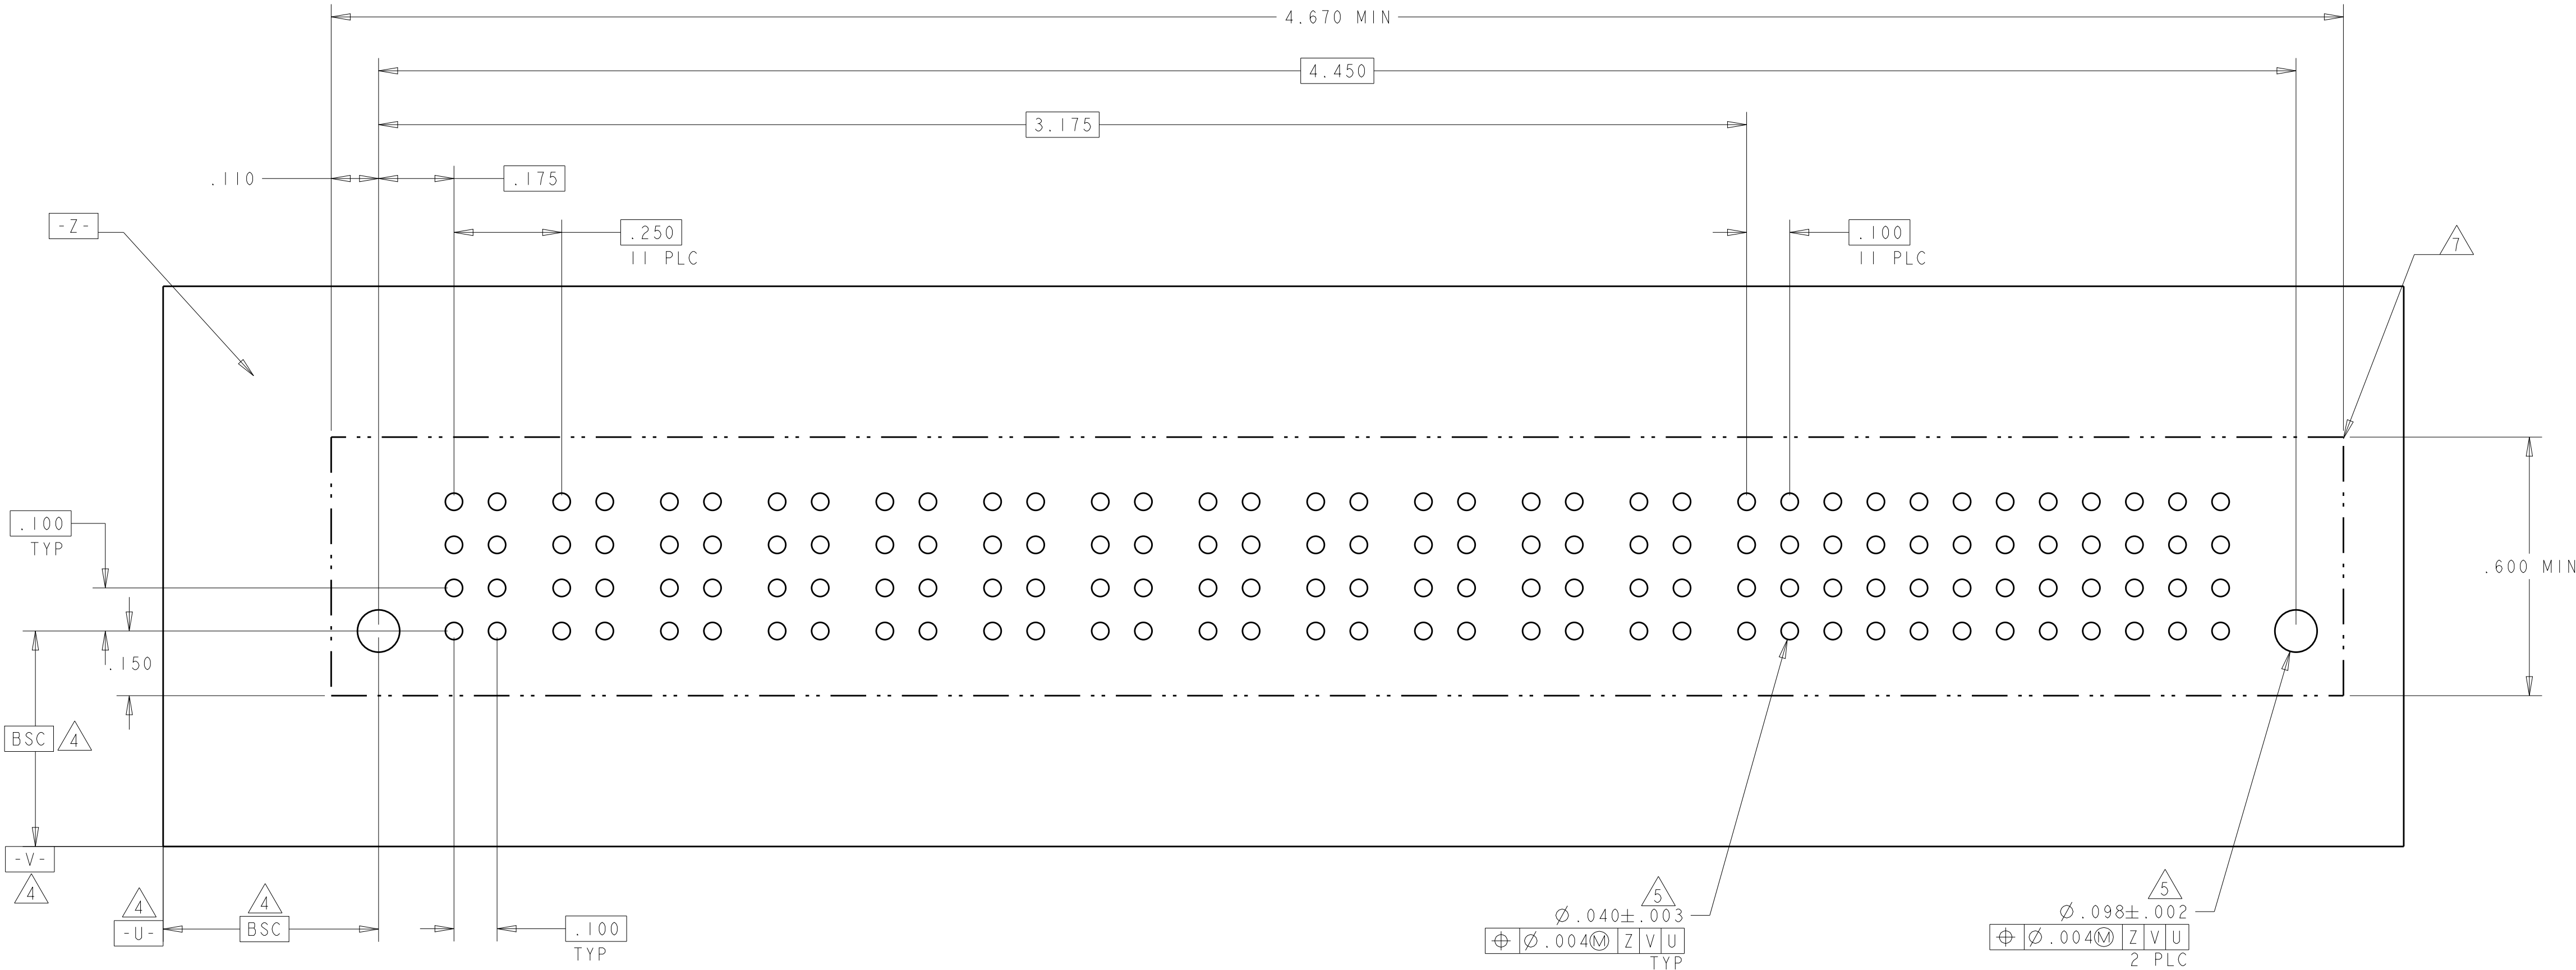

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.
1 PLC ±.
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

Customer Drawing

SCALE

-

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450820

RESTRICTED TO

-


REV


G8

TE Connectivity

VERTICAL HEADER ASSEMBLY W/ SHORT END MODULES, PRESS FIT MULTI-BEAM XLE

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER					SIGNAL												POWER																																																																																																																																																																																																																																																					
			P1	P2	P3	P4	P5	1	2	3	4	5	6	7	8	9	10	11	12	P6	P7	P8	P9	P10																																																																																																																																																																																																																																																	
1-6450820-8	D C B A																																																																																																																																																																																																																																																																								</

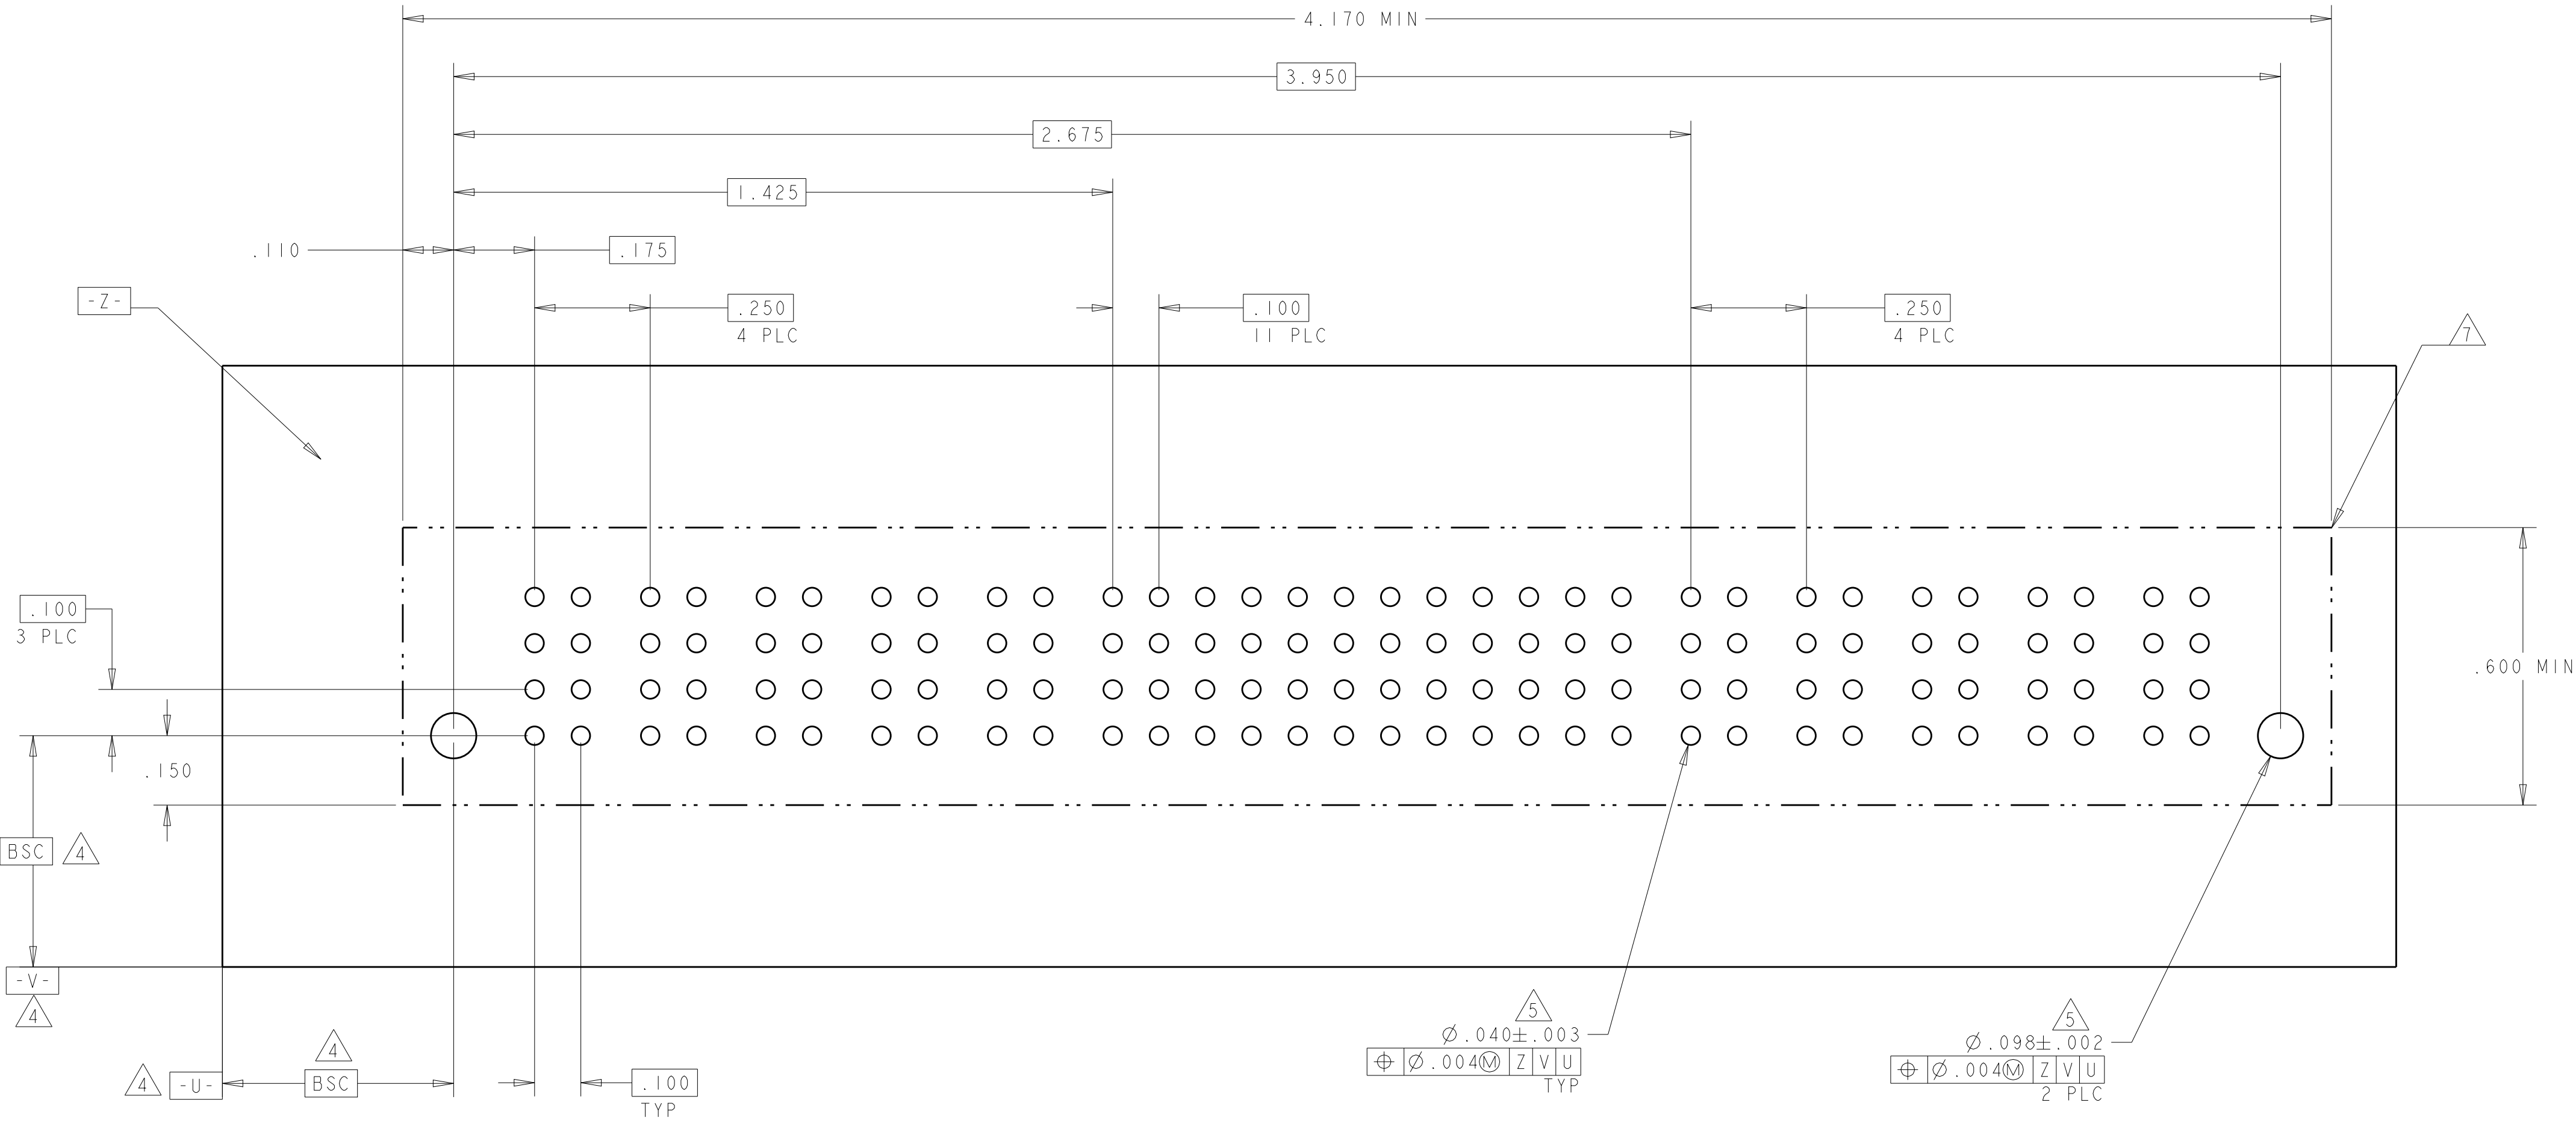

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT -

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450820

RESTRICTED TO
-

SCALE
-


SHEET
15

OF
20

REV
G8

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER					SIGNAL						POWER					
			P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10	
1-6450820-9	D C B A		VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	
								EV	EV	EV	EV	EV	EV						
								EV	EV	EV	EV	EV	EV						
								EV	EV	EV	EV	EV	EV						
5P + 24S + 5P																			

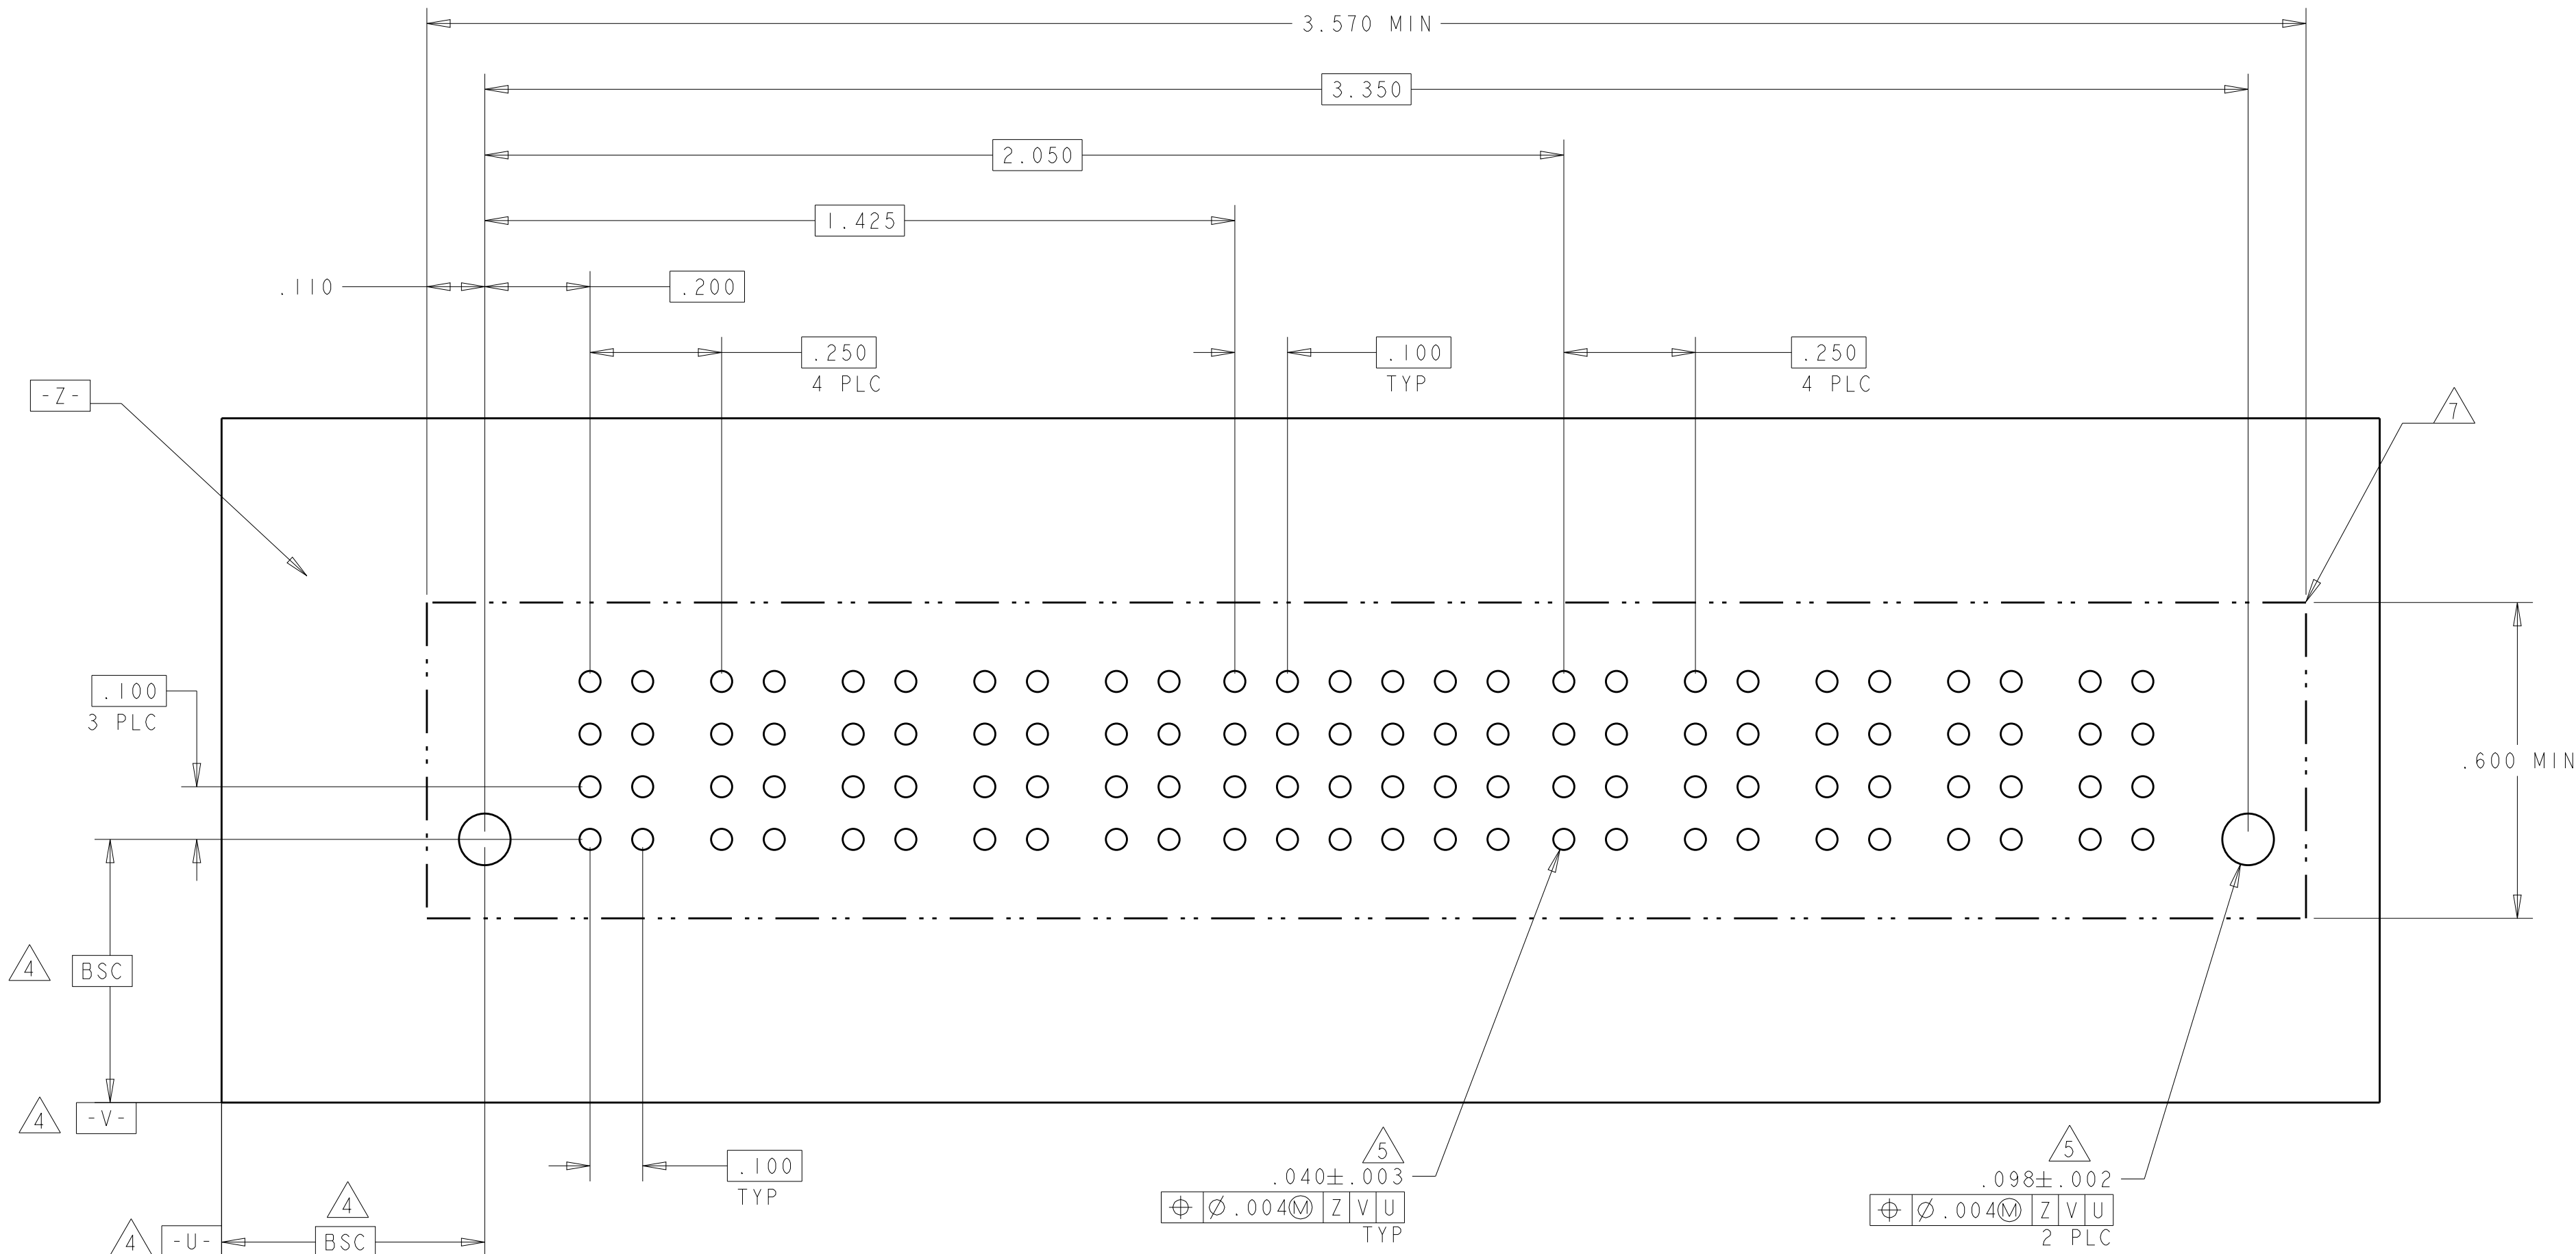

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D.ZHU
CHK
S.ZHAO
APVD
S.ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±"
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

108-2292
APPLICATION SPEC
114-13251

WEIGHT
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450820

RESTRICTED TO
-

SCALE
-

SHEET
16


OF
20

REV
G8


TE Connectivity



LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			LP1	1	2	3	4	LP2	
2-6450820-0	D	HD	LZ	EV	EV	EV	EV	LZ	HD
	C			EV	EV	EV	EV		
	B			EV	EV	EV	EV		
	A			EV	EV	EV	EV		
1LP + 16S + 1LP									

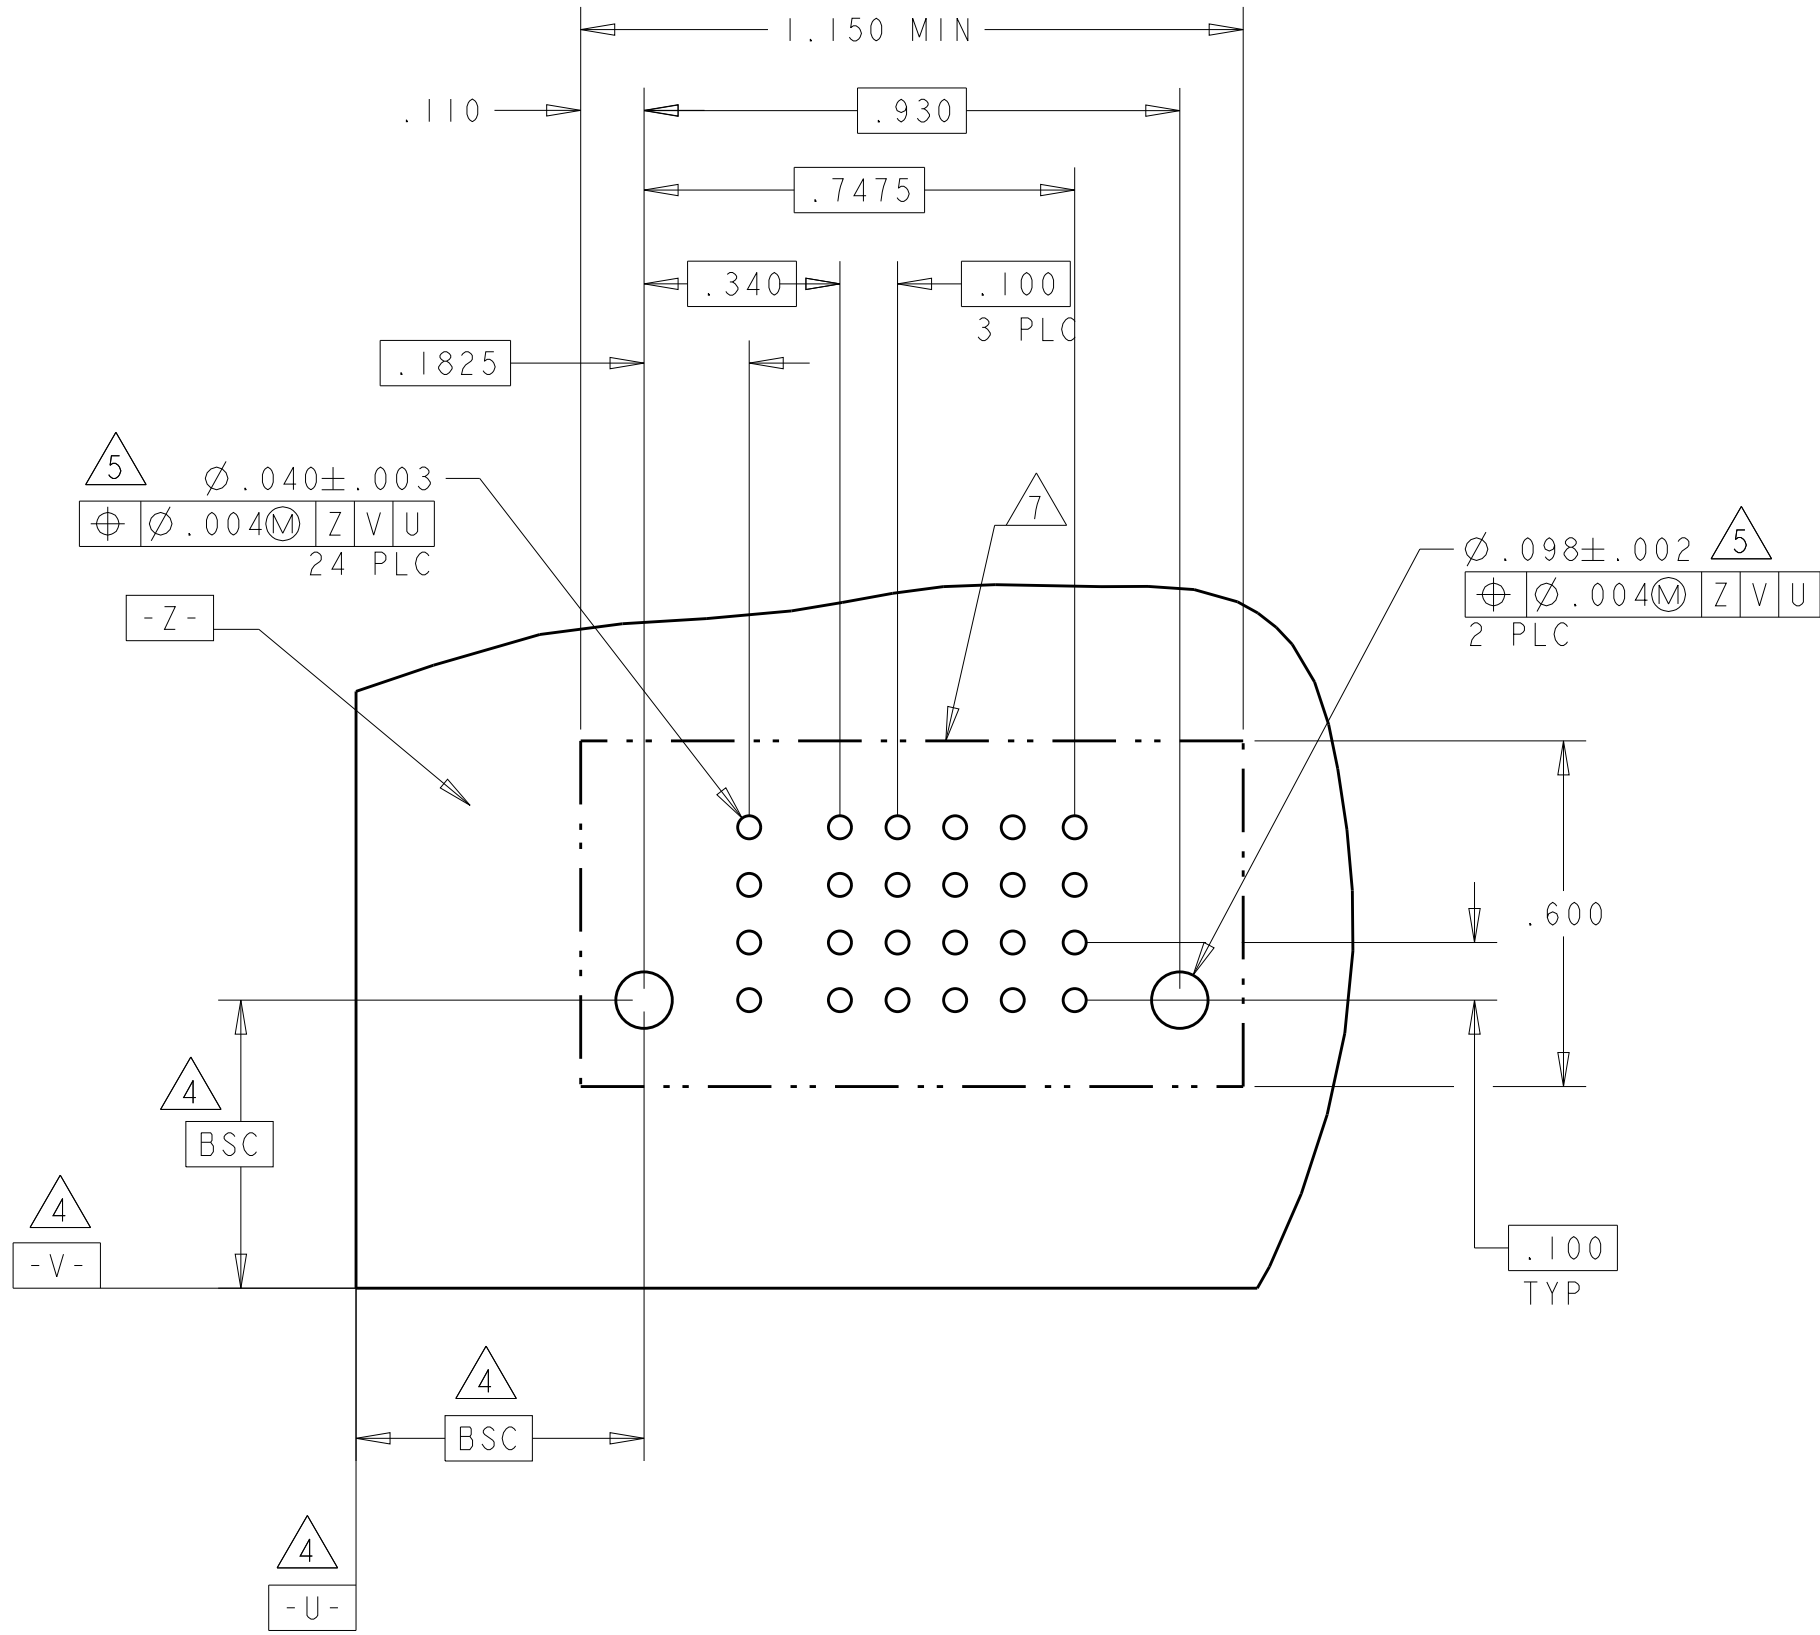

PART NUMBER	ROWS		LOW POWER						SIGNAL						POWER			
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	P1	P2	P3	
2-6450820-1	D	HD	LZ	LZ	LZ	LZ	LZ	LZ	EV	EV	EV	EV	EV	EV	VM	VM	VM	HD
	C								EV	EV	EV	EV	EV	EV				
	B								EV	EV	ES	EV	EV	EV				
	A								EV	EV	EV	EV	EV	EV				
6LP + 24S + 3P																		

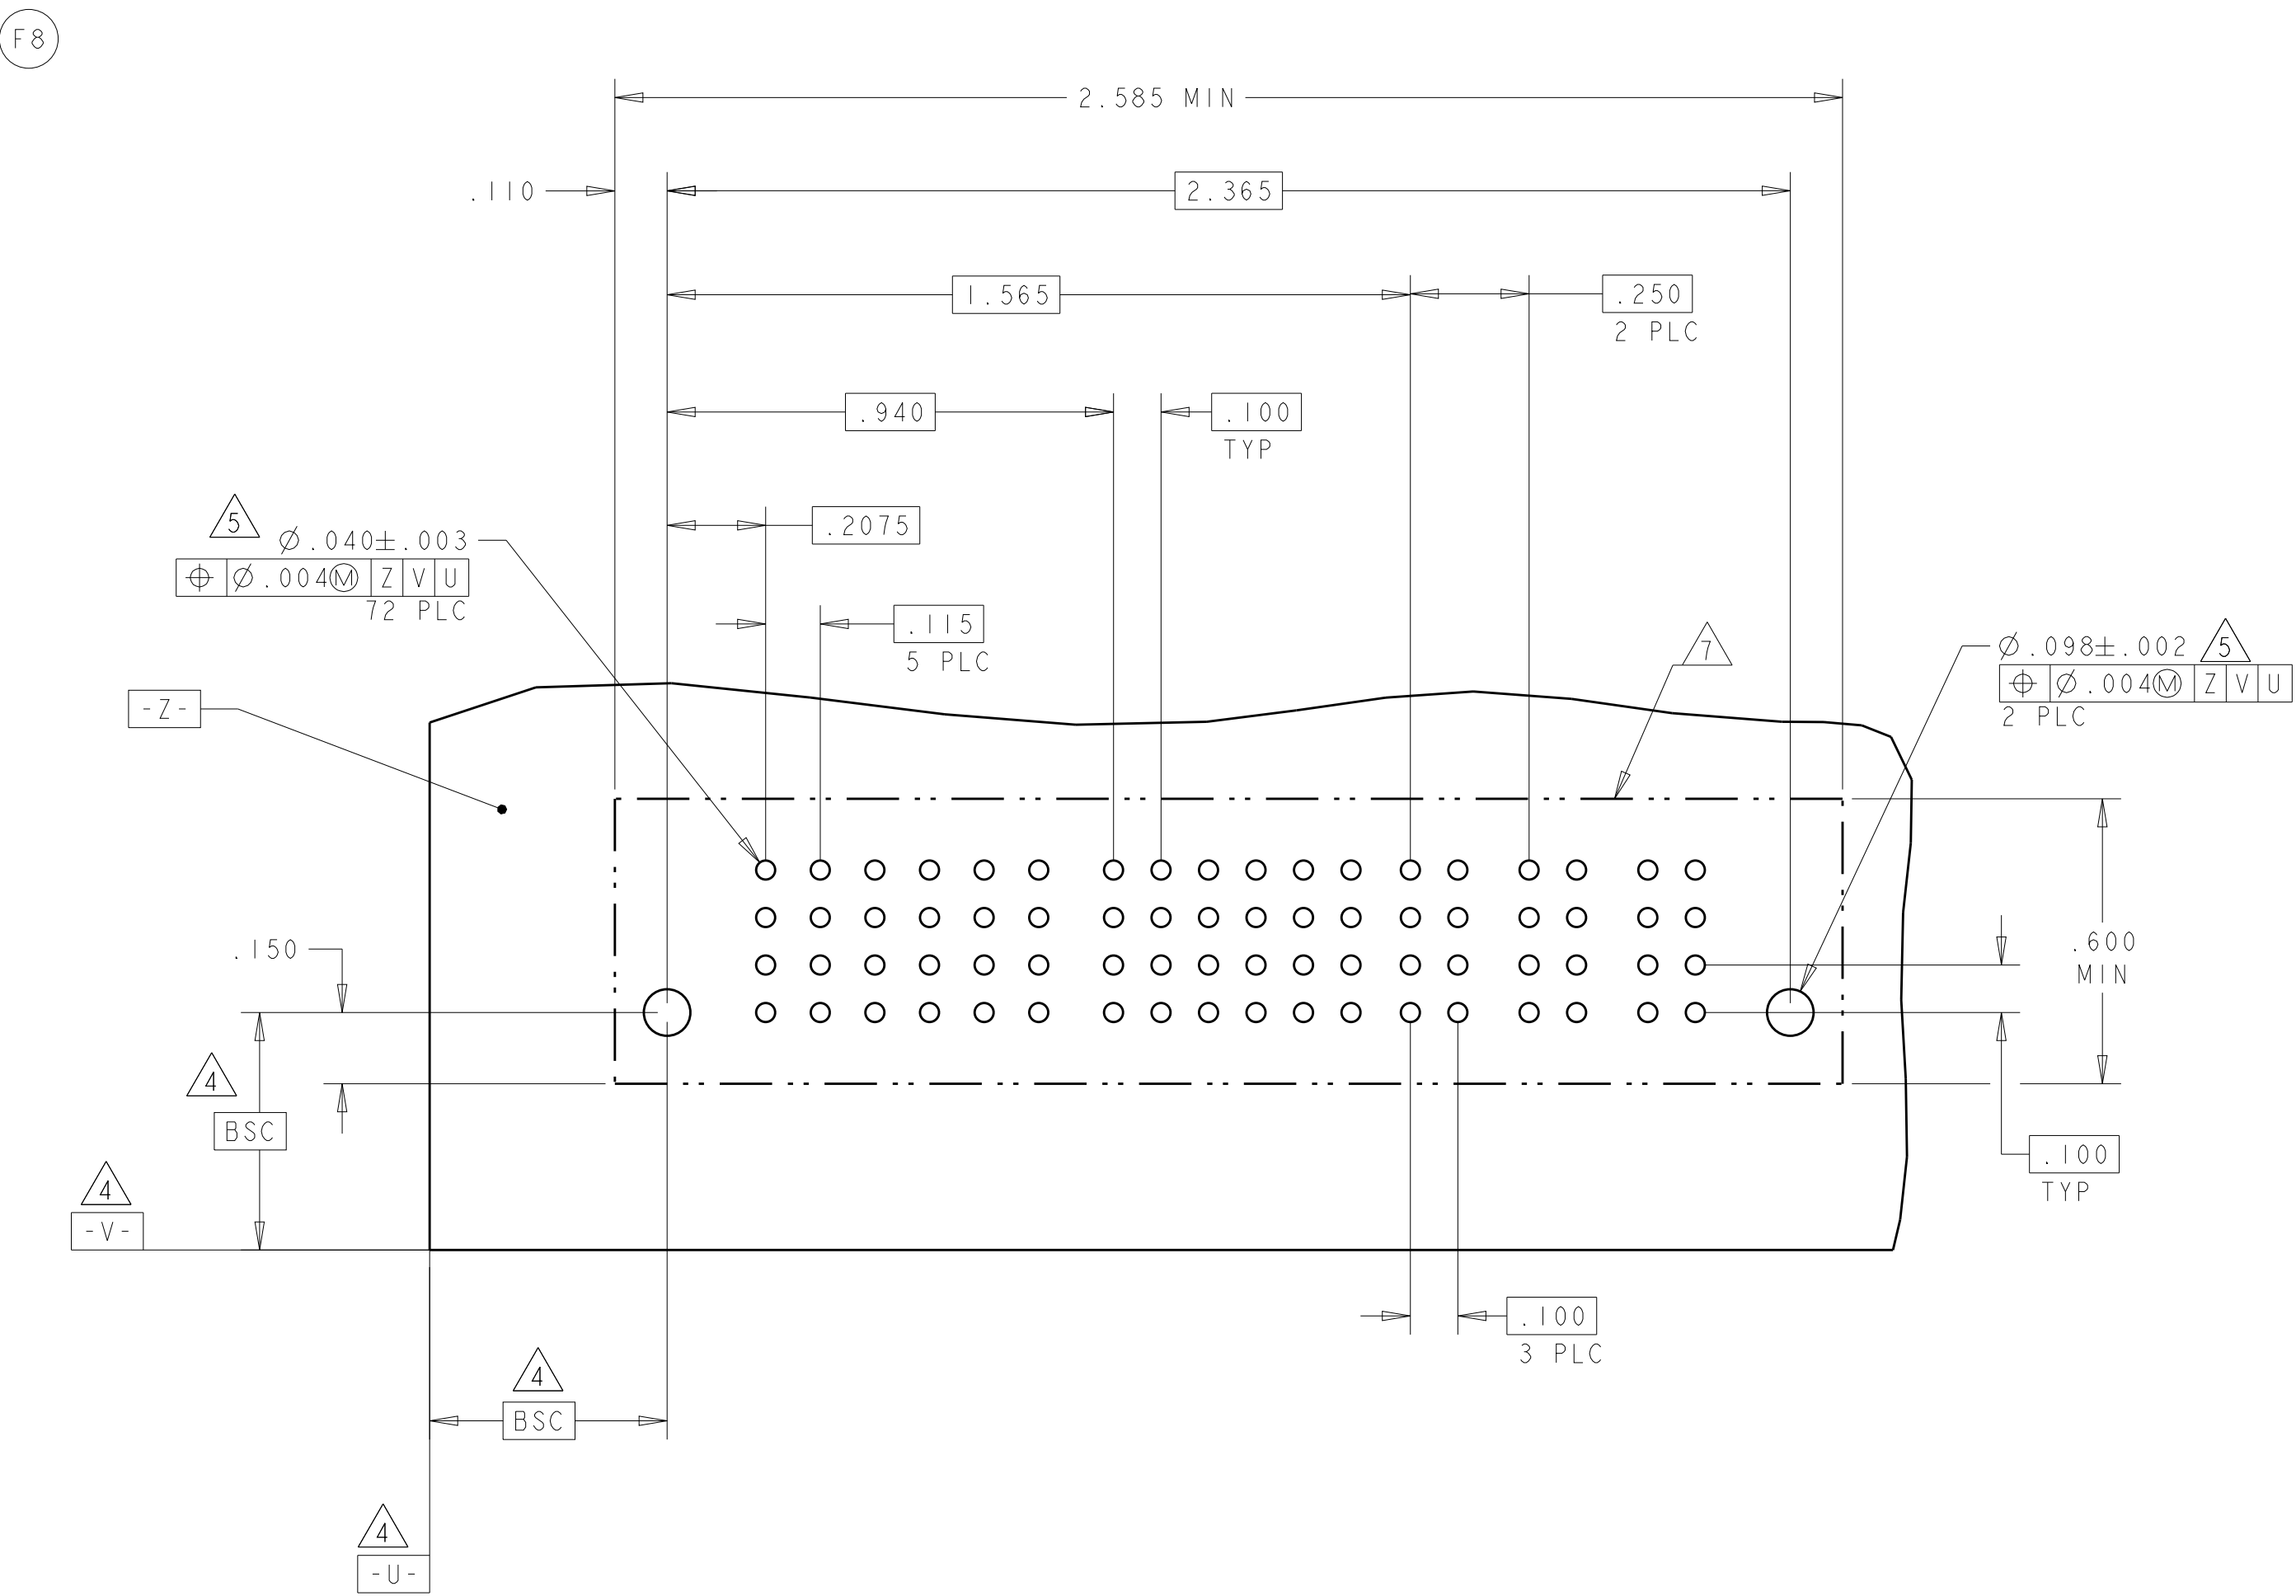


PART NUMBER	ROWS		POWER								SIGNAL																		POWER									
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	P9	P10	P11	P12	P13	P14	P15	P16		
6450820-9	D C B A		VM VM VM VM VM VM VM VM VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV			
				EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	
				EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
				EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV
8P + 72S + 8P																																						

4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER										SIGNAL																																																																																																																																																																																																																																																																																																																																																	
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6																																																																																																																																																																																																																																																																																																																																												
2-6450820-3	D	HD	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	

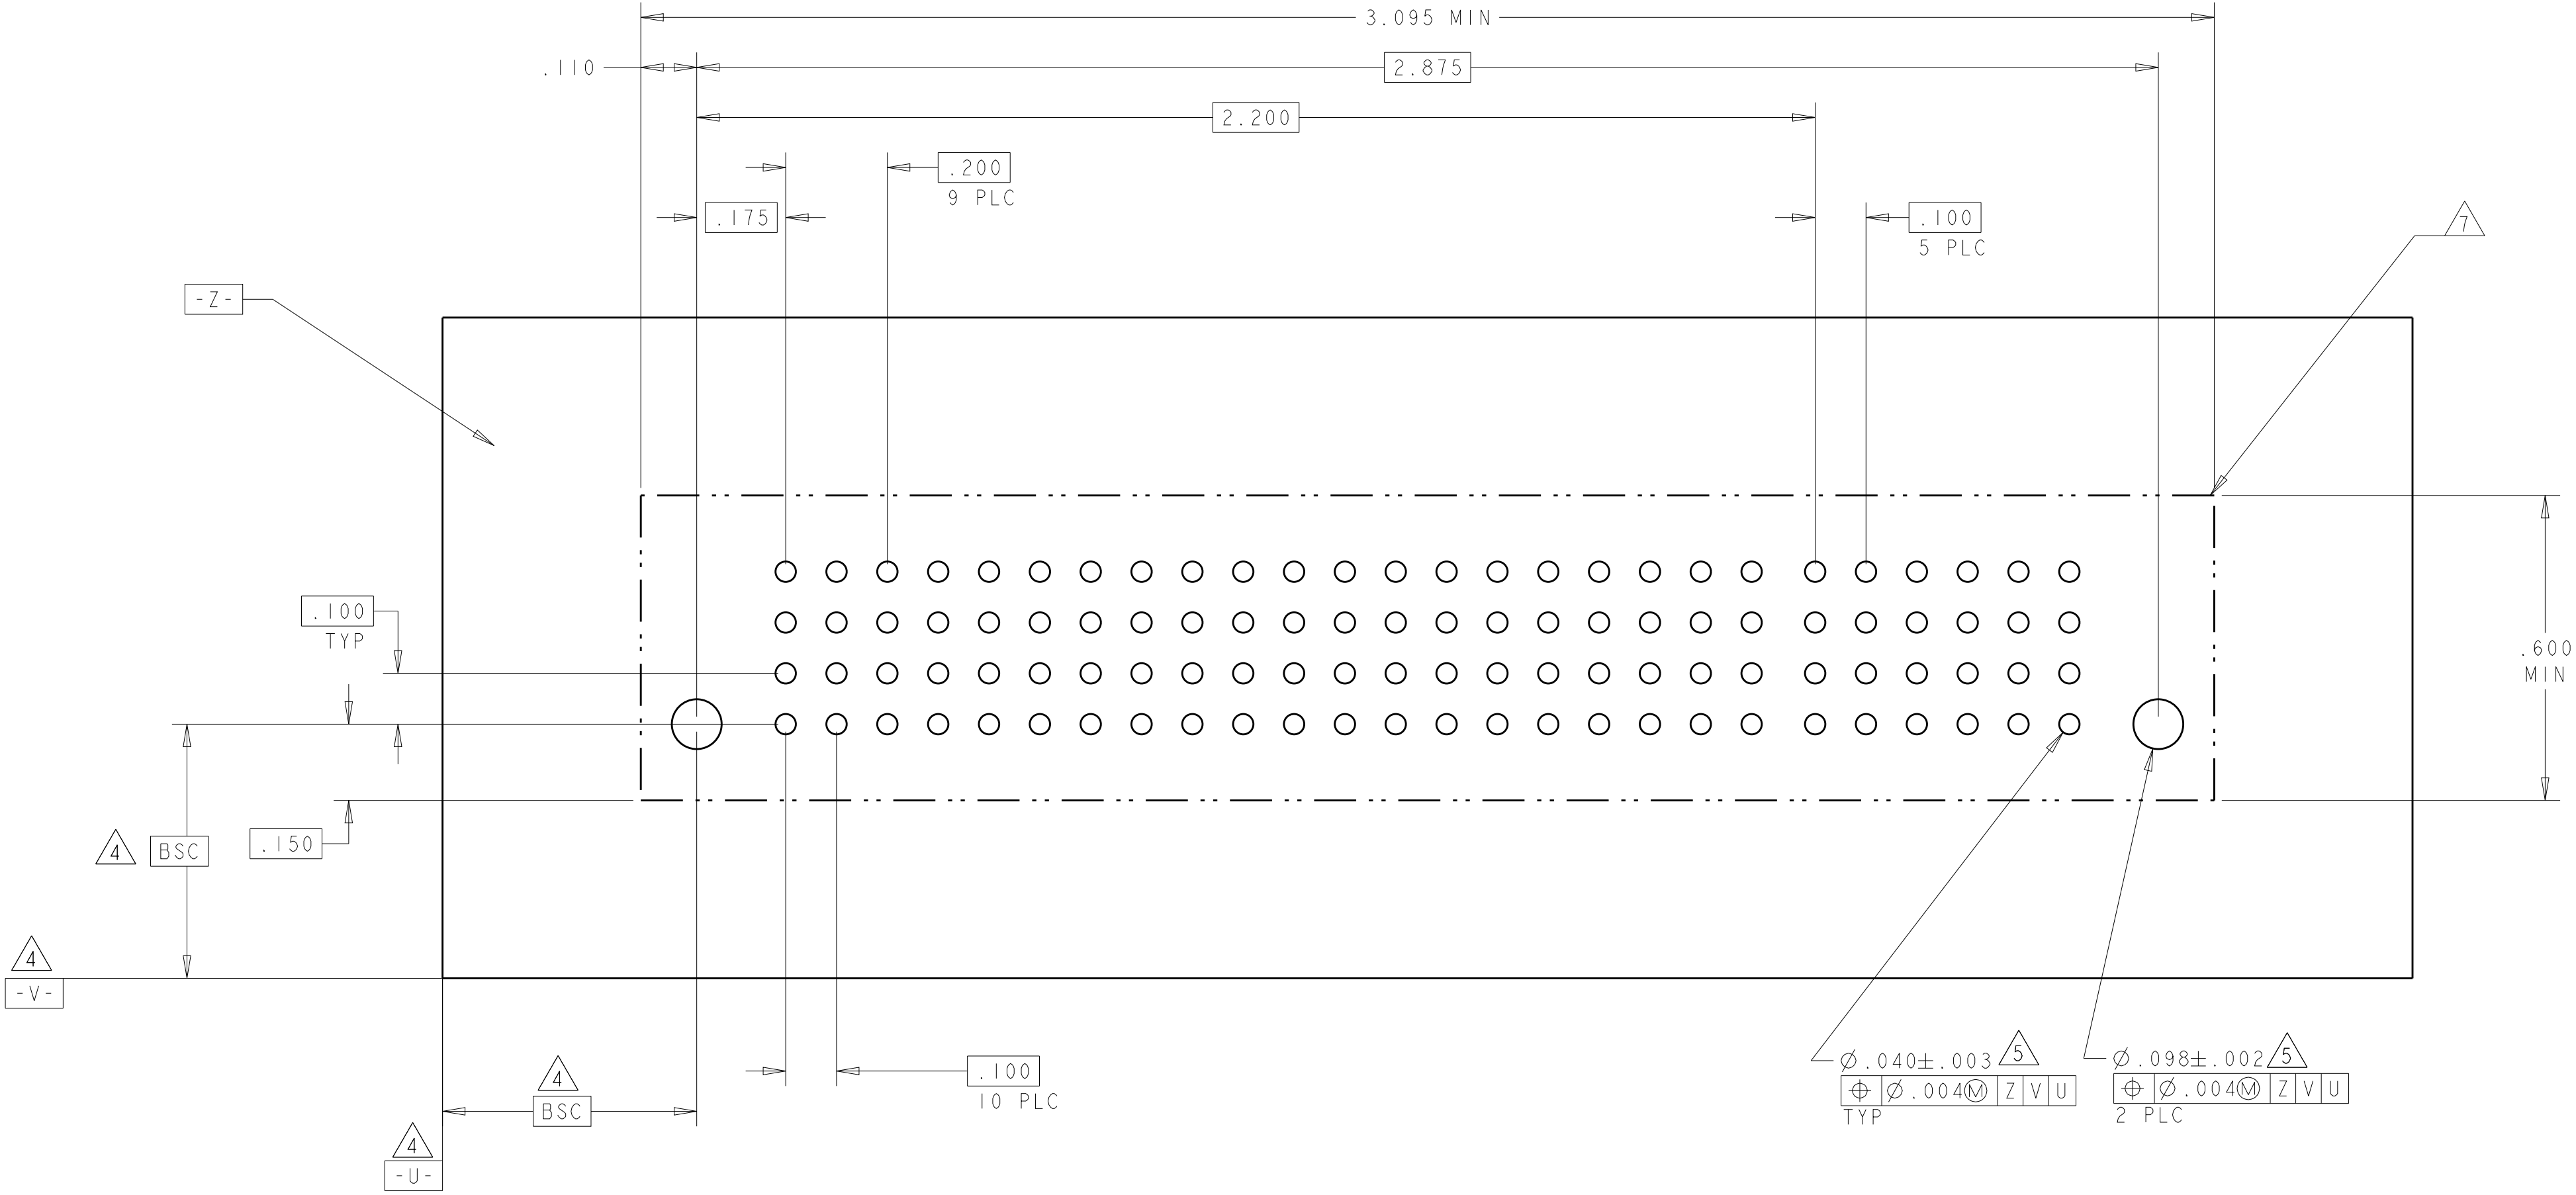

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH -

MATERIAL
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450820

RESTRICTED TO
-

TE Connectivity

SCALE
-


SHEET
19

OF
20

REV
G8

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL				POWER				
			LP1	LP2	LP3	1	2	3	4	LP4	LP5	LP6	LP7	
2-6450820-5	D	 HD	 LZ	 LZ	 LZF					 LZ	 LZ	 LZ	 LZ	 HD
	EV EV EV ES													
	EV EV EV EV													
	EV EV EV EV													
	EV EV EV EV													
3LP + 16S + 4LP														

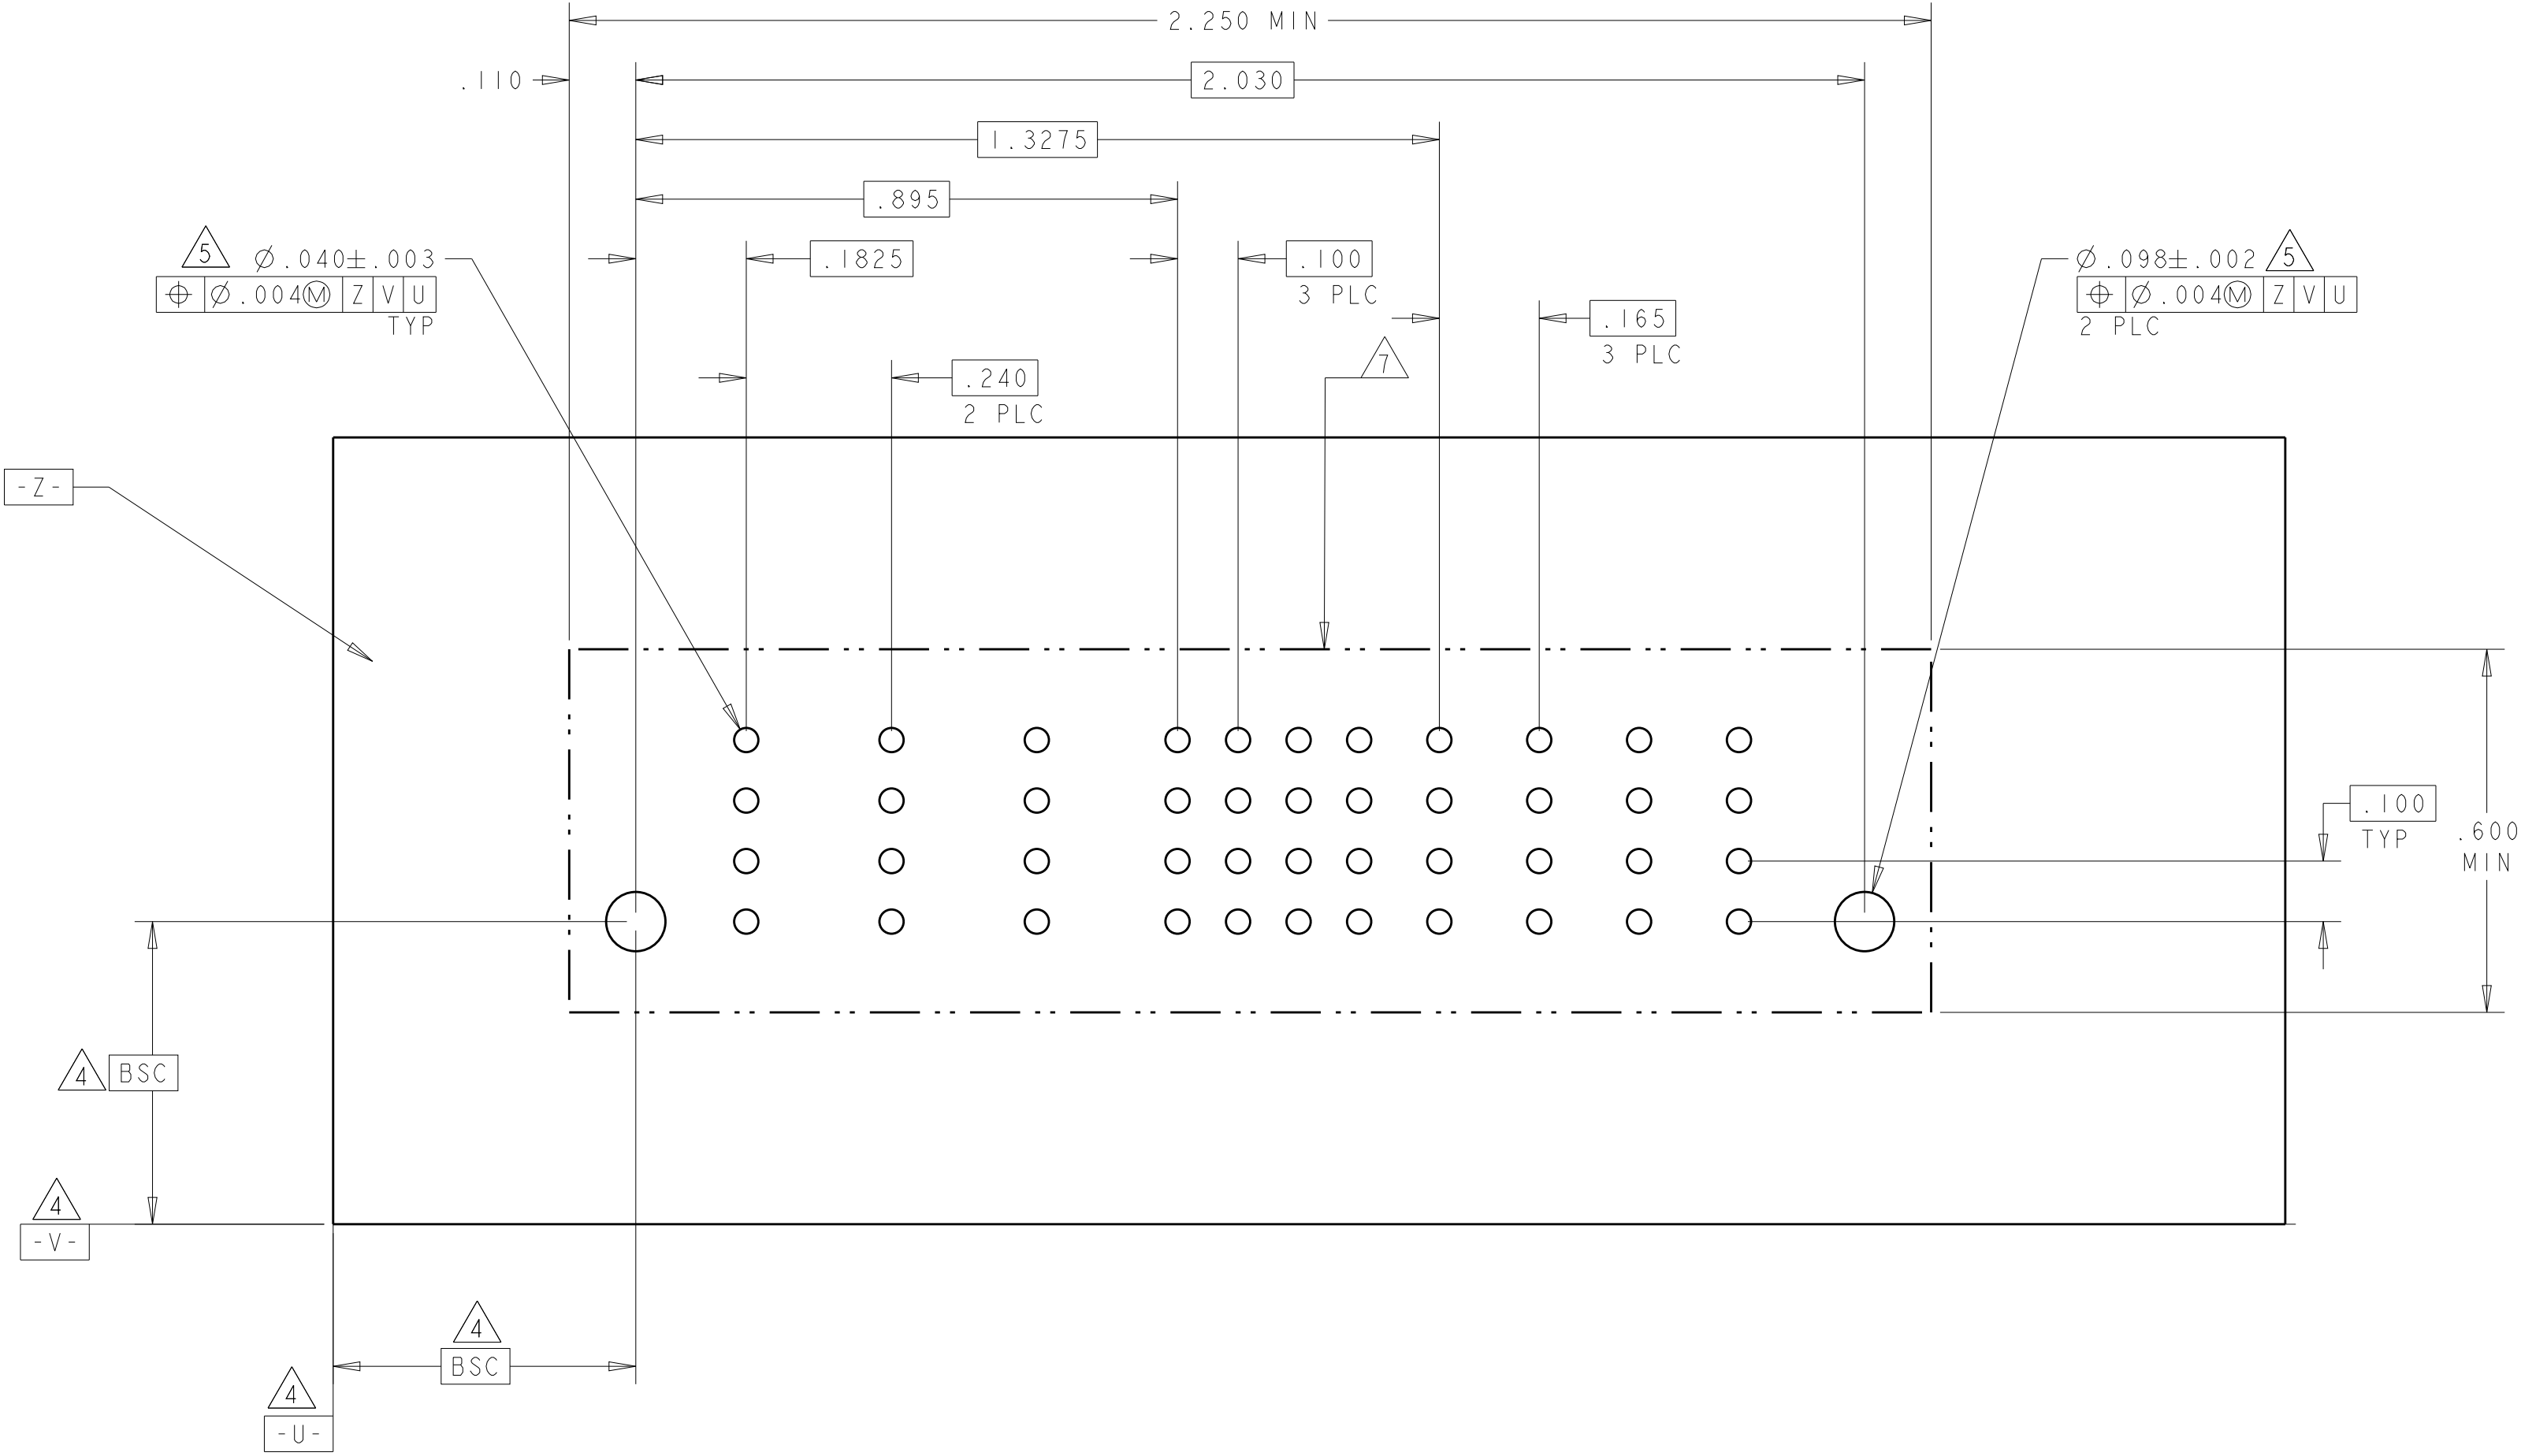

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

DIMENSIONS:
INCHES

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

MATERIAL
-

Customer Drawing

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

15NOV2007
15NOV2007
-

NAME
VERTICAL HEADER ASSEMBLY W/ SHORT
END MODULES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450820

RESTRICTED TO
-

TE Connectivity

Customer Drawing

SCALE
-

SHEET
20

OF
20

REV
G8

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9