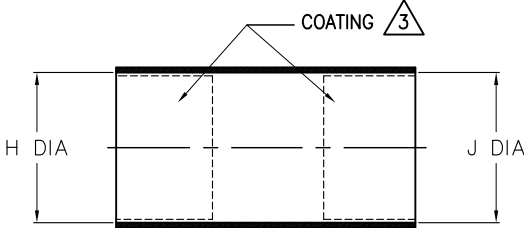


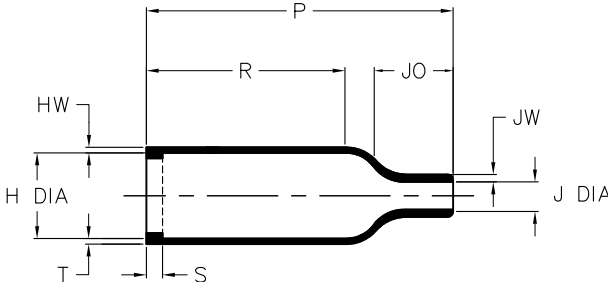


4		3		2		1																																																																		
AS SUPPLIED (MATERIAL -3, -4, OR -25)  AS SUPPLIED (MATERIAL -12) 						REVISIONS <table border="1"><thead><tr><th>LTR</th><th>DESCRIPTION</th><th>DATE</th></tr></thead><tbody><tr><td>B</td><td>REVISED PER ECO-10-020693</td><td>10/12/2010</td></tr></tbody></table>		LTR	DESCRIPTION	DATE	B	REVISED PER ECO-10-020693	10/12/2010																																																											
						LTR	DESCRIPTION	DATE																																																																
B	REVISED PER ECO-10-020693	10/12/2010																																																																						
NOTES 1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2. DIMENSIONS APPEARING IN TABLE ARE AS FOLLOWS: a - AS SUPPLIED b - AFTER UNRESTRICTED RECOVERY 3. COATING (ADHESIVE): IS OPTIONAL AS SUPPLIED DIMENSIONS APPEARING IN TABLE ARE FOR UNCOATED PARTS. WHEN COATING IS ADDED, ENTRY DIAMETER WILL BE REDUCED BY .06 [1.5] MAX. 4. ORDERING INFORMATION 202A111 -XX -G07 /XXX /0 BASE PART NUMBER MATERIAL DASH NUMBER -3 POLYOLEFIN, SEMI RIGID (RT-301) -4 POLYOLEFIN, FLEXIBLE (RT-1304) -12 FLUORO ELASTOMER, FLEXIBLE (RT-1312) -25 ELASTOMER, FLUID RESISTANT (RW-2070) MODIFICATION NUMBER ADHESIVE SLASH NUMBER SEE COMPATIBILITY CHART BELOW COLOR DESIGNATOR						AS SUPPLIED (MATERIAL -12) 		AFTER UNRESTRICTED RECOVERY 																																																																
TABLE OF DIMENSIONS <table border="1"><thead><tr><th rowspan="3">PART DESCRIPTION</th><th colspan="2">H</th><th colspan="2">J</th><th rowspan="3">P ±10% b</th><th rowspan="3">R ±10% b</th><th rowspan="3">S ±10% b</th><th rowspan="3">T ±10% b</th><th rowspan="3">JO ±10% b</th><th rowspan="3">JW ±20% b</th><th rowspan="3">HW ±20% b</th></tr><tr><th>MIN</th><th>MAX</th><th>MIN</th><th>MAX</th></tr><tr><th>a</th><th>b</th><th>a</th><th>b</th></tr></thead><tbody><tr><td>202A111-X-G07 (X: -3,-4 OR -25)</td><td>.67 [17]</td><td>.31 [7.9]</td><td>.67 [17]</td><td>.09 [2,2]</td><td>.98 [25]</td><td>.55 [14]</td><td>.12 [3,0]</td><td>.04 [1,0]</td><td>.24 [6,0]</td><td>.07 [1,7]</td><td>.05 [1,3]</td></tr><tr><td>202A111-12-G07</td><td>.63 [16]</td><td>.31 [8]</td><td>.43 [11]</td><td>.09 [2,2]</td><td>.98 [25]</td><td>.55 [14]</td><td>.12 [3,0]</td><td>.04 [1,0]</td><td>.24 [6,0]</td><td>.07 [1,7]</td><td>.05 [1,3]</td></tr></tbody></table>						PART DESCRIPTION	H		J		P ±10% b	R ±10% b	S ±10% b	T ±10% b	JO ±10% b	JW ±20% b	HW ±20% b	MIN	MAX	MIN	MAX	a	b	a	b	202A111-X-G07 (X: -3,-4 OR -25)	.67 [17]	.31 [7.9]	.67 [17]	.09 [2,2]	.98 [25]	.55 [14]	.12 [3,0]	.04 [1,0]	.24 [6,0]	.07 [1,7]	.05 [1,3]	202A111-12-G07	.63 [16]	.31 [8]	.43 [11]	.09 [2,2]	.98 [25]	.55 [14]	.12 [3,0]	.04 [1,0]	.24 [6,0]	.07 [1,7]	.05 [1,3]	COMPATIBILITY CHART <table border="1"><thead><tr><th>MATERIAL DASH NO.</th><th>ADHESIVE (COATING) SLASH NUMBER</th><th>ADHESIVE (COATING) S NUMBER</th></tr></thead><tbody><tr><td>-3</td><td>/42; /86; /180</td><td>S-1017; S-1048; S1030</td></tr><tr><td>-4</td><td>/42; /86; /180</td><td>S-1017; S-1048; S1030</td></tr><tr><td>-12</td><td>N/A</td><td>N/A</td></tr><tr><td>-25</td><td>/42; /86; /225</td><td>S-1017; S-1048; S-1206</td></tr></tbody></table>		MATERIAL DASH NO.	ADHESIVE (COATING) SLASH NUMBER	ADHESIVE (COATING) S NUMBER	-3	/42; /86; /180	S-1017; S-1048; S1030	-4	/42; /86; /180	S-1017; S-1048; S1030	-12	N/A	N/A	-25	/42; /86; /225	S-1017; S-1048; S-1206	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMAL TOLERANCES .XXX ± 0.005 [0.13 mm] .XX ± 0.01 [0.25 mm] .X ± 0.1 [0.50 mm] ANGLE TOLERANCE .X ± 1 DEG. TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION. © 1997-2010 Tyco Electronics Corporation. All rights reserved.		REVISED UNGUYN APPROVED DHURRELL THIRD ANGLE PROJECTION DO NOT SCALE THIS DRAWING		CUSTOMER DRAWING  Raychem Molded Parts 305 Constitution Dr Menlo Park, CA 94025 TITLE BOOT, STRAIGHT SIZE B CODE IDENT. NO. 06090 DWG. NO. 202A111-X-G07 SHEET 1 OF 1	
PART DESCRIPTION	H		J		P ±10% b		R ±10% b	S ±10% b	T ±10% b	JO ±10% b								JW ±20% b	HW ±20% b																																																					
	MIN	MAX	MIN	MAX																																																																				
	a	b	a	b																																																																				
202A111-X-G07 (X: -3,-4 OR -25)	.67 [17]	.31 [7.9]	.67 [17]	.09 [2,2]	.98 [25]	.55 [14]	.12 [3,0]	.04 [1,0]	.24 [6,0]	.07 [1,7]	.05 [1,3]																																																													
202A111-12-G07	.63 [16]	.31 [8]	.43 [11]	.09 [2,2]	.98 [25]	.55 [14]	.12 [3,0]	.04 [1,0]	.24 [6,0]	.07 [1,7]	.05 [1,3]																																																													
MATERIAL DASH NO.	ADHESIVE (COATING) SLASH NUMBER	ADHESIVE (COATING) S NUMBER																																																																						
-3	/42; /86; /180	S-1017; S-1048; S1030																																																																						
-4	/42; /86; /180	S-1017; S-1048; S1030																																																																						
-12	N/A	N/A																																																																						
-25	/42; /86; /225	S-1017; S-1048; S-1206																																																																						

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9