


SPECIFICATION CONTROL DRAWING								55PC6309	
TITLE								Date	Revision
ONE CONDUCTOR CABLE, DOUBLE SHIELDED, DOUBLE JACKETED, GENERAL PURPOSE, 600 VOLT								2-13-13	B
This specification sheet forms a part of the latest issue of Raychem Specification 55PC.									



CABLE CONSTRUCTION DETAILS												
PART NUMBER 1/	CONDUCTOR SIZE (AWG)	1 st SHIELD SIZE (AWG)	1 st JACKET THICKNESS (in.)		2 nd SHIELD SIZE (AWG)	2 nd JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL		LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC6309-22-*	22	38	.0050	.0060	38	.0050	.0060	.098	.104	.110	11.87	12.83
55PC6309-20-*	20	38	.0050	.0060	38	.0050	.0065	.105	.113	.121	14.48	15.59
55PC6309-18-*	18	38	.0050	.0060	38	.0050	.0065	.116	.123	.130	17.96	19.28
55PC6309-16-*	16	38	.0050	.0060	38	.0050	.0065	.121	.130	.139	20.62	22.04
55PC6309-14-*	14	38	.0050	.0065	38	.0050	.0065	.137	.146	.155	27.22	28.96
55PC6309-12-*	12	38	.0050	.0065	38	.0055	.0070	.156	.166	.176	36.68	38.79
55PC6309-10-*	10	38	.0050	.0065	38	.0055	.0070	.176	.190	.204	51.16	53.97

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.			
1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx"). OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.			
Page 1 of 2	Raychem, TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.		
	DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.		
	THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.		
			Raychem Wire & Cable 501 Oaks Avenue Redwood City, CA 94063-3800 Phone: 1-800-227-8816 Fax: 1-650-361-6297

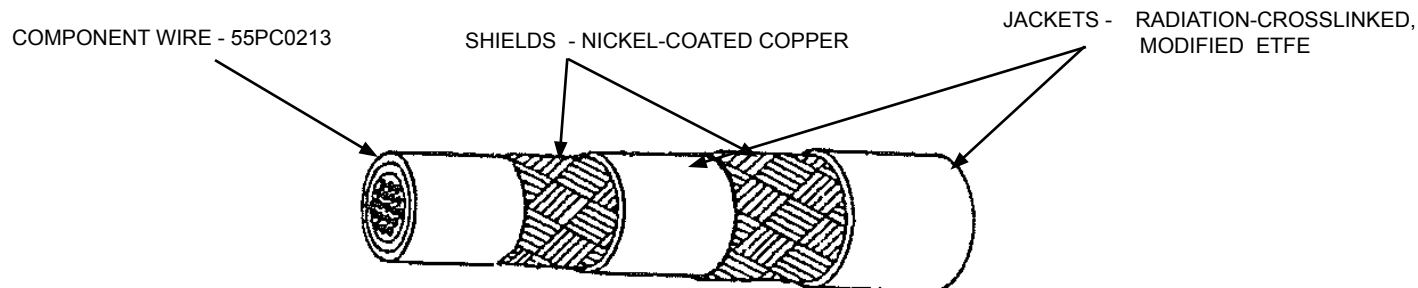

SPECIFICATION CONTROL DRAWING

Page 2 of 2

Revision

B

SCD

55PC6309

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour

DIELECTRIC WITHSTAND:

1500 volts (rms), 60 Hz conductor to shield

500 volts (rms), 60 Hz shield to shield

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum) (each)

Tensile Strength, 5000 lbf/in² (minimum) (each)

JACKET FLAWS:

Spark Test, 1000 volts (rms)

Impulse Dielectric Test, 6.0 kV (peak)

SHIELD COVERAGE:

85% (minimum) (each)

VOLTAGE WITHSTAND (Post Environmental):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers on page 1 shall be replaced by color code designators with a dash separating the component wire color from the inner jacket color and a dash separating the inner jacket color from the outer jacket color.

1/ Example: AWG 22, white component wire; white inner jacket and white outer jacket:
55PC6309-22-9-9-9

1/ See footer section on page 1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9