

DESCRIPTION

The PUP15/25N3 series of AC-DC switching power supplies are for 15-25 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with an IEC320/C14 inlet to mate with interchangeable cord for world-wide use. All models meet EN55032, EN55024 and FCC class B emission limits and comply with UL, CSA, IEC and CE requirements.

FEATURES

- No load power consumption less than 0.075w
- Compliant with DoE level VI requirements
- Meet energy star EPS2.0 /ErP lot 7
- Meet EU CoC EPS V5 Tier2
- Operating altitude up to 5000 meters
- Overvoltage protection (auto-recovery)
- Short-circuit protection (auto-recovery)
- Overcurrent protection (auto-recovery)
- High Efficiency
- 100% burn-in at full rated load
- Compliant with RoHS requirements
- Meet LPS requirements

INPUT SPECIFICATIONS

Input voltage: 90-264 VAC
 Input frequency: 47-63 Hz
 Input current: 0.8A (rms) for 115 Vac
 0.45A (rms) for 230 Vac
 Earth Leakage current: 250 μ A max. @ 264 VAC, 60 Hz

OUTPUT SPECIFICATIONS

Output voltage /current: See rating chart.
 Maximum output power: See rating chart.
 Ripple and noise: See rating chart.
 Overvoltage protection: Set at 115-200% of its nominal output voltage
 Overcurrent protection: Protect to short circuit conditions
 Temperature coefficient: All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
 Transient response: Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature: 0° C to $+40^{\circ}$ C
 Storage temperature: -20° C to $+80^{\circ}$ C
 Operating humidity: 20% to 80% non-condensing
 Storage humidity: 10% to 90% non-condensing

PUP15/25N3 SERIES



SAFETY STANDARD APPROVALS



UL 62368-1, CSA C22.2 No. 62368-1
 File No. E190414



TUV EN 62368-1

GENERAL SPECIFICATIONS

Hold-up time: 8 ms minimum at 115 VAC
 Turn on delay time: 3 s maximum at 115 VAC
 Efficiency: 85% up at full load
 Line regulation: $\pm 0.5\%$ maximum at full load
 Inrush current: 30 A @ 115 VAC or 60 A @ 230 VAC at 25° C cold start
 Withstand voltage: 4242 VDC from input to output, 2500 VDC from input to ground, 100,000 hours at full load at 25° C ambient, calculated per SR332
 MTBF:

EMC Performance

EN55032:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class A and D
EN61000-3-3:	Line flicker
EN55024	
EN61000-4-2:	ESD, ± 8 KV air and ± 4 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ± 1 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms


OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Output						Average efficiency (typical) @ 115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise ⁽¹⁾	Max. Power	
PUP15N3-10	5 V	0 A	3.00 A	±5%	150 mV	15 W	83 /83%
PUP25N3-12	12 V	0 A	2.08 A	±5%	180 mV	25 W	87 /88%
PUP25N3-13-2	19 V	0 A	1.32 A	±5%	300 mV	25 W	88 /89%
PUP25N3-14	24 V	0 A	1.04 A	±5%	300 mV	25 W	89 /89%

NOTES:

1. Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 47 µF electrolytic capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

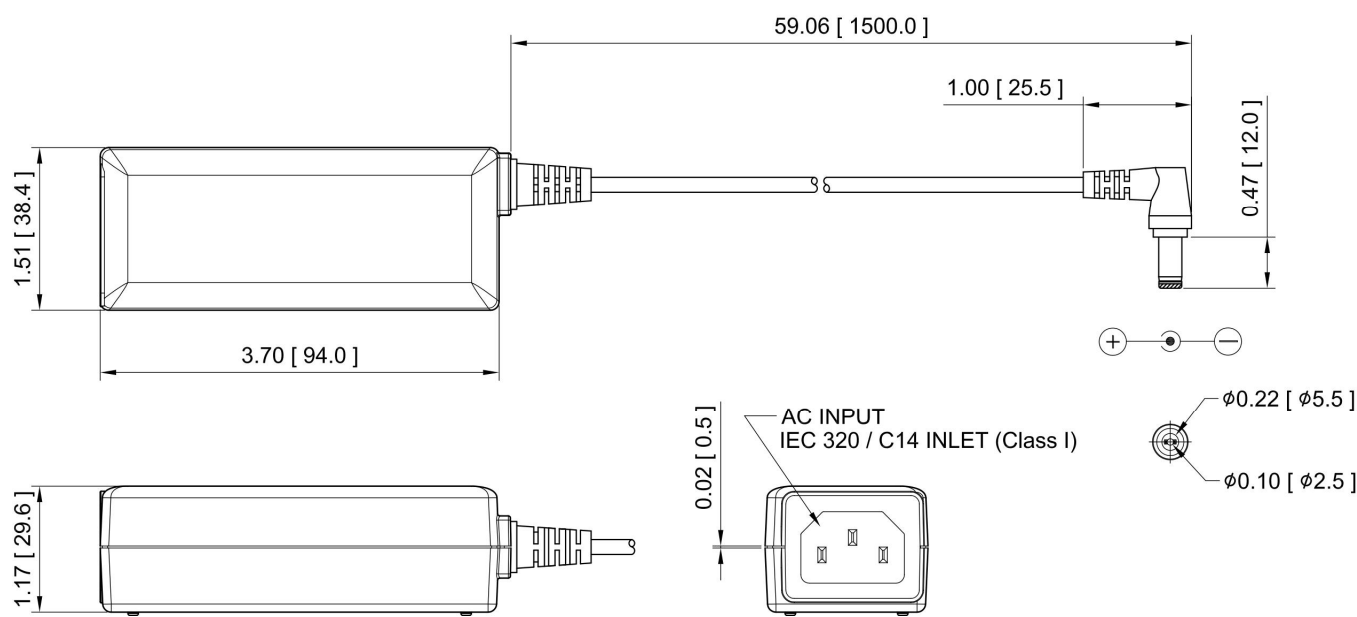

NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Weight: 112 grams (0.25 lbs.) approx.
4. Output return (-) is electrically connected to incoming Earth Ground through a 0 ohm resistor as standard.
5. The length of output cable for PUP15N3-10 is 39.37 [1000.0].

PIN CHART

MODEL	CONNECTION
Polarity	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9