

#### LTC1407-1/LTC1407A-1

Serial 12-Bit/14-Bit, 3Msps Simultaneous Sampling ADCs with Shutdown

#### **FEATURES**

- 3Msps Sampling ADC with Two Simultaneous Differential Inputs
- 1.5Msps Throughput per Channel
- Low Power Dissipation: 14mW (Typ)
- 3V Single Supply Operation
- ±1.25V Differential Input Range
- Pin Compatible 0V to 2.5V Input Range Version (LTC1407/LTC1407A)
- 2.5V Internal Bandgap Reference with External Overdrive
- 3-Wire Serial Interface
- Sleep (10µW) Shutdown Mode
- Nap (3mW) Shutdown Mode
- 80dB Common Mode Rejection at 100kHz
- Tiny 10-Lead MS Package

#### **APPLICATIONS**

- Telecommunications
- Data Acquisition Systems
- Uninterrupted Power Supplies
- Multiphase Motor Control
- I & Q Demodulation
- Industrial Radio

#### DESCRIPTION

The LTC®1407-1/LTC1407A-1 are 12-bit/14-bit, 3Msps ADCs with two 1.5Msps simultaneously sampled differential inputs. The devices draw only 4.7mA from a single 3V supply and come in a tiny 10-lead MS package. A sleep shutdown feature lowers power consumption to  $10\mu W$ . The combination of speed, low power and tiny package makes the LTC1407-1/LTC1407A-1 suitable for high speed, portable applications.

The LTC1407-1/LTC1407A-1 contain two separate differential inputs that are sampled simultaneously on the rising edge of the CONV signal. These two sampled inputs are then converted at a rate of 1.5Msps per channel.


The 80dB common mode rejection allows users to eliminate ground loops and common mode noise by measuring signals differentially from the source.

The devices convert -1.25V to 1.25V bipolar inputs differentially. The absolute voltage swing for CH0<sup>+</sup>, CH0<sup>-</sup>, CH1<sup>+</sup> and CH1<sup>-</sup> extends from ground to the supply voltage.


The serial interface sends out the two conversion results in 32 clocks for compatibility with standard serial interfaces.

T, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners. Protected by U.S. Patents including 6084440, 6522187.

#### **BLOCK DIAGRAM**

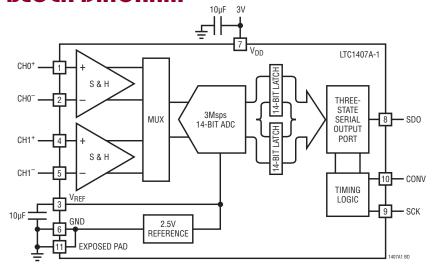

### THD, 2nd and 3rd vs Input Frequency for Differential Input Signals






#### **ABSOLUTE MAXIMUM RATINGS**

#### (Notes 1, 2)

Supply Voltage (V <sub>DD</sub> )	4V
Analog Input Voltage (Note 3).	$-0.3V$ to $(V_{DD} + 0.3V)$
Digital Input Voltage	$-0.3V$ to $(V_{DD} + 0.3V)$
Digital Output Voltage	$-0.3V$ to $(V_{DD} + 0.3V)$
Power Dissipation	100mW
Operation Temperature Range	
LTC1407C-1/LTC1407AC-1	0°C to 70°C
LTC1407I-1/LTC1407AI-1	40°C to 85°C
Storage Temperature Range	65°C to 150°C
Lead Temperature (Soldering, 1	0 sec) 300°C

#### PIN CONFIGURATION

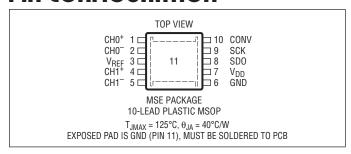

#### ORDER INFORMATION

LEAD FREE FINISH	TAPE AND REEL	PART MARKING	PACKAGE DESCRIPTION	TEMPERATURE RANGE
LTC1407CMSE-1#PBF	LTC1407CMSE-1#TRPBF	LTBGT	10-Lead Plastic MSOP	0°C to 70°C
LTC1407IMSE-1#PBF	LTC1407IMSE-1#TRPBF	LTBGV	10-Lead Plastic MSOP	-40°C to 85°C
LTC1407ACMSE-1#PBF	LTC1407ACMSE-1#TRPBF	LTBGW	10-Lead Plastic MSOP	0°C to 70°C
LTC1407AIMSE-1#PBF	LTC1407AIMSE-1#TRPBF	LTBGX	10-Lead Plastic MSOP	-40°C to 85°C

Consult LTC Marketing for parts specified with wider operating temperature ranges.

Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: http://www.linear.com/leadfree/

For more information on tape and reel specifications, go to: http://www.linear.com/tapeandreel/

### **CONVERTER CHARACTERISTICS** The $\bullet$ denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}C$ . With internal reference, $V_{DD} = 3V$ .

				LTC1407-	1	L	ΓC1407A	\-1	
PARAMETER	CONDITIONS		MIN	TYP	MAX	MIN	TYP	MAX	
Resolution (No Missing Codes)		•	12			14			Bits
Integral Linearity Error	(Notes 5, 17)	•	-2	±0.25	2	-4	±0.5	4	LSB
Offset Error	(Notes 4, 17)	•	-10	±1	10	-20	±2	20	LSB
Offset Match from CH0 to CH1	(Note 17)		-5	±0.5	5	-10	±1	10	LSB
Gain Error	(Notes 4, 17)	•	-30	±5	30	-60	±10	60	LSB
Gain Match from CH0 to CH1	(Note 17)		-5	±1	5	-10	±2	10	LSB
Gain Tempco	Internal Reference (Note 4) External Reference			±15 ±1			±15 ±1		ppm/°C ppm/°C



## **ANALOG INPUT** The $\bullet$ denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}C$ . With internal reference, $V_{DD} = 3V$ .

SYMBOL	PARAMETER	CONDITIONS		MIN TYP	MAX	UNITS
V <sub>IN</sub>	Analog Differential Input Range (Notes 3, 8, 9)	$2.7V \le V_{DD} \le 3.3V$		-1.25 to 1.25		V
V <sub>CM</sub>	Analog Common Mode + Differential Input Range (Note 10)			0 to V <sub>DD</sub>		V
I <sub>IN</sub>	Analog Input Leakage Current		•		1	μА
C <sub>IN</sub>	Analog Input Capacitance	(Note 18)		13		pF
t <sub>ACQ</sub>	Sample-and-Hold Acquisition Time	(Note 6)	•		39	ns
t <sub>AP</sub>	Sample-and-Hold Aperture Delay Time			1		ns
t <sub>JIπer</sub>	Sample-and-Hold Aperture Delay Time Jitter			0.3		ps
t <sub>SK</sub>	Sample-and-Hold Aperture Skew from CH0 to CH1			200		ps
CMRR	Analog Input Common Mode Rejection Ratio	$f_{IN} = 1 MHz, V_{IN} = 0 V \text{ to } 3 V \\ f_{IN} = 100 MHz, V_{IN} = 0 V \text{ to } 3 V$		-60 -15		dB dB

# **DYNAMIC ACCURACY** The $\bullet$ denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}C$ . With internal reference, $V_{DD} = 3V$ . Single-ended signal drive CH0+/CH1+ with CH0-/CH1- = 1.5V DC. Differential signals drive both inputs of each channel with $V_{CM} = 1.5V$ DC.

				L	ГС1407-	1	LT			
SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	MIN	TYP	MAX	UNITS
SINAD	Signal-to-Noise Plus Distortion Ratio	100kHz Input Signal (Note 19) 750kHz Input Signal (Note 19) 100kHz Input Signal, External $V_{REF} = 3.3V$ , $V_{DD} \ge 3.3V$ (Note 19) 750kHz Input Signal, External $V_{REF} = 3.3V$ , $V_{DD} \ge 3.3V$ (Note 19)	•	68	70.5 70.5 72.0 72.0		70	73.5 73.5 76.3 76.3		dB dB dB
THD	Total Harmonic Distortion	100kHz First 5 Harmonics (Note 19) 750kHz First 5 Harmonics (Note 19)	•		-87 -83	-77		-90 -86	-80	dB dB
SFDR	Spurious Free Dynamic Range	100kHz Input Signal (Note 19) 750kHz Input Signal (Note 19)			87 83			90 86		dB dB
IMD	Intermodulation Distortion	0.625V <sub>P-P</sub> 1.4MHz Summed with 0.625V <sub>P-P</sub> , 1.56MHz into CHO <sup>+</sup> and Inverted into CHO <sup>-</sup> . Also Applicable to CH1 <sup>+</sup> and CH1 <sup>-</sup>			-82			-82		dB
	Code-to-Code Transition Noise	V <sub>REF</sub> = 2.5V (Note 17)			0.25			1		LSB <sub>RMS</sub>
	Full Power Bandwidth	$V_{IN} = 2.5V_{P-P}$ , SDO = 11585LSB <sub>P-P</sub> (-3dBFS) (Note 15)			50			50		MHz
	Full Linear Bandwidth	$S/(N + D) \ge 68dB$			5			5		MHz

### INTERNAL REFERENCE CHARACTERISTICS $T_A = 25$ °C. $V_{DD} = 3V$ .

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V <sub>REF</sub> Output Voltage	I <sub>OUT</sub> = 0		2.5		V
V <sub>REF</sub> Output Tempco			15		ppm/°C
V <sub>REF</sub> Line Regulation	V <sub>DD</sub> = 2.7V to 3.6V, V <sub>REF</sub> = 2.5V		600		μV/V
V <sub>REF</sub> Output Resistance	Load Current = 0.5mA		0.2		Ω
V <sub>REF</sub> Setting Time			2		ms

## **DIGITAL INPUTS AND DIGITAL OUTPUTS** The $\bullet$ denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}C$ . $V_{DD} = 3V$ .

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
$\overline{V_{IH}}$	High Level Input Voltage	V <sub>DD</sub> = 3.3V	•	2.4			V
$\overline{V_{IL}}$	Low Level Input Voltage	V <sub>DD</sub> = 2.7V	•			0.6	V
I <sub>IN</sub>	Digital Input Current	V <sub>IN</sub> = 0V to V <sub>DD</sub>	•			±10	μА
C <sub>IN</sub>	Digital Input Capacitance				5		pF
$V_{OH}$	High Level Output Voltage	$V_{DD} = 3V$ , $I_{OUT} = -200\mu A$	•	2.5	2.9		V
V <sub>OL</sub>	Low Level Output Voltage	V <sub>DD</sub> = 2.7V, I <sub>OUT</sub> = 160μA V <sub>DD</sub> = 2.7V, I <sub>OUT</sub> = 1.6mA	•		0.05 0.10	0.4	V
I <sub>OZ</sub>	Hi-Z Output Leakage D <sub>OUT</sub>	V <sub>OUT</sub> = 0V to V <sub>DD</sub>	•			±10	μА
$\overline{C_{OZ}}$	Hi-Z Output Capacitance D <sub>OUT</sub>				1		pF
I <sub>SOURCE</sub>	Output Short-Circuit Source Current	V <sub>OUT</sub> = 0V, V <sub>DD</sub> = 3V			20		mA
I <sub>SINK</sub>	Output Short-Circuit Sink Current	$V_{OUT} = V_{DD} = 3V$			15		mA

### **POWER REQUIREMENTS** The ullet denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25 \,^{\circ}\text{C}$ . With internal reference, $V_{DD} = 3V$ .

SYMBOL	PARAMETER	CONDITIONS	CONDITIONS		TYP	MAX	UNITS
$V_{DD}$	Supply Voltage			2.7		3.6	V
I <sub>DD</sub>	Supply Current	Active Mode, f <sub>SAMPLE</sub> = 1.5Msps Nap Mode Sleep Mode (LTC1407) Sleep Mode (LTC1407A)	•		4.7 1.1 2.0 2.0	7.0 1.5 15 10	mA mA μΑ μΑ
PD	Power Dissipation	Active Mode with SCK in Fixed State (Hi or Lo)			12	-	mW

### **TIMING CHARACTERISTICS** The $\bullet$ denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}C$ . $V_{DD} = 3V$ .

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
f <sub>SAMPLE(MAX)</sub>	Maximum Sampling Frequency per Channel (Conversion Rate)		•	1.5			MHz
t <sub>THROUGHPUT</sub>	Minimum Sampling Period (Conversion + Acquisition Period)		•			667	ns
t <sub>SCK</sub>	Clock Period	(Note 16)	•	19.6		10000	ns
t <sub>CONV</sub>	Conversion Time	(Note 6)		32	34		SCLK cycles
t <sub>1</sub>	Minimum Positive or Negative SCLK Pulse Width	(Note 6)		2			ns
t <sub>2</sub>	CONV to SCK Setup Time	(Notes 6, 10)		3		10000	ns
t <sub>3</sub>	SCK Before CONV	(Note 6)		0			ns
t <sub>4</sub>	Minimum Positive or Negative CONV Pulse Width	(Note 6)		4			ns
t <sub>5</sub>	SCK to Sample Mode	(Note 6)		4			ns
$t_6$	CONV to Hold Mode	(Notes 6, 11)		1.2			ns
t <sub>7</sub>	32nd SCK↑ to CONV↑ Interval (Affects Acquisition Period)	(Notes 6, 7, 13)		45			ns
t <sub>8</sub>	Minimum Delay from SCK to Valid Bits 0 Through 11	(Notes 6, 12)		8			ns
t <sub>9</sub>	SCK to Hi-Z at SDO	(Notes 6, 12)		6			ns
t <sub>10</sub>	Previous SDO Bit Remains Valid After SCK	(Notes 6, 12)		2			ns
t <sub>12</sub>	V <sub>REF</sub> Settling Time After Sleep-to-Wake Transition	(Notes 6, 14)			2		ms

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: All voltage values are with respect to ground GND.

**Note 3:** When these pins are taken below GND or above  $V_{DD}$ , they will be clamped by internal diodes. This product can handle input currents greater than 100mA below GND or greater than  $V_{DD}$  without latchup.

**Note 4:** Offset and range specifications apply for a single-ended CH0<sup>+</sup> or CH1<sup>+</sup> input with CH0<sup>-</sup> or CH1<sup>-</sup> grounded and using the internal 2.5V reference.

**Note 5:** Integral linearity is tested with an external 2.55V reference and is defined as the deviation of a code from the straight line passing through the actual endpoints of a transfer curve. The deviation is measured from the center of quantization band.

Note 6: Guaranteed by design, not subject to test.

Note 7: Recommended operating conditions.

**Note 8:** The analog input range is defined for the voltage difference between CHO<sup>+</sup> and CHO<sup>-</sup> or CH1<sup>+</sup> and CH1<sup>-</sup>. Performance is specified with CHO<sup>-</sup> = 1.5V DC while driving CHO<sup>+</sup> and with CH1<sup>-</sup> = 1.5V DC while driving CH1<sup>+</sup>.

**Note 9:** The absolute voltage at CH0+, CH0-, CH1+ and CH1- must be within this range.

**Note 10:** If less than 3ns is allowed, the output data will appear one clock cycle later. It is best for CONV to rise half a clock before SCK, when running the clock at rated speed.

**Note 11:** Not the same as aperture delay. Aperture delay (1ns) is the difference between the 2.2ns delay through the sample-and-hold and the 1.2ns CONV to hold mode delay.

**Note 12:** The rising edge of SCK is guaranteed to catch the data coming out into a storage latch.

**Note 13:** The time period for acquiring the input signal is started by the 32nd rising clock and it is ended by the rising edge of CONV.

**Note 14:** The internal reference settles in 2ms after it wakes up from sleep mode with one or more cycles at SCK and a  $10\mu F$  capacitive load.

Note 15: The full power bandwidth is the frequency where the output code swing drops by 3dB with a  $2.5V_{P-P}$  input sine wave.

**Note 16:** Maximum clock period guarantees analog performance during conversion. Output data can be read with an arbitrarily long clock period.


**Note 17:** The LTC1407A-1 is measured and specified with 14-bit Resolution (1LSB =  $152\mu V$ ) and the LTC1407-1 is measured and specified with 12-bit Resolution (1LSB =  $610\mu V$ ).


**Note 18:** The sampling capacitor at each input accounts for 4.1pF of the input capacitance.


**Note 19:** Full-scale sinewaves are fed into the noninverting inputs while the inverting inputs are kept at 1.5V DC.




**TYPICAL PERFORMANCE CHARACTERISTICS**  $V_{DD}=3V$ ,  $T_A=25^{\circ}C$ . Single-ended signals drive +CH0/+CH1 with -CH0/-CH1 = 1.5V DC, differential signals drive both inputs with  $V_{CM}=1.5V$  DC (LTC1407A-1)










**SNR vs Input Frequency** 74 71 68 SNR (dB) 62 59 56 53 50 0.1 10 100 FREQUENCY (MHz) 14071 G04




**ENOBs and SINAD** 











**TYPICAL PERFORMANCE CHARACTERISTICS**  $V_{DD}=3V$ ,  $T_A=25^{\circ}C$ . Single-ended signals drive +CH0/+CH1 with -CH0/-CH1 = 1.5V DC, differential signals drive both inputs with  $V_{CM}=1.5V$  DC (LTC1407A-1)


1403kHz Input Summed with 1563kHz Input IMD 4096 Point FFT **Plot for Differential Input Signals** 




748kHz Sine Wave 4096 Point FFT **Plot for Differential Input Signals** 




10.7MHz Sine Wave 4096 Point FFT Plot for Differential Input **Signals** 




Differential Linearity for CHO with Internal 2.5V Reference




Integral Linearity End Point Fit for CHO with Internal 2.5V Reference




Integral Linearity End Point Fit for CHO with Internal 2.5V Reference for Differential Input Signals




**Differential Linearity for CH1 with** Internal 2.5V Reference




**Integral Linearity End Point Fit for** CH1 with Internal 2.5V Reference




**Integral Linearity End Point Fit for** CH1 with Internal 2.5V Reference for Differential Input Signals





## 







 $V_{DD} = 3V$ ,  $T_A = 25$ °C (LTC1407-1/LTC1407A-1)








Output Match with Simultaneous Input Steps at CHO and CH1 from  $25\Omega$ 









#### TYPICAL PERFORMANCE CHARACTERISTICS

 $V_{DD} = 3V$ ,  $T_A = 25^{\circ}C$  (LTC1407-1/LTC1407A-1)





#### PIN FUNCTIONS

**CHO+** (Pin 1): Noninverting Channel 0. CHO+ operates fully differentially with respect to CHO-, with a -1.25V to 1.25V differential swing with respect to CHO- and a 0 to  $V_{DD}$  absolute input range.

**CHO**<sup>-</sup> (**Pin 2**): Inverting Channel 0. CHO<sup>-</sup> operates fully differentially with respect to CHO<sup>+</sup>, with a 1.25V to -1.25V differential swing with respect to CHO<sup>+</sup> and a 0 to V<sub>DD</sub> absolute input range.

**V**<sub>REF</sub> (**Pin 3**): 2.5V Internal Reference. Bypass to GND and a solid analog ground plane with a  $10\mu\text{F}$  ceramic capacitor (or  $10\mu\text{F}$  tantalum in parallel with  $0.1\mu\text{F}$  ceramic). Can be overdriven by an external reference voltage  $\geq 2.55\text{V}$  and  $\leq \text{V}_{DD}$ .

**CH1**<sup>+</sup> (**Pin 4**): Noninverting Channel 1. CH1<sup>+</sup> operates fully differentially with respect to CH1<sup>-</sup>, with a -1.25V to 1.25V differential swing with respect to CH1<sup>-</sup> and a 0 to  $V_{DD}$  absolute input range.

**CH1**<sup>-</sup> (**Pin 5**): Inverting Channel 1. CH1<sup>-</sup> operates fully differentially with respect to CH1<sup>+</sup>, with a 1.25V to -1.25V differential swing with respect to CH1<sup>+</sup> and a 0 to V<sub>DD</sub> absolute input range.

**GND (Pins 6, 11):** Ground and Exposed Pad. This single ground pin and the Exposed Pad must be tied directly to

the solid ground plane under the part. Keep in mind that analog signal currents and digital output signal currents flow through these connections.

 $V_{DD}$  (Pin 7): 3V Positive Supply. This single power pin supplies 3V to the entire chip. Bypass to GND pin and solid analog ground plane with a 10μF ceramic capacitor (or 10μF tantalum) in parallel with 0.1μF ceramic. Keep in mind that internal analog currents and digital output signal currents flow through this pin. Care should be taken to place the 0.1μF bypass capacitor as close to Pins 6 and 7 as possible.

**SDO (Pin 8):** Three-State Serial Data Output. Each pair of output data words represent the two analog input channels at the start of the previous conversion. The output format is 2's complement.


**SCK (Pin 9):** External Clock Input. Advances the conversion process and sequences the output data on the rising edge. One or more pulses wake from sleep.

**CONV (Pin 10):** Convert Start. Holds the two analog input signals and starts the conversion on the rising edge. Two pulses with SCK in fixed high or fixed low state starts nap mode. Four or more pulses with SCK in fixed high or fixed low state starts sleep mode.






#### **BLOCK DIAGRAM**

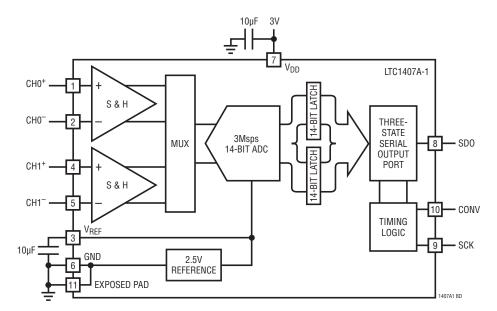

HOLD


#### **TIMING DIAGRAMS**

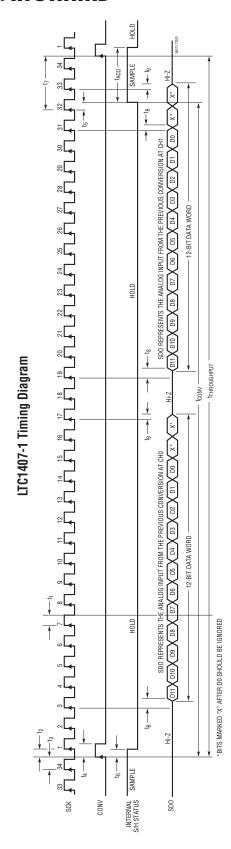


SDO REPRESENTS THE ANALOG INPUT FROM THE PREVIOUS CONVERSION AT CH1 HOLD LTC1407A-1 Timing Diagram INTERNAL SAMPLE SD0 SCK CONV

#### **TIMING DIAGRAMS**

#### **Nap Mode Waveforms**





#### **Sleep Mode Waveforms**

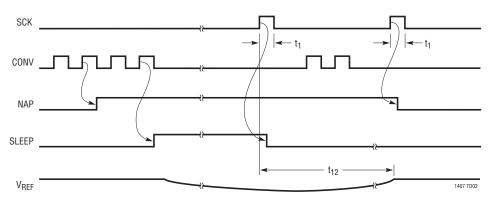

NOTE: NAP AND SLEEP ARE INTERNAL SIGNALS

#### SCK to SDO Delay





#### DRIVING THE ANALOG INPUT

The differential analog inputs of the LTC1407-1/LTC1407A-1 are easy to drive. The inputs may be driven differentially or as a single-ended input (i.e., the CHO<sup>-</sup> input is AC grounded at  $V_{CC}/2$ ). All four analog inputs of both differential analog input pairs, CH0+ with CH0- and CH1+ with CH1-, are sampled at the same instant. Any unwanted signal that is common to both inputs of each input pair will be reduced by the common mode rejection of the sample-and-hold circuit. The inputs draw only one small current spike while charging the sample-and-hold capacitors at the end of conversion. During conversion, the analog inputs draw only a small leakage current. If the source impedance of the driving circuit is low, then the LTC1407-1/LTC1407A-1 inputs can be driven directly. As source impedance increases, so will acquisition time. For minimum acquisition time with high source impedance, a buffer amplifier must be used. The main requirement is that the amplifier driving the analog input(s) must settle after the small current spike before the next conversion starts (settling time must be 39ns for full throughput rate). Also keep in mind, while choosing an input amplifier, the amount of noise and harmonic distortion added by the amplifier.

#### **CHOOSING AN INPUT AMPLIFIER**

Choosing an input amplifier is easy if a few requirements are taken into consideration. First, to limit the magnitude of the voltage spike seen by the amplifier from charging the sampling capacitor, choose an amplifier that has a low output impedance ( $<100\Omega$ ) at the closed-loop bandwidth frequency. For example, if an amplifier is used in a gain of 1 and has a unity-gain bandwidth of 50MHz, then the output impedance at 50MHz must be less than  $100\Omega$ . The second requirement is that the closed-loop bandwidth must be greater than 40MHz to ensure adequate small-signal settling for full throughput rate. If slower op amps are used, more time for settling can be provided by increasing

the time between conversions. The best choice for an op amp to drive the LTC1407-1/LTC1407A-1 depends on the application. Generally, applications fall into two categories: AC applications where dynamic specifications are most critical and time domain applications where DC accuracy and settling time are most critical. The following list is a summary of the op amps that are suitable for driving the LTC1407-1/LTC1407A-1.

**LTC1566-1:** Low Noise 2.3MHz Continuous Time Low-pass Filter.

**LT**®**1630:** Dual 30MHz Rail-to-Rail Voltage FB Amplifier. 2.7V to  $\pm$ 15V supplies. Very high A<sub>VOL</sub>, 500µV offset and 520ns settling to 0.5LSB for a 4V swing. THD and noise are -93dB to 40kHz and below 1LSB to 320kHz (A<sub>V</sub> = 1, 2V<sub>P-P</sub> into 1k $\Omega$ , V<sub>S</sub> = 5V), making the part excellent for AC applications (to 1/3 Nyquist) where rail-to-rail performance is desired. Quad version is available as LT1631.

**LT1632:** Dual 45MHz Rail-to-Rail Voltage FB Amplifier. 2.7V to  $\pm$ 15V supplies. Very high A<sub>VOL</sub>, 1.5mV offset and 400ns settling to 0.5LSB for a 4V swing. It is suitable for applications with a single 5V supply. THD and noise are -93dB to 40kHz and below 1LSB to 800kHz (A<sub>V</sub> = 1, 2V<sub>P-P</sub> into 1k $\Omega$ , V<sub>S</sub> = 5V), making the part excellent for AC applications where rail-to-rail performance is desired. Quad version is available as LT1633.

**LT1801:** 80MHz GBWP, -75dBc at 500kHz, 2mA/amplifier, 8.5nV/ $\sqrt{\text{Hz}}$ .

**LT1806/LT1807:** 325MHz GBWP, -80dBc distortion at 5MHz, unity-gain stable, rail-to-rail in and out, 10mA/amplifier, 3.5nV/ $\sqrt{\text{Hz}}$ .

**LT1810:** 180MHz GBWP, -90dBc distortion at 5MHz, unity-gain stable, rail-to-rail in and out, 15mA/amplifier,  $16nV/\sqrt{Hz}$ .

LinearView is a trademark of Linear Technology Corporation.



**LT1818/LT1819:** 400MHz, 2500V/µs, 9mA, Single/Dual Voltage Mode Operational Amplifier.

**LT6200:** 165MHz GBWP, -85dBc distortion at 1MHz, unity-gain stable, rail-to-rail in and out, 15mA/amplifier, 0.95nV/ $\sqrt{\text{Hz}}$ .

**LT6203:** 100MHz GBWP, -80dBc distortion at 1MHz, unity-gain stable, rail-to-rail in and out, 3mA/amplifier, 1.9nV/ $\sqrt{\text{Hz}}$ .

**LT6600:** Amplifier/Filter Differential In/Out with 10MHz Cutoff.

#### INPUT FILTERING AND SOURCE IMPEDANCE

The noise and the distortion of the input amplifier and other circuitry must be considered since they will add to the LTC1407-1/LTC1407A-1 noise and distortion. The small-signal bandwidth of the sample-and-hold circuit is 50MHz. Any noise or distortion products that are present at the analog inputs will be summed over this entire bandwidth. Noisy input circuitry should be filtered prior to the analog inputs to minimize noise. A simple 1-pole RC filter is sufficient for many applications. For example, Figure 1 shows a 47pF capacitor from CHO+ to ground and a 51 $\Omega$  source resistor to limit the net input bandwidth to 30MHz. The 47pF capacitor also acts as a charge reservoir for the input sample-and-hold and isolates the ADC input from sampling-glitch sensitive circuitry. High quality capacitors and resistors should be used since these




Figure 1. RC Input Filter

components can add distortion. NPO and silvermica type dielectric capacitors have excellent linearity. Carbon surface mount resistors can generate distortion from self heating and from damage that may occur during soldering. Metal film surface mount resistors are much less susceptible to both problems. When high amplitude unwanted signals are close in frequency to the desired signal frequency a multiple pole filter is required.

High external source resistance, combined with 13pF of input capacitance, will reduce the rated 50MHz input bandwidth and increase acquisition time beyond 39ns.

#### INPUT RANGE

The analog inputs of the LTC1407-1/LTC1407A-1 may be driven fully differentially with a single supply. Either input may swing up to 3V, provided the differential swing is no greater than 1.25V. In the valid input range, each input of each channel is always up to ±1.25V away from the other input of each channel. The -1.25V to 1.25V range is also ideally suited for AC-coupled signals in single supply applications. Figure 2 shows how to AC-couple signals in a single supply system without needing a mid-supply 1.5V DC external reference. The DC common mode level is supplied by the previous stage that is already bounded by single supply voltage of the system. The common mode range of the inputs extends from ground to the supply voltage V<sub>DD</sub>. If the difference between the CHO+ and CHO<sup>-</sup> inputs or the CH1<sup>+</sup> and CH1<sup>-</sup> inputs exceeds 1.25V, the output code will stay fixed at zero and all ones, and if this difference goes below -1.25V, the output code will stay fixed at one and all zeros.




Figure 2. AC Coupling of AC Signals with 1kHz Low Cut

#### INTERNAL REFERENCE

The LTC1407-1/LTC1407A-1 have an on-chip, temperature compensated, bandgap reference that is factory trimmed near 2.5V to obtain a precise  $\pm 1.25 V$  input span. The reference amplifier output  $V_{REF}$ , (Pin 3) must be bypassed with a capacitor to ground. The reference amplifier is stable with capacitors of 1µF or greater. For the best noise performance, a 10µF ceramic or a 10µF tantalum in parallel with a 0.1µF ceramic is recommended. The  $V_{REF}$  pin can be overdriven with an external reference as shown in Figure 3. The voltage of the external reference must be higher than the 2.5V of the open-drain P-channel output of the internal reference. The recommended range for an external reference is 2.55V to  $V_{DD}$ . An external reference at 2.55V will see a DC quiescent load of 0.75mA and as much as 3mA during conversion.




Figure 3

#### INPUT SPAN VERSUS REFERENCE VOLTAGE

The differential input range has a unipolar voltage span that equals the difference between the voltage at the reference buffer output  $V_{REF}$  (Pin 3) and the voltage at the Exposed Pad ground. The differential input range of ADC is -1.25V to 1.25V when using the internal reference. The internal ADC is referenced to these two nodes. This relationship also holds true with an external reference.

#### **DIFFERENTIAL INPUTS**

The ADC will always convert the bipolar difference of CH0<sup>+</sup> minus CH0<sup>-</sup> or the bipolar difference of CH1<sup>+</sup> minus CH1<sup>-</sup>, independent of the common mode voltage at either set of inputs. The common mode rejection holds up at high frequencies (see Figure 4). The only requirement is that both inputs not go below ground or exceed V<sub>DD</sub>. Integral nonlinearity errors (INL) and differential nonlinearity

errors (DNL) are largely independent of the common mode voltage. However, the offset error will vary. CMRR is typically better than 60dB.

Figure 5 shows the ideal input/output characteristics for the LTC1407-1/LTC1407A-1. The code transitions occur midway between successive integer LSB values (i.e., 0.5LSB, 1.5LSB, 2.5LSB, FS – 1.5LSB). The output code is 2's complement with 1LSB =  $2.5V/16384 = 153\mu V$  for the LTC1407A-1 and 1LSB =  $2.5V/4096 = 610\mu V$  for the LTC1407-1. The LTC1407A-1 has 1LSB RMS of Gaussian white noise. Figure 6a shows the LTC1819 converting a single-ended input signal to differential input signals for optimum THD and SFDR performance as shown in the FFT plot (Figure 6b).




Figure 4. CMRR vs Frequency




Figure 5. LTC1407-1/LTC1407A-1 Transfer Characteristic



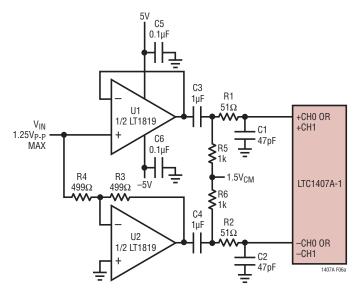


Figure 6a. The LT1819 Driving the LTC1407A-1 Differentially

#### **Board Layout and Bypassing**

Wire wrap boards are not recommended for high resolution and/or high speed A/D converters. To obtain the best performance from the LTC1407-1/LTC1407A-1, a printed circuit board with ground plane is required. Layout for the printed circuit board should ensure that digital and analog signal lines are separated as much as possible. In particular, care should be taken not to run any digital track alongside an analog signal track. If optimum phase match between the inputs is desired, the length of the four input wires of the two input channels should be kept matched. But each pair of input wires to the two input channels should be kept separated by a ground trace to avoid high frequency crosstalk between channels.

High quality tantalum and ceramic bypass capacitors should be used at the  $V_{DD}$  and  $V_{REF}$  pins as shown in the Block Diagram on the first page of this data sheet. For optimum performance, a  $10\mu F$  surface mount tantalum capacitor with a  $0.1\mu F$  ceramic is recommended for the  $V_{DD}$  and  $V_{REF}$  pins. Alternatively,  $10\mu F$  ceramic chip capacitors such as X5R or X7R may be used. The capacitors must be located as close to the pins as possible. The traces connecting the pins and the bypass capacitors must be kept short and should be made as wide as possible. The  $V_{DD}$  bypass capacitor returns to GND (Pin 6) and the  $V_{REF}$  bypass capacitor returns to the Exposed Pad ground (Pin 11).




Figure 6b. LTC1407-1 6MHz Sine Wave 4096 Point FFT Plot with the LT1819 Driving the Inputs Differentially

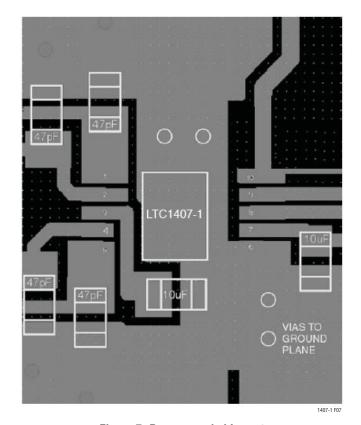


Figure 7. Recommended Layout

Care should be taken to place the  $0.1\mu F\ V_{DD}$  bypass capacitor as close to Pins 6 and 7 as possible.

Figure 7 shows the recommended system ground connections. All analog circuitry grounds should be terminated



at the LTC1407-1/LTC1407A-1 Exposed Pad. The ground return from the LTC1407-1/LTC1407A-1 Pin 6 to the power supply should be low impedance for noise-free operation. The Exposed Pad of the 10-lead MSE package is also tied to Pin 6 and the LTC1407-1/LTC1407A-1 GND. The Exposed Pad should be soldered on the PC board to reduce ground connection inductance. Digital circuitry grounds must be connected to the digital supply common.

#### **POWER-DOWN MODES**

Upon power-up, the LTC1407-1/LTC1407A-1 are initialized to the active state and are ready for conversion. The nap and sleep mode waveforms show the power-down modes for the LTC1407-1/LTC1407A-1. The SCK and CONV inputs control the power-down modes (see Timing Diagrams). Two rising edges at CONV, without any intervening rising edges at SCK, put the LTC1407-1/LTC1407A-1 in nap mode and the power drain drops from 14mW to 6mW. The internal reference remains powered in nap mode. One or more rising edges at SCK wake up the LTC1407-1/LTC1407A-1 for service very quickly and CONV can start an accurate conversion within a clock cycle.

Four rising edges at CONV, without any intervening rising edges at SCK, put the LTC1407-1/LTC1407A-1 in sleep mode and the power drain drops from 14mW to 10 $\mu$ W. To bring the part out of sleep mode requires one or more rising SCK edges followed by a nap request. Then one or more rising edges at SCK wake up the LTC1407-1/LTC1407A-1 for operation. When nap mode is entered after sleep mode, the reference that was shut down in sleep mode is reactivated.

The internal reference ( $V_{REF}$ ) takes 2ms to slew and settle with a 10µF load. Using sleep mode more frequently compromises the settled accuracy of the internal reference. Note that for slower conversion rates, the nap and sleep modes can be used for substantial reductions in power consumption.

#### **DIGITAL INTERFACE**

The LTC1407-1/LTC1407A-1 have a 3-wire SPI (serial protocol interface) interface. The SCK and CONV inputs and SDO output implement this interface. The SCK and CONV inputs accept swings from 3V logic and are TTL

compatible, if the logic swing does not exceed  $V_{DD}$ . A detailed description of the three serial port signals follows:

#### **Conversion Start Input (CONV)**

The rising edge of CONV starts a conversion, but subsequent rising edges at CONV are ignored by the LTC1407-1/ LTC1407A-1 until the following 32 SCK rising edges have occurred. The duty cycle of CONV can be arbitrarily chosen to be used as a frame sync signal for the processor serial port. A simple approach to generate CONV is to create a pulse that is one SCK wide to drive the LTC1407-1/LTC1407A-1 and then buffer this signal to drive the frame sync input of the processor serial port. It is good practice to drive the LTC1407-1/LTC1407A-1 CONV input first to avoid digital noise interference during the sample-to-hold transition triggered by CONV at the start of conversion. It is also good practice to keep the width of the low portion of the CONV signal greater than 15ns to avoid introducing glitches in the front end of the ADC just before the sample-and-hold goes into hold mode at the rising edge of CONV.

#### Minimizing Jitter on the CONV Input

In high speed applications where high amplitude sinewaves above 100kHz are sampled, the CONV signal must have as little jitter as possible (10ps or less). The square wave output of a common crystal clock module usually meets this requirement easily. The challenge is to generate a CONV signal from this crystal clock without jitter corruption from other digital circuits in the system. A clock divider and any gates in the signal path from the crystal clock to the CONV input should not share the same integrated circuit with other parts of the system. As shown in the interface circuit examples, the SCK and CONV inputs should be driven first, with digital buffers used to drive the serial port interface. Also note that the master clock in the DSP may already be corrupted with jitter, even if it comes directly from the DSP crystal. Another problem with high speed processor clocks is that they often use a low cost, low speed crystal (i.e., 10MHz) to generate a fast, but jittery, phase-locked-loop system clock (i.e., 40MHz). The jitter in these PLL-generated high speed clocks can be several nanoseconds. Note that if you choose to use the frame sync signal generated by the DSP port, this signal will have the same jitter of the DSP's master clock.



#### Serial Clock Input (SCK)

The rising edge of SCK advances the conversion process and also updates each bit in the SDO data stream. After CONV rises, the third rising edge of SCK sends out two sets of 12/14 data bits, with the MSB sent first. A simple approach is to generate SCK to drive the LTC1407-1/ LTC1407A-1 first and then buffer this signal with the appropriate number of inverters to drive the serial clock input of the processor serial port. Use the falling edge of the clock to latch data from the serial data output (SDO) into your processor serial port. The 14-bit serial data will be received right justified, in two 16-bit words with 32 or more clocks per frame sync. It is good practice to drive the LTC1407-1/LTC1407A-1 SCK input first to avoid digital noise interference during the internal bit comparison decision by the internal high speed comparator. Unlike the CONV input, the SCK input is not sensitive to jitter because the input signal is already sampled and held constant.

#### Serial Data Output (SDO)

Upon power-up, the SDO output is automatically reset to the high impedance state. The SDO output remains in high impedance until a new conversion is started. SDO sends out two sets of 12/14 bits in 2's complement format in the output data stream after the third rising edge of SCK after the start of conversion with the rising edge of CONV. The two 12-/14-bit words are separated by two clock cycles in high impedance mode. Please note the delay specification from SCK to a valid SDO. SDO is always guaranteed to

be valid by the next rising edge of SCK. The 32-bit output data stream is compatible with the 16-bit or 32-bit serial port of most processors.

#### HARDWARE INTERFACE TO TMS320C54x

The LTC1407-1/LTC1407A-1 are serial output ADCs whose interface has been designed for high speed buffered serial ports in fast digital signal processors (DSPs). Figure 8 shows an example of this interface using a TMS320C54X.

The buffered serial port in the TMS320C54x has direct access to a 2kB segment of memory. The ADC's serial data can be collected in two alternating 1kB segments, in real time, at the full 3Msps conversion rate of the LTC1407-1/LTC1407A-1. The DSP assembly code sets frame sync mode at the BFSR pin to accept an external positive going pulse and the serial clock at the BCLKR pin to accept an external positive edge clock. Buffers near the LTC1407-1/LTC1407A-1 may be added to drive long tracks to the DSP to prevent corruption of the signal to LTC1407-1/LTC1407A-1. This configuration is adequate to traverse a typical system board, but source resistors at the buffer outputs and termination resistors at the DSP. may be needed to match the characteristic impedance of very long transmission lines. If you need to terminate the SDO transmission line, buffer it first with one or two 74ACxx gates. The TTL threshold inputs of the DSP port respond properly to the 3V swing used with the LTC1407-1/ LTC1407A-1.

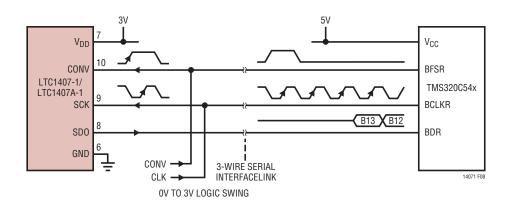


Figure 8. DSP Serial Interface to TMS320C54x

LINEAR TECHNOLOGY

```
; Files: 014SIAB.ASM ->
                       1407A Sine wave collection with Serial Port interface
                        both channels collected in sequence in the same 2k record.
        bvectors.asm
        s2k14ini.asm
                       Buffered mode 2k buffer size.
; First element at 1024, last element at 1023, two middles at 2047 and 0000
; bipolar mode
; Works 16 or 64 clock frames.
; negative edge BCLKR
; negative BFSR pulse
; -0 data shifted
                  .width
                160
        .length 110
        .title "sineb0 BSP in auto buffer mode"
        .mmregs
                                     ;Set address of executable
        .setsect ".text",
                          0x500.0
        .setsect "vectors", 0x180,0
                                   ;Set address of incoming 1403 data
        .setsect "buffer", 0x800,0
                                   ;Set address of BSP buffer for clearing
        .setsect "result", 0x1800,0
                                   ;Set address of result for clearing
       .text
                                     :.text marks start of code
start:
                      ; this label seems necessary
                      ; Make sure / PWRDWN is low at J1-9
                      ; to turn off AC01 adc
       tim=#0fh
       prd=#0fh
       tcr = #10h
                      ; stop timer
       tspc = #0h
                      ; stop TDM serial port to AC01
       pmst = #01a0h
                     ; set up iptr. Processor Mode STatus register
       sp = #0700h
                      ; init stack pointer.
       dp = #0
                      ; data page
       ar2 = #1800h
                      ; pointer to computed receive buffer.
       ar3 = #0800h
                     ; pointer to Buffered Serial Port receive buffer
       ar4 = #0h
                     ; reset record counter
       call sineinit
                      ; Double clutch the initialization to insure a proper
sinepeek:
       call sineinit
                      ; reset. The external frame sync must occur 2.5 clocks
                      ; or more after the port comes out of reset.
wait
       goto wait
           —— Buffered Receive Interrupt Routine —
       ifr = #10h
                              ; clear interrupt flags
       TC = bitf(@BSPCE, #4000h); check which half (bspce(bit14)) of buffer
       if (NTC) goto bufull ; if this still the first half get next half
       bspce = #(2023h + 08000h); turn on halt for second half (bspce(bit15))
       return enable
```



```
---- mask and shift input data -
bufull:
                         ; load acc b with BSP buffer and shift right -0
; mask out the TRISTATE bits with #03FFFh
      b = *ar3 + << -0
      b = #07FFFh \& b
                         ; invert the MSB for bipolar operation
      b = b ^ #2000h
      *ar2+ = data(#0bh)
                         ; store B to out buffer and advance AR2 pointer
      TC = (@ar2 == #02000h); output buffer is 2k starting at 1800h
      if (TC) goto start ; restart if out buffer is at 1fffh
      goto bufull
            — dummy bsend return -
bsend return_enable ;this is also a dummy return to define bsend
                          ; in vector table file BVECTORS.ASM
        ---- end ISR -
      .copy "c:\dskplus\1403\s2k14ini.asm" ;initialize buffered serial port
      .space 16*32
                          ; clear a chunk at the end to mark the end
VECTORS
.sect "vectors" ;The vectors start here
      .sect "buffer"
                               ;Set address of BSP buffer for clearing
      .space 16*0x800
      .sect "result"
                               ;Set address of result for clearing
      .space 16*0x800
      . end
 *********************
; File: BVECTORS.ASM -> Vector Table for the 'C54x DSKplus
                 BSP vectors and Debugger vectors
 TDM vectors just return
; The vectors in this table can be configured for processing external and
; internal software interrupts. The DSKplus debugger uses four interrupt
; vectors. These are RESET, TRAP2, INT2, and HPIINT.
  * DO NOT MODIFY THESE FOUR VECTORS IF YOU PLAN TO USE THE DEBUGGER *
; All other vector locations are free to use. When programming always be sure
; the HPIINT bit is unmasked (IMR=200h) to allow the communications kernel and
; host PC interact. INT2 should normally be masked (IMR(bit 2) = 0) so that the
; DSP will not interrupt itself during a HINT. HINT is tied to INT2 externally.
;
```

```
.title "Vector Table"
         .mmregs
reset
         goto #80h
                           ;00; RESET * DO NOT MODIFY IF USING DEBUGGER *
         nop
         nop
nmi
         return_enable
                           ;04; non-maskable external interrupt
         nop
         nop
         nop
         goto #88h
                           ;08; trap2 * DO NOT MODIFY IF USING DEBUGGER *
trap2
         nop
         nop
         .space 52*16
                           ;0C-3F: vectors for software interrupts 18-30
int0
         return_enable
                           ;40; external interrupt int0
         nop
         nop
         nop
int1
         return_enable
                           ;44; external interrupt int1
         nop
         nop
         nop
int2
                           ;48; external interrupt int2
         return_enable
         nop
         nop
         nop
tint
         return enable
                           ;4C; internal timer interrupt
         nop
         nop
         nop
brint
         goto breceive
                           ;50; BSP receive interrupt
         nop
         nop
         nop
bxint
         goto bsend
                           ;54; BSP transmit interrupt
         nop
         nop
         nop
trint
         return_enable
                           ;58; TDM receive interrupt
         nop
         nop
         nop
txint
         return_enable
                           ;5C; TDM transmit interrupt
         nop
         nop
int3
         return_enable
                           ;60; external interrupt int3
         nop
         nop
         nop
hpiint
         dgoto #0e4h
                           ;64; HPIint * DO NOT MODIFY IF USING DEBUGGER *
         nop
         nop
```



```
.space 24*16
                 ;68-7F; reserved area
******************
      (C) COPYRIGHT TEXAS INSTRUMENTS, INC. 1996
   *******************
* File: s2k14ini.ASM BSP initialization code for the 'C54x DSKplus
     for use with 1407 in buffered mode
     BSPC and SPC are the same in the 'C542
     BSPCE and SPCE seem the same in the 'C542
      .title "Buffered Serial Port Initialization Routine"
ON
      .set 1
OFF
      .set !ON
YES
      .set 1
      .set !YES
NO
BIT 8
      .set 2
BIT 10
      .set 1
BIT 12
     .set 3
BIT_16
     .set 0
     .set 0x80
* This is an example of how to initialize the Buffered Serial Port (BSP).
^{\star} The BSP is initialized to require an external CLK and FSX for
* operation. The data format is 16-bits, burst mode, with autobuffering
* enabled.
*************************
*LTC1407 timing from board with 10MHz crystal.
*10MHz, divided from 40MHz, forced to CLKIN by 1407 board.
*Horizontal scale is 25ns/chr or 100ns period at BCLKR
*Timing measured at DSP pins. Jxx pin labels for jumper cable.
~~~~~*
~\_/~\_/~*
*BDR
    Pin J1-26 ___-<B13-B12-B11-B10-B09-B08-B07-B06-B05-B04-B03-B02-B01-B00>-_-<B13-
*CLKIN Pin J5-09 ~~~~\____/~~~~~\___/~~~~~\___/~~~~~\___/
/~~~*
*C542 read
                   0 B13 B12 B11 B10 B09 B08 B07 B06 B05 B04 B03 B02 B01 B00 0
B13 B12*
* negative edge BCLKR
* negative BFSR pulse
* no data shifted
* 1' cable from counter to CONV at DUT
```

LINEAR


```
* 2' cable from counter to CLK at DUT
*No right shift is needed to right justify the input data in the main program
*the two msbs should also be masked
*****************************
                               ;(digital looback mode?)
Loopback
              .set
Format
                      BIT 16
                               ;(Data format? 16,12,10,8)
              .set
                      NO
IntSync
              .set
                               ;(internal Frame syncs generated?) TXM bit
                      NO
                               ;(internal clks generated?)
                                                                MCM bit
IntCLK
              .set
              .set
                               ;(if BurstMode=NO, then Continuous) FSM bit
BurstMode
                      YES
CLKDIV
                      3
                               ;(3=default value, 1/4 CLOCKOUT)
              .set
              .set
                               ; (Turn on PCM mode?)
PCM_Mode
                      NO
                      YES
                               ;(change polarity)YES=^^^\_/^^^, NO=___
FS_polarity
              .set
CLK_polarity
              .set
                      NO
                               ;(change polarity)for BCLKR YES=_/^, NO=~\_
                               ;(inverted !YES -ignores frame)
Frame ignore
            .set
                     !YES
XMTautobuf
             .set NO
                               ;(transmit autobuffering)
RCVautobuf
                     YES
                               ; (receive autobuffering)
             .set
             .set NO
                               ;(transmit buff halt if XMT buff is full)
XMThalt
                    NO
                               ; (receive buff halt if RCV buff is full)
RCVhalt
             .set
             .set
XMTbufAddr
                      0x800
                               ; (address of transmit buffer)
              .set
XMTbufSize
                      0x000
                               ; (length of transmit buffer)
RCVbufAddr
                               ; (address of receive buffer)
                      0x800
              .set
RCVbufSize
              .set
                     0x800
                               ; (length of receive buffer) works up to 800
* See notes in the `C54x CPU and Peripherals Reference Guide on setting up
^{\star} valid buffer start and length values. Page 9-44
*****************
       .eval ((Loopback >> 1)|((Format & 2)<<1)|(BurstMode <<3)|(IntCLK <<4)|(IntSync</pre>
<<5)) ,SPCval
       .eval ((CLKDIV)|(FS_polarity <<5)|(CLK_polarity<<6)|((Format &</pre>
1)<<7) | (Frame_ignore<<8) | (PCM_Mode<<9)), SPCEval
       .eval (SPCEval (XMTautobuf <<10) (XMThalt <<12) (RCVautobuf <<13) (RCVhalt <<15)),</pre>
SPCEval
sineinit:
       bspc = #SPCval
                            ; places buffered serial port in reset
       ifr = #10h
                             ; clear interrupt flags
                             ; Enable HPINT, enable BRINTO
       imr = #210h
                             ; all unmasked interrupts are enabled.
       intm = 0
       bspce = #SPCEval
                            ; programs BSPCE and ABU
                            ; initializes transmit buffer start address
       axr = #XMTbufAddr
       bkx = #XMTbufSize
                             ; initializes transmit buffer size
       arr = #RCVbufAddr
                             ; initializes receive buffer start address
       bkr = #RCVbufSize
                             ; initializes receive buffer size
                            ; bring buffered serial port out of reset
       bspc = #(SPCval | GO)
                             ;for transmit and receive because GO=0xCO
```



#### PACKAGE DESCRIPTION

#### **MSE Package** 10-Lead Plastic MSOP

(Reference LTC DWG # 05-08-1664 Rev C)

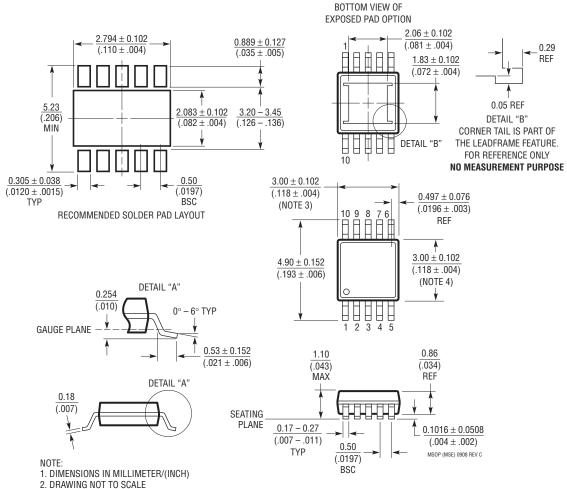

- 2. DRAWING NOT TO SCALE
- 3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
- 4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.
- INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
- 5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.102mm (.004") MAX



### **REVISION HISTORY** (Revision history begins at Rev B)

REV	DATE	DESCRIPTION	PAGE NUMBER
В	12/09	Update Pin Configuration	2



#### TYPICAL APPLICATION

DESCRIPTION	COMMENTS
16-Bit, 500ksps Parallel ADC	±5V Supply, ±2.5V Span, 90dB SINAD
16-Bit, 250ksps Serial ADC	5V Configurable Bipolar/Unipolar Inputs
12-/14-Bit, 2.8Msps Serial ADC	3V, 15mW, Unipolar Inputs, MSOP Package
12-/14-Bit, 2.8Msps Serial ADC	3V, 15mW, Bipolar Inputs, MSOP Package
12-/14-Bit, 3Msps Simultaneous Sampling ADC	3V, 14mW, 2-Channel Unipolar Input Range
14-Bit, 2.5Msps Parallel ADC	5V, Selectable Spans, 80dB SINAD
12-Bit, 10Msps Parallel ADC	5V, Selectable Spans, 72dB SINAD
12-Bit, 5Msps Parallel ADC	5V, Selectable Spans, 115mW
12-Bit, 3Msps Parallel ADC	±5V Supply, ±2.5V Span, 72dB SINAD
12-Bit, 2.2Msps Serial ADC	5V or ±5V Supply, 4.096V or ±2.5V Span
16-Bit, 250ksps 1-/2-Channel Serial ADCs	5V or 3V (L-Version), Micropower, MSOP Package
12-/14-/16-Bit, 50Msps DAC	87dB SFDR, 20ns Settling Time
16-Bit, Serial SoftSpan™ I <sub>OUT</sub> DAC	±1LSB INL/DNL, Software Selectable Spans
Micropower Series Reference in SOT-23	0.05% Initial Accuracy, 10ppm Drift
Precision Voltage Reference	0.04% Initial Accuracy, 3ppm Drift
Micropower Series Voltage Reference	0.10% Initial Accuracy, 10ppm Drift
	16-Bit, 500ksps Parallel ADC  16-Bit, 250ksps Serial ADC  12-/14-Bit, 2.8Msps Serial ADC  12-/14-Bit, 2.8Msps Serial ADC  12-/14-Bit, 3Msps Simultaneous Sampling ADC  14-Bit, 2.5Msps Parallel ADC  12-Bit, 10Msps Parallel ADC  12-Bit, 5Msps Parallel ADC  12-Bit, 3Msps Parallel ADC  12-Bit, 2.2Msps Serial ADC  12-Bit, 2.2Msps Serial ADC  16-Bit, 250ksps 1-/2-Channel Serial ADCs  12-/14-/16-Bit, 50Msps DAC  Micropower Series Reference in SOT-23  Precision Voltage Reference

SoftSpan is a trademark of Linear Technology Corporation.

#### **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

#### Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

#### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

#### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9