



Conductive Tape

High-Flex® Conductive Fabric Shielding Tape

High-Flex® conductive fabric shielding tapes offer exceptional conformability and conductivity for dynamic flex applications. High-Flex® tapes are constructed of Electron® nickel/copper metallized ripstop or plain weave fabric with a pressure sensitive adhesive (PSA). This reliable tape design provides outstanding shielding performance while offering superior abrasion and corrosion resistance under high dynamic flex conditions.

The proprietary anti-fray coating of High-Flex® EMI shielding tapes virtually eliminates concerns of loose conductive fibers and their potential to cause board level damage. Other significant advantages over other fabric and foil shielding tapes include:

- Thinner design provides superior flexibility and durability.
- High conductivity and shielding effectiveness.
- Adhesive system provides high peel strength.
- Easy die-cutting and processing.
- Superb adhesion of nickel copper plating.
- Eliminates the potential of injury due to the sharp edges of metal foil tapes.

High-Flex® EMI shielding tape is available in standard roll widths from 0.394" (10 mm) to 1.969" (50 mm) in 0.197" (5 mm) increments and roll lengths of 65.62' (20 M). Master rolls are available in sizes up to 1.4 meter widths and 300 meter lengths. For your unique design requirements, custom die-cut parts are also available.

Some typical applications for High-Flex® EMI shielding tapes include:

- Shielding cables on notebook computers, copiers or other electronic equipment.
- "Fix-it" applications in test laboratories.
- Shielding over a component in which high conformability is essential.
- Shielding or grounding in weight sensitive applications.
- Shielding or grounding for electronic equipment where vibration may be present during operation.


Tape Construction

| | |
|----------|--|
| Carrier | Electron® Nickel Copper Ripstop Fabric (1A) Electron® Nickel Copper Ripstop Fabric (2T) Electron® Metallized Nickel Copper Plain Weave Fabric (2Z) |
| Adhesive | High Strength Pressure Sensitive Acrylic Adhesive |
| Liner | Kraft Paper |

Performance Characteristics

| | High-Flex® Tape 1A = Nickel Copper Ripstop Fabric | High-Flex II® Tape 2T = Nickel Copper Ripstop Fabric 2Z = Nickel Copper Plain Weave Fabric |
|--|---|--|
| Tape Thickness | 0.004 to 0.005 inches (0.10 mm to 0.13 mm) | 0.003 to 0.005 inches (0.08 mm to 0.13 mm) |
| Liner Thickness | 0.005 to 0.006 inches (0.13 mm to 0.15 mm) | 0.003 to 0.004 inches (0.08 mm to 0.10 mm) |
| Break Strength (ASTM 5035) | 50 lb./in. (856/100 mm) | 50 lb./in. (856/100 mm) |
| Weight (LT 500) | 2.3 to 3.0 oz./sq. yard (78.0 to 118.7 grams/sq. Meter) | 2.3 to 3.0 oz./sq. yard (78.0 to 118.7 grams/sq. Meter) |
| XY Sheet Resistivity (ASTM F390) | Below 0.08 ohms/sq. (Typically 0.03 ohms/sq.) | Below 0.05 ohms/sq. (Typically 0.02 ohms/sq.) |
| Peel Strength (ASTM D330 & PSTC-1) | 48 oz./in. (52 N/100 mm) | 54 oz./in. (59 N/100 mm) |
| Abrasion Resistance (ASTM D3886) | > 1,000,000 Cycles | > 1,000,000 Cycles |
| Temperature Range | -40 °F to 212 °F (Min/Max) (-40 °C to 100 °C) | -40 °F to 212 °F (Min/Max) (-40 °C to 100 °C) |
| Shielding Effectiveness per Mil-Std-285 (Mod.) | > 70 dB up to 18GHz | > 70 dB up to 18GHz |

All dimensions shown are in inches (millimeters) unless otherwise specified.

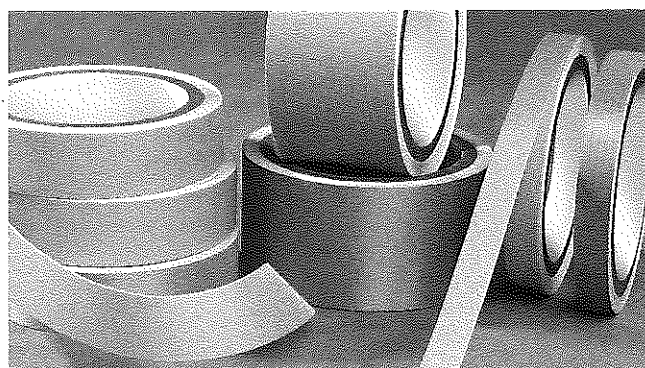

Ordering Information:

Digits: 1 2 3 4 5 6 7 8 9 10 11
1 A 0 2 5 0 R 0 2 0 0

Digits 1 and 2:

Designate conductive tape product line and fabric options:
1A = Nickel Copper Ripstop Fabric
2T = Nickel Copper Ripstop Fabric
2Z = Nickel Copper Plain Weave Fabric

Digits 3 through 6:

Designate width in millimeters to one decimal place. (i.e., in the above example, the 0250 indicates a 25 mm wide roll).


Digit 7:

Designates the form the tape is provided in:
R = Roll K = Kiss-Cut in Pieces P = Pieces

Digits 8 through 11:

Designate the roll length in meters to one decimal place (i.e., in the above example 0200 indicates a roll length of 20 meters).

Shielding Effectiveness

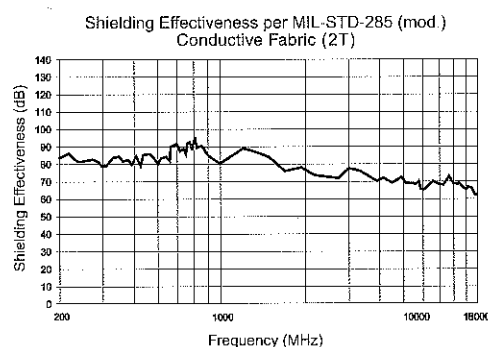

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9