

D2RV

Miniature Basic Switch

High Reliability for Micro Load Applications, Even in Adverse Atmospheres (Dust, High Humidity, Silicon Gas, etc.)

- The reed switch offers exceptional contact reliability in micro load applications.
- Same mounting pitch as for the V Miniature Basic Switch.
- High durability with a bounce time of 1 ms max.

RoHS Compliant

Model Number Legend

D2RV-12

1. Actuator

- None : Pin plunger model
- L11 : Short hinge lever
- L : Hinge lever
- L13 : Simulated roller lever
- L22 : Short hinge roller lever
- L2 : Hinge roller lever


2. Maximum Operating Force (OF)

- None : 0.49 N {50 gf}
- E : 0.25 N {25 gf}
- (for pin plungers only)
- G : 0.98 N {100 gf}

Note. These values are for the pin plunger models.


List of Models

Actuator	Maximum Operating Force (OF)	Model
Pin plunger 	0.25 N {25 gf}	D2RV-E
	0.49 N {50 gf}	D2RV
	0.98 N {100 gf}	D2RV-G
Short hinge lever 	0.49 N {50 gf}	D2RV-L11
	0.98 N {100 gf}	D2RV-L11G
Hinge lever 	0.25 N {25 gf}	D2RV-L
	0.49 N {50 gf}	D2RV-LG
Simulated roller lever 	0.25 N {25 gf}	D2RV-L13
	0.49 N {50 gf}	D2RV-L13G
Short hinge roller lever 	0.49 N {50 gf}	D2RV-L22
	0.98 N {100 gf}	D2RV-L22G
Hinge roller lever 	0.25 N {25 gf}	D2RV-L2
	0.49 N {50 gf}	D2RV-L2G

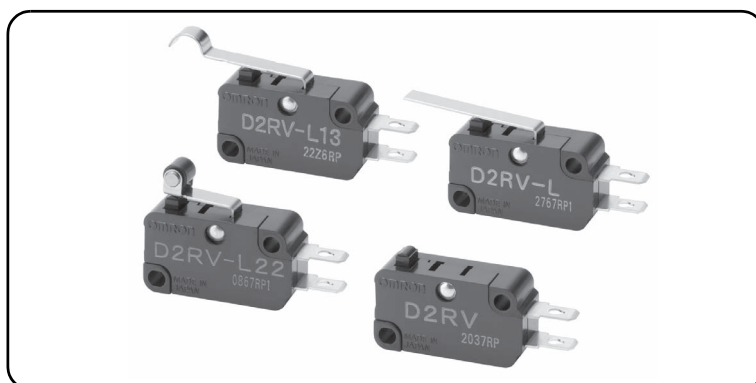

Contact Form

● SPST-NO



Ratings

Switching voltage	100 VDC (max.)
Switching current	0.25 ADC (max.)
Contact capacity	10 WDC (max.)

Note. The above rating values apply under the following test conditions.

- (1) Ambient temperature: 20±2°C
- (2) Ambient humidity: 65±5%
- (3) Operating frequency: 30 operations/min

Characteristics

Permissible operating speed		0.1mm to 1 m/s (for pin plunger models)
Permissible operating frequency	Mechanical	200 operations/min
	Electrical	200 operations/min
Insulation resistance		100 MΩ min. (at 500 VDC with insulation tester)
Contact resistance (initial value)		150 mΩ max.
Dielectric strength * 1	Between terminals of the same polarity	200 VDC 1 min
	Between current-carrying metal parts and ground	500 VAC 50/60 Hz for 1 min
	Between each terminal and non-current-carrying metal parts	500 VAC 50/60 Hz for 1 min
Vibration resistance * 2	Malfunction	10 to 55 Hz, 1.5 mm double amplitude
	Destruction	500 m/s² {approx. 50G} max.
Shock resistance	Malfunction * 2	200 m/s² {approx. 20G} max.
	Destruction	500 m/s² {approx. 50G} max.
Durability * 3	Mechanical	10,000,000 operations min. (60 operations/min)
	Electrical	3,000,000 operations min. (30 operations/min)
Degree of protection		IEC IP40
Ambient operating temperature		-10°C to +60°C (at ambient humidity of 60% max.) (with no icing or condensation)
Ambient operating humidity		80% max. (for +5°C to +35°C)
Weight		Approx. 7g (for pin plunger models)



Note. The data given above are initial values.

- *1. The values for dielectric strength shown are for models with a Separator (refer to "Basic Switch Common Accessories").
- *2. For the pin plunger models, the above values apply for use at the free position and total travel position. For the lever models, they apply at the total travel position. Close or open circuit of the contact is 1ms max.
- *3. For testing conditions, consult your OMRON sales representative.

Separator (Sold Separately), Actuator (Sold Separately), Terminal Connector (Sold Separately) ➡ Refer to "Basic Switch Common Accessories"


Terminals/Apearances (Unit:mm)

Mounting Holes (Unit: mm)




Dimensions (Unit: mm) /Operating Characteristics

●Pin Plunger
D2RV-E
D2RV
D2RV-G

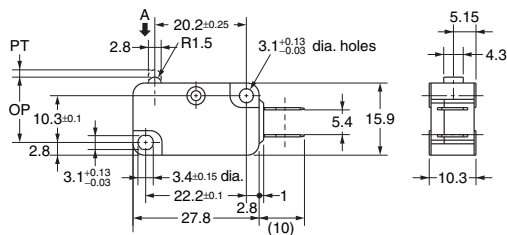


Model		D2RV-E	D2RV	D2RV-G
Operating characteristics				
Operating Force	OF Max.	0.25 N {25 gf}	0.49 N {50 gf}	0.98 N {100 gf}
Pretravel	PT Max.	1.6 mm		
Overtravel	OT Min.	0.6 mm		
Movement Differential	MD Max.	0.8 mm		
Operating Position	OP	14.4±0.6 mm		

●Short Hinge Lever
D2RV-L11
D2RV-L11G

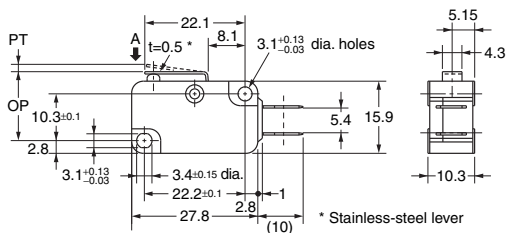


Model		D2RV-L11	D2RV-L11G
Operating characteristics			
Operating Force	OF Max.	0.49 N {50 gf}	0.98 N {100 gf}
Pretravel	PT Max.	1.8 mm	
Overtravel	OT Min.	0.4 mm	
Movement Differential	MD Max.	1.0 mm	
Operating Position	OP	15.0±0.6 mm	

●Hinge Lever Models
D2RV-L
D2RV-LG

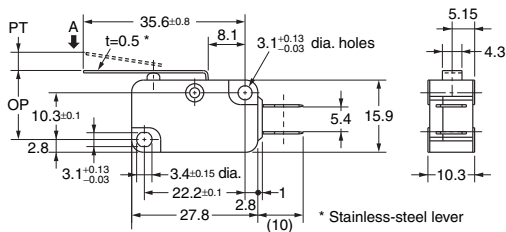

Model		D2RV-L	D2RV-LG
Operating characteristics			
Operating Force	OF Max.	0.25 N {25 gf}	0.49 N {50 gf}
Pretravel	PT Max.	4.0 mm	
Overtravel	OT Min.	1.0 mm	
Movement Differential	MD Max.	1.6 mm	
Operating Position	OP	14.4±1.2 mm	

●Simulated Roller Lever Models
D2RV-L13
D2RV-L13G

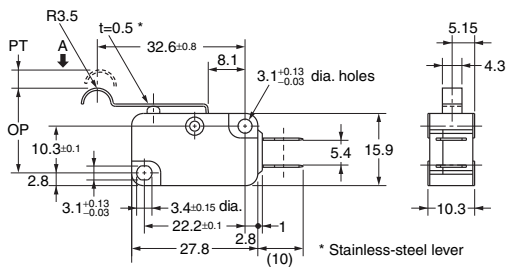



Model		D2RV-L13	D2RV-L13G
Operating characteristics			
Operating Force	OF Max.	0.25 N {25 gf}	0.49 N {50 gf}
Pretravel	PT Max.	4.0 mm	
Overtravel	OT Min.	1.0 mm	
Movement Differential	MD Max.	1.6 mm	
Operating Position	OP	18.1±1.2 mm	

Note 1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.
Note 2. The operating characteristics are for operation in the A direction (↓).

●Short Hinge Roller Lever Models

D2RV-L22

D2RV-L22G

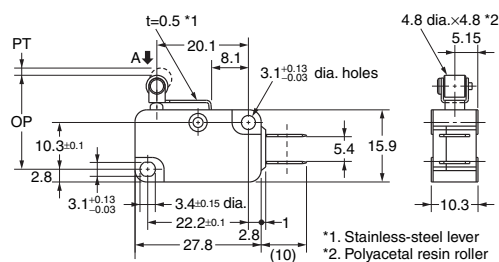


Model		D2RV-L22	D2RV-L22G
Operating characteristics			
Operating Force	OF Max.	0.49 N {50 gf}	0.98 N {100 gf}
Pretravel	PT Max.	1.8 mm	
Overtravel	OT Min.	0.4 mm	
Movement Differential	MD Max.	1.0 mm	
Operating Position	OP	20.4±0.6 mm	

●Hinge Roller Lever Models

D2RV-L2

D2RV-L2G

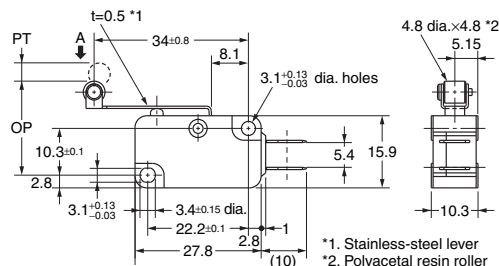

Model		D2RV-L2	D2RV-L2G
Operating characteristics			
Operating Force	OF Max.	0.25 N {25 gf}	0.49 N {50 gf}
Pretravel	PT Max.	4.0 mm	
Overtravel	OT Min.	1.0 mm	
Movement Differential	MD Max.	1.6 mm	
Operating Position	OP	19.9±1.2 mm	

Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (↓).

Precautions

★Please refer to "Basic Switches Common Precautions" for correct use.

Cautions

●Handling

Do not drop the Switch or apply strong shock. It may result in internal mechanism damages and may deteriorate the characteristics of the inner Reed Switch.

●Effect of the External Vibration

When a vibration of 1 kHz or higher is applied, note that false switching operations may occur due to resonant frequency, even with a low acceleration.

●Soldering

• Terminal connections

Complete the soldering at the iron tip temperature between 250 to 350°C (60W) within 5 seconds, and do not apply any external force for 1 minute after soldering.

Apply minimum amount of flux required. It may result in contact failure once the flux penetrates into the internal part of the Switch.

Correct Use

●Effect of the External Magnetic Fields

- If two or more switch units are closely installed, mutual interference due to the fringing field will occur, resulting in malfunction. Be sure to keep the gap between the switch units 8 mm or more.
- If you install the switch unit on the iron plate, each operating characteristic will change. Therefore, confirm that the interval between the switch units should be 2 mm or more.
- Do not use the switch in some area where a strong external magnetic field would be applied, otherwise malfunction will be caused.
- Use nonmagnetic brass or stainless steel (SUS304 alloy) screws for installation. Do not use any iron screw.



D
2
R
V

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9