

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


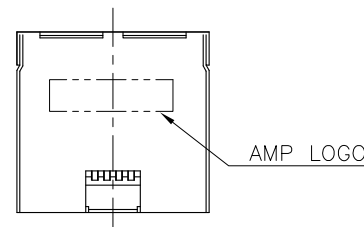

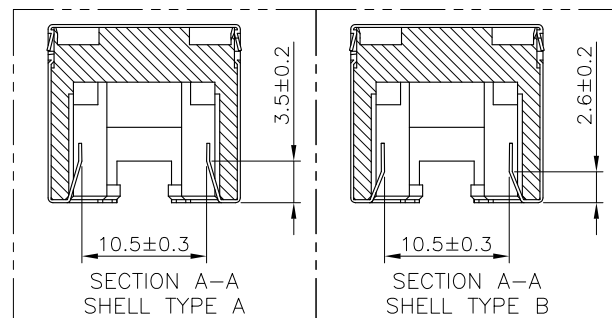
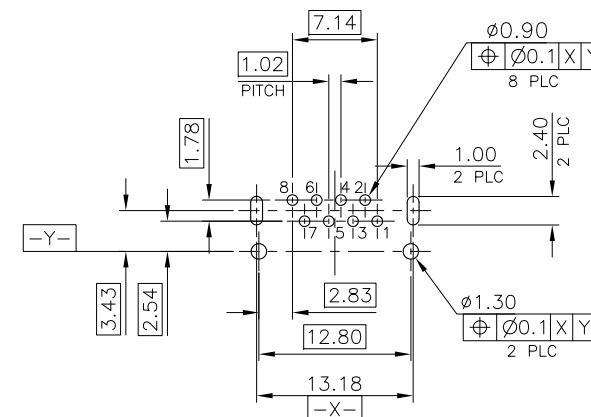
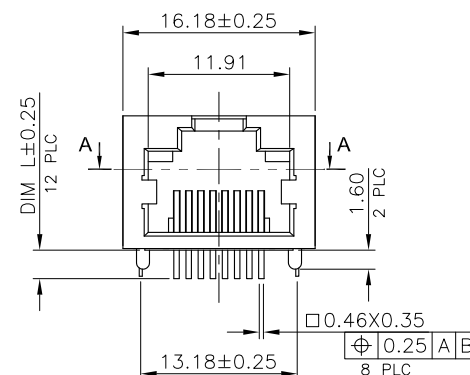
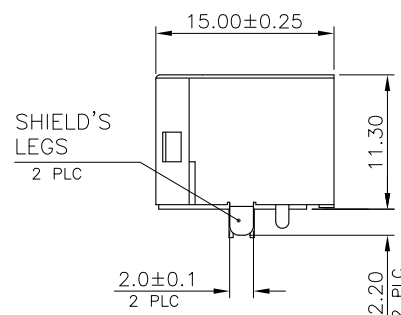
© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
DW

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REVISED (ECR-12-012115) OBSOLETE PNS: -3, -8, -13, -14, -16 & -17	26OCT'12	E.L.	W.K.

MATING WITH RJ-45 PLUG
(REFERENCE)RECOMMENDED PCB LAYOUT (THICKNESS: 1.6MM)
(DIMENSION TOLERANCE: 1 PLC: ±0.1, 2 PLC: ±0.05)

NOTE:

1. MATERIAL:

1.1 HOUSING: PA9T WITH 30% GF, UL94 V-0, BLACK COLOR.

1.2 CONTACTS: PHOSPHOR BRONZE.

1.3 SHELL: BRASS.

2. FINISH:

2.1 CONTACTS:

(SEE TABLE) GOLD PLATED ON CONTACT AREA.

GOLD FLASH ON SOLDER TAIL.

1.27µm [50u"] MIN. NICKEL UNDERPLATED OVERALL.

2.2 SHELL: 0.51µm [20u"] MIN. NICKEL PLATED.

3. WAVE SOLDER CAPABLE TO 265°C PER TYCO TEST SPEC. 109-202, CONDITION B.

4. OBSOLETE PART : OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	± .
1 PLC	± 0.3
2 PLC	± 0.2
3 PLC	± 0.15
4 PLC	± .
ANGLES	± 3°
MATERIAL SEE NOTE	FINISH SEE NOTE

DWN O. HU	14SEP2007
CHK S. HOU	14SEP2007
APVD W.J. KE	14SEP2007
PRODUCT SPEC	108-57535
APPLICATION SPEC	
WEIGHT	3.5 GRAMS
CUSTOMER DRAWING	

	TAPE & REEL	W/O		TYPE A	2.2	6u"	3-1734795-2
					1.5	6u"	3-1734795-1
TE	TRAY	W/ W/O			2.4	50u"	1734795-8
			30u"	1734795-7			
			15u"	1734795-6			
			6u"	1734795-5			
TE		W/O	TYPE B	50u"	1734795-4		
TE				30u"	1734795-3		
	TYPE A		15u"	1734795-2			
				6u"	1734795-1		
	PACKAGE TYPE	PANEL GROUND	LED	SHELL TYPE	DIM L	MIN. GOLD THICKNESS	PART NUMBER

STE

TE Connectivity

NAME				MODULAR JACK CONNECTOR RJ45, 8P8C, SHIELDED TAB UP, DIP TYPE, H=11.3mm	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
A3	00779	C=1734795			
SCALE			SHEET	REV	
			1 OF 5	E	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
DW




DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

0.8~2.0
6 PLC

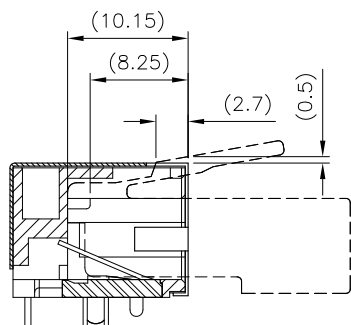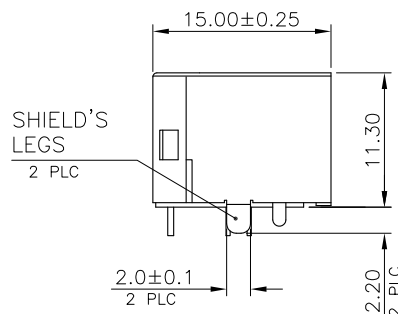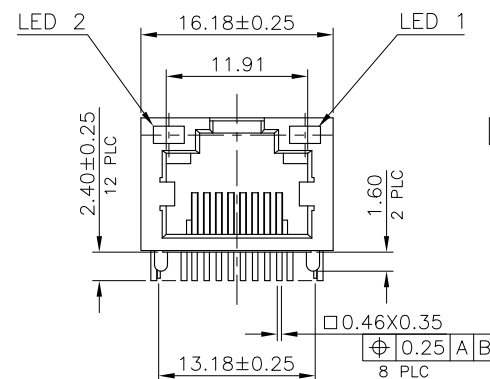AMP LOGO

MATING WITH RJ-45 PLUG
(REFERENCE)SHIELD'S
LEGS
2 PLC

LED 2

LED 1

0.46X0.35
8 PLC

0.25 A B

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

8 PLC

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC
DW

DIST



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

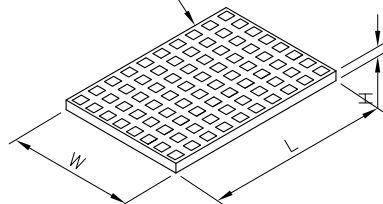TRAY
325mm(L)X216mm(W)X17.5mm(H)






INNER CARTON
345mm(L)X240mm(W)X175mm(H)

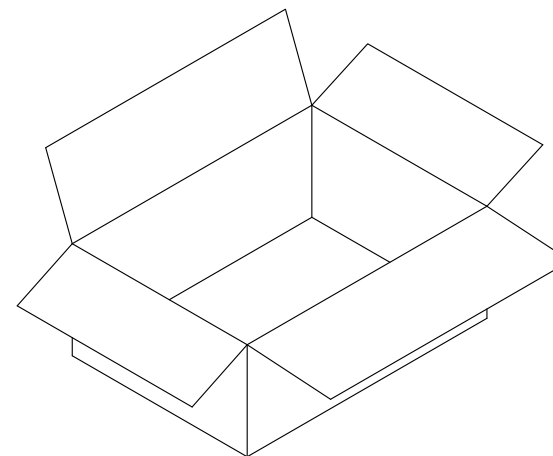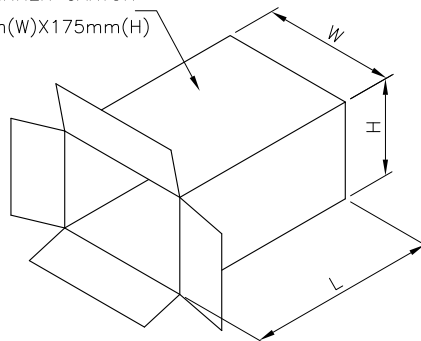

CARTON
500mm(L)X365mm(W)X195mm(H)

PACKAGE BEIT

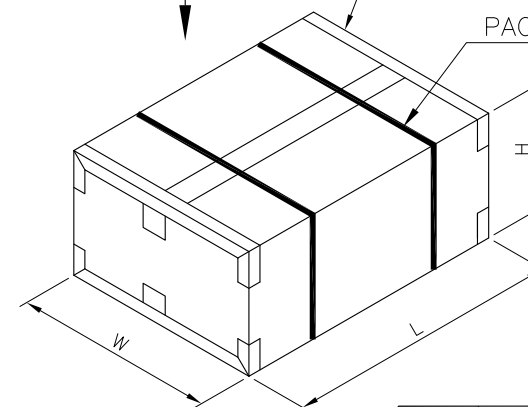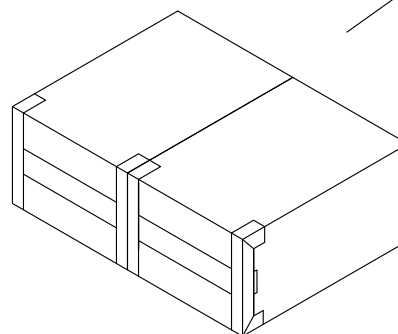TRAY (10 LAYERS)

20 DESICCATING AGENTS
AT LEAST

80	800	1600	8.5	6.5	1734795-4
					1734795-3
					1734795-2
					1734795-1
PCS/ TRAY	TRAYS/ CARTON	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± .
	1 PLC ± 0.3
	2 PLC ± 0.2
	3 PLC ± 0.15
	4 PLC ± .
	ANGLES ± 3'
MATERIAL	FINISH

DWN	CHK	APVD	PRODUCT SPEC	APPLICATION SPEC	WEIGHT	CUSTOMER DRAWING
NAME	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	SCALE	SHEET 3 of 5
MODULAR JACK CONNECTOR RJ45, 8P8C, SHIELDED TAB UP, DIP TYPE, H=11.3mm						REV E
A300779C=1734795						

TE

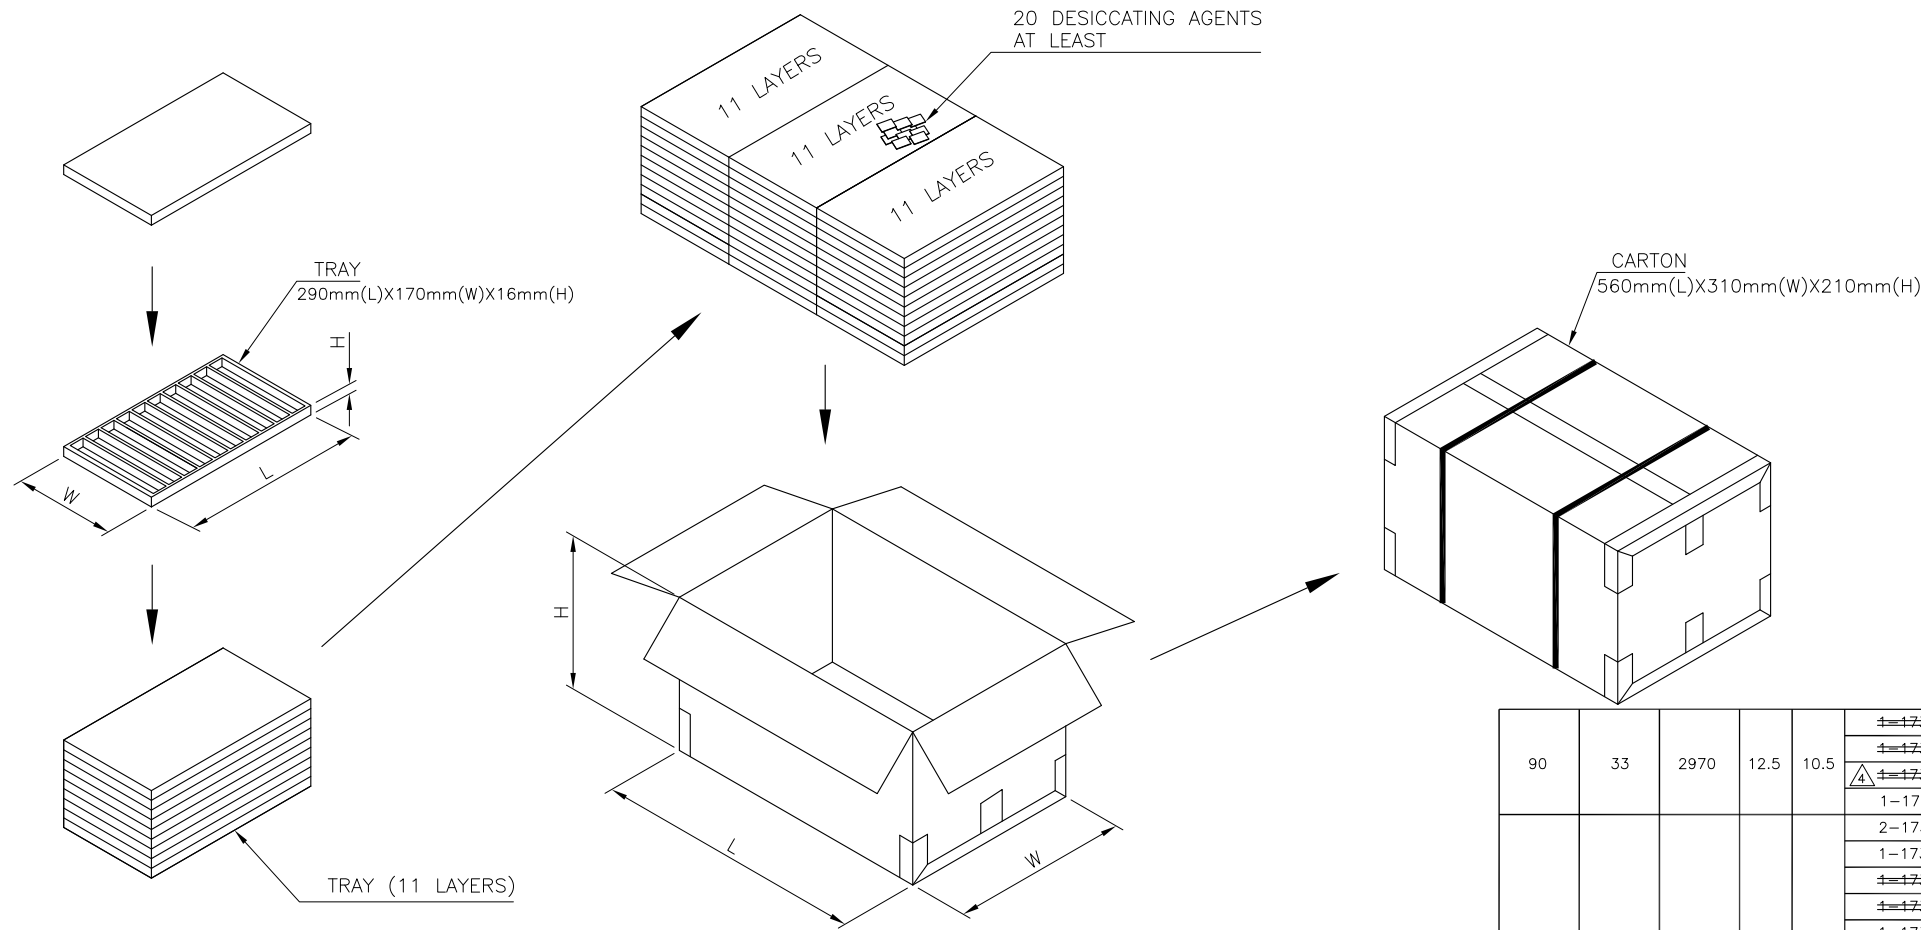TE Connectivity



90	33	2970	12.5	10.5	1-1734795-4
					1-1734795-3
					1-1734795-2
					1-1734795-1
					2-1734795-2
					1-1734795-8
					1-1734795-7
					1-1734795-6
					1-1734795-5
					1734795-8
					1734795-7
					1734795-6
					1734795-5
PCS/ TRAY	TRAYS/ CARTON	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± 0.3

2 PLC ± 0.2

3 PLC ± 0.15

4 PLC ± -

ANGLES ± 3°

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

TE Connectivity

NAME

MODULAR JACK CONNECTOR
RJ45, 8P8C, SHIELDED
TAB UP, DIP TYPE, H=11.3mm

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

CUSTOMER DRAWING

SCALE

SHEET 4 of 5

REV E

A3

00779

C=1734795

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION.

LOC
DW

DIST

REVISIONS

P

LTR

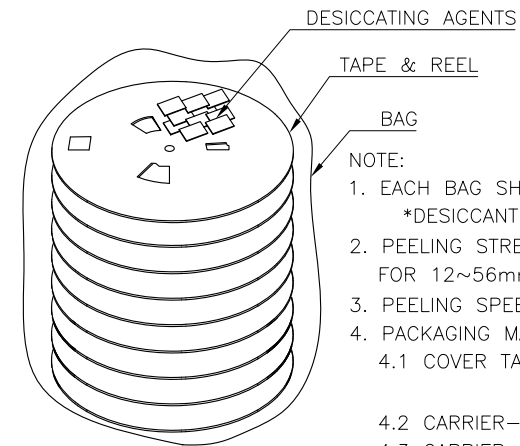
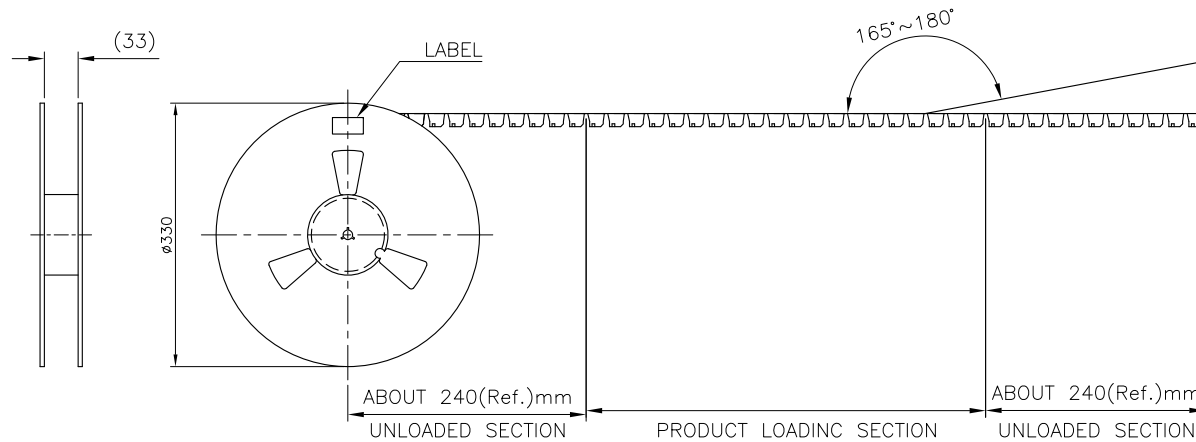
DESCRIPTION

DATE

DWN



APVD

SEE SHEET 1.



NOTE:

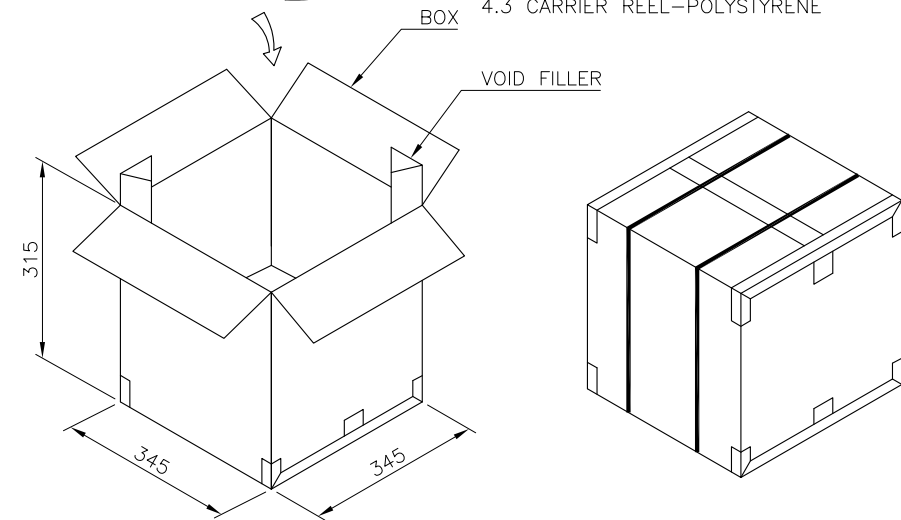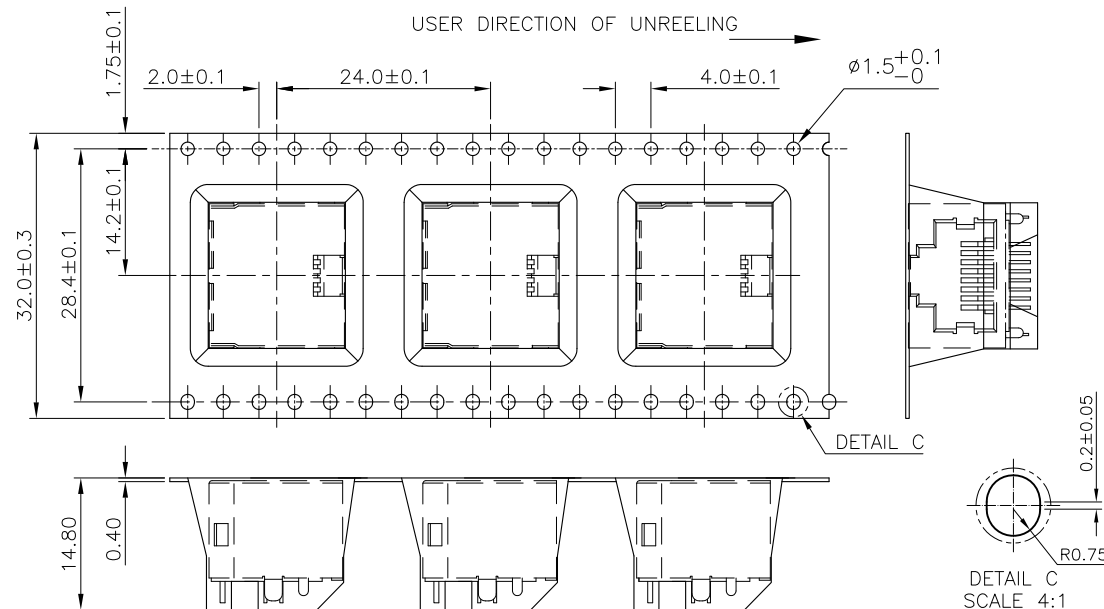1. EACH BAG SHALL BE INCLUDED:
*DESICCANT
2. PEELING STRENGTH: $0.1 \sim 1.3N$ ($1 \sim 130$ GRAMS) FOR $12 \sim 56mm$ WIDE CARRIER TAPES
3. PEELING SPEED: $300mm/MINUTES$.
4. PACKAGING MATERIAL:
 - 4.1 COVER TAPE—COMPOSITE OF POLYETHYLENE TEREPHTHALATE (PET)
 - 4.2 CARRIER—POLYSTYRENE (PS)
 - 4.3 CARRIER REEL—POLYSTYRENE



8.7 KG	5.05 KG	180	8	1440	3-1734795-2
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REEL/BOX	PCS/BOX	PART NUMBER
					3-1734795-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm .$
 1 PLC ± 0.3
 2 PLC ± 0.2
 3 PLC ± 0.15
 4 PLC $\pm .$
 ANGLES $\pm 3^{\circ}$

MATERIAL

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

STE

TE Connectivity

NAME

MODULAR JACK CONNECTOR
 RJ45, 8P8C, SHIELDED
 TAB UP, DIP TYPE, H=11.3mm

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734795

SCALE

SHEET

5 of 5

REV

E

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9