

Product information

VAD M12 1A-VAD 1A-1-3-226/0.4 M - VAD M12 1A-VAD 1A-1-3-226/0,4 M

Industrial Connecting Solutions:Cables and Adapters:Connecting and Data Cables:M8, M12, M23, Valve Connectors - Connecting Cables:Valve Connector on Valve Connector:Double solenoid valve

adaptor:VAD M12 1A-VAD 1A-1-3-226/0.4 M

<https://e-catalog.hirschmann.com:443/link/57078-24228-256254-248344-248345-252399-219299-219301/en/conf/uistate>

Name		VAD M12 1A-VAD 1A-1-3-226/0.4 M
		
		Double solenoid valve adaptor (valve adaptor with integrated M12 male receptacle connector), according to DIN EN 175301-803, form A, with LED function indicator and varistor for voltage protection, connected protective earth
Delivery informations		
Availability		available
Product description		
Type		VAD M12 1A-VAD 1A-1-3-226/0,4 M
Order No.		12180
Description		Double solenoid valve adaptor (valve adaptor with integrated M12 male receptacle connector), according to DIN EN 175301-803, form A, with LED function indicator and varistor for voltage protection, connected protective earth
Note		The application of these products in harsh environments should always be checked before use.
Number of contacts		2
Color of housing		black translucent
Color of Housing, side 2		black translucent
Product characteristics		Vibration resistance, Oil resistance
Classification		
Belden brand		Lumberg-Automation
Environmental conditions		
Environmental temperature		-25 °C ... 80 °C
Degree of protection (IP), mounted		IP67
Pollution degree		3
Materials		
Housing material / Molded body		TPU, self-extinguishing
Housing material / Molded body, side 2		TPU, self-extinguishing
Contact bearer material		PBT
Contact bearer material, side 2		PBT
Contact material		CuZn
Contact material - Surface refinement		pre-nickel and tin-plated
Contact material, side 2		CuZn
Contact material - Surface refinement, side 2		pre-nickel and tin-plated
Electrical data		
Contact resistance		≤ 5 mΩ
Rated current I _n		4 A at 40 °C
Nominal voltage		24 V
Rated voltage		32 V
Insulation resistance		> 1 GΩ
Cable		
Cable length		0.4 m
Cable number		226
Cable description		Cable for sensors and actuators
Color of jacket		black
Material of outer jacket		PUR

Industrial Connecting Solutions:Cables and Adapters:Connecting and Data Cables:M8, M12, M23, Valve Connectors - Connecting Cables:Valve Connector on Valve Connector:Double solenoid valve adaptor:VAD M12 1A-VAD 1A-1-3-226/0.4 M

<https://e-catalog.hirschmann.com:443/link/57078-24228-256254-248344-248345-252399-219299-219301/en/conf/ui/istate>


Without halogens as in EN 50267-2-3	✓
shielded	✗
welding spark proof	✗
Outer diameter of the cable	4.6 mm
Number of conductors	3
Cable design	3 x 0.50 mm ²
Conductor design	16 x 0.20 mm
Flame resistant according to standard	yes

Scope of delivery and accessories

Scope of delivery	Attachable label, Screw (fitted)
-------------------	----------------------------------

Picture

Drawing

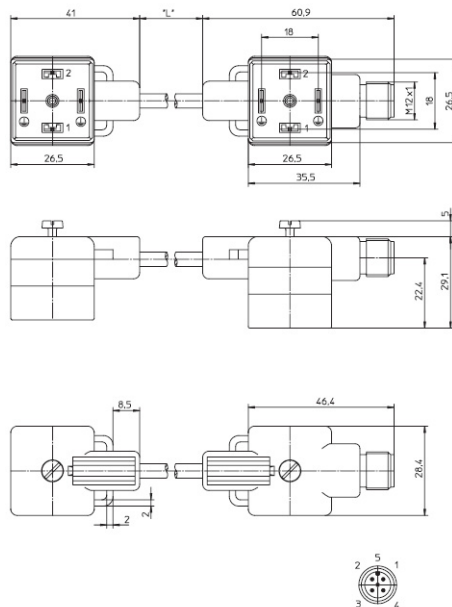

Belden Deutschland GmbH

Im Gewerbpark 2
58579 Schalksmühle
Germany
Phone: +49 7127/14-1806
E-Mail: icos-sales@belden.com

The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect.
The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9