
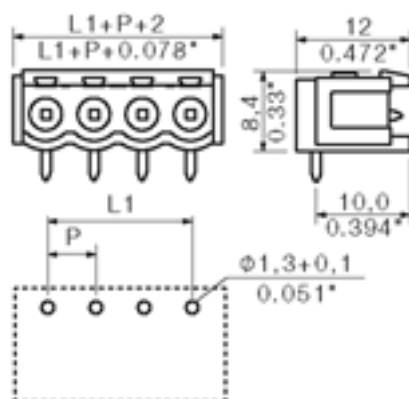


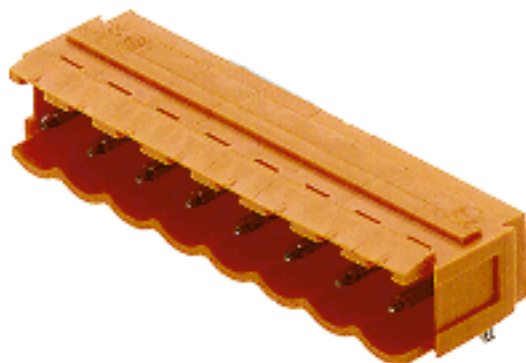

General ordering data

Order No.	1510960000
Part designation	SL 5.08/8/90B3.2SN OR
Version	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 8, 90°, Box
EAN	4008190167295
Qty.	50 pc(s).

System parameters

Fitted to PCB	Soldered connection
Outgoing elbow	90°
Pitch	5.08 mm
Pitch in inch	0.2 inch
No. of poles	8
Solder pin length	3.2 mm
Can be coded	Yes
No. of rows	1
No. of solder pins per pole	1
Dia. of fitting hole	1.3 mm
Fitting hole tolerance	+ 0.1 mm
L1 in mm	35.56 mm
L1 in inch	1.4 inch
Insulation resistance	1 MΩ

System parameters

Electric shock protection to DIN VDE 0470	IP20 plugged
Electric shock protection to DIN VDE 0470	Safe from finger touch, plugged

Material data

Insulating material	PBT
Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 200
Contact base material	CuSn
Contact surface	tinned
Constant operating temp., min.	-25 °C
Constant operating temp., max.	100
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C
Max. relative humidity during storage	80 %

DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	18 A
Rated current, max. No. pins (Tu=20°C)	14.5 A
Rated current, min. No. pins (Tu=40°C)	15 A
Rated current, max. No. pins (Tu=40°C)	12 A
Rated voltage for overvoltage class/pollution severity III/3	250 V
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	4 kV
Rated voltage for overvoltage class/pollution severity III/2	320 V
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	4 kV
Rated voltage for overvoltage class/pollution severity II/2	400 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	4 kV
Short-time withstand current resistance	3 x 1s with 120 A

CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A

UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A

Approvals

Approvals institutes



Downloads

CAD Library (P-CAD Format - Standard) SL.LIB

Classifications

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

Similar products

Order No.	Part designation	Version
1510360000	SL 5.08/2/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 2, 90°, Box
1510460000	SL 5.08/3/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 3, 90°, Box
1510560000	SL 5.08/4/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 4, 90°, Box
1510660000	SL 5.08/5/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 5, 90°, Box
1510760000	SL 5.08/6/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 6, 90°, Box
1510860000	SL 5.08/7/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 7, 90°, Box
1511060000	SL 5.08/9/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 9, 90°, Box
1511160000	SL 5.08/10/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 10, 90°, Box
1511260000	SL 5.08/11/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 11, 90°, Box
1511360000	SL 5.08/12/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 12, 90°, Box

1511460000	SL 5.08/13/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 13, 90°, Box
1511560000	SL 5.08/14/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 14, 90°, Box
1511660000	SL 5.08/15/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 15, 90°, Box
1511760000	SL 5.08/16/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 16, 90°, Box
1511860000	SL 5.08/17/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 17, 90°, Box
1511960000	SL 5.08/18/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 18, 90°, Box
1512060000	SL 5.08/19/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 19, 90°, Box
1512160000	SL 5.08/20/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 20, 90°, Box
1512260000	SL 5.08/21/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 21, 90°, Box
1512360000	SL 5.08/22/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 22, 90°, Box
1512460000	SL 5.08/23/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 23, 90°, Box
1512560000	SL 5.08/24/90B3.2SN OR	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 5.08 mm, No. of poles: 24, 90°, Box

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9