

Kxxx0yH Series

RoHS



Schematic Symbol



Description

The new Kxxx0yH is a higher energy SIDAC switch for gas ignition applications requiring higher current pulse current especially at low repetition rate. It is offered in a DO-15 and TO-92 leaded packages as well as DO-214 surface mount package. Voltage activation of this solid state switch is accomplished with peak voltage level of 190 to 280Volts. The SIDAC is a silicon bilateral voltage triggered Thyristor switch that switches on through a negative resistance region to a low on-state voltage. Conduction will continue until current is interrupted or lowered below minimum holding current of the device.

Features

- AC Circuit Oriented
- 280A Pulse Current Capability
- Triggering Voltage of 190 to 280V
- RoHS Compliant

Applications

Suitable for high voltage power supplies, natural gas igniters, and Xenon flash ignition.

Electrical Specifications (T_j = 25°C, unless otherwise specified)

| Symbol | Parameters | Test Conditions | Min | Max | Unit |
|----------------------|---|--|------|-----|------|
| V _{BO} | Breakover/Trigger Voltage | K2000yH | 190 | 215 | V |
| | | K2200yH | 205 | 230 | |
| | | K2400yH | 220 | 250 | |
| | | K2500yH | 240 | 280 | |
| V _{DRM} | Repetitive Peak Off-state Voltage | K2000yH | 180 | | V |
| | | K2200yH | 180 | | |
| | | K2400yH | 190 | | |
| | | K2500yH | 200 | | |
| I _{TR(RMS)} | On-state RMS Current | 50/60Hz, T _j < 125°C | | 1 | A |
| V _{TM} | Peak On-state Voltage | I _T = 1A | | 1.5 | V |
| I _H | Dynamic Holding Current | R _T = 100Ω 50/60Hz Sine Wave | | 150 | mA |
| R _S | Switching Resistance, $R_s = \frac{(V_{BO} - V_s)}{(I_s - I_{BO})}$ | 50/60Hz Sine Wave | 100 | | Ω |
| I _{BO} | Breakover Current | 50/60Hz Sine Wave | | 50 | μA |
| I _{TRM} | Peak Repetitive Pulse Current (refer to figure 4) | t _p = 10μs | 60Hz | 120 | A |
| | | | 5Hz | 280 | |
| di/dt | Critical Rate of Rise of On-State Current | | | 150 | A/μs |
| dv/dt | Critical Rate of Rise of Off-State Voltage | | 1500 | | V/μs |
| T _S | Storage Temperature Range | | -40 | 150 | °C |
| T _J | Junction Temperature Range | | -40 | 125 | °C |
| R _{θJL} | Thermal Resistance, Junction to Lead | DO-15 | | 18 | °C/W |
| | | DO-214 | | 30 | |
| R _{θJC} | Thermal Resistance, Junction to Case | TO-92 | | 35 | °C/W |
| R _{θJA} | Thermal Resistance, Junction to Ambient | DO-15 | | 75 | °C/W |
| | | TO-92 | | 95 | |

Note: xxx - voltage, y = package

Figure 1: V-I Characteristics



Figure 2: On-state Current vs. On-state Voltage (Typical)



Figure 3: Power Dissipation vs. On-state Current (Typical)



Figure 4: Repetitive Peak On-state Current (I_{TRM}) vs. Pulse Width at Various Frequencies



Figure 5: Surge Peak On-state Current vs. Number of Cycles



Figure 6: Normalized V_{BO} Change vs. Junction Temperature



Figure 7: Normalized DC Holding Current vs. Junction Temperature



Figure 8: Maximum Allowable Case Temperature vs. RMS On-State Current



Figure 9: Maximum Allowable Ambient Temperature vs. RMS On-State Current



Figure 10: Normalized Repetitive Peak Breakover Current (I_{BO}) vs. Junction Temperature



Figure 11: Dynamic Holding Current Test Circuit for SIDACs



Figure 12: Basic SIDAC Circuit



Figure 13: Relaxation Oscillator Using a SIDAC



Figure 14: General Gas Ignitor Circuit



Soldering Parameters

| | | |
|--|------------------------------------|-------------------------|
| Reflow Condition | | Pb – Free assembly |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (min to max) (t_s) | 60 – 180 secs |
| Average ramp up rate (Liquidus Temp (T_L) to peak) | | 5°C/second max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 5°C/second max |
| Reflow | - Temperature (T_L) (Liquidus) | 217°C |
| | - Temperature (t_L) | 60 – 150 seconds |
| Peak Temperature (T_p) | | 260 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 20 – 40 seconds |
| Ramp-down Rate | | 5°C/second max |
| Time 25°C to peak Temperature (T_p) | | 8 minutes Max. |
| Do not exceed | | 280°C |



Additional Information



Datasheet



Resources



Samples

Physical Specifications

| | |
|--------------------------|--|
| Terminal Material | Copper Alloy |
| Terminal Finish | 100% Matte Tin-plated /Pb Free solder dipped. |
| Body Material | UL recognized epoxy meeting flammability classification 94V-0. |

Design Considerations

Careful selection of the correct device for the application's operating parameters and environment will go a long way toward extending the operating life of the Thyristor. Overheating and surge currents are the main killers of SIDACs. Correct mounting, soldering, and forming of the leads also help protect against component damage.

Reliability/Environmental Tests

| Test | Specifications and Conditions |
|--|---|
| High Temperature Voltage Blocking | MIL-STD-750: Method 1040, Condition A Rated V_{DRM} (VAC-peak), 125°C, 1008 hours |
| Temperature Cycling | MIL-STD-750: Method 1051 -40°C to 150°C, 15-minute dwell, 100 cycles |
| Biased Temperature & Humidity | EIA/JEDEC: JESD22-A101 (VDC), 85°C, 85%RH, 1008 hours |
| High Temp Storage | MIL-STD-750: Method 1031 150°C, 1008 hours |
| Low-Temp Storage | -40°C, 1008 hours |
| Thermal Shock | MIL-STD-750: Method 1056 0°C to 100°C, 5-minute dwell, 10-second transfer, 10 cycles |
| Autoclave (Pressure Cooker Test) | EIA/JEDEC: JESD22-A102 121°C, 100%RH, 2atm, 168 hours |
| Resistance to Solder Heat | MIL-STD-750: Method 2031 260°C, 10 seconds |
| Solderability | ANSI/J-STD-002: Category 3 |
| Repetitive Surge Life Testing | MIL-STD-750: Method 2036, Condition E |

Dimensions — DO-214



| Dimension | Inches | | Millimeters | |
|-----------|--------|-------|-------------|------|
| | Max | Max | Min | Max |
| A | 0.130 | 0.156 | 3.30 | 3.95 |
| B | 0.201 | 0.220 | 5.10 | 5.60 |
| C | 0.077 | 0.087 | 1.95 | 2.20 |
| D | 0.159 | 0.181 | 4.05 | 4.60 |
| E | 0.030 | 0.063 | 0.75 | 1.60 |
| F | 0.075 | 0.096 | 1.90 | 2.45 |
| G | 0.002 | 0.008 | 0.05 | 0.20 |
| H | 0.077 | 0.104 | 1.95 | 2.65 |
| K | 0.006 | 0.016 | 0.15 | 0.41 |

Dimensions — DO-15



| Dimension | Inches | | Millimeters | |
|-----------|--------|-------|-------------|-------|
| | Max | Max | Min | Max |
| øB | 0.028 | 0.034 | 0.711 | 0.864 |
| øD | 0.120 | 0.140 | 3.048 | 3.556 |
| G | 0.235 | 0.270 | 5.969 | 6.858 |
| L | 1.000 | | 25.400 | |

Dimensions - TO-92 with Type 70 Lead Form



| Dimension | Inches | | Millimeters | |
|-----------|--------|-------|-------------|------|
| | Max | Max | Min | Max |
| A | 0.176 | 0.196 | 4.47 | 4.98 |
| B | 0.500 | | 12.70 | |
| C | 0.095 | 0.105 | 2.41 | 2.67 |
| D | 0.150 | | 3.81 | |
| E | 0.046 | 0.054 | 1.16 | 1.37 |
| F | 0.135 | 0.145 | 3.43 | 3.68 |
| G | 0.088 | 0.096 | 2.23 | 2.44 |
| H | 0.176 | 0.186 | 4.47 | 4.73 |
| I | 0.088 | 0.096 | 2.23 | 2.44 |
| J | 0.013 | 0.019 | 0.33 | 0.48 |
| K | 0.013 | 0.017 | 0.33 | 0.43 |
| L | | 0.060 | | 1.52 |

- Notes:
- Type 70 lead form as shown is standard for the E package.
 - All leads are insulated from case. Case is electrically nonconductive (rated at 16000V ac rms for one minute from leads to case over the operating temperature range.)
 - Mold flash shall not exceed 0.13 mm per side.

Product Selector

| Part Number | Switching Voltage Range | | Blocking Voltage | Packages | | |
|-------------|-------------------------|-------------------------|------------------|----------|---------|-----------|
| | V _{BO} Minimum | V _{BO} Maximum | V _{DRM} | DO-15 | DO-214 | TO-92 |
| K2000yH | 190V | 215V | 180V | K2000GH | K2000SH | K2000EH70 |
| K2200yH | 205V | 230V | 180V | K2200GH | K2200SH | K2200EH70 |
| K2400yH | 220V | 250V | 190V | K2400GH | K2400SH | K2400EH70 |
| K2500yH | 240V | 280V | 200V | K2500GH | K2500SH | K2500EH70 |

Note: y = package

Packing Options

| Part Number | Marking | Weight | Packaging Mode | Base Quantity |
|--------------|---------|--------|----------------|---------------|
| Kxxx0GH | Kxxx0GH | 0.38g | Bulk | 1000 |
| Kxxx0GHRP | Kxxx0GH | 0.38g | Reel Pack | 5000 |
| Kxxx0SHRP | KxxSH | 0.1g | Reel Pack | 2500 |
| Kxxx0EH70 | Kxxx0EH | 0.17g | Bulk | 2000 |
| Kxxx0EH70AP | Kxxx0EH | 0.17g | Ammo Pack | 2000 |
| Kxxx0EH70RP2 | Kxxx0EH | 0.17g | Reel Pack | 2000 |
| Kxxx0EH70RP3 | Kxxx0EH | 0.17g | Reel Pack | 2000 |

Note: xxx or xx = voltage

DO-214 Embossed Carrier Reel Pack (RP) Specifications

Meets all EIA-481-1 Standards



DO-15 Reel Pack (RP) Specifications

Meets all EIA RS-296 Standards



TO-92 Type 70 Ammo Pack (AP) Radial Leaded Specifications


Meets all EIA-468-C Standards



TO-92 Type 70 Reel Pack (RP3) Optional Specifications



TO-92 Type 70 Reel Pack (RP2) Standard Specifications

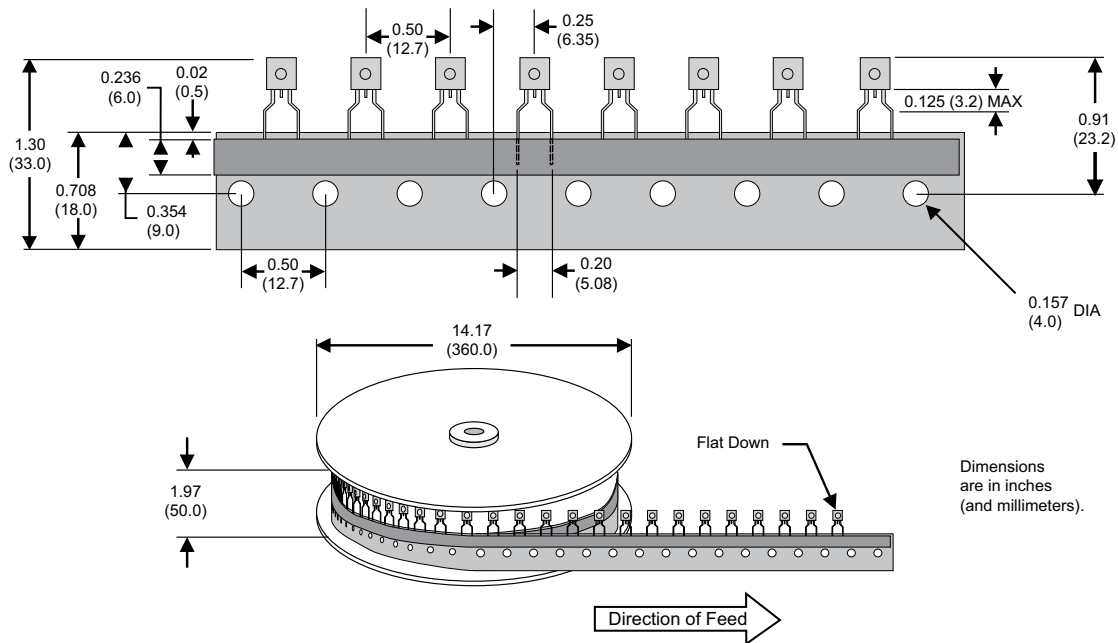

Part Numbering System



Part Marking System



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9