

# SSF series


## Programmable Time Delay Relay

- 4 user-programmable timing modes
- 0.1 sec. to 10 hr. programmable timing range
- Parameters set with recessed screwdriver dials
- Universal voltage (plug-in relay dependent)
- 10A DPDT replaceable output relay minimizes downtime
- Front screw terminals
- DIN-rail, panel or machine tool track mount

File E15631

File LR29186

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.



### Timing Modes

Modes are user selectable via screwdriver adjustment of recessed 4-position selector dial. Modes offered are: On-Delay, Off-Delay, Interval and Latching Interval.

### Timing Specifications

**Timing Ranges:** 0.1 to 3 / 0.33 to 10 / 1 to 30 / 4 to 120 sec.; 0.33 to 10 / 1 to 30 / 2 to 60 min.; 0.33 to 10 hr.

**Timing Range Selection:** Screwdriver select via recessed 8-position selector dial.

**Timing Adjustment:** Recessed potentiometer adjustment with reference calibrations.

**Accuracy:** Repeat Accuracy:  $\pm 1\% \pm 0.01$  sec.  
Overall Accuracy:  $\pm 3\% \pm 0.01$  sec.

**Reset Time:** 30 ms.

**Relay Operate Time:** On-Delay and Interval mode: 30 ms.

**Relay Release Time:** Off-Delay, Interval and Latching Interval: 30 ms. (with factory-installed relay).

### Contact Data @ 25°C


**Arrangements:** 2 Form C (DPDT).

**Rating:** 10A @ 28VDC or 120VAC, resistive; 1/3 HP @ 120/240VAC 345VA.

**Expected Mechanical Life:** 10 million operations (with factory-installed relay).

**Expected Electrical Life:** 500,000 operations, min., at rated resistive load (with factory-installed relay).

### Outline Dimensions

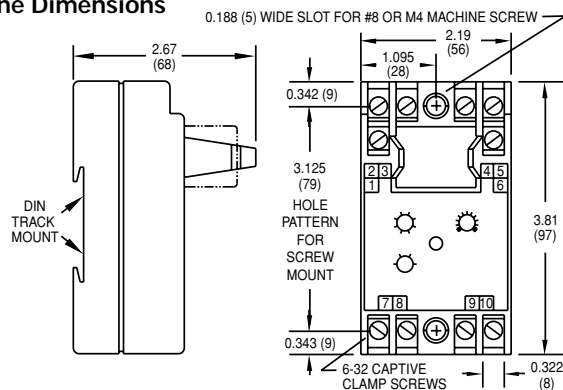

### Wiring Diagram (Top View)



Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

### Initial Dielectric Strength

**Between Coil/Control Switch and Contacts:** 1,500VAC for one minute.

### Input Data @ 25°C

**Voltage:** See Ordering Information section for details.

**Power Requirement:** 2W, max.

**Transient Protection:** Non-repetitive transients of the following magnitudes will not cause spurious operation of affect function and accuracy.

| Operating Voltage | <0.1 ms | <1 ms  |
|-------------------|---------|--------|
| 24, 48 VAC/VDC    | 1,000V  | 480V   |
| 120, 240VAC/VDC   | 3,000V  | 2500V* |

\* Min. source impedance of 100 ohm@120/240VAC, 3000V <0.1 , sec.

### Environmental Data

**Temperature Range:** Storage: -40°C to +85°C.

Operating: -30°C to +65°C.

### Mechanical Data

**Mounting/Termination:** Panel, DIN-rail, Machine Tool mounting track mounting case with screw terminals.

**Weight:** 5.5 oz. (156g) approximately.

### Ordering Information

| SSF                              | R                                 | 90  | A  |
|----------------------------------|-----------------------------------|---|--|
| Series SSF<br>Universal<br>Timer | R = UL<br>Recognized<br>Component | Operating Mode 90<br>Multiple modes -<br>On-Delay<br>Off-Delay<br>Interval<br>Latching Interval | Operating Voltage<br>(+10%, -15%)<br>A = 120VAC, 50/60 Hz.<br>B = 240VAC, 50/60 Hz.<br>E = 24VAC, 50/60 Hz.<br>F = 48VAC, 50/60 Hz.<br>N = 48VDC<br>O = 24VDC<br>P = 125VDC<br>X = No factory-<br>installed relay. † |

† Voltage determined by customer-supplied relay. Only relays that operate on the above-listed voltages should be used. Timer operation using other relay voltages is not recommended.

### Authorized distributors are likely to stock the following:

SSFR90A  
SSFR90X

Specifications and availability subject to change.

www.tycoelectronics.com  
Technical support:  
Refer to inside back cover.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9