

**DIP8-pin type
featuring low on-resistance
with 400V load voltage**

**PhotoMOS[®]
HE 2 Form A
(AQW254)**

FEATURES

1. High sensitivity and low on-resistance

Can control max. 0.16 A load current with 5 mA input current. Low on-resistance of typ. 10.2Ω.



2. Applicable for 2 Form A use as well as two independent 1 Form A use

3. Controls low-level analog signals
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

4. Low-level off state leakage current of max. 1 μA

TYPICAL APPLICATIONS

- High-speed inspection machines
- Data communication equipment
- Telephone equipment

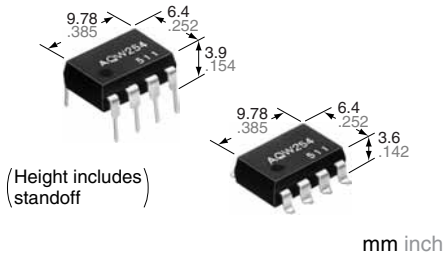

RoHS compliant

TYPES

| | Output rating* | | Package | Part No. | | | | Packing quantity | |
|----------------|----------------|--------------|----------|-----------------------|------------------------|-----------------------------|----------|--|---------------|
| | | | | Through hole terminal | Surface-mount terminal | | | Tube | Tape and reel |
| | Load voltage | Load current | | | Tube packing style | Tape and reel packing style | | | |
| AC/DC dual use | 400 V | 120 mA | DIP8-pin | AQW254 | AQW254A | AQW254AX | AQW254AZ | 1 tube contains: 50 pcs. 1 batch contains: 500 pcs. | 1,000 pcs |

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| | Item | Symbol | AQW254(A) | Remarks |
|-------------------------|-------------------------|------------|---------------------------------|---|
| Input | LED forward current | I_F | 50 mA | |
| | LED reverse voltage | V_R | 5 V | |
| | Peak forward current | I_{FP} | 1 A | $f = 100 \text{ Hz}$, Duty factor = 0.1% |
| | Power dissipation | P_{in} | 75 mW | |
| Output | Load voltage (peak AC) | V_L | 400 V | |
| | Continuous load current | I_L | 0.12 A (0.16 A) | A connection: Peak AC, DC (): in case of using only 1 channel |
| | Peak load current | I_{peak} | 0.36 A | A connection: 100 ms (1 shot), $V_L = \text{DC}$ |
| | Power dissipation | P_{out} | 800 mW | |
| Total power dissipation | | P_T | 850 mW | |
| I/O isolation voltage | | V_{iso} | 1,500 V AC | Between input and output/between contact sets |
| Temperature limits | Operating | T_{opr} | -40°C to +85°C -40°F to +185°F | Non-condensing at low temperatures |
| | Storage | T_{stg} | -40°C to +100°C -40°F to +212°F | |

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item | | Symbol | AQW254(A) | Condition |
|----------------------------------|---------------------------|--|------------------|---|
| Input | LED operate current | Typical | 0.9 mA | $I_L = \text{Max.}$ |
| | | Maximum | 3 mA | |
| | LED turn off current | Minimum | 0.4 mA | $I_L = \text{Max.}$ |
| | | Typical | 0.8 mA | |
| LED dropout voltage | Typical | 1.25 V (1.14 V at $I_F = 5 \text{ mA}$) | | $I_F = 50 \text{ mA}$ |
| | Maximum | 1.5 V | | |
| Output | On resistance | Typical | 10.2 Ω | $I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time |
| | | Maximum | 16 Ω | |
| | Off state leakage current | Maximum | 1 μA | |
| Transfer characteristics | Turn on time* | Typical | 0.8 ms | $I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ |
| | | Maximum | 2 ms | |
| | Turn off time* | Typical | 0.04 ms | $I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ |
| | | Maximum | 0.2 ms | |
| | I/O capacitance | Typical | 0.8 pF | $f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$ |
| | | Maximum | 1.5 pF | |
| Initial I/O isolation resistance | Minimum | R_{iso} | 1,000 M Ω | 500 V DC |

*Turn on/Turn off time

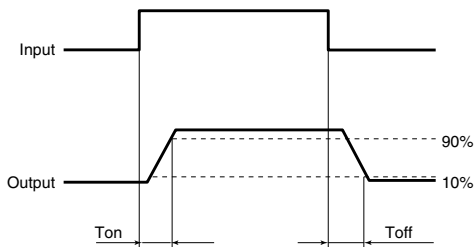

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

| Item | Symbol | Recommended value | Unit |
|-------------------|--------|-------------------|------|
| Input LED current | I_F | 5 | mA |

- For Dimensions.
- For Schematic and Wiring Diagrams.
- For Cautions for Use.

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.
For more information.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to $+85^\circ\text{C}$
 -40°F to $+185^\circ\text{F}$

When using 2 channels

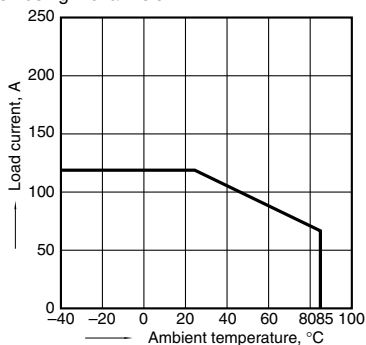


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

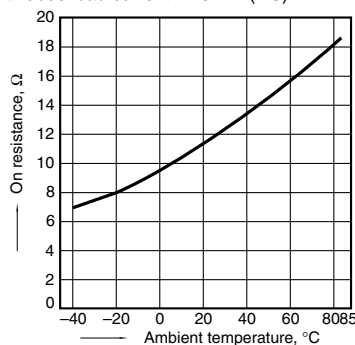

3. Turn on time vs. ambient temperature characteristics


LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

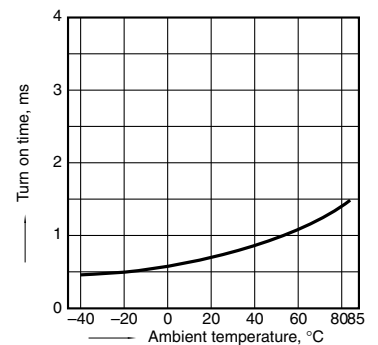

HE 2 Form A (AQW254)


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

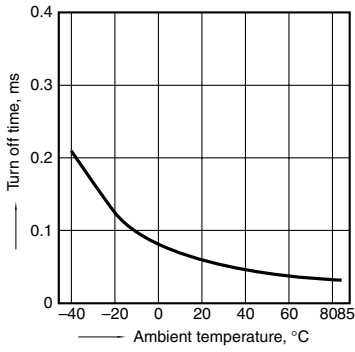


5. LED operate current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

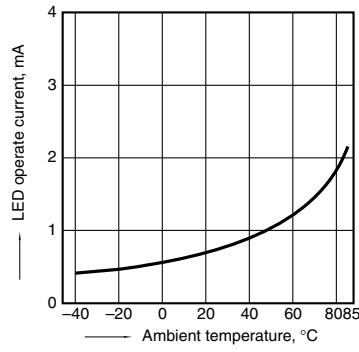


6. LED turn off current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

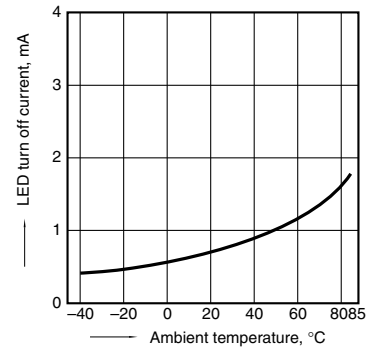


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

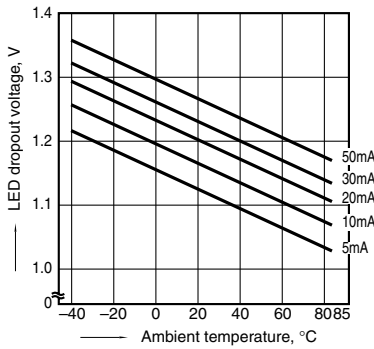


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

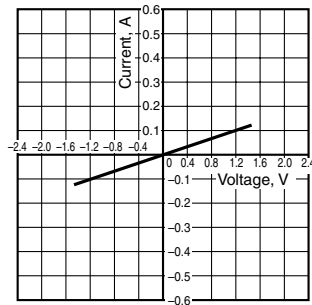


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

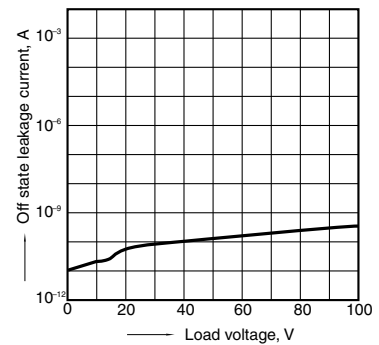


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

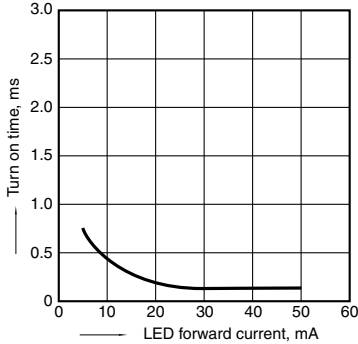


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

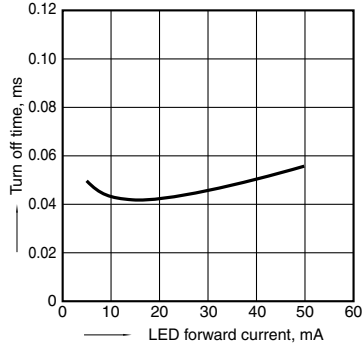

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

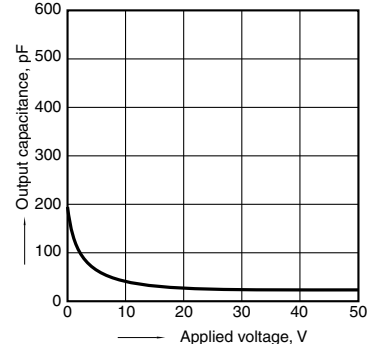

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[AQW254AZ](#) [AQW254](#) [AQW254A](#) [AQW254AX](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9