

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0458450002](#)
Status: **Active**
Overview: [edge_card_connectors](#)
Description: 2.50mm (.098") Pitch EXTreme PowerEdge™, Signal Connector, Double Sided, 3 Segments, 8 Signal Contacts per Segment, Press-Fit

Documents:

3D Model	Product Specification PS-45719-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
TUV	30482572

General

Product Family	Edge Card Connectors
Series	45845
Component Type	Edgecard to PCB
Overview	edge_card_connectors
Product Name	EXTreme PowerEdge™

Physical

Circuits (Loaded)	24
Circuits (maximum)	24
Circuits Detail	All Signal
Color - Resin	Black
Durability (mating cycles max)	250
Entry Angle	Vertical (Top Entry)
Flammability	94V-0
Keying to Mating Part	N/A
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
PC Tail Length (in)	0.177 In
PC Tail Length (mm)	4.50 mm
PCB Thickness Recommended (in)	0.093 In
PCB Thickness Recommended (mm)	2.40 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.098 In
Pitch - Mating Interface (mm)	2.50 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	150
Plating min: Termination (µm)	3.75
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole - Compliant Pin


Electrical

Current - Maximum per Contact	3A
Voltage - Maximum	250V

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-45714-001
Product Specification	PS-45719-001



Series
image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Contains SVHC: No
Halogen-Free
Status

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[45845Series](#)

Mates With
1.58mm (.062") double sided card edge

This document was generated on 06/04/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

D

C

B




A

D

C


B

A

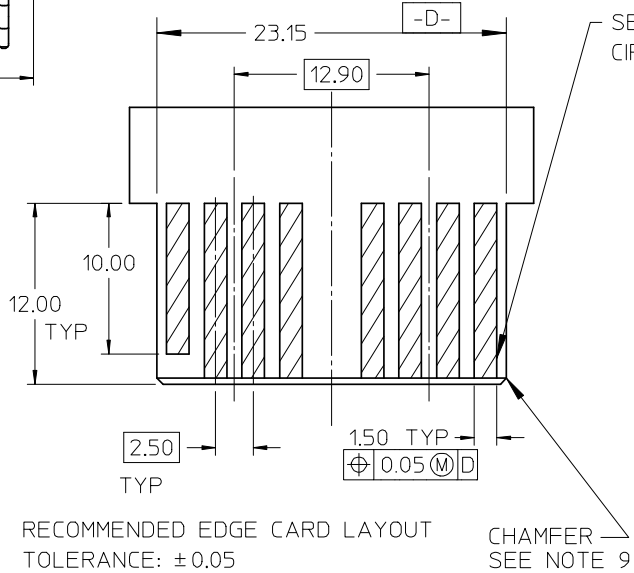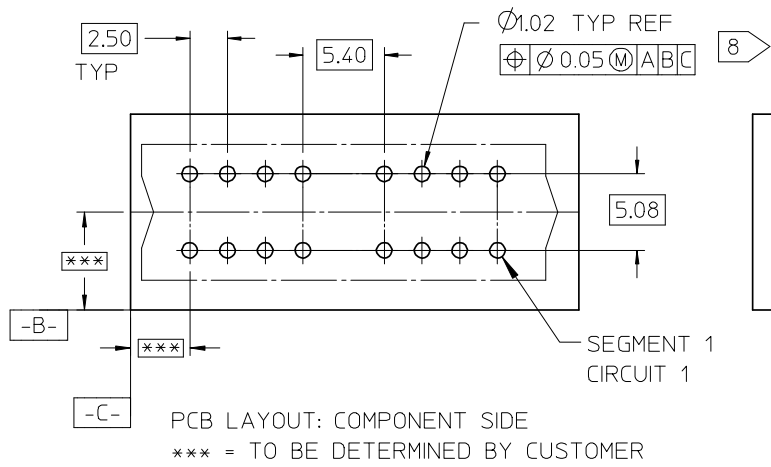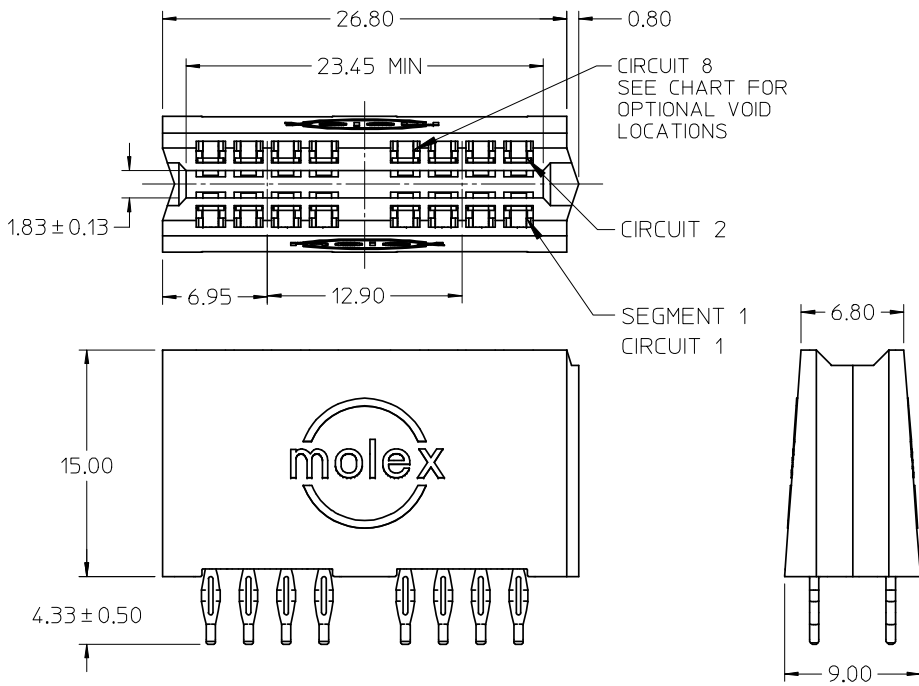

- NOTES:
1. MATERIAL: HOUSING 30% GF LCP, UL94V-0, BLACK
MATERIAL: TERMINAL C5210 ALLOY
 2. FINISH: SEE SHT 2 FOR FINISH SPECIFICATIONS
 3. PRODUCT SPECIFICATION: PS-45719-001.
 4. PACKAGING SPECIFICATION: PK-45714-001.
 5. THIS PART MATES WITH 1.60±0.16 THICK PCB OR BUSBAR
 6. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
 7. PCB THICKNESS: 2.36 MIN
EDGE CARD THICKNESS: 1.57±0.15
 8. PCB HOLE SPECIFICATION: SEE PS-45719-001.
 9. 0.50 X 45° CHAMFER ON LEADING EDGE, TYP 4 SIDES.
 10. THIS PART IS RoHS COMPLIANT. SEE ES-45482-999 FOR LABEL REQUIREMENTS.

MATERIAL NUMBER	SEGMENTS	FINISH (SHT 2)	VOID LOCATIONS
45845-0001	2	1	NONE
45845-0002	3	1	NONE
45845-0003	4	1	NONE
45845-1001	2	1	SEG 1 CKT 7, 8
45845-1003	3	1	SEGS 1, 2 CKTS 5,6,15,16
45845-2001	2	2	SEG 1 CKT 7, 8
45845-3001	2	1	SEG 1 CKTS 3,4,7,8
45845-9001	2	3	NONE
45845-9003	4	3	NONE



ADD -1002	DESCRIPTION
EC NO: UCP2008-2498	2008/04/16
DRWN: SCHAFER	2008/04/22
CHKD:	2008/04/25
APPR: APATEL	
REV	

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± ---
1 PLACE	± ---	± ---
ANGULAR ± 1/2°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	
MM ONLY	
DRAWN BY	DATE
MARGULIS	2004/08/05
CHECKED BY	DATE
MARGULIS	2004/08/05
APPROVED BY	DATE
MARGULIS	2004/08/05
MATERIAL NUMBER	SEE CHART
SIZE	A

SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
TITLE POWER EDGE ASSEMBLY SIGNAL VERTICAL CPI		
 MOLEX INCORPORATED		
DOCUMENT NO. SD-45845-001		SHEET NO. 1 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

6



5

4


3

2

1

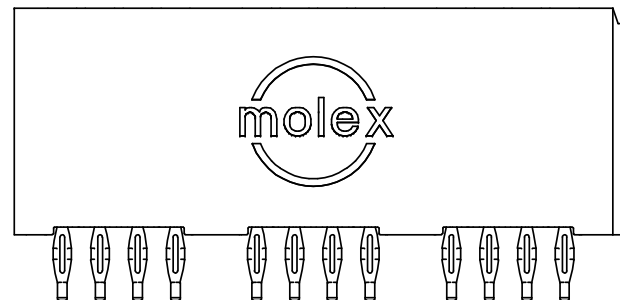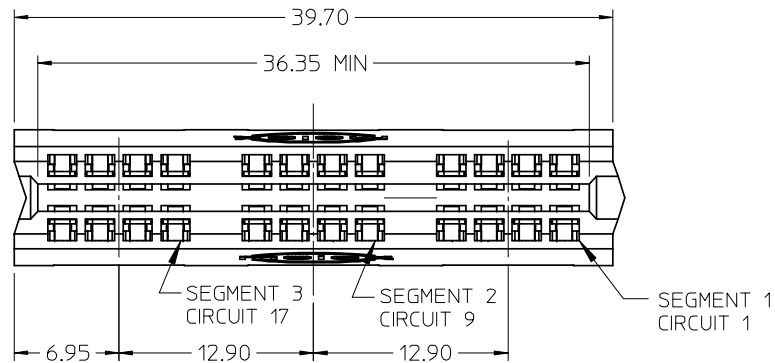

5.40
TYP

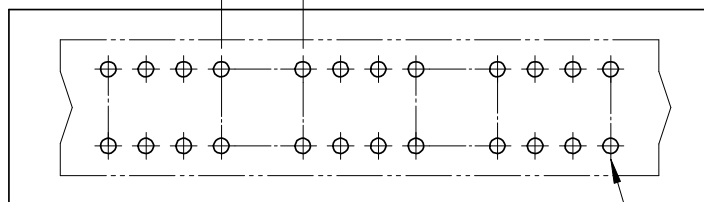



PCB LAYOUT: COMPONENT SIDE

SEGMENT 1
CIRCUIT 1

NOTES

1. FOR NOTES AND DIMENSIONS NOT SHOWN SEE SHEET 1

2. FINISH:

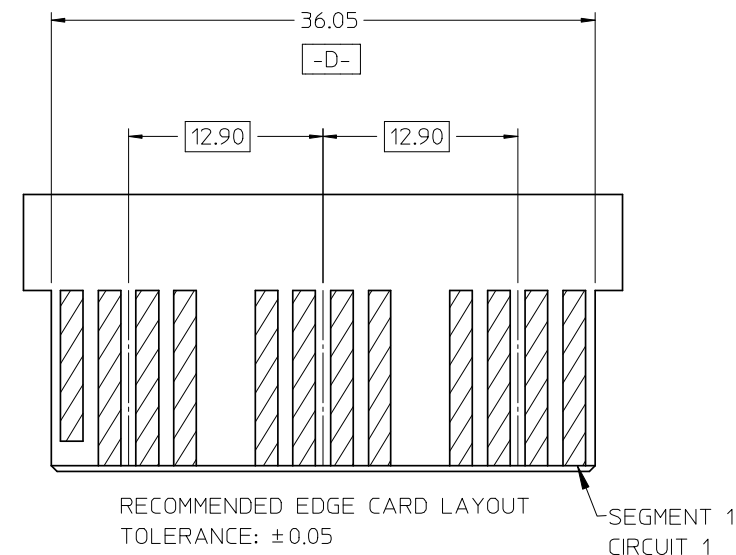FINISH 1- SELECT GOLD 30 M.I.MIN IN CONTACT AREA
SELECT TIN 100 M.I.MIN IN PC TAIL AREA
BOTH OVER NICKEL 50 M.I.MIN OVERALLFINISH 2- SELECT GOLD PLATE OVER 100-200 M.I.
Pd/Ni IN MATING AREA OVER
NICKEL 15-50 M.I. IN MATING AREA.
TIN 15-60 M.I. IN TAIL AREA OVER
NICKEL 30-60 M.I. IN TAIL AREA.FINISH 3- SELECT GOLD 30 M.I.MIN IN CONTACT AREA
SELECT TIN/LEAD 100 M.I.MIN IN PC TAIL AREA
BOTH OVER NICKEL 50 M.I.MIN OVERALL

EC NO: UCP2008-2498	2008/04/16
DRWN: SCHAFER	2008/04/22
CHKD: APATEL	2008/04/25
APPR: APATEL	2008/04/25
DESCRIPTION	
REV	

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± ---
1 PLACE	± ---	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONSDIMENSION STYLE
MM ONLY

DRAWN BY	DATE
MARGULIS	2004/08/05
CHECKED BY	DATE
MARGULIS	2004/08/05
APPROVED BY	DATE
MARGULIS	2004/08/05

MATERIAL NUMBER
SEE CHARTSIZE
ASCALE
2:1DESIGN UNITS
METRICTHIRD ANGLE
PROJECTIONTITLE
POWER EDGE ASSEMBLY
SIGNAL VERTICAL
CPI

MOLEX INCORPORATED

DOCUMENT NO.
SD-45845-001SHEET NO.
2 OF 3



5

4


3

2

1

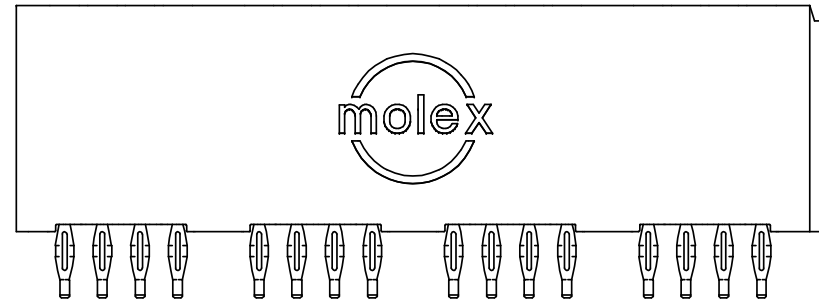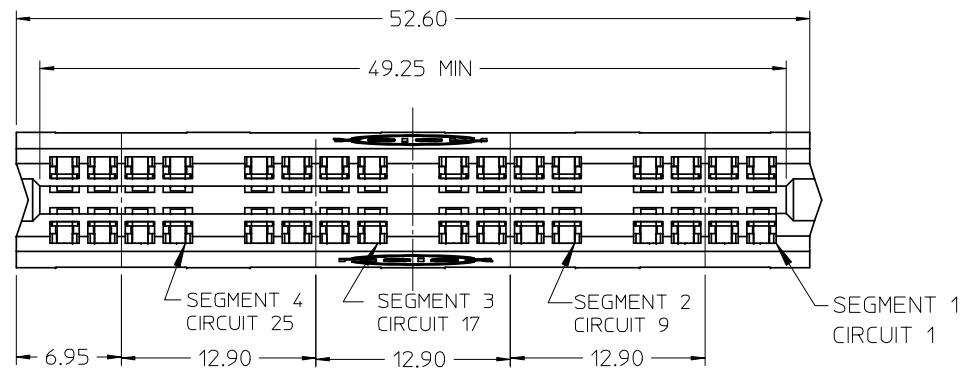


5.40
TYP 3

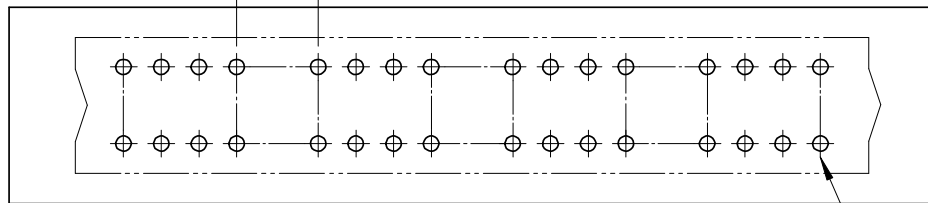

PCB LAYOUT: COMPONENT SIDE


SEGMENT 1
CIRCUIT 1

NOTE
FOR ALL OTHER DIMENSIONS AND NOTES SEE SHEET 1.

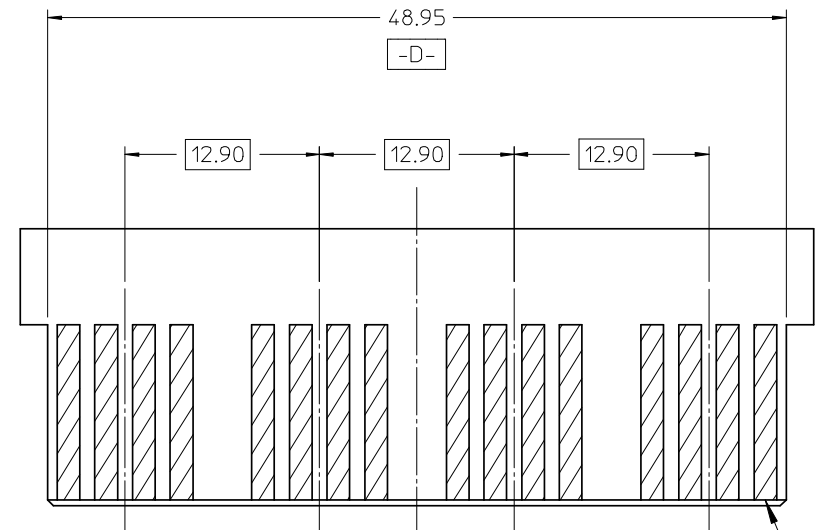

RECOMMENDED EDGE CARD LAYOUT
TOLERANCE: ± 0.05

SEGMENT 1
CIRCUIT 1

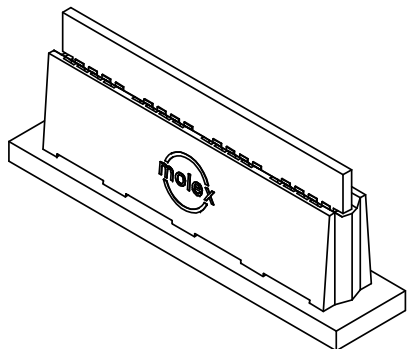

EC NO: UCP2008-2498	2008/04/16	DRWN: JSCHAFER	2008/04/22	CHKD: APATEL	2008/04/25	APPR: APATEL	2008/04/25	DESCRIPTION
H								REV

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	$\pm$ ---	$\pm$ ---
3 PLACES	$\pm$ ---	$\pm$ ---
2 PLACES	± 0.25	$\pm$ ---
1 PLACE	$\pm$ ---	$\pm$ ---
ANGULAR $\pm 1/2^\circ$		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
MARGULIS	2004/08/05
CHECKED BY	DATE
MARGULIS	2004/08/05
APPROVED BY	DATE
MARGULIS	2004/08/05
MATERIAL NUMBER	SEE CHART
SIZE	A

SCALE 2:1		DESIGN UNITS METRIC		 THIRD ANGLE PROJECTION	
TITLE POWER EDGE ASSEMBLY SIGNAL VERTICAL CPI					
 MOLEX INCORPORATED					
DOCUMENT NO. SD-45845-001				SHEET NO. 3 OF 3	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9