



UPR5e3, UPR10e3, UPR15e3

2.5 Amp High Efficiency Ultrafast Rectifier

DESCRIPTION

The Microsemi UPR5e3, UPR10e3, and UPR15e3 Powermite® high efficiency rectifiers are RoHS compliant and offers optimized forward voltage characteristics with reverse blocking capabilities up to 150 Volts. They are ideal for surface mount applications that operate at high frequencies.

In addition to its size advantages, Powermite® package features include a full metallic bottom that eliminates possibility of solder flux entrapment during assembly and a unique locking tab acts as an efficient heat path from die to mounting plane for external heat sinking with very low thermal resistance junction to case (bottom). Its innovative design makes this device ideal for use with automatic insertion equipment.

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

ABSOLUTE MAXIMUM RATINGS AT 25° C (UNLESS OTHERWISE SPECIFIED)

| Rating | Symbol | Value | Unit |
|---|-----------|-------------|------|
| Working Peak Reverse Voltage UPR5e3 | V_{RWM} | 50 | V |
| Working Peak Reverse Voltage UPR10e3 | V_{RWM} | 100 | V |
| Working Peak Reverse Voltage UPR15e3 | V_{RWM} | 150 | V |
| Average Rectified Output Current (at rated V_{RWM} , $T_C = 75^\circ\text{C}$) | I_o | 2.5 | A |
| Non-Repetitive Peak Forward Surge Current 8.3ms Single half-sine wave | I_{FSM} | 25 | A |
| Storage Temperature | T_{STG} | -55 to +150 | °C |
| Junction Temperature | T_J | -55 to +150 | °C |

THERMAL CHARACTERISTICS (UNLESS OTHERWISE SPECIFIED)

| Thermal Resistance | | | |
|---------------------------|-----------------|-----|----------|
| Junction-to-case (bottom) | $R_{\theta JC}$ | 10 | °C/ Watt |
| Junction-to-ambient (1) | $R_{\theta JA}$ | 240 | °C/ Watt |

(1) When mounted on FR-4 PC board using 1 oz copper with recommended minimum foot print

DO-216



See further details and dimensions on last page

KEY FEATURES

- Low thermal resistance DO-216 package for higher current operation
- Ultrafast recovery time of 25 ns
- RoHS Compliant with e3 suffix part number
- Efficient heat path with Integral locking bottom metal tab
- Low forward voltage
- Full metallic bottom eliminates flux entrapment
- Compatible with automatic insertion
- Low profile-maximum height of 1mm

APPLICATIONS/BENEFITS

- Switching and Regulating Power Supplies.
- Charge Pump Circuits
- Reduces reverse recovery loss with low I_{RM}
- Small 8.45 mm² foot print
(See mounting pad details next page)

MECHANICAL & PACKAGING

- CASE: Void-free transfer molded thermosetting epoxy compound meeting UL94V-0
- FINISH: Annealed matte-Tin plating over copper and readily solderable per MIL-STD-750 method 2026 (consult factory for Tin-Lead plating)
- POLARITY: See figure (left)
- MARKING: UPR5e3: R05•
UPR10e3: R10•
UPR15e3: R15•
- WEIGHT: 0.016 grams (approx.)
- Package dimension on last page
- Tape & Reel option: 12 mm tape per Standard EIA-481-B, 3000 on 7 inch reel and 12,000 on 13" reel



UPR5e3, UPR10e3, UPR15e3



2.5 Amp High Efficiency Ultrafast Rectifier

ELECTRICAL PARAMETERS @ 25°C (unless otherwise specified)


| Parameter | Symbol | Conditions | Min | Typ. | Max | Units |
|--------------------------|----------|--|-----|------|-------|---------------|
| Forward Voltage (Note 1) | | $I_F = 2.0$ Amps | | | 0.975 | V |
| Forward Voltage (Note 1) | | $I_F = 2.0$ Amps, $T_J = 100^\circ\text{C}$ | | | 0.895 | V |
| Reverse Current | I_R | $V_R = V_{RWM}$, $T_J = 25^\circ\text{C}$ | | | 2.0 | μA |
| Reverse Current | I_R | $V_R = V_{RWM}$, $T_J = 100^\circ\text{C}$ | | | 50 | μA |
| Reverse Recovery Time | t_{rr} | $I_F = 0.5$ A; $I_R = 1.0$ A; $I_{REC} = 0.25$ A | | | 25 | ns |

Note: 1 Short duration test pulse used to minimize self – heating effect.

PACKAGE & MOUNTING PAD DIMENSIONS

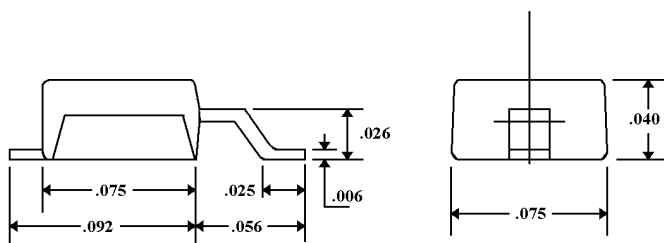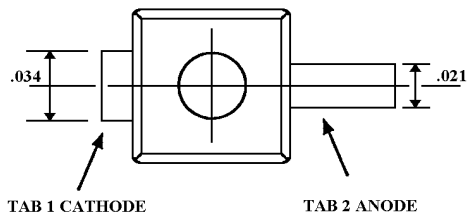

DO-216 Package (All dimensions +/- .005 inches)

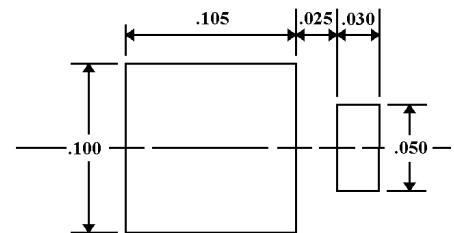

MOUNTING PAD in inches

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9