BC807-16W / -25W / -40W

PNP SURFACE MOUNT TRANSISTOR

Lead-free Green

Features

- Ideally Suited for Automatic Insertion
- Epitaxial Planar Die Construction
- For Switching, AF Driver and Amplifier Applications
- Complementary NPN Types Available (BC817-xxW)
- **Lead Free By Design/RoHS Compliant (Note 1)**
- **"Green" Device (Note 2)**

Mechanical Data

- Case: SOT-323
- Case Material: Molded Plastic. "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish – Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Pin Connections: See Diagram
- Marking:

P/N	Marking
BC807-16W	K5A
BC807-25W	K5B
BC807-40W	K5C

- Ordering & Date Code Information: See Page 3
- Approximate Weight: 0.006 grams

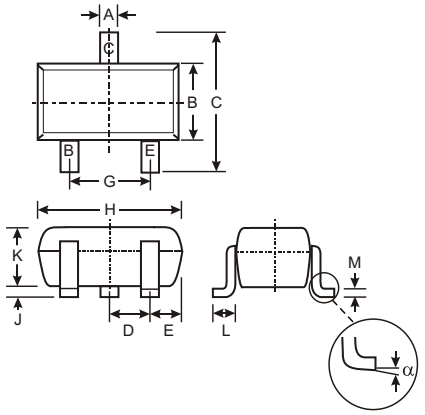

SOT-323		
Dim	**Min**	**Max**
A	0.25	0.40
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
E	0.30	0.40
G	1.20	1.40
H	1.80	2.20
J	0.0	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.18
	0	8
All Dimensions in mm		

Maximum Ratings @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	-45	V
Emitter-Base Voltage	V_{EBO}	-5.0	V
Collector Current	I_C	-500	mA
Peak Collector Current	I_{CM}	-1000	mA
Peak Emitter Current	I_{EM}	-1000	mA
Power Dissipation at T_{SB} = 50°C (Note 3)	P_d	200	mW
Thermal Resistance, Junction to Ambient Air (Note 3)	R_{JA}	625	°C/W
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150	°C

Electrical Characteristics @T_A = 25°C unless otherwise specified

Characteristic (Note 4)		Symbol	Min	Typ	Max	Unit	Test Condition
DC Current Gain	Current Gain Group -16	h_{FE}	100	—	250	—	V_{CE} = -1.0V, I_C = -100mA
	-25		160		400		
	-40		250		600		
	Current Gain Group -16		60		—		V_{CE} = -1.0V, I_C = -300mA
	-25		100		—		
	-40		170		—		
Collector-Emitter Saturation Voltage		$V_{CE(SAT)}$	—	—	-0.7	V	I_C = -500mA, I_B = -50mA
Base-Emitter Voltage		V_{BE}	—	—	-1.2	V	V_{CE} = -1.0V, I_C = -300mA
Collector-Emitter Cutoff Current		I_{CES}	—	—	-100 -5.0	nA μA	V_{CE} = -45V V_{CE} = -25V, T_j = 150°C
Emitter-Base Cutoff Current		I_{EBO}	—	—	-100	nA	V_{EB} = -4.0V
Gain Bandwidth Product		f_T	100	—	—	MHz	V_{CE} = -5.0V, I_C = -10mA, f = 50MHz
Collector-Base Capacitance		C_{CBO}	—	—	12	pF	V_{CB} = -10V, f = 1.0MHz

Notes:
1. No purposefully added lead.
2. Diodes Inc's "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
3. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.
4. Short duration pulse test used to minimize self-heating effect.

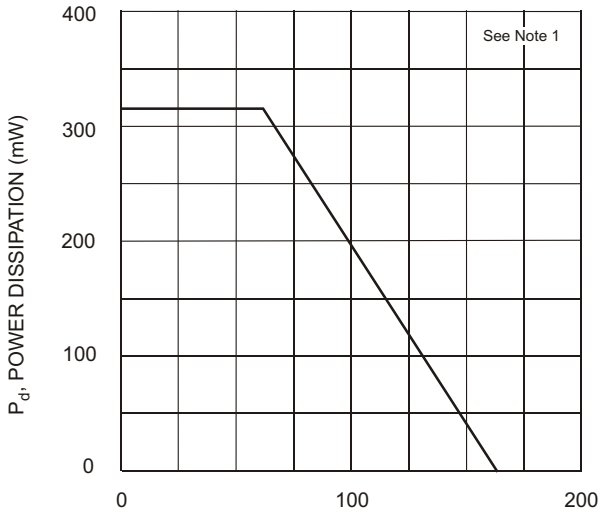

T_{SB}, SUBSTRATE TEMPERATURE (°C)

Fig. 1, Power Derating Curve

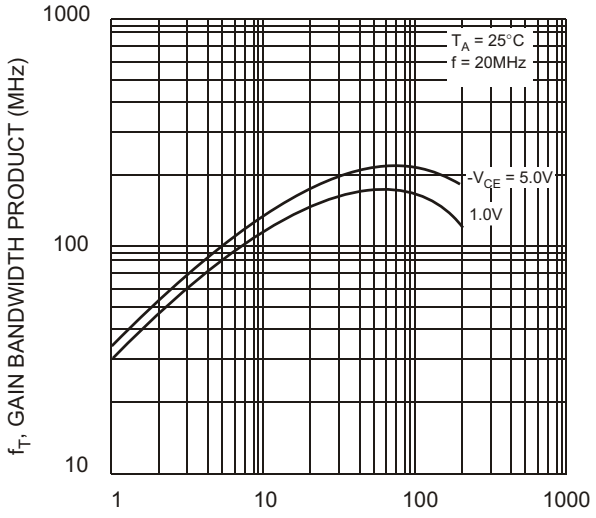

$-I_C$, COLLECTOR CURRENT (mA)

Fig. 2, Gain-Bandwidth Product vs Collector Current

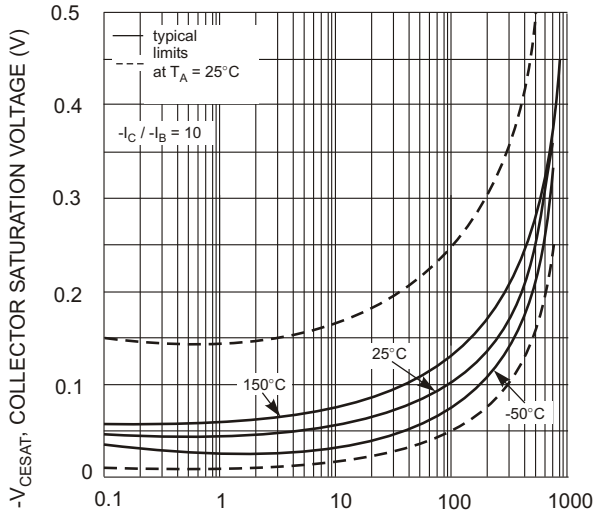

$-I_C$, COLLECTOR CURRENT (mA)

Fig. 3, Collector Sat. Voltage vs Collector Current

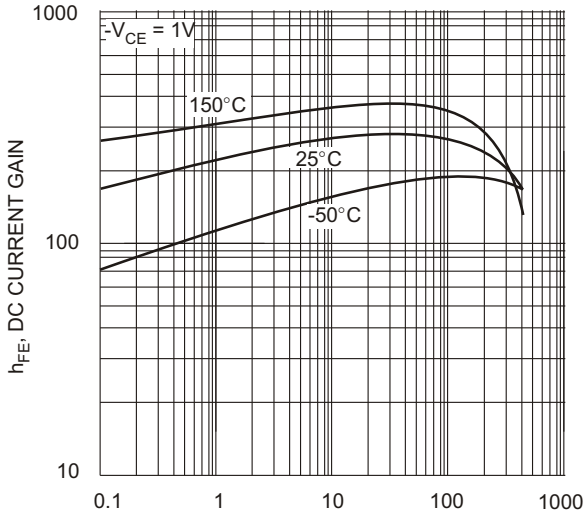

$-I_C$, COLLECTOR CURRENT (mA)

Fig. 4, DC Current Gain vs Collector Current

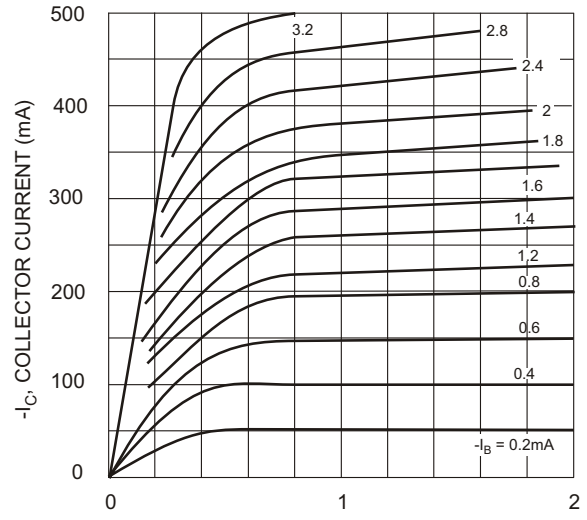

$-V_{CE}$, COLLECTOR-EMITTER VOLTAGE (V)

Fig. 5, Typical Emitter-Collector Characteristics

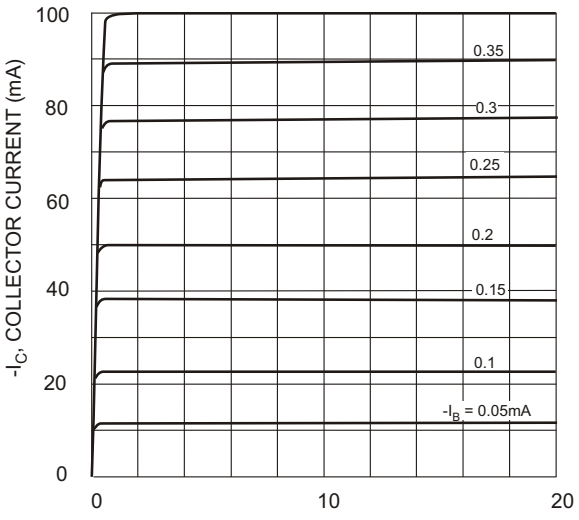

$-V_{CE}$, COLLECTOR-EMITTER VOLTAGE (V)

Fig. 6, Typical Emitter-Collector Characteristics

Ordering Information (Note 5)

Device*	Packaging	Shipping
BC807-xxW-7	SOT-323	3000/Tape & Reel

Notes: 5. For Packaging Details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.
* xx = gain group, e.g. BC807-16W-7.

Marking Information



XXX = Product Type Marking Code (See Page 1), e.g. K5A = BC807-16
YM = Date Code Marking
Y = Year ex: S = 2005
M = Month ex: 9 = September

Date Code Key

Year	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	R	S	T	U	V	W	X	Y	Z

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9