

AMPHENOL PART NUMBER CONFIGURATION
U95 - T 1 X 1 - 1 X X X

HEAT SINK OPTION

1 = NO HEAT SINK OR CLIP SHIPPED
5 = ROUND PIN STYLE (H=6.5mm; SAN HEIGHT)--(NOT AVAILABLE WITH QUAD LIGHT PIPE)
6 = ROUND PIN STYLE (H=4.2mm; PCI HEIGHT)--(NOT AVAILABLE WITH QUAD LIGHT PIPE)
7 = ROUND PIN STYLE (H=13.5mm; TALL)--(NOT AVAILABLE WITH QUAD LIGHT PIPE)
A = SQUARE PIN STYLE (H=6.5mm; SAN HEIGHT)
B = SQUARE PIN STYLE (H=4.2mm; PCI HEIGHT)
C = SQUARE PIN STYLE (H=13.5mm; TALL)
N = PIN-FIN STYLE FOR SIDE TO SIDE AIR FLOW (H=6.5mm; SAN HEIGHT)
P = PIN-FIN STYLE FOR SIDE TO SIDE AIR FLOW (H=4.2mm; PCI HEIGHT)
R = PIN-FIN STYLE FOR SIDE TO SIDE AIR FLOW (H=13.5mm; TALL)
Y = EXTRUDED FIN STYLE FOR FRONT - BACK AIR FLOW (H=6.94mm)
W = EXTRUDED FIN STYLE FOR FRONT - BACK AIR FLOW (H=8.72mm)

NOTE: FOR DIMENSION "H" SEE SHEET 2

PACKAGING OPTION


1 = TRAY PACKAGING (LIGHT PIPE AND/OR HEAT SINK SHIPPED LOOSE IF ORDERED)
A = TRAY PACKAGING (LIGHT PIPE AND/OR HEAT SINK ASSEMBLED TO THE CAGE)

OPTIONAL LIGHT PIPE


0 = NO LIGHT PIPE
1 = DUAL BARREL LIGHT PIPE - ROUND OUTLET
7 = SINGLE BARREL LIGHT PIPE - ROUND OUTLET
4 = QUAD BARREL LIGHT PIPE - ROUND OUTLET

OPTIONAL DUST COVER (CONDUCTIVE)


0 = WITHOUT DUST COVER
D = WITH DUST COVER (SHIPPED LOOSE PIECE)

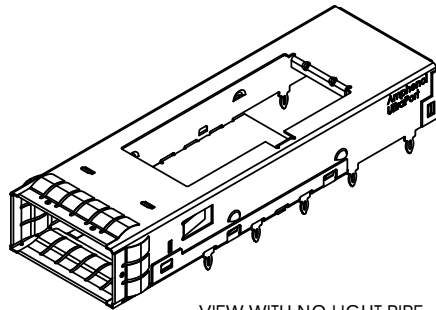


VIEW WITH NO LIGHT PIPE
AND NO HEAT SINK
(NO DUST COVER)
(P/N U95-T111-1001)

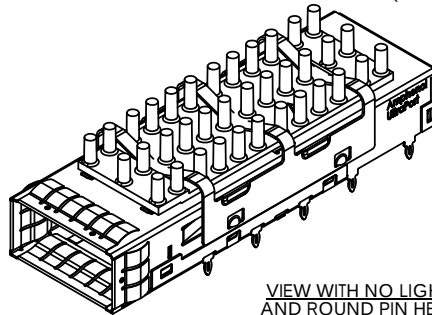


VIEW WITH NO LIGHT PIPE
AND ROUND PIN HEAT SINK
(NO DUST COVER)
(P/N U95-T151-100A)

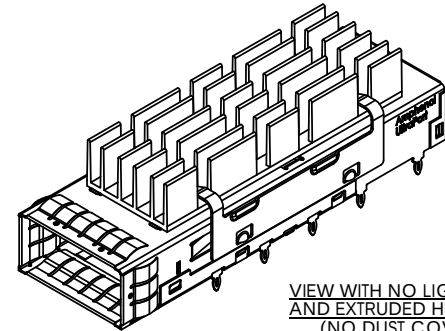


VIEW WITH NO LIGHT PIPE
AND EXTRUDED HEAT SINK
(NO DUST COVER)
(P/N U95-T1W1-100A)

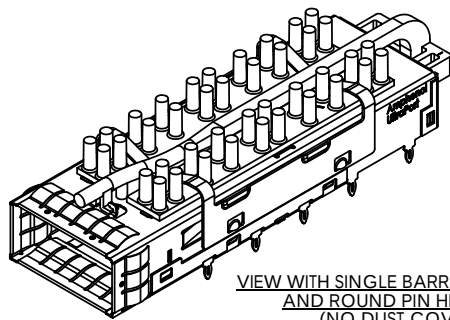


VIEW WITH SINGLE BARREL LIGHT PIPE
AND ROUND PIN HEAT SINK
(NO DUST COVER)
(P/N U95-T151-107A)

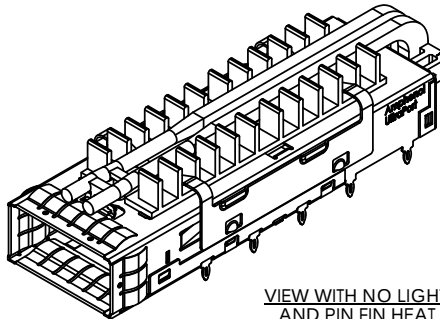

VIEW WITH NO LIGHT PIPE
AND PIN FIN HEAT SINK
(NO DUST COVER)
(P/N U95-T1N1-101A)

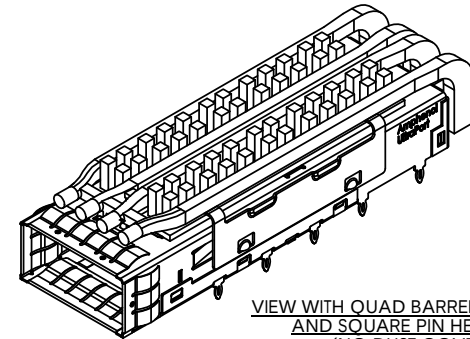

VIEW WITH QUAD BARREL LIGHT PIPE
AND SQUARE PIN HEAT SINK
(NO DUST COVER)
(P/N U95-T1A1-104A)





CONDUCTIVE DUST COVER
SHOWN (OPTIONAL)
(SHIPPED LOOSE)
(P/N U79-111-9000-P)






THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
H	ADDED HEAT SINK OPTIONS	JAN. 16/15	AC
J	PCB FRONT EDGE NOTE ADDED	APR 22/15	AC
K	COMPLIANT PIN LEAD IN TIP SHORTENED FOR THINNER B2B PCB APPLICATION	JUL 10/15	AC


UNLESS SPECIFIED OTHERWISE		DRAWN	A.C.	JUL5/13	Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com	
UNIT	MILLIMETERS	CHECKED	ZLJ	JUL5/13		
REFERENCE IN PARENTHESES		M.E. APP'D				
		Q.A. APP'D				
GENERAL TOLERANCES		DWG APP'D	ZLJ	JUL5/13	UltraPort QSFP 1X1 CAGE ASSEMBLY THRU BEZEL TWO REAR PIN WITH HEAT SINK AND LIGHT PIPE OPTIONS	
1 DECIMAL PLACE	±0.2	ENG. REL. NO.	-			
2 DECIMAL PLACES	±0.15	REF.			DWG. NO.	
ANGULAR DEGREES	±1°	THIRD ANGLE PROJECTION			P-U95-T1X1-1XXX	
		DO NOT SCALE DRAWING			CODE ID NO.	03554
					DWG SIZE:	C
					SCALE:	3:1
					SHEET	1 OF 5

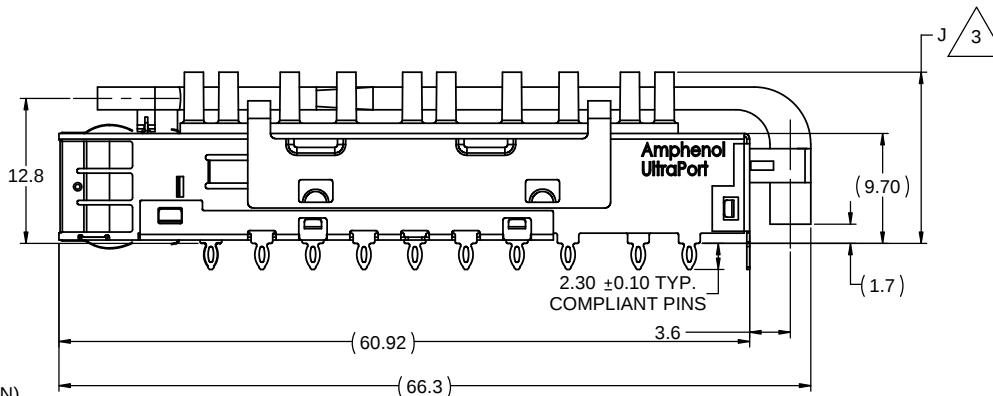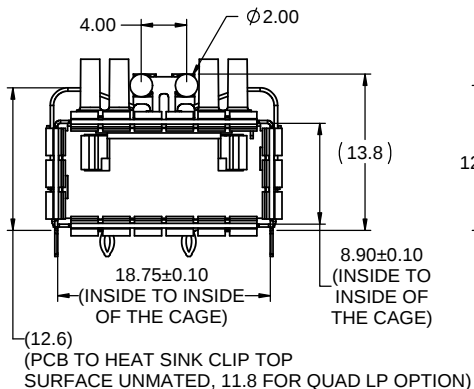


VIEW WITH DUAL BARREL LIGHT PIPE
AND ROUND PIN HEAT SINK
(NO DUST COVER)
(P/N U95-T151-101A)

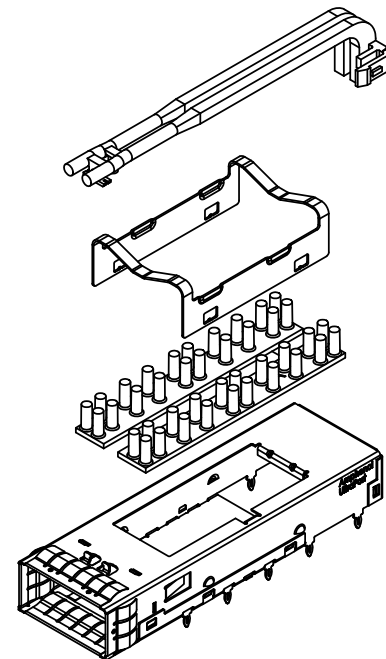


ROUND PIN STYLE WITHOUT LP
(FOR REFERENCE ONLY)



SQUARE PIN STYLE WITHOUT LP
(FOR REFERENCE ONLY)



PIN FIN STYLE WITHOUT LP
(FOR REFERENCE ONLY)




FIN STYLE WITHOUT LP
(FOR REFERENCE ONLY)


PART NUMBER	DIM "J"	DIM "H"
U95-T15(N, A)1-1XXX	15.10	6.50
U95-T16(P, B)1-1XXX	12.80	4.20
U95-T17(R, C)1-1XXX	22.10	13.50
U95-T1Y1-1XXX	15.54	6.94
U95-T1W1-1XXX	17.32	8.72

NOTES:


- MATERIAL:
CAGE AND EMI SPRINGS: COPPER ALLOY
CAGE PLATING: 2.54µm [100µ"] MIN. NICKEL.
LIGHT PIPE: GE LEXAN RESIN, CLEAR OPTICAL GRADE
HEAT SINK: ALUMINUM ALLOY, NICKEL PLATED
HEAT SINK CLIP: STAINLESS STEEL
DUST COVER: CONDUCTIVE RUBBER
- DUST COVER IS SHIPPED AS A LOOSE PIECE IF ORDERED.
- DIMENSION "J" IS IN THE UNPLUGGED STATE




ROUND PIN STYLE WITH LP
(FOR REFERENCE ONLY,
LAYOUT MAY VARY W/ LP OPTION)



SQUARE PIN STYLE WITH LP
(FOR REFERENCE ONLY,
LAYOUT MAY VARY W/ LP OPTION)





PIN FIN STYLE WITH LP
(FOR REFERENCE ONLY,
LAYOUT MAY VARY W/ LP OPTION)



FIN STYLE WITH LP
(FOR REFERENCE ONLY,
LAYOUT MAY VARY W/ LP OPTION)

UNLESS SPECIFIED OTHERWISE		DRAWN	A.C.	JUL5/13
UNIT	MILLIMETERS	CHECKED	ZLJ	JUL5/13
REFERENCE IN PARENTHESES		M.E. APP'D		
		Q.A. APP'D		
GENERAL TOLERANCES		DWG APP'D	ZLJ	JUL5/13
1 DECIMAL PLACE	±0.2	ENG. REL. NO.	-	
2 DECIMAL PLACES	±0.15	REF.		
ANGULAR DEGREES	±1°	THIRD ANGLE PROJECTION		
		DO NOT SCALE DRAWING		

Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com			
UltraPort QSFP 1X1 CAGE ASSEMBLY THRU BEZEL TWO REAR PIN WITH HEAT SINK AND LIGHT PIPE OPTIONS			
DWG. NO. P-U95-T1X1-1XXX			REV K
CODE ID NO. 03554	DWG SIZE: C	SCALE: 3:1	SHEET 2 OF 5

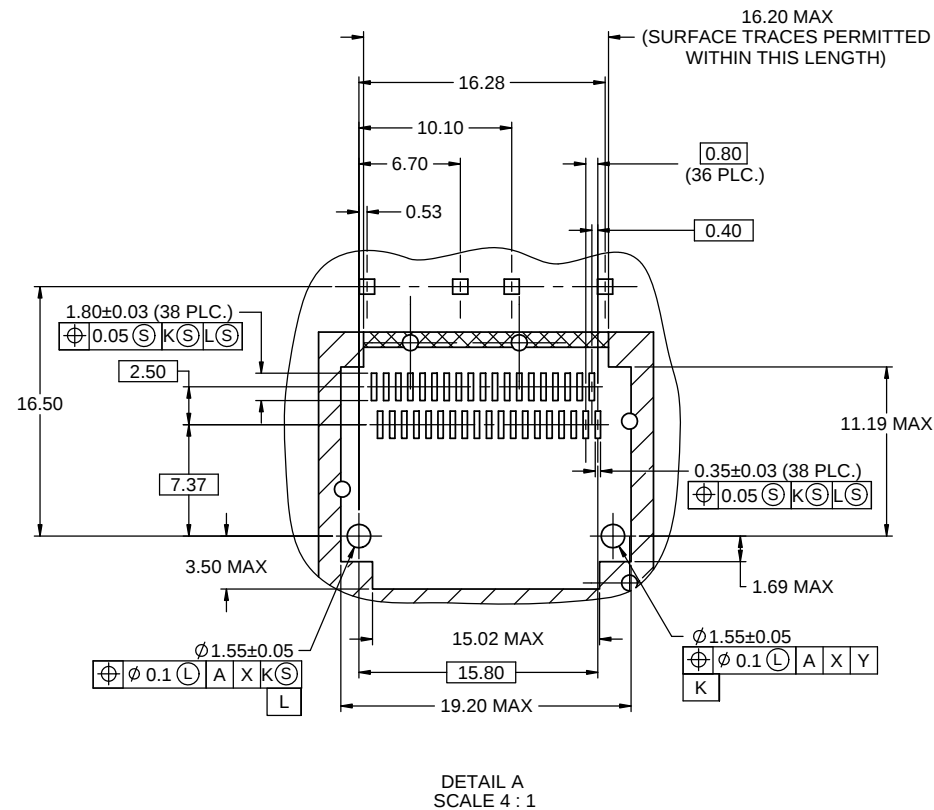
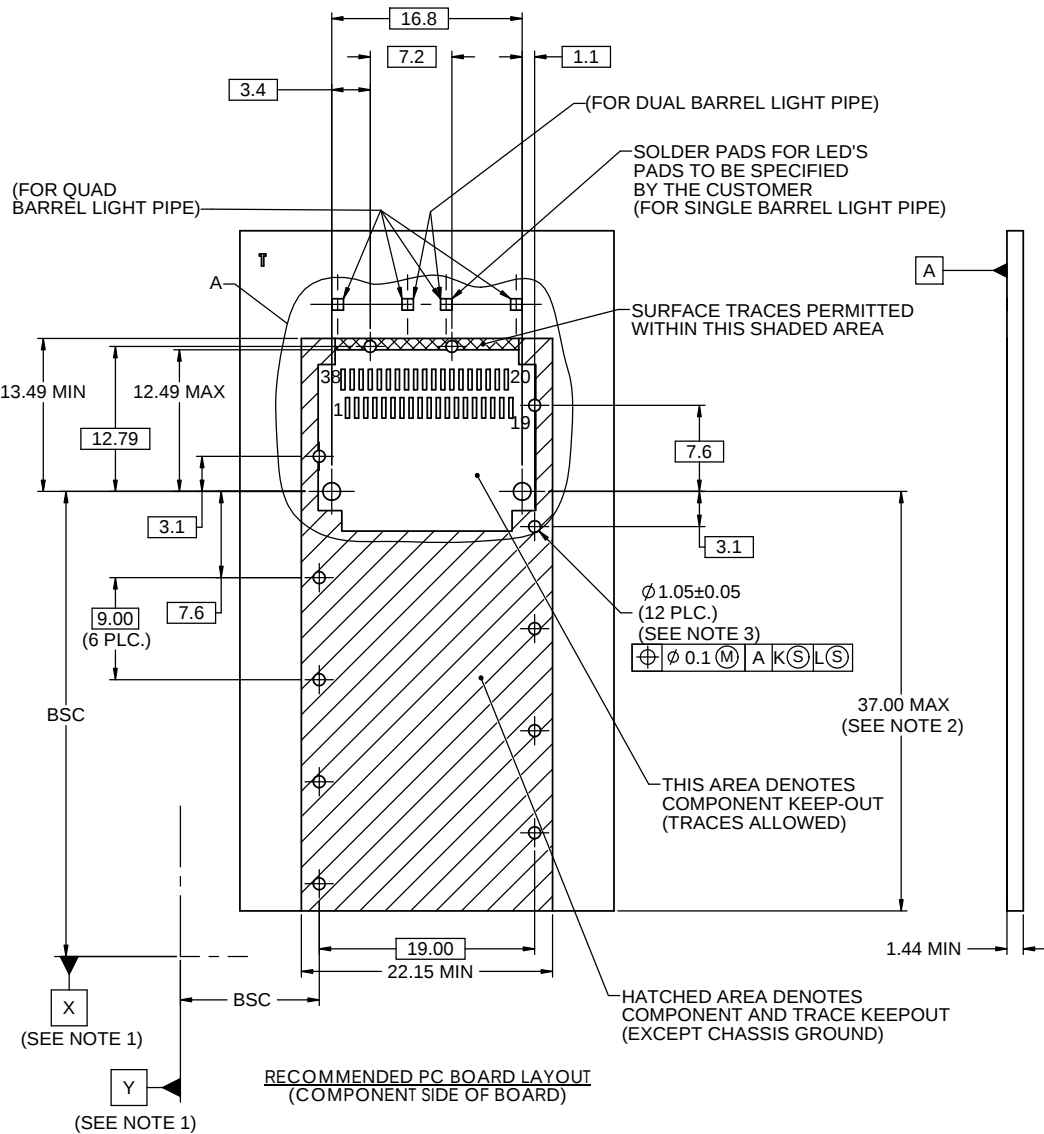


NOTES:

- DATUMS X AND Y ESTABLISHED BY CUSTOMER'S FIDUCIAL.
- LOCATION OF EDGE OF PCB IS APPLICATION SPECIFIC.
- FINISHED HOLE SIZE.

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.







UNLESS SPECIFIED OTHERWISE		DRAWN	A.C.	JUL5/13	Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com	
UNIT	MILLIMETERS	CHECKED	ZLJ	JUL5/13		
REFERENCE IN PARENTHESES		M.E. APP'D				
GENERAL TOLERANCES		Q.A. APP'D			UltraPort QSFP 1X1 CAGE ASSEMBLY THRU BEZEL TWO REAR PIN WITH HEAT SINK AND LIGHT PIPE OPTIONS	
1 DECIMAL PLACE	±0.2	DWG APP'D	ZLJ	JUL5/13		
2 DECIMAL PLACES	±0.15	ENG. REL. NO.				
ANGULAR DEGREES	±1°	REF.			DWG. NO.	REV
		THIRD ANGLE PROJECTION			P-U95-T1X1-1XXX	K
		DO NOT SCALE DRAWING			CODE ID NO. 03554	DWG SIZE: C
					SCALE: 3:1	SHEET 3 OF 5

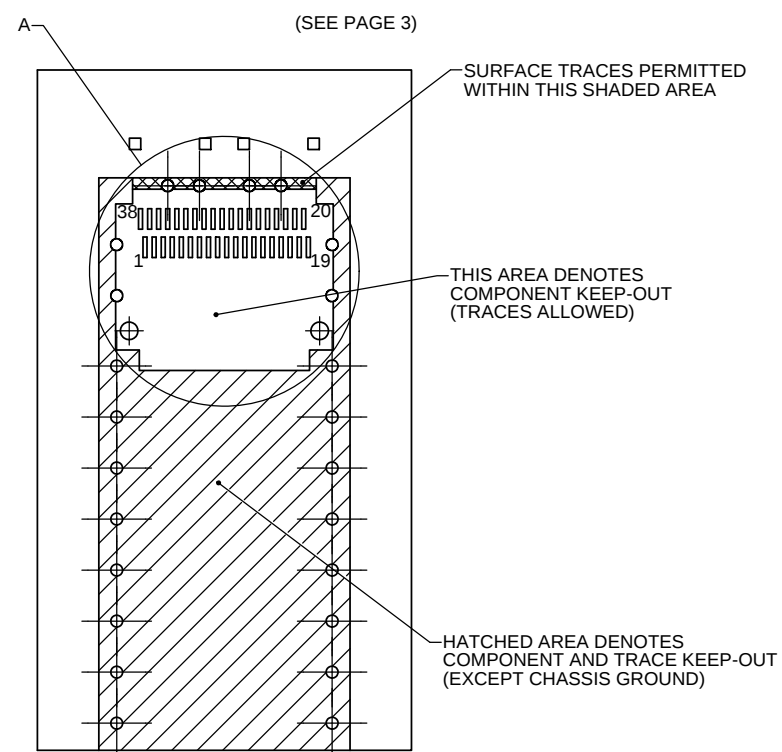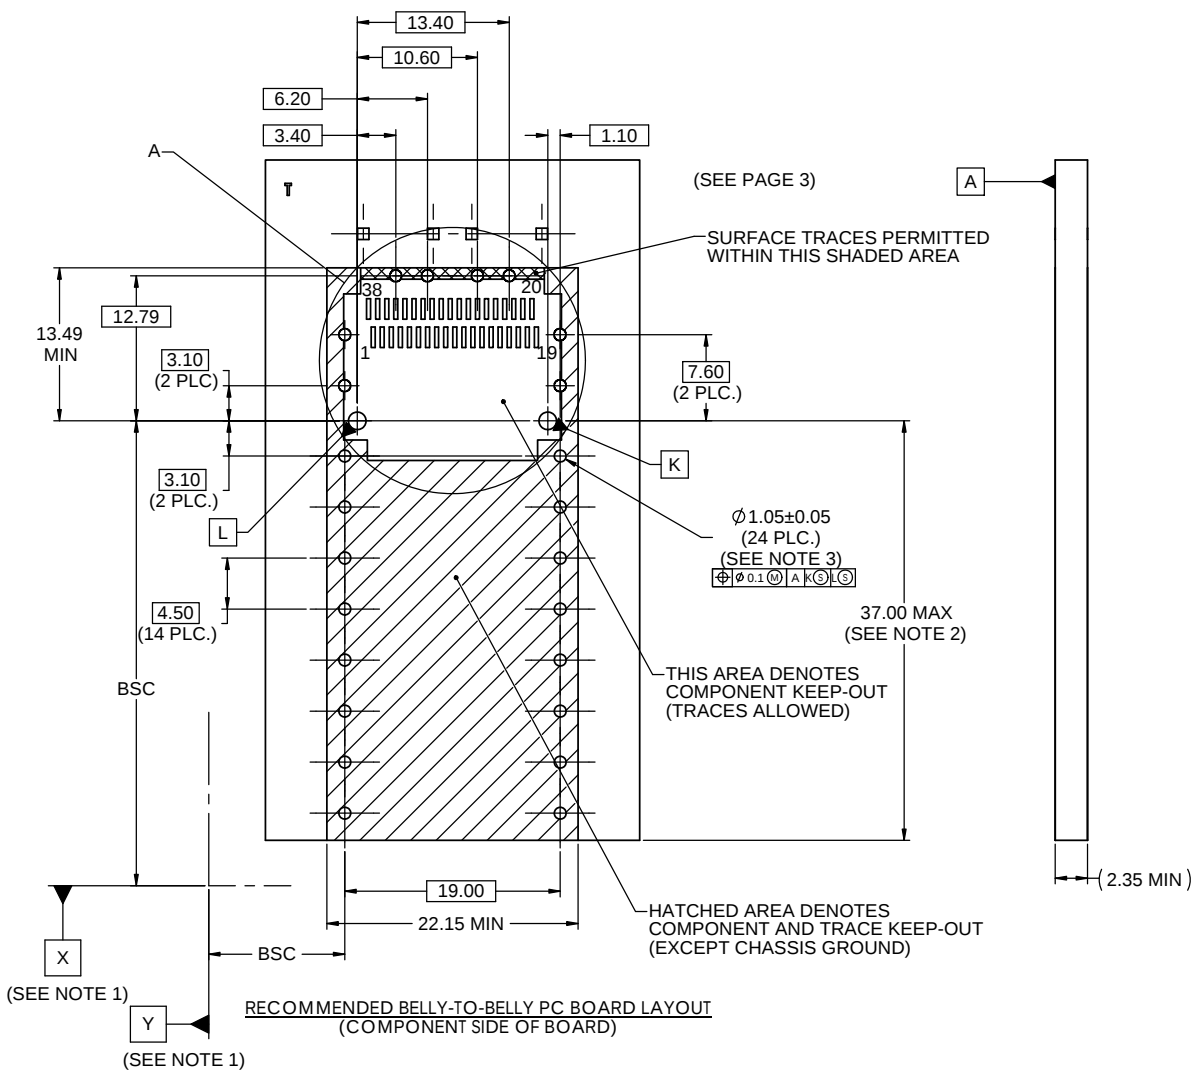

- NOTES:
- DATUMS X AND Y ESTABLISHED BY CUSTOMER'S FIDUCIAL.
 - LOCATION OF EDGE OF PCB IS APPLICATION SPECIFIC.
 - FINISHED HOLE SIZE.

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE		DRAWN	A.C.	JUL5/13	Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com		
UNIT	MILLIMETERS	CHECKED	ZLJ	JUL5/13			
REFERENCE IN PARENTHESES		M.E. APP'D			UltraPort QSFP 1X1 CAGE ASSEMBLY THRU BEZEL TWO REAR PIN WITH HEAT SINK AND LIGHT PIPE OPTIONS		
GENERAL TOLERANCES		Q.A. APP'D					
1 DECIMAL PLACE	±0.2	DWG APP'D	ZLJ	JUL5/13	DWG. NO. P-U95-T1X1-1XXX		
2 DECIMAL PLACES	±0.15	ENG. REL. NO.					
ANGULAR DEGREES		REF.			CODE ID NO. 03554 DWG SIZE: C SCALE: 3:1 SHEET 4 OF 5		
		THIRD ANGLE PROJECTION					
		DO NOT SCALE DRAWING			REV K		

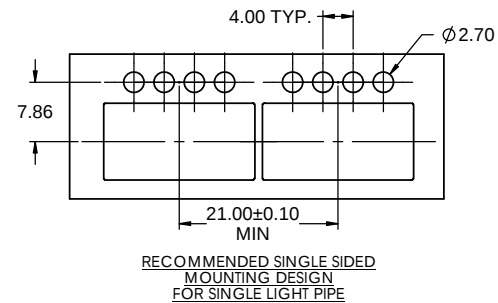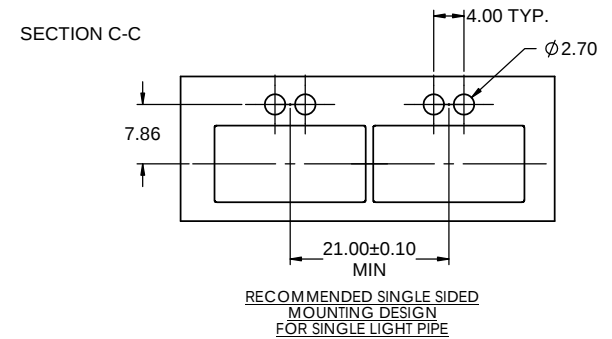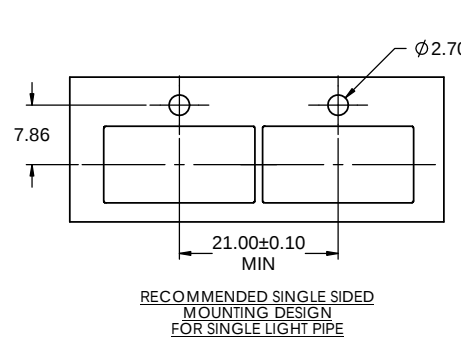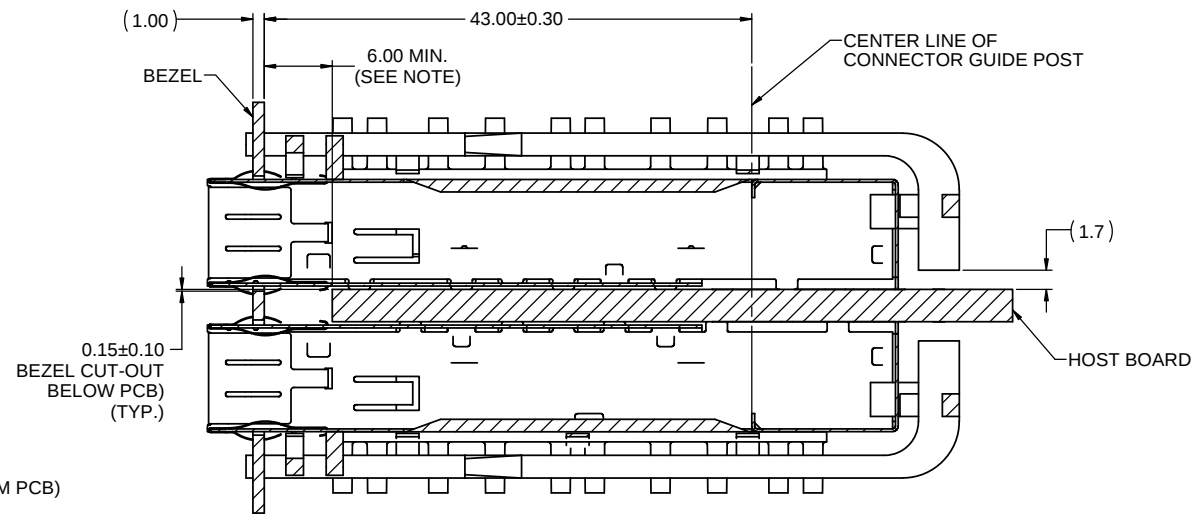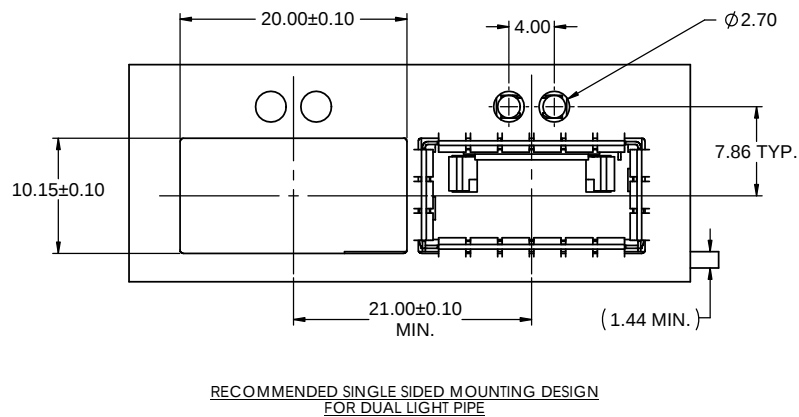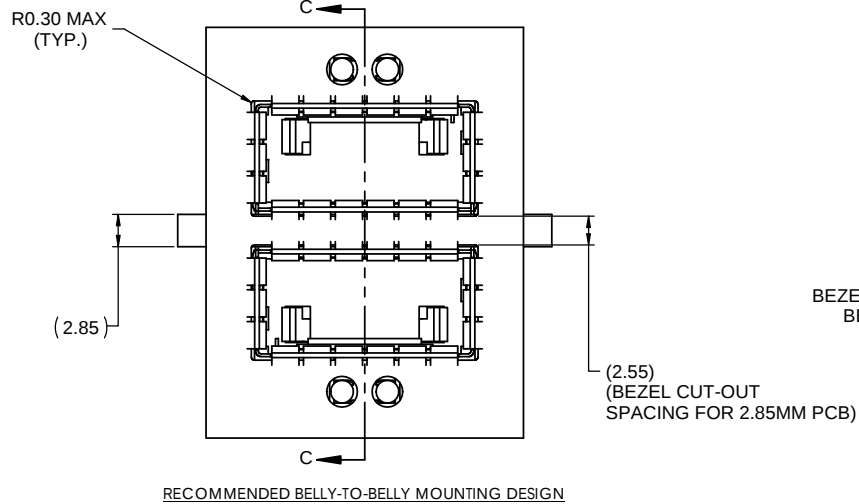

NOTES:

LOCATION OF EDGE OF PCB IS APPLICATION SPECIFIC.

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE		DRAWN	A.C.	JUL5/13	Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com	
UNIT	MILLIMETERS	CHECKED	ZLJ	JUL5/13		
REFERENCE IN PARENTHESES		M.E. APP'D				
		Q.A. APP'D				
GENERAL TOLERANCES		DWG APP'D	ZLJ	JUL5/13	UltraPort QSFP 1X1 CAGE ASSEMBLY THRU BEZEL TWO REAR PIN WITH HEAT SINK AND LIGHT PIPE OPTIONS	
1 DECIMAL PLACE	±0.2	ENG. REL. NO.				
2 DECIMAL PLACES	±0.15	REF.				
ANGULAR DEGREES	±1°	THIRD ANGLE PROJECTION				
					DWG. NO.	REV
					P-U95-T1X1-1XXX	K
					CODE ID NO. 03554	DWG SIZE: C
					SCALE: 3:1	SHEET 5 OF 5

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9