

## Precision Thermostats



### DESCRIPTION

Thermostats can provide either temperature control or over-temperature protection by breaking electrical contact when a specified temperature is reached.

Honeywell manufactures a wide range of thermostats for a variety of potential applications:

- Non-hermetic and hermetically-sealed versions designed to serve infotech, transportation, telecom, industrial, aircraft, medical equipment, radar, communications and electronic control systems needs.
- High reliability military and aerospace versions that meet the unique needs of the military, aerospace and aviation industries.

Honeywell can also integrate these thermostats in higher value cable assemblies, incorporating wire harness and connectors.

Also available are a selection of pre-configured REDI-TEMP Thermostats.

### Table of Contents

|                                                            |              |
|------------------------------------------------------------|--------------|
| <b>DESCRIPTION</b>                                         | <b>p. 1</b>  |
| <b>NOMENCLATURE</b>                                        | <b>p. 2</b>  |
| <b>DEFINITION OF TERMS</b>                                 | <b>p. 3</b>  |
| <b>NOTES</b>                                               |              |
| <b>PRECISION THERMOSTATS</b>                               |              |
| 3600/3601 Series TO-5 Thermal Switches                     | <b>p. 4</b>  |
| 3001/3004 Series Non-Hermetic                              | <b>p. 6</b>  |
| 3150 Series Low Profile Hermetic                           | <b>p. 8</b>  |
| 3156 Series Low Level/Low Profile Hermetic                 | <b>p. 10</b> |
| 3100 Series Hermetic                                       | <b>p. 12</b> |
| 3106 Series Low Level Hermetic                             | <b>p. 14</b> |
| 3800 Series Industrial Grade for Severe Duty               | <b>p. 16</b> |
| 3000 Series Custom (345X Series Internal)                  | <b>p. 18</b> |
| <b>HIGH RELIABILITY MILITARY AND AEROSPACE THERMOSTATS</b> |              |
| 3153 Series Low Profile                                    | <b>p. 21</b> |
| 3500 Series Military                                       | <b>p. 22</b> |
| 3000 Series Custom (3500 Series/Other Internal)            | <b>p. 24</b> |
| 3MS1 QPL Series Military                                   | <b>p. 25</b> |
| 3200 Series High Reliability                               | <b>p. 27</b> |
| <b>MOUNTING HARDWARE</b>                                   | <b>p. 29</b> |
| Brackets, studs and terminations                           |              |
| <b>REDI-TEMP THERMOSTATS</b>                               |              |
| 3100U REDI-TEMP Series                                     | <b>p. 34</b> |
| 3600/3601 REDI-TEMP Series                                 | <b>p. 35</b> |

# Precision Thermostats

## NOMENCLATURE

The nomenclature given in Figures 1 and 2 is provided for reference only.

Figure 1. Precision Thermostat Nomenclature


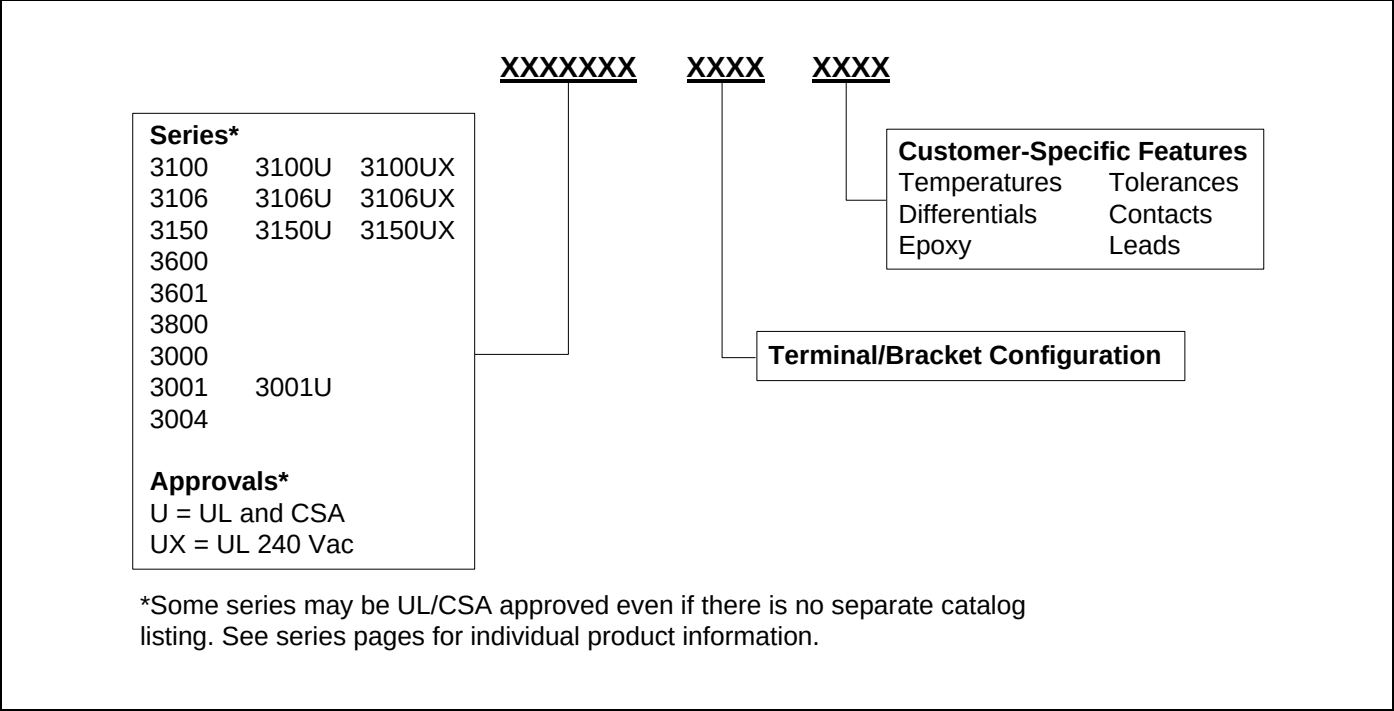


Figure 2. High Reliability Military and Aerospace Thermostat Nomenclature

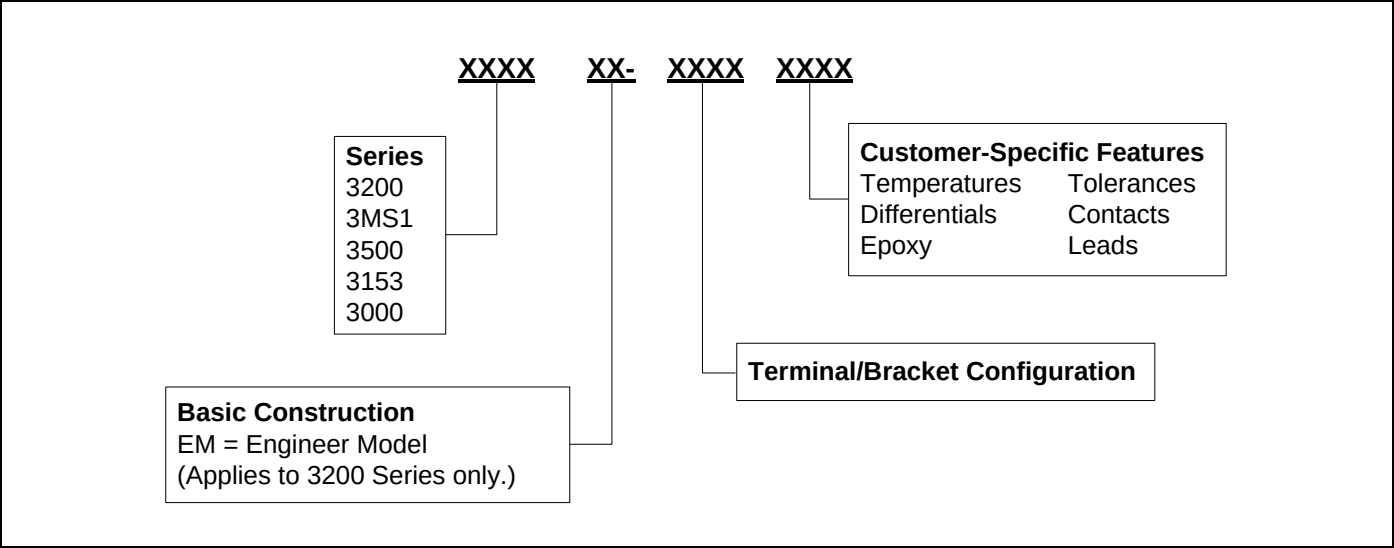

## DEFINITION OF TERMS

- **Automatic Reset:** A type of thermostat that will automatically reset at a specific temperature (i.e. a thermostat operates at 65,5 °C [150 °F] and resets at 48,89 °C [120 °F]).
- **Bimetal:** Two dissimilar metals bonded together to form the material for manufacturing thermally-sensitive discs which actuate the thermostat.
- **Close on Rise (COR):** Refers to operation of the contacts. When the temperature rises to its set point, the contacts close or make contact and complete the circuit.
- **Contact Resistance:** The value of resistance measured between the terminals.
- **Dielectric Strength:** The value of insulation between two electrically conducting parts. It may be tested by the application of a predetermined overvoltage for a specified time.
- **Differential:** The temperature difference between the operate and reset set points, also known as operate and reset.
  - **Nominal:** The temperature difference between nominal set points regardless of tolerance.
  - **Maximum:** The temperature difference between the operate and reset points.
  - **Minimum:** Minimum number of degrees between actual open and closing set points.
- **Exposure Temperature:** Thermal environment of a device during application operation.
- **FLA (Full Load Amps):** Current taken from the line by the motor when the motor is yielding the rated hp at the rated voltage and frequency.
- **Life Cycles:** The endurance rating of the thermostat expressed in number of operations with stated electrical load applied. Temperature limit application = open or rise.
- **LRA (Locked Rotor Amps):** The amount of current the motor can be expected to draw under starting conditions when full voltage is applied, also known as starting inrush current.
- **Manual Reset:** A bimetal thermostat with a reset button that must be pressed to reset the contacts.
- **Open on Rise (OOR):** Refers to the operation of contacts. When the temperature rises to its set point the contacts open, terminating the circuit.
- **Overmold:** Encapsulation with an insulating material.
- **Phenolic:** Thermoset plastic used for the insulating body of the thermostat.
- **Set Point:** The nominal temperature at which the thermostat operates.
- **SPST (Single Pole/Single Throw):** A switch with one current path which can be either open or closed.
- **Tolerance:** The allowable range above and below the set point temperature.
- **Operate:** Change of state when the thermostat reaches its set point.
- **Reset:** Change of state when the thermostat returns to its original condition prior to operation.

## NOTES

- **Standard Temperature Characteristics Tables:**
  - **Temperatures:** Please consult applications engineering for temperature ranges, tolerances and differentials not noted. The operating temperature ranges include tolerances.
  - **Tolerances:** The  $\pm$  tolerances given have been established after review of many thermostat applications. Attempts should be made to establish the widest acceptable tolerance possible.
- **UL and CSA Approvals:** 12,7 mm [0.5 in] thermostats are available with multiple agency approval for incorporation into equipment.
- **Fan control applications:** Require thermostat set points to be derated by 20 °C from the equivalent temperature limit application. They also close on rise.

# Precision Thermostats

Figure 3. 3600/3601 Series TO-5 Thermal Switches

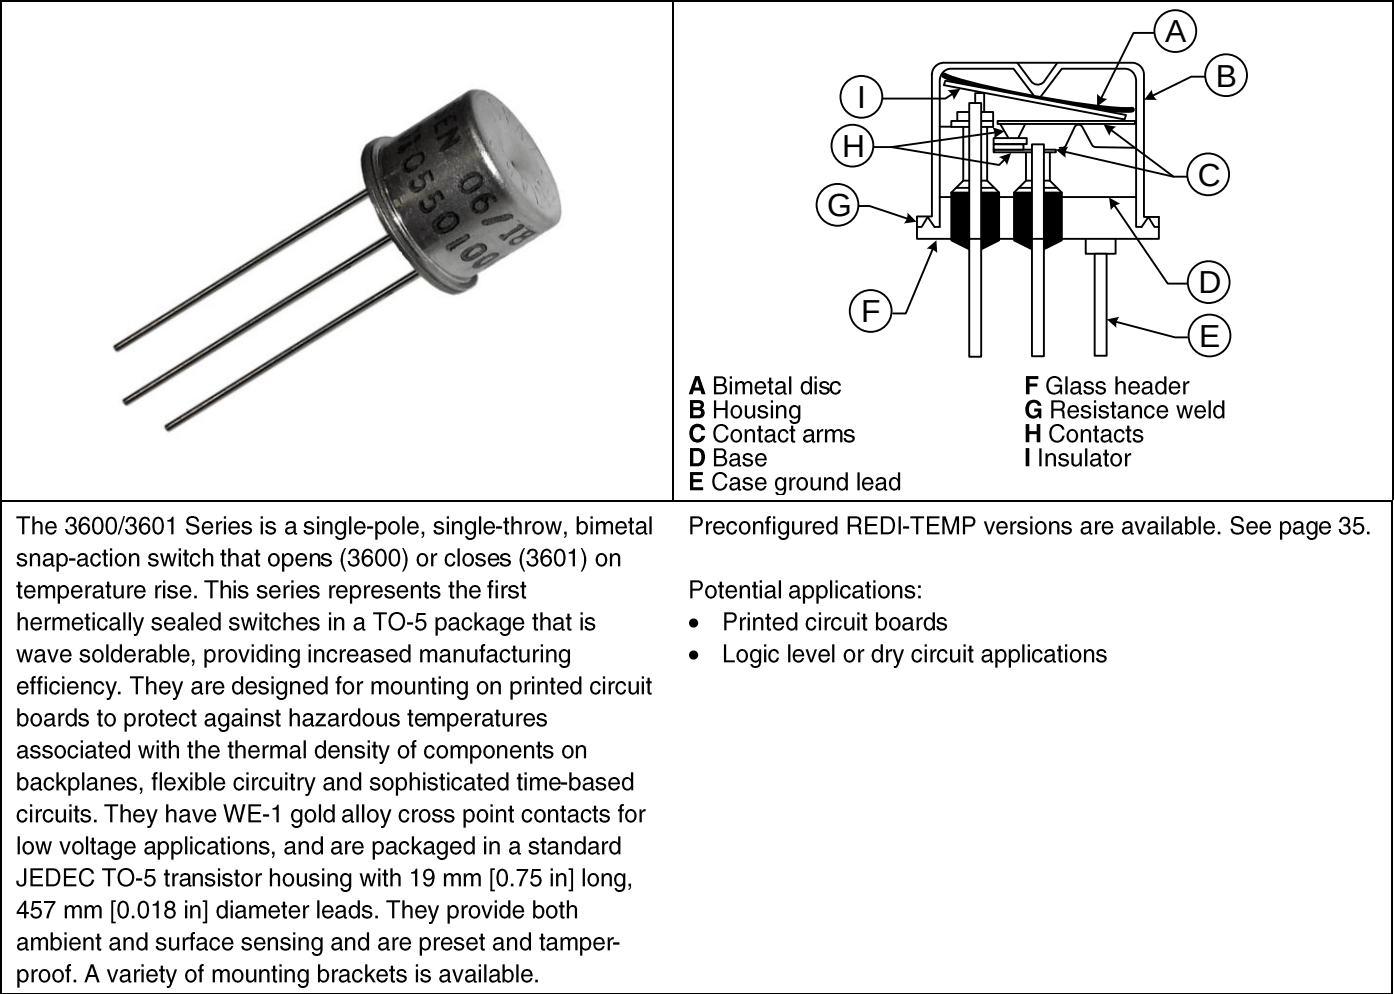


Table 1. 3600/3601 Series Standard Temperature Characteristics\*

| Series | Operating Temperature Range        | Contact Action | Set Point Tolerance |
|--------|------------------------------------|----------------|---------------------|
| 3600   | 40 °C to 120 °C [104 °F to 248 °F] | open on rise   | ±5 °C [±8 °F]       |
| 3601   | 40 °C to 120 °C [104 °F to 248 °F] | close on rise  | ±7 °C [±12.6 °F]    |

\*Operating temperatures are available in 5 °C [8 °F] increments between 40 °C to 120 °C [104 °F to 248 °F].

**Table 2. 3600/3601 Series Specifications**

| Characteristic               | Parameter                                                               |
|------------------------------|-------------------------------------------------------------------------|
| Switch type                  | SPST                                                                    |
| Reset type                   | automatic                                                               |
| Amperage                     | 1 A resistive                                                           |
| Voltage                      | 28 Vdc/ac                                                               |
| Operating temperature range  | 40 °C to 120 °C [104 °F to 248 °F]                                      |
| Environmental exposure range | -50 °C to 150 °C [-58 °F to 302 °F]                                     |
| Dielectric strength          | MIL-STD-202 Method 301 – 500 Vac 60 Hz for one second, terminal to case |
| Insulation resistance        | MIL-STD-202 Method 302 Cond. B – 20 MOhm, 500 Vdc                       |
| Contact resistance           | MIL-STD-202 Method 307 – 60 mOhm                                        |
| Hermetic seal                | MIL-STD-202 Method 112 Cond. 1x10 <sup>3</sup> Atm cc/sec               |
| Material:                    |                                                                         |
| Base                         | nickel                                                                  |
| Contacts                     | WE-1 gold alloy cross point                                             |
| Terminals                    | nickel/iron alloy allow, copper core                                    |
| Closure                      | hermetically sealed                                                     |
| Brackets                     | phosphor bronze                                                         |
| Marking                      | MIL-STD-1285                                                            |
| Weight                       | 1,6 g [0.06 oz] (brackets and wire leads not included)                  |

**Table 3. 3600/3601 Series Contact Ratings**

| Life Cycles | 28 Vdc/ac | 5 Vdc/Vac |
|-------------|-----------|-----------|
| 10,000      | 1 A       | 5 mA      |

# Precision Thermostats

Figure 4. 3001/3004 Series Non-Hermetic Thermostats

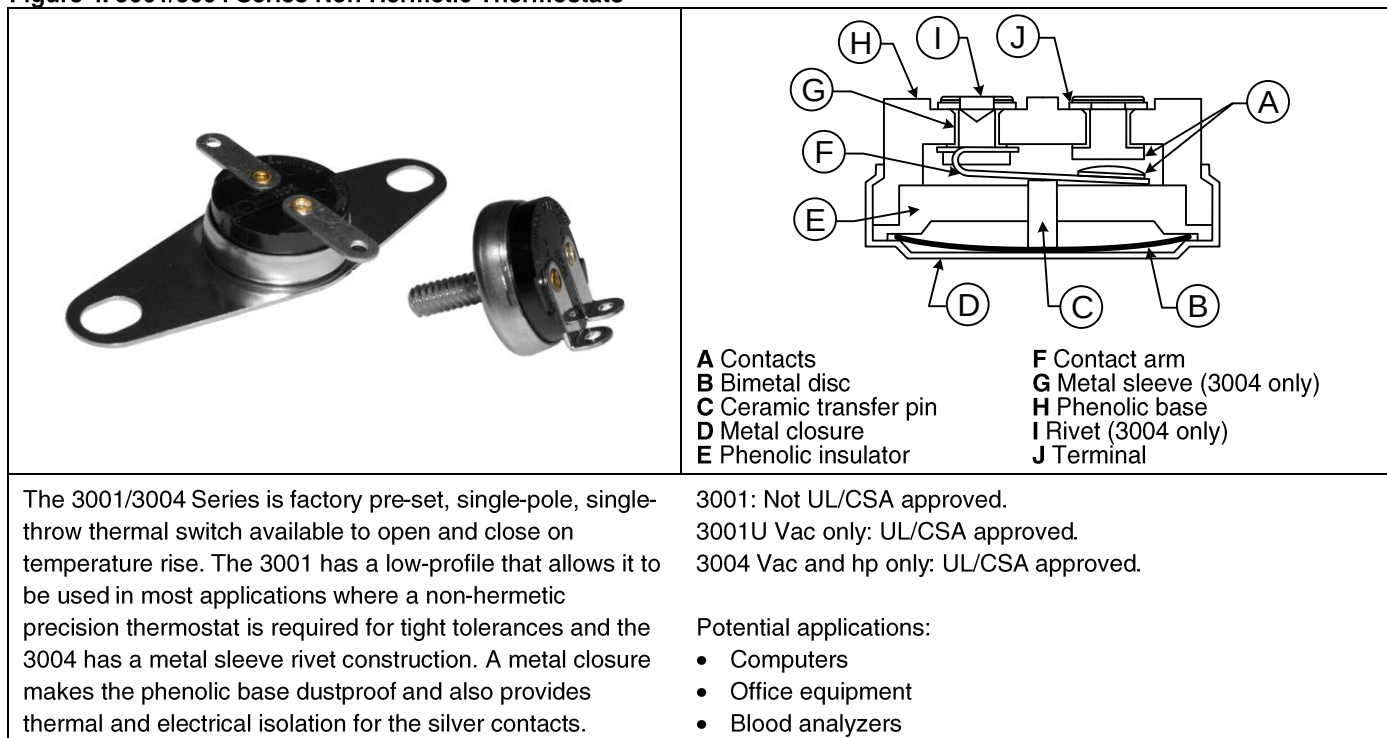


Table 4. 3001/3004 Series Standard Temperature Characteristics

| Operating Temperature Range                | Tolerance       |                  | Standard Mean Differential<br>°C [°F] | Optional Max. Differential<br>°C [°F] |
|--------------------------------------------|-----------------|------------------|---------------------------------------|---------------------------------------|
|                                            | Open<br>°C [°F] | Close<br>°C [°F] |                                       |                                       |
| -17,8 °C to 0 °C<br>[0 °F to 31 °F]        | ±3,9 [±7]       | ±5,0 [±9]        | 16,7 to 33,3 [30 to 60]               | -                                     |
|                                            | ±3,3 [±6]       | ±3,9 [±7]        | 8,3 to 16,1 [15 to 29]                | -                                     |
| 0 °C to 26,1 °C<br>[32 °F to 79 °F]        | ±3,3 [±6]       | ±4,4 [±8]        | 16,7 to 33,3 [30 to 60]               | -                                     |
|                                            | ±2,8 [±5]       | ±3,9 [±7]        | 8,3 to 16,1 [15 to 29]                | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 7,8 [10 to 14]                 | -                                     |
| 26,7 °C to 93,3 °C<br>[80 °F to 200 °F]    | ±2,8 [±5]       | ±3,9 [±7]        | 16,7 to 33,3 [30 to 60]               | -                                     |
|                                            | ±2,8 [±5]       | ±3,3 [±6]        | 8,3 to 16,1 [15 to 29]                | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 7,8 [10 to 14]                 | -                                     |
|                                            | ±2,8 [±5]       | -                | -                                     | 5,6 [10]                              |
|                                            | -               | ±2,8 [±5]        | -                                     | 5,6 [10]                              |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
| 93,9 °C to 148,9 °C<br>[201 °F to 300 °F]  | ±3,9 [±7]       | ±4,4 [±8]        | 16,7 to 44,4 [30 to 80]               | -                                     |
|                                            | ±3,9 [±7]       | ±3,9 [±7]        | 13,9 to 16,1 [25 to 29]               | -                                     |
|                                            | ±3,3 [±6]       | ±3,9 [±7]        | 11,1 to 13,3 [20 to 24]               | -                                     |
|                                            | ±3,9 [±7]       | -                | -                                     | 8,3 [15]                              |
|                                            | -               | ±3,9 [±7]        | -                                     | 8,3 [15]                              |
|                                            | ±3,3 [±6]       | -                | -                                     | 6,7 [12]                              |
|                                            | -               | ±3,3 [±6]        | -                                     | 6,7 [12]                              |
| 149,4 °C to 168,3 °C<br>[301 °F to 335 °F] | ±5,6 [±10]      | ±6,7 [±12]       | 22,2 to 44,5 [40 to 80]               | -                                     |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 19,5 to 21,7 [35 to 39]               | -                                     |
|                                            | ±4,4 [±8]       | ±5,6 [±10]       | 13,9 to 16,1 [30 to 34]               | -                                     |
|                                            | ±5,6 [±10]      | -                | -                                     | 11,1 [20]                             |
|                                            | -               | ±5,6 [±10]       | -                                     | 11,1 [20]                             |
|                                            | ±4,4 [±8]       | -                | -                                     | 10,0 [18]                             |
|                                            | -               | ±4,4 [±8]        | -                                     | 10,0 [18]                             |

Table 5. 3001/3004 Series Specifications

| Characteristic               | Parameter                                                                                                  |
|------------------------------|------------------------------------------------------------------------------------------------------------|
| Switch type                  | SPST                                                                                                       |
| Reset type                   | automatic                                                                                                  |
| Amperage                     | see Tables 6, 7, 8                                                                                         |
| Voltage                      | 120 Vac                                                                                                    |
| Operating temperature range  | -17,8 °C to 150 °C [0 °F to 302 °F]                                                                        |
| Environmental exposure range | -17,8 °C to 177 °C [0 °F to 350 °F]                                                                        |
| Dielectric strength          | MIL-STD-202 Method 301<br>3001: 1500 Vac 60 Hz, terminal to case<br>3004: 2000 Vac 60 Hz, terminal to case |
| Insulation resistance        | MIL-STD-202 Method 302 Cond. B – 500 MOhm, 500 Vdc applied                                                 |
| Contact resistance           | MIL-STD-202 Method 307 – 50 mOhm                                                                           |
| Material:                    |                                                                                                            |
| Base                         | phenolic                                                                                                   |
| Contacts                     | silver alloy                                                                                               |
| Terminals                    | plated brass or steel                                                                                      |
| Closure                      | aluminum, stainless steel or brass                                                                         |
| Brackets                     | stainless steel or brass                                                                                   |
| Approvals                    | UL File E36103, CSA File LR21048                                                                           |
| Weight                       | 4 g [0.14 oz] (brackets and wire leads not included)                                                       |

Table 6. 3001 Contact Ratings

| Life Cycles | 30 Vac/dc | 120 Vac | 240 Vac |
|-------------|-----------|---------|---------|
| 5,000       | 7 A       | 6 A     | 3 A     |
| 10,000      | 6.5 A     | 5 A     | 2.5 A   |
| 25,000      | 6 A       | 4 A     | 2 A     |
| 50,000      | 5.5 A     | 3.3 A   | 1.5 A   |
| 100,000     | 5 A       | 2 A     | 1 A     |

Table 7. 3001U Contact Ratings

| Life Cycles | 120 Vac | 240 Vac | 250 Vac |
|-------------|---------|---------|---------|
| 6,000       | 6 A     | 1.5 A   | 1.5 A   |
| 6,000       | 1/10 hp | -       | -       |
| 100,000     | 3 A     | -       | -       |

Table 8. 3004 Contact Ratings

| Life Cycles | 120 Vac | 250 Vac |
|-------------|---------|---------|
| 6,000       | 8 A     | 1.5 A   |
| 6,000       | 1/10 hp | -       |
| 100,000     | 4.0 A   | -       |

# Precision Thermostats

Figure 5. 3150 Series Low Profile Hermetic Thermostats

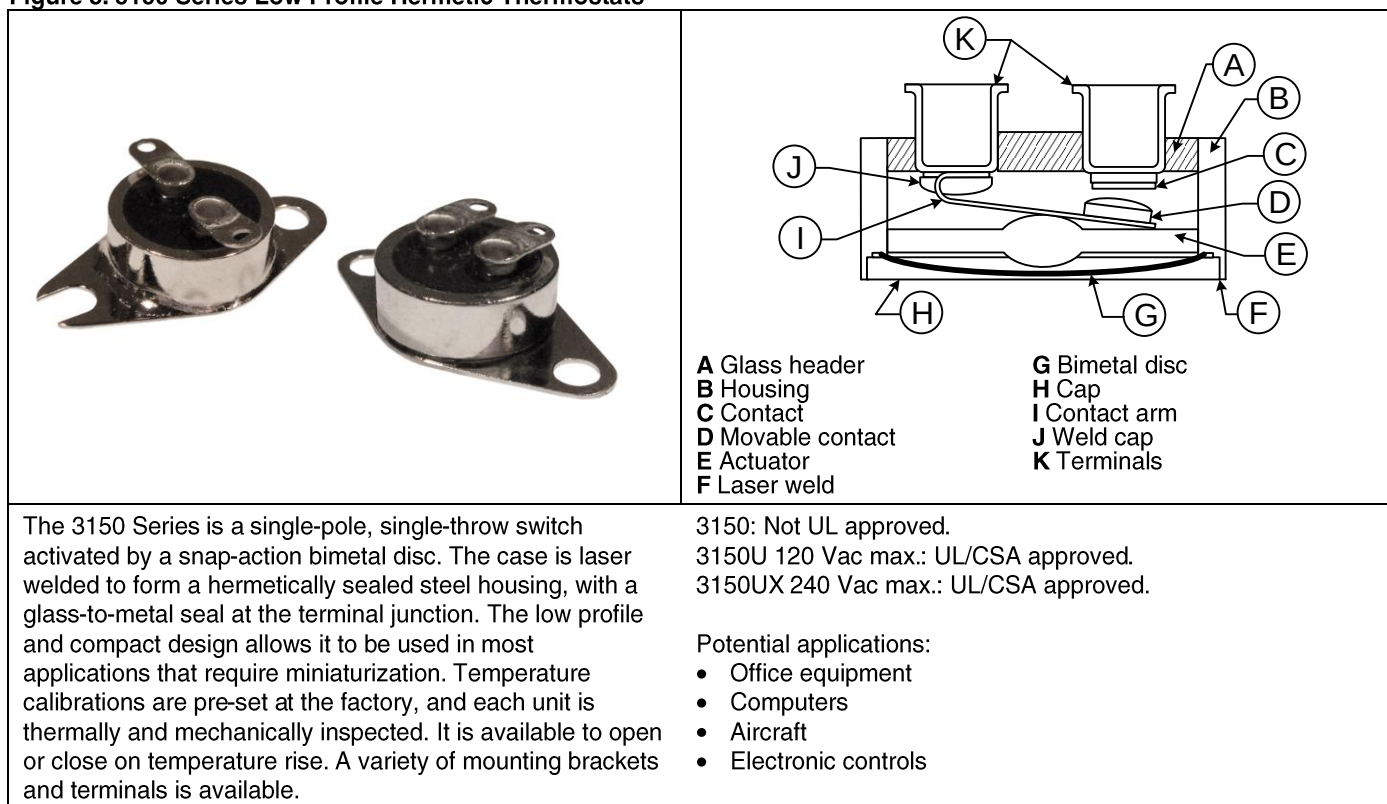


Table 9. 3150 Series Standard Temperature Characteristics

| Operating Temperature Range                | Tolerance       |                  | Standard Mean Differential<br>°C [°F] | Optional Max. Differential<br>°C [°F] |
|--------------------------------------------|-----------------|------------------|---------------------------------------|---------------------------------------|
|                                            | Open<br>°C [°F] | Close<br>°C [°F] |                                       |                                       |
| -28,89 °C to -12,2 °C<br>[-20 °F to 10 °F] | ±5,6 [±10]      | ±4,4 [±8]        | 16,7 to 22,2 [30 to 40]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 16,1 [20 to 29]               | -                                     |
|                                            | ±3,9 [±7]       | ±3,9 [±7]        | 7,8 to 10,6 [14 to 19]                | -                                     |
| -11,7 °C to 107,2 °C<br>[11 °F to 225 °F]  | ±2,8 [±5]       | ±2,8 [±5]        | 11,1 to 44,4 [20 to 80]               | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 8,3 to 10,6 [15 to 19]                | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 7,8 [10 to 14]                 | -                                     |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
|                                            | ±1,7 [±3]       | -                | -                                     | 3,3 [6]                               |
|                                            | -               | ±1,7 [±3]        | -                                     | 3,3 [6]                               |
| 107,8 °C to 148,9 °C<br>[226 °F to 300 °F] | ±4,4 [±8]       | ±3,3 [±6]        | 13,9 to 27,8 [25 to 50]               | -                                     |
|                                            | 5,6 [±7]        | ±3,3 [±6]        | 8,3 to 13,3 [15 to 34]                | -                                     |
|                                            | ±3,3 [±6]       | ±3,3 [±6]        | 6,7 to 7,8 [12 to 14]                 | -                                     |
|                                            | ±2,8 [±5]       | -                | -                                     | 6,7 [12]                              |
|                                            | -               | ±2,8 [±5]        | -                                     | 6,7 [12]                              |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
| 149,4 °C to 176,7 °C<br>[301 °F to 350 °F] | ±6,7 [±12]      | ±5,6 [±10]       | 19,5 to 27,8 [35 to 50]               | -                                     |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 13,9 to 18,9 [25 to 34]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 8,3 to 13,3 [15 to 24]                | -                                     |
|                                            | ±3,9 [±7]       | -                | -                                     | 8,3 [15]                              |
|                                            | -               | ±3,9 [±7]        | -                                     | 8,3 [15]                              |
|                                            | ±2,8 [±5]       | -                | -                                     | 5,6 [10]                              |
|                                            | -               | ±2,8 [±5]        | -                                     | 5,6 [10]                              |



Table 10. 3150 Series Specifications

| Characteristic               | Parameter                                                                                                                                                                                               |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switch type                  | SPST                                                                                                                                                                                                    |
| Reset type                   | automatic                                                                                                                                                                                               |
| Amperage                     | see Tables 11, 12, 13                                                                                                                                                                                   |
| Voltage                      | 120 Vac                                                                                                                                                                                                 |
| Operating temperature range  | -28,89 °C to 177 °C [-20 °F to 350 °F]                                                                                                                                                                  |
| Environmental exposure range | -54 °C to 260 °C [-65 °F to 500 °F]                                                                                                                                                                     |
| Dielectric strength          | 3150: MIL-STD-202 Method 301 – 750 Vac, 60 Hz terminal to case<br>3150U: MIL-STD-202 Method 301 – 1250 Vac, 60 Hz terminal to case<br>3150UX: MIL-STD-202 Method 301 – 1500 Vac, 60 Hz terminal to case |
| Insulation resistance        | MIL-STD-202 Method 302 Cond. B: 50 MOhm, 500 Vdc applied                                                                                                                                                |
| Contact resistance           | MIL-STD-202, Method 307: 50 mOhm                                                                                                                                                                        |
| Hermetic seal                | MIL-STD-202, Method 112 Cond. 1x10 <sup>5</sup> Atm cc/sec                                                                                                                                              |
| Moisture resistance          | MIL-STD-202, Method 106                                                                                                                                                                                 |
| Material:                    |                                                                                                                                                                                                         |
| Base                         | cold rolled plated steel                                                                                                                                                                                |
| Contacts                     | silver alloy                                                                                                                                                                                            |
| Terminals                    | nickel/iron alloy                                                                                                                                                                                       |
| Closure                      | hermetically sealed                                                                                                                                                                                     |
| Brackets                     | cold rolled plated steel                                                                                                                                                                                |
| Plating                      | copper/nickel QQ-N-290                                                                                                                                                                                  |
| Marking                      | MIL-STD-1285                                                                                                                                                                                            |
| Approvals                    | UL File E36103, CSA File LR21048                                                                                                                                                                        |
| Weight                       | 5,0 g [0.17 oz] (brackets and wire leads not included)                                                                                                                                                  |

Table 11. 3150 Contact Ratings

| Life Cycles | 30 Vac/dc | 120 Vac | 240 Vac |
|-------------|-----------|---------|---------|
| 5,000       | 6 A       | 6 A     | 1.5 A   |
| 10,000      | 4 A       | 4 A     | 1.25 A  |
| 25,000      | 3 A       | 3 A     | 1 A     |
| 50,000      | 2 A       | 2 A     | 1 A     |
| 100,000     | 2 A       | 2 A     | 1 A     |

Table 12. 3150U Contact Ratings

| Life Cycles | 24 Vdc | 120 Vac |
|-------------|--------|---------|
| 6,000       | –      | 6 A     |
| 6,000       | –      | 1/10 hp |
| 100,000     | 0.5 A  | 3 A     |

Table 13. 3150UX Contact Ratings

| Life Cycles | 240 Vac |
|-------------|---------|
| 6,000       | 1.5 A   |
| 100,000     | 0.25 A  |

# Precision Thermostats

Figure 6. 3156 Series Low Level/Low Profile Hermetic Thermostats

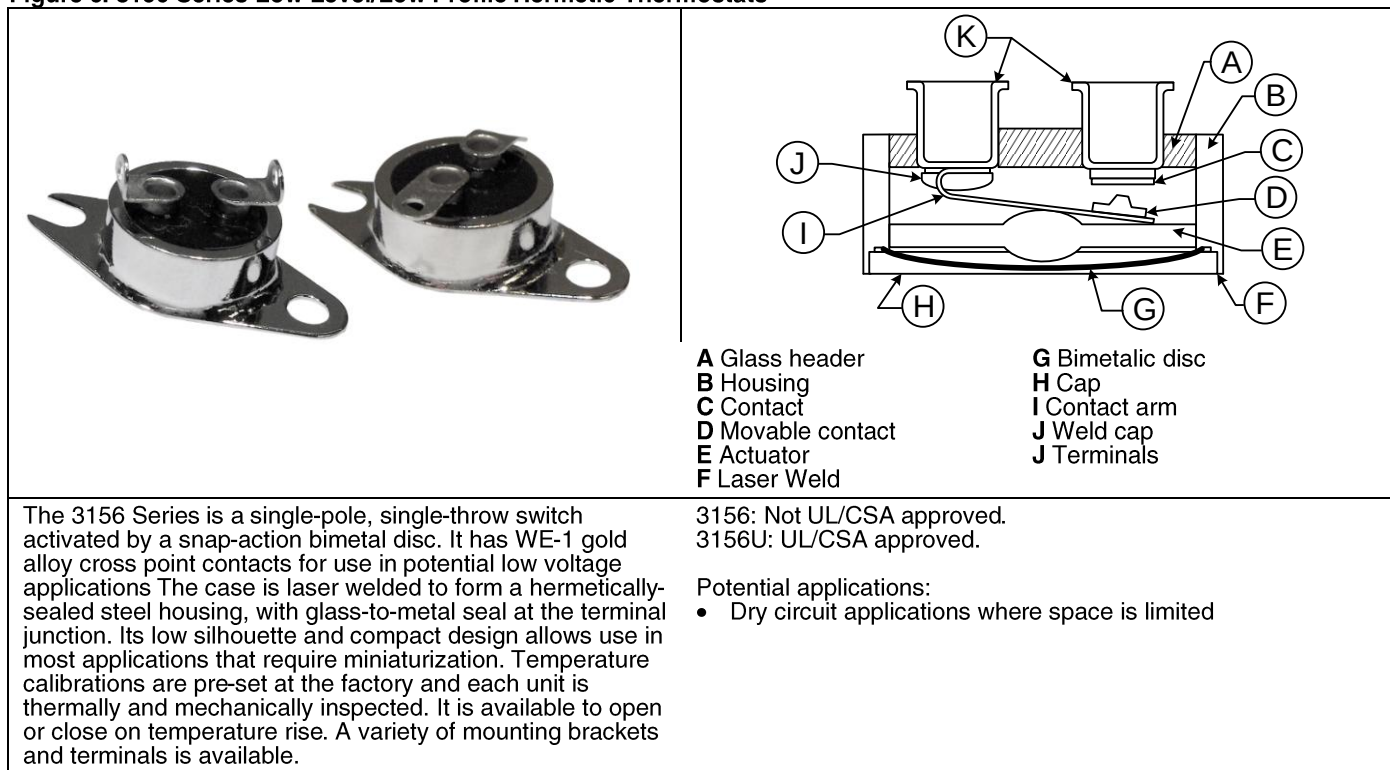


Table 14. 3156 Series Standard Temperature Characteristics

| Operating Temperature Range                | Tolerance       |                  | Standard Mean Differential<br>°C [°F] | Optional Max. Differential<br>°C [°F] |
|--------------------------------------------|-----------------|------------------|---------------------------------------|---------------------------------------|
|                                            | Open<br>°C [°F] | Close<br>°C [°F] |                                       |                                       |
| -28,89 °C to -12,2 °C<br>[-20 °F to 10 °F] | ±5,6 [±10]      | ±4,4 [±8]        | 16,7 to 22,2 [30 to 40]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 16,1 [20 to 29]               | -                                     |
|                                            | ±3,9 [±7]       | ±3,9 [±7]        | 7,8 to 10,6 [14 to 19]                | -                                     |
| -11,7 °C to 107,2 °C<br>[11 °F to 225 °F]  | ±2,8 [±5]       | ±2,8 [±5]        | 11,1 to 44,4 [20 to 80]               | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 8,3 to 10,6 [15 to 19]                | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 7,8 [10 to 14]                 | -                                     |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
|                                            | ±1,7 [±3]       | -                | -                                     | 3,3 [6]                               |
|                                            | -               | ±1,7 [±3]        | -                                     | 3,3 [6]                               |
| 107,8 °C to 148,9 °C<br>[226 °F to 300 °F] | ±4,4 [±8]       | ±3,3 [±6]        | 13,9 to 44,4 [25 to 80]               | -                                     |
|                                            | ±3,9 [±7]       | ±3,3 [±6]        | 8,3 to 13,3 [15 to 24]                | -                                     |
|                                            | 3,3 [±6]        | ±3,3 [±6]        | 6,7 to 7,8 [12 to 14]                 | -                                     |
|                                            | ±2,8 [±5]       | -                | -                                     | 6,7 [12]                              |
|                                            | -               | ±2,8 [±5]        | -                                     | 6,7 [12]                              |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
| 149,4 °C to 176,7 °C<br>[301 °F to 350 °F] | ±6,7 [±12]      | ±5,6 [±10]       | 19,5 to 27,8 [35 to 50]               | -                                     |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 13,9 to 18,9 [25 to 34]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 8,3 to 13,3 [15 to 24]                | -                                     |
|                                            | ±3,9 [±7]       | -                | -                                     | 8,3 [15]                              |
|                                            | -               | ±3,9 [±7]        | -                                     | 8,3 [15]                              |
|                                            | ±2,8 [±5]       | -                | -                                     | 5,6 [10]                              |
|                                            | -               | ±2,8 [±5]        | -                                     | 5,6 [10]                              |

Table 15. 3156 Series Specifications

| Characteristic               | Parameter                                                                                                                          |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Switch type                  | SPST                                                                                                                               |
| Reset type                   | automatic                                                                                                                          |
| Amperage                     | 500 mA                                                                                                                             |
| Voltage                      | 50 Vdc                                                                                                                             |
| Operating temperature range  | -28,89 °C to 177 °C [-20 °F to 350 °F]                                                                                             |
| Environmental exposure range | -54 °C to 260 °C [-65 °F to 500 °F]                                                                                                |
| Dielectric strength          | 3156: MIL-STD-202 Method 301 – 750 Vac, 60 Hz terminal to case<br>3156U: MIL-STD-202 Method 301 – 1250 Vac, 60 Hz terminal to case |
| Insulation resistance        | MIL-STD-202 Method 302 Cond. B – 50 MOhm, 500 Vdc applied                                                                          |
| Contact resistance           | MIL-STD-202, Method 307 – 50 mOhm                                                                                                  |
| Hermetic seal                | MIL-STD-202, Method 112 Cond. 1x10 <sup>5</sup> Atm cc/sec                                                                         |
| Moisture resistance          | MIL-STD-202, Method 106                                                                                                            |
| Material:                    |                                                                                                                                    |
| Base                         | cold rolled plated steel                                                                                                           |
| Contacts                     | WE-1 gold alloy cross point                                                                                                        |
| Terminals                    | nickel/iron alloy                                                                                                                  |
| Closure                      | hermetically sealed                                                                                                                |
| Brackets                     | cold rolled plated steel                                                                                                           |
| Plating                      | copper/nickel QQ-N-290                                                                                                             |
| Marking                      | MIL-STD-1285                                                                                                                       |
| Approvals                    | UL File E36103, CSA File LR21048                                                                                                   |
| Weight                       | 5,0 g [0.17 oz] (brackets and wire leads not included)                                                                             |

Table 16. 3156 Series Contact Ratings

| Life Cycles | 50 Vdc | 120 Vac |
|-------------|--------|---------|
| 100,000     | 500 mA | 100 mA  |

# Precision Thermostats

Figure 7. 3100 Series Hermetic Thermostats

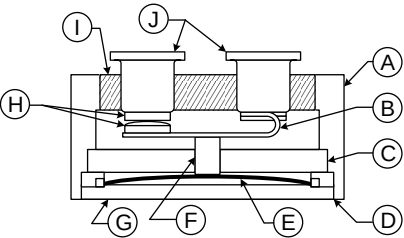
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  <p> <b>A</b> Housing<br/> <b>B</b> Contact arm<br/> <b>C</b> Ceramic insulator<br/> <b>D</b> Laser weld<br/> <b>E</b> Bimetal disc<br/> <b>F</b> Ceramic transfer pin<br/> <b>G</b> Cap<br/> <b>H</b> Contacts<br/> <b>I</b> Glass header<br/> <b>J</b> Terminals         </p> |
| <p>The 3100 Series is a single-pole, single-throw switch activated by a snap-action bimetal disc. The case is laser welded to form a hermetically-sealed steel housing, with a glass-to-metal seal at the terminal junction. Temperature calibrations are pre-set at the factory. Each unit is thermally and mechanically inspected and tamperproof. They are available to open or close on temperature rise. A variety of mounting brackets and terminals is available.</p> <p>Preconfigured REDI-TEMP versions are available. See page 34.</p> | <p>3100 120 Vac max.: Not UL/CSA approved.<br/>           3100U 240 V: UL/CSA approved.<br/>           3100UX: UL/CSA approved.</p> <p>Potential applications include high temperature control for:</p> <ul style="list-style-type: none"> <li>• Office equipment</li> <li>• Computers</li> <li>• Aircraft</li> <li>• Electronic controls</li> </ul>              |

Table 17. 3100 Series Standard Temperature Characteristics

| Operating Temperature Range                | Tolerance       |                  | Standard Mean Differential<br>°C [°F] | Optional Max. Differential<br>°C [°F] |
|--------------------------------------------|-----------------|------------------|---------------------------------------|---------------------------------------|
|                                            | Open<br>°C [°F] | Close<br>°C [°F] |                                       |                                       |
| -28,89 °C to -12,2 °C<br>[-20 °F to 10 °F] | ±5,6 [±10]      | ±4,4 [±8]        | 16,7 to 22, 2 [30 to 40]              | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 16,1 [20 to 29]               | -                                     |
|                                            | ±3,9 [±7]       | ±3,9 [±7]        | 7,8 to 10,6 [14 to 19]                | -                                     |
|                                            | ±3,3 [±6]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±3,3 [±6]        | -                                     | 4,4 [8]                               |
| -11,7 °C to 93,3 °C<br>[11 °F to 200 °F]   | ±2,8 [±5]       | ±2,8 [±5]        | 11,1 to 44,4 [20 to 80]               | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 8,3 to 10,6 [15 to 19]                | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 7,8 [10 to 14]                 | -                                     |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
|                                            | ±1,7 [±3]       | -                | -                                     | 3,3 [6]                               |
|                                            | -               | ±1,7 [±3]        | -                                     | 3,3 [6]                               |
| 93,9 °C to 148,9 °C<br>[201 °F to 300 °F]  | ±4,4 [±8]       | ±3,3 [±6]        | 13,9 to 44,4 [25 to 80]               | -                                     |
|                                            | ±3,9 [±7]       | ±3,3 [±6]        | 8,3 to 13,3 [15 to 24]                | -                                     |
|                                            | ±3,3 [±6]       | ±3,3 [±6]        | 6,7 to 7,8 [12 to 14]                 | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 7,8 [10 to 14]                 | -                                     |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
| 149,4 °C to 176,7 °C<br>[301 °F to 350 °F] | ±6,7 [±12]      | ±5,6 [±10]       | 19,4 to 44,4 [35 to 80]               | -                                     |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 13,9 to 18,9 [25 to 34]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 8,9 to 13,3 [16 to 24]                | -                                     |
|                                            | ±3,9 [±7]       | ±3,9 [±7]        | 7,8 to 10,0 [14 to 18]                | -                                     |
|                                            | ±2,8 [±5]       | -                | -                                     | 5,6 [10]                              |
|                                            | -               | ±2,8 [±5]        | -                                     | 5,6 [10]                              |
| 177,2 °C to 204,4 °C<br>[351 °F to 400 °F] | ±8,3 [±15]      | ±8,3 [±15]       | 22,2 to 55,6 [40 to 100]              | -                                     |
|                                            | ±8,3 [±15]      | ±6,7 [±12]       | 16,7 to 21,7 [30 to 39]               | -                                     |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 11,1 to 16,1 [20 to 29]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 8,9 to 10,6 [16 to 19]                | -                                     |
|                                            | ±3,3 [±6]       | -                | -                                     | 8,3 [15]                              |
| 205 °C to 232,20 °C<br>[401 °F to 450 °F]  | ±11,1 [±20]     | ±8,3 [±15]       | 22,2 to 55,6 [40 to 100]              | -                                     |
| 232,8 °C to 260 °C<br>[451 °F to 500 °F]   | ±13,9 [±25]     | ±13,9 [±25]      | 33,3 to 66,7 [60 to 120]              | -                                     |

Table 18. 3100 Series Specifications

| Characteristic               | Parameter                                                                                                                                      |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Switch type                  | SPST                                                                                                                                           |
| Reset type                   | automatic                                                                                                                                      |
| Amperage                     | see Tables 19, 20, 21                                                                                                                          |
| Voltage                      | 30 Vac/dc                                                                                                                                      |
| Operating temperature range  | -28,89 °C to 260 °C [-20 °F to 500 °F]                                                                                                         |
| Environmental exposure range | -62 °C to 288 °C [-80 °F to 550 °F]                                                                                                            |
| Dielectric strength          | 3100 and 3100U: MIL-STD-202 Method 301 – 1250 Vac, 60 Hz terminal to case<br>3100UX: MIL-STD-202 Method 301 – 1500 Vac, 60 Hz terminal to case |
| Insulation Resistance        | MIL-STD-202 Method 302 Cond. B – 50 MOhm, 500 Vdc applied                                                                                      |
| Contact Resistance           | MIL-STD-202, Method 307 – 50 mOhm                                                                                                              |
| Hermetic seal                | MIL-STD-202, Method 112 Cond. 1x10 <sup>5</sup> Atm cc/sec                                                                                     |
| Moisture resistance          | MIL-STD-202, Method 106                                                                                                                        |
| Material:                    |                                                                                                                                                |
| Base                         | cold rolled plated steel                                                                                                                       |
| Contacts                     | silver                                                                                                                                         |
| Terminals                    | nickel/iron alloy                                                                                                                              |
| Closure                      | hermetically sealed                                                                                                                            |
| Brackets                     | cold rolled plated steel                                                                                                                       |
| Plating                      | copper/nickel QQ-N-290                                                                                                                         |
| Marking                      | Mil-STD-1285                                                                                                                                   |
| Approvals                    | 3100U: UL File E36103; CSA File LR21048                                                                                                        |
| Weight                       | 5,5 g [0.19 oz] (brackets and wire leads not included)                                                                                         |

Table 19. 3100 Contact Ratings

| Life Cycles | 30 Vac/dc | 120 Vac | 240 Vac |
|-------------|-----------|---------|---------|
| 5,000       | 7 A       | 6 A     | 3 A     |
| 10,000      | 6.5 A     | 5 A     | 2.5 A   |
| 25,000      | 6 A       | 4 A     | 2 A     |
| 50,000      | 5.5 A     | 3 A     | 1.5 A   |
| 100,000     | 5 A       | 2 A     | 1 A     |

Table 20. 3100U Contact Ratings

| Life Cycles | 120 Vac |
|-------------|---------|
| 6,000       | 6 A     |
| 6,000       | 1/10 hp |
| 100,000     | 3 A     |
| 30,000      | 3 A     |
| 100,000     | 100 mA  |

Table 21. 3100UX Contact Ratings

| Life Cycles | 240 Vac  |
|-------------|----------|
| 6,000       | 1.5 A    |
| 6,000       | -        |
| 100,000     | 1.1025 A |
| 30,000      | -        |
| 100,000     | -        |

# Precision Thermostats

Figure 8. 3106 Series Low Level Hermetic Thermostats

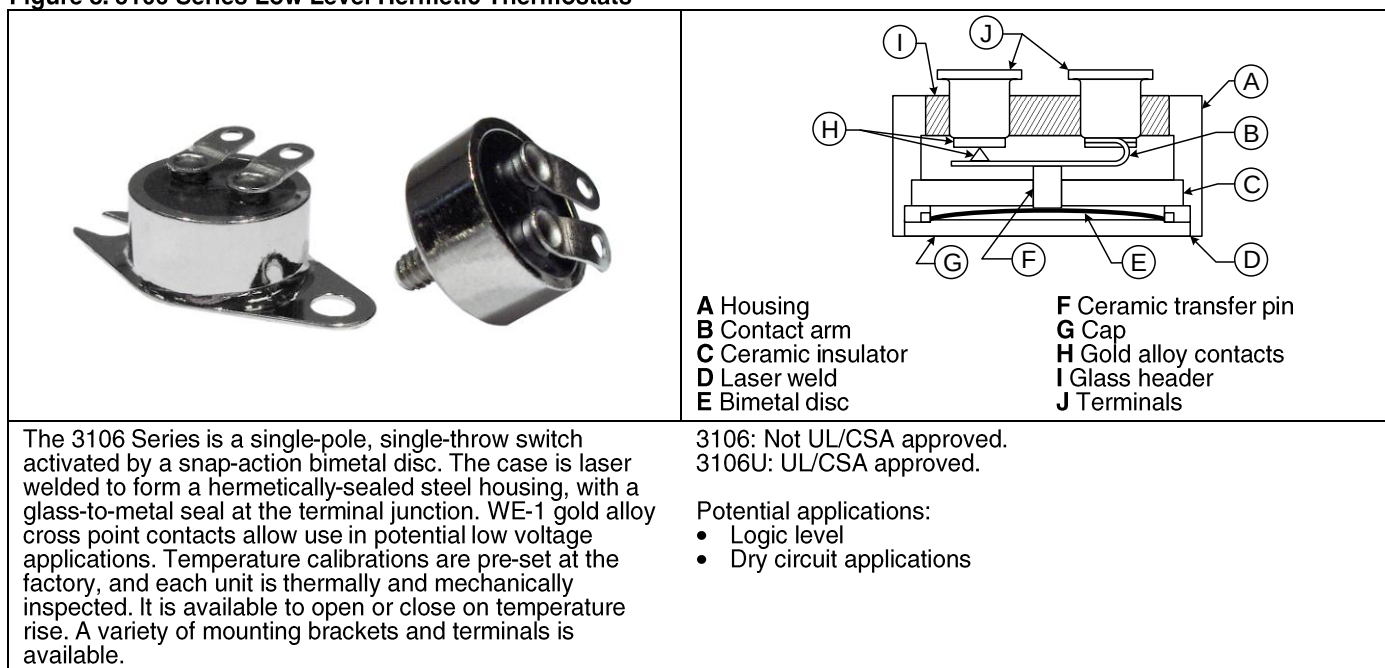


Table 22. 3106 Series Standard Temperature Characteristics

| Operating Temperature Range                | Tolerance       |                  | Standard Mean Differential<br>°C [°F] | Optional Max. Differential<br>°C [°F] |
|--------------------------------------------|-----------------|------------------|---------------------------------------|---------------------------------------|
|                                            | Open<br>°C [°F] | Close<br>°C [°F] |                                       |                                       |
| -28,89 °C to -12,2 °C<br>[-20 °F to 10 °F] | ±5,6 [±10]      | ±4,4 [±8]        | 16,7 to 22, 2 [30 to 40]              | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 16,1 [20 to 29]               | -                                     |
|                                            | ±3,9 [±7]       | ±3,9 [±7]        | 7,8 to 10,6 [14 to 19]                | -                                     |
|                                            | ±3,3 [±6]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±3,3 [±6]        | -                                     | 4,4 [8]                               |
| -11,7 °C to 93,3 °C<br>[11 °F to 200 °F]   | ±2,8 [±5]       | ±2,8 [±5]        | 11,1 to 44,4 [20 to 80]               | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 8,3 to 10,6 [15 to 19]                | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 7,8 [10 to 14]                 | -                                     |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
|                                            | ±1,7 [±3]       | -                | -                                     | 3,3 [6]                               |
| 93,9 °C to 148,9 °C<br>[201 °F to 300 °F]  | -               | ±1,7 [±3]        | -                                     | 3,3 [6]                               |
|                                            | ±4,4 [±8]       | ±3,3 [±6]        | 13,9 to 44,4 [25 to 80]               | -                                     |
|                                            | ±3,9 [±7]       | ±3,3 [±6]        | 8,3 to 13,3 [15 to 24]                | -                                     |
|                                            | ±3,3 [±6]       | ±3,3 [±6]        | 6,7 to 7,8 [12 to 14]                 | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 7,8 [10 to 14]                 | -                                     |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
| 149,4 °C to 176,7 °C<br>[301 °F to 350 °F] | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
|                                            | ±6,7 [±12]      | ±5,6 [±10]       | 19,4 to 44,4 [35 to 80]               | -                                     |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 13,9 to 18,9 [25 to 34]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 8,9 to 13,3 [16 to 24]                | -                                     |
|                                            | ±3,9 [±7]       | ±3,9 [±7]        | 7,8 to 10,0 [14 to 18]                | -                                     |
|                                            | ±2,8 [±5]       | -                | -                                     | 5,6 [10]                              |
| 177,2 °C to 204,4 °C<br>[351 °F to 400 °F] | -               | ±2,8 [±5]        | -                                     | 5,6 [10]                              |
|                                            | ±8,3 [±15]      | ±8,3 [±15]       | 22,2 to 55,6 [40 to 100]              | -                                     |
|                                            | ±8,3 [±15]      | ±6,7 [±12]       | 16,7 to 21,7 [30 to 39]               | -                                     |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 11,1 to 16,1 [20 to 29]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 8,9 to 10,6 [16 to 19]                | -                                     |
|                                            | ±3,3 [±6]       | -                | -                                     | 8,3 [15]                              |
|                                            | -               | ±3,3 [±6]        | -                                     | 8,3 [15]                              |

Table 23. 3106 Series Specifications

| Characteristic               | Parameter                                                  |
|------------------------------|------------------------------------------------------------|
| Switch type                  | SPST                                                       |
| Reset type                   | automatic                                                  |
| Amperage                     | 500 mA                                                     |
| Voltage                      | 50 Vdc                                                     |
| Operating temperature range  | -29 °C to 204,4 °C [-20 °F to 400 °F]                      |
| Environmental exposure range | -62 °C to 260 °C [80 °F to 500 °F]                         |
| Dielectric strength          | MIL-STD-202 Method 301 – 1250 Vac 60 Hz, terminal to case  |
| Insulation resistance        | MIL-STD-202 Method 302 Cond. B – 50 MOhm, 500 Vdc applied  |
| Contact resistance           | MIL-STD-202, Method 307 – 25 mOhm                          |
| Hermetic seal                | MIL-STD-202, Method 112 Cond. 1x10 <sup>5</sup> Atm cc/sec |
| Moisture resistance          | MIL-STD-202, Method 106                                    |
| Material:                    |                                                            |
| Base                         | cold rolled plated steel                                   |
| Contacts                     | WE-1 gold alloy cross point                                |
| Terminals                    | nickel/iron alloy                                          |
| Closure                      | hermetically sealed                                        |
| Brackets                     | cold rolled plated steel                                   |
| Plating                      | copper/nickel QQ-N-290                                     |
| Marking                      | MIL-STD 1285                                               |
| Approvals                    | UL File E36103, CSA File LR21048                           |
| Weight                       | 5,5 g [0.19 oz] (brackets and wire leads not included)     |

Table 24. 3106 Series Contact Ratings

| Life Cycles | 24 Vdc | 50 Vdc | 120 Vac |
|-------------|--------|--------|---------|
| 100,000     | 500 mA | 500 mA | 100 mA  |

# Precision Thermostats

Figure 9. 3800 Series Industrial Grade Thermostats for Severe Duty Applications

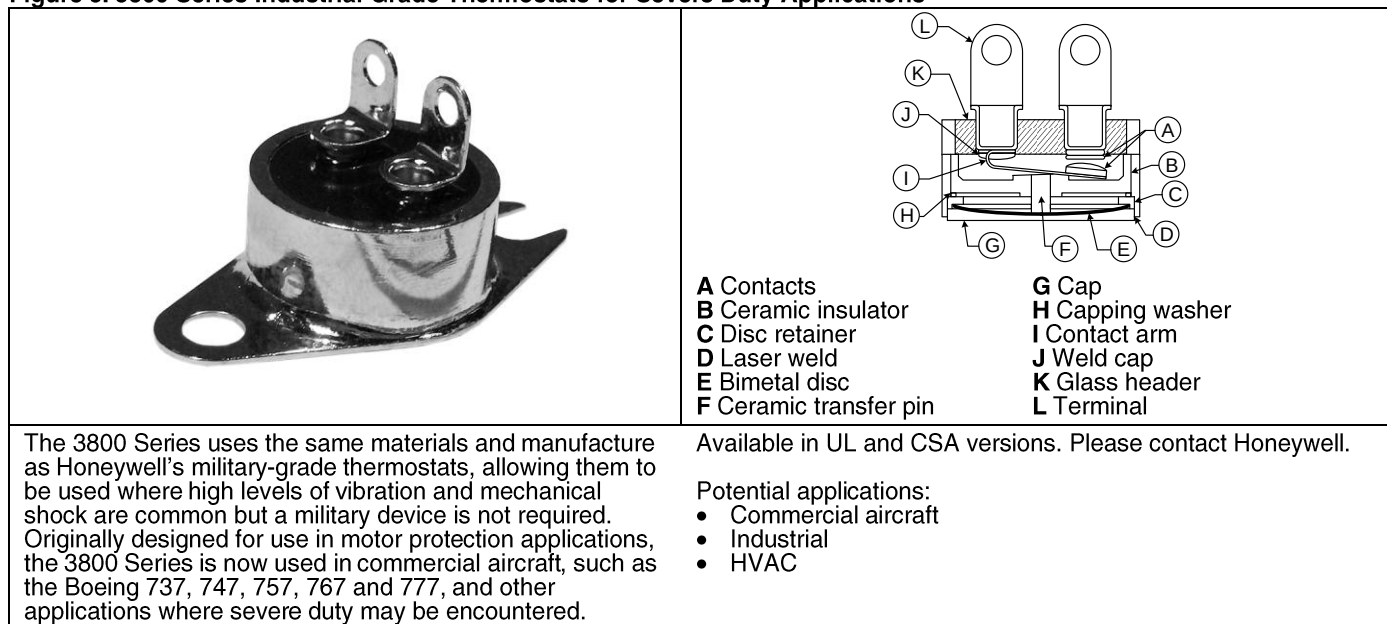


Table 25. Standard Temperature Characteristics

| Operating Temperature Range                | Tolerance       |                  | Standard Mean Differential<br>°C [°F] | Optional Max. Differential<br>°C [°F] |
|--------------------------------------------|-----------------|------------------|---------------------------------------|---------------------------------------|
|                                            | Open<br>°C [°F] | Close<br>°C [°F] |                                       |                                       |
| -28,9 °C to -12,2 °C<br>[-20 °F to 10 °F]  | ±5,6 [±10]      | ±4,4 [±8]        | 16,7 to 22,2 [30 to 40]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 16,1 [20 to 29]               | -                                     |
|                                            | ±3,9 [±7]       | ±3,9 [±7]        | 7,8 to 10,6 [14 to 19]                | -                                     |
|                                            | ±3,3 [±6]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±3,3 [±6]        | -                                     | 4,4 [8]                               |
| -11,7 °C to 93,3 °C<br>[11 °F to 200 °F]   | ±2,8 [±5]       | ±2,8 [±5]        | 11,1 to 44,4 [20 to 80]               | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 8,3 to 10,6 [15 to 19]                | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 7,8 [10 to 14]                 | -                                     |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
|                                            | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
|                                            | ±1,7 [±3]       | -                | -                                     | 3,3 [6]                               |
| 93,9 °C to 148,9 °C<br>[201 °F to 300 °F]  | -               | ±1,7 [±3]        | -                                     | 3,3 [6]                               |
|                                            | ±4,4 [±8]       | ±3,3 [±6]        | 13,9 to 44,4 [25 to 80]               | -                                     |
|                                            | ±3,9 [±7]       | ±3,3 [±6]        | 8,3 to 13,3 [15 to 24]                | -                                     |
|                                            | ±3,3 [±6]       | ±3,3 [±6]        | 6,7 to 7,8 [12 to 14]                 | -                                     |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 7,8 [10 to 14]                 | -                                     |
|                                            | ±2,2 [±4]       | -                | -                                     | 4,4 [8]                               |
| 149,4 °C to 176,7 °C<br>[301 °F to 350 °F] | -               | ±2,2 [±4]        | -                                     | 4,4 [8]                               |
|                                            | ±6,7 [±12]      | ±5,6 [±10]       | 19,4 to 44,4 [35 to 80]               | -                                     |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 13,9 to 18,9 [25 to 34]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 8,9 to 13,3 [16 to 24]                | -                                     |
|                                            | ±3,9 [±7]       | ±3,9 [±7]        | 7,8 to 10,0 [14 to 18]                | -                                     |
|                                            | ±2,8 [±5]       | -                | -                                     | 5,6 [10]                              |
| 177,2 °C to 204,4 °C<br>[351 °F to 400 °F] | -               | ±2,8 [±5]        | -                                     | 5,6 [10]                              |
|                                            | ±8,3 [±15]      | ±8,3 [±15]       | 22,2 to 55,6 [40 to 100]              | -                                     |
|                                            | ±8,3 [±15]      | ±6,7 [±12]       | 16,7 to 21,7 [30 to 39]               | -                                     |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 11,1 to 16,1 [20 to 29]               | -                                     |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 8,9 to 10,6 [16 to 19]                | -                                     |
|                                            | ±3,3 [±6]       | -                | -                                     | 6,7 [12]                              |
| 205 °C to 232,2 °C<br>[401 °F to 450 °F]   | -               | ±3,3 [±6]        | -                                     | 6,7 [12]                              |
|                                            | ±11,1 [±20]     | ±8,3 [±15]       | 22,2 to 55,6 [40 to 100]              | -                                     |
| 232,8 °C to 260 °C<br>[541 °F to 500 °F]   | ±13,9 [±25]     | ±13,9 [±25]      | 33,3 to 66,7 [60 to 120]              | -                                     |



Table 26. 3800 Series Specifications

| Characteristic               | Parameter                                                         |
|------------------------------|-------------------------------------------------------------------|
| Switch type                  | SPST                                                              |
| Reset type                   | automatic                                                         |
| Amperage                     | see Table 27                                                      |
| Voltage                      | 120 Vac                                                           |
| Operating temperature range  | -28.9 °C to 260 °C [-20 °F to 500 °F]                             |
| Environmental exposure range | -62 °C to 288 °C [-80 °F to 550 °F]                               |
| Dielectric strength          | MIL-STD-202 Method 301, 1250 Vac 60 Hz, terminal to case          |
| Insulation resistance        | MIL-STD-202 Method 302 Cond. B, 50 MOhm, minimum terminal to case |
| Contact resistance           | MIL-STD-202 Method 307, 50 mOhm max.                              |
| Hermetic seal                | MIL-STD-202, Method 112, Cond. A, A x 10 <sup>-5</sup> atm cc/sec |
| Vibration (random)           | MIL-STD-202, Method 214, 30 Grms, 20 Hz to 2,000 Hz               |
| Vibration (sinusoidal)       | MIL-STD-202, Method 204, Cond. D 20 G, 20 Hz to 2,000 Hz          |
| Mechanical shock             | MIL-STD-202, Method 213, 400 G                                    |
| Thermal shock                | MIL-STD-202, Method 107, Cond. B                                  |
| Acceleration                 | MIL-STD-202, Method 212, 20 G                                     |
| Moisture resistance          | MIL-STD-202, Method 106                                           |
| Material:                    |                                                                   |
| Base                         | cold plated steel                                                 |
| Contacts                     | silver alloy                                                      |
| Terminals                    | Ni/Fe Alloy                                                       |
| Closure                      | hermetically sealed                                               |
| Brackets                     | cold rolled plated steel                                          |
| Marking                      | MIL-STD-1285                                                      |
| Weight                       | 7.5 g [0.26 oz] (brackets and wires not included)                 |

Table 27. 3800 Series Contact Ratings

| Life Cycles | 30 Vac/dc | 120 Vac | 240 Vac |
|-------------|-----------|---------|---------|
| 5,000       | 7 A       | 6 A     | 3 A     |
| 10,000      | 6.5 A     | 5 A     | 2.5 A   |
| 25,000      | 6 A       | 4 A     | 2 A     |
| 50,000      | 5.5 A     | 3 A     | 1.5 A   |
| 100,000     | 5 A       | 2 A     | 1       |

# Precision Thermostats

Figure 10. 3000 Series (345X Series Internal) Custom Packaged Thermostats



The 3000 Series is customizable. Features include internal and external design options, all-welded hermetically sealed stainless steel construction, customized probe length (152 mm [6 in]) and a hermetic connector or potted construction.

Potential applications:

- HVAC
- Automotive
- Liquid bath control

A typical 3000 Series configuration includes:

- 345X Series thermostat
- Termination selection
- Housing selection
- Customized part number

Table 28. 3000 Series (345X Series Internal) Specifications

| Characteristic               | Parameter                             |
|------------------------------|---------------------------------------|
| Switch type                  | custom                                |
| Reset type                   | automatic                             |
| Amperage                     | custom                                |
| Voltage                      | custom                                |
| Operating temperature range  | -40 °C to 204 °C [-40 °F to 400 °F]   |
| Environmental exposure range | -65 °C to 260 °C [-85 °F to 500 °F]   |
| Dielectric strength          | MIL-STD-202, Method 301, 1250 Vac     |
| Insulation Resistance        | MIL-STD-202, Method 302, 500 MOhm     |
| Contact Resistance           | MIL-STD-202, Method 307, 50 mOhm max. |
| Hermetic seal                | MIL-STD-202, Method 112 Cond. A       |
| Moisture resistance          | MIL-STD-202, Method 106               |
| Shock                        | MIL-STD-202, Method 213, 100 G        |
| Vibration                    | MIL-STD-202, Method 204, 20 G         |
| Thermal shock                | MIL-STD-202, Method 107, Cond. B      |
| Salt spray                   | MIL-STD-202, Method 101, Cond. B      |
| Housing material             | stainless steel and brass             |
| Weight                       | 72 g [2.5 oz]                         |

## HIGH RELIABILITY THERMOSTATS

Tables 29 and 30 provide overall performance qualifications for the High Reliability Thermostats. Figure 11 indicates potential applications.

**Table 29. Performance Qualifications, Part 1**


| Series Name    | Shock                             | Vibration                                                           | Acceleration                     | Thermal Shock                       | Dielectric Strength                  |
|----------------|-----------------------------------|---------------------------------------------------------------------|----------------------------------|-------------------------------------|--------------------------------------|
| 3200<br>3200EM | MIL-STD-202<br>Method 213 – 750 G | MIL-STD-202<br>Method 204 – 30 G<br>MIL-STD-202<br>Method 21 – 50 G | MIL-STD-202<br>Method 212 – 20 G | MIL-STD-202<br>Method 107 – Cond. B | MIL-STD-202<br>Method 301 – 1250 Vac |
| 3MS1 QPL       | MIL-STD-202<br>Method 213 – 100 G | MIL-STD-202<br>Method 204 – 20 G                                    |                                  |                                     |                                      |
| 3500           | MIL-STD-202<br>Method 213 – 400 G |                                                                     |                                  |                                     |                                      |
| 3153           | MIL-STD-202                       |                                                                     |                                  |                                     |                                      |
| 3000           | Method 213 – 100 G                |                                                                     |                                  |                                     |                                      |
|                |                                   |                                                                     | N/A                              |                                     |                                      |

**Table 30. Performance Qualifications, Part 2**

| Series Name | Insulation Resistance                | Contact Resistance                            | Hermetic Seal                       | Moisture Resistance       | Salt Spray*                         |
|-------------|--------------------------------------|-----------------------------------------------|-------------------------------------|---------------------------|-------------------------------------|
| 3200        | MIL-STD-202<br>Method 302 – 500 MOhm | MIL-STD-202<br>Method 307 –<br>0.025 Ohm max. | MIL-STD-202<br>Method 112 – Cond. C | MIL-STD-202<br>Method 106 | MIL-STD-202<br>Method 101 – Cond. B |
| 3MS1 QPL    |                                      |                                               |                                     |                           |                                     |
| 3500        |                                      |                                               |                                     |                           |                                     |
| 3153        |                                      |                                               |                                     |                           |                                     |
| 3000        |                                      |                                               |                                     |                           |                                     |
|             |                                      | MIL-STD-202<br>Method 307 –<br>0.055 Ohm max. |                                     |                           |                                     |

\*Not applicable to 3153 and 3500 Series with mounting brackets and operating temperatures exceeding 162,8 °C [325 °F].

**Figure 11. High Reliability Thermostat Potential Applications**

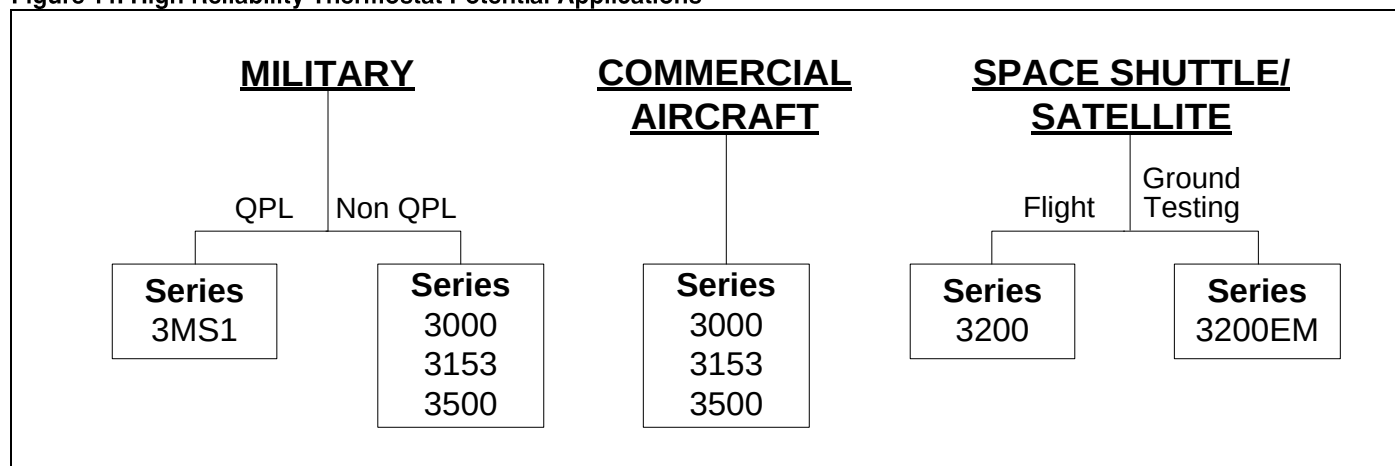

# Precision Thermostats

## HIGH RELIABILITY MILITARY AND AEROSPACE THERMOSTATS

Figure 12. 3153 Series Low Profile Thermostats

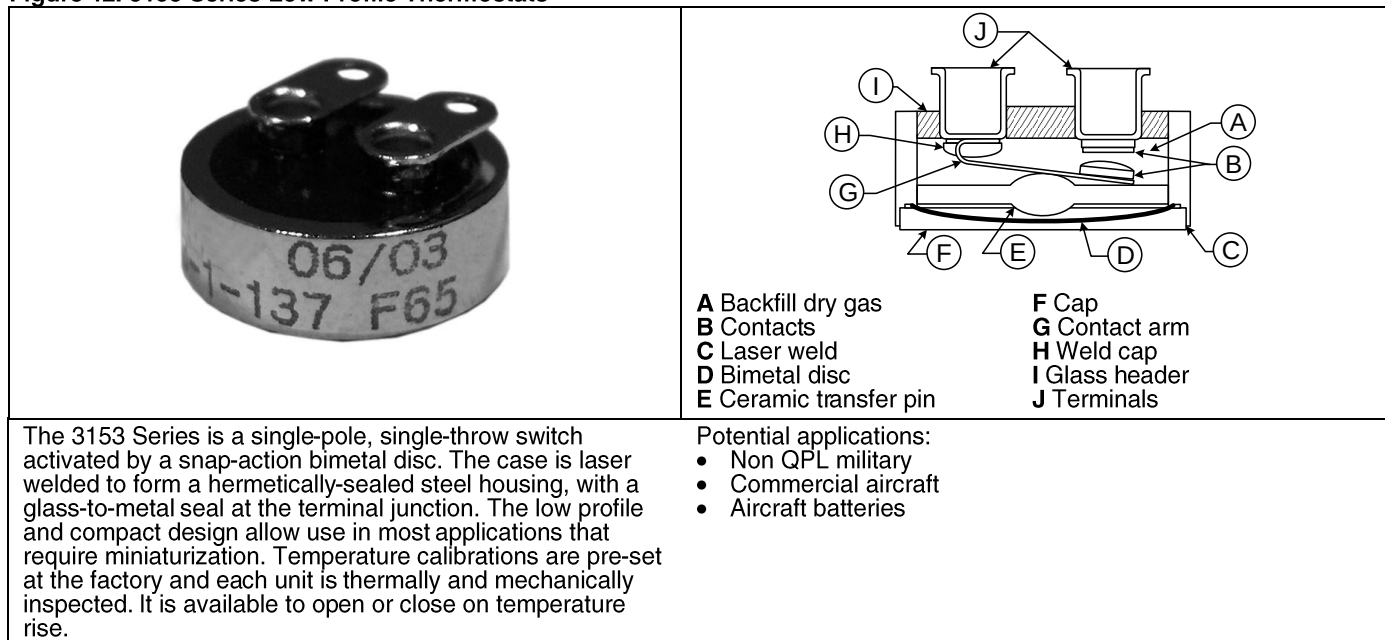


Table 31. 3153 Series Standard Temperature Characteristics

| Temperature Setpoint Range                 | Tolerance          |                  | Nominal Differential<br>°C [°F] | Max. Differential<br>°C [°F] |
|--------------------------------------------|--------------------|------------------|---------------------------------|------------------------------|
|                                            | Open<br>°C [°F]    | Close<br>°C [°F] |                                 |                              |
| -28,89 °C to -12,2 °C<br>[-20 °F to 10 °F] | ±5,6 [±10]         | ±4,4 [±8]        | 16,7 to 22,2 [30 to 40]         | -                            |
|                                            | ±4,4 [±8]          | ±4,4 [±8]        | 11,1 to 16,1 [20 to 29]         | -                            |
|                                            | ±3,9 [±7]          | ±3,9 [±7]        | 11,1 to 16,1 [20 to 29]         | -                            |
| -11,7 °C to 9,4 °C<br>[11 °F to 49 °F]     | ±2,8 [±5]          | ±2,8 [±5]        | 11,1 to 22,2 [20 to 40]         | -                            |
|                                            | ±2,8 [±5]          | ±2,8 [±5]        | 8,3 to 10,6 [15 to 19]          | -                            |
|                                            | ±2,8 [±5]          | ±2,8 [±5]        | 6,1 to 7,8 [11 to 14]           | -                            |
|                                            | Open or Close Only |                  |                                 |                              |
|                                            | ±2,2 [±4]          | ±2,2 [±4]        | -                               | 4,4 [8]                      |
| 10 °C to 107,2 °C<br>[50 °F to 225 °F]     | ±2,8 [±5]          | ±2,8 [±5]        | 11,1 to 22,2 [20 to 40]         | -                            |
|                                            | ±2,8 [±5]          | ±2,8 [±5]        | 8,3 to 10,6 [15 to 19]          | -                            |
|                                            | ±2,8 [±5]          | ±2,8 [±5]        | 6,1 to 7,8 [11 to 14]           | -                            |
|                                            | Open or Close Only |                  |                                 |                              |
|                                            | ±2,2 [±4]          | ±2,2 [±4]        | -                               | 4,4 [8]                      |
| 107,8 °C to 148,9 °C<br>[226 °F to 350 °F] | ±4,4 [±8]          | ±3,3 [±6]        | 13,9 to 27,8 [25 to 50]         | -                            |
|                                            | ±3,9 [±7]          | ±3,3 [±6]        | 11,1 to 13,3 [20 to 24]         | -                            |
|                                            | ±3,3 [±6]          | ±3,3 [±6]        | 8,3 to 10,6 [15 to 19]          | -                            |
|                                            | Open or Close Only |                  |                                 |                              |
|                                            | ±2,8 [±5]          | ±2,8 [±5]        | -                               | 6,7 [12]                     |
| 149,4 °C to 176,7 °C<br>[301 °F to 350 °F] | ±6,7 [±12]         | ±5,6 [±10]       | 19,5 to 27,8 [35 to 50]         | -                            |
|                                            | ±5,6 [±10]         | ±5,6 [±10]       | 13,6 to 18,9 [25 to 34]         | -                            |
|                                            | ±4,4 [±8]          | ±4,4 [±8]        | 8,3 to 13,3 [15 to 24]          | -                            |
|                                            | Open or Close Only |                  |                                 |                              |
|                                            | ±3,9 [±7]          | ±3,9 [±7]        | -                               | 8,3 [15]                     |

Table 32. 3153 Series Specifications

| Characteristic               | Parameter                                                                 |
|------------------------------|---------------------------------------------------------------------------|
| Switch type                  | SPST                                                                      |
| Reset type                   | automatic                                                                 |
| Amperage                     | 5 A resistive                                                             |
| Voltage                      | 28 Vac/dc                                                                 |
| Operating temperature range  | -29 °C to 177 °C [-20 °F to 350 °F]                                       |
| Environmental exposure range | -65 °C to 260 °C [-85 °F to 500 °F]                                       |
| Dielectric strength          | MIL-STD-202, Method 301, 1250 Vac                                         |
| Insulation resistance        | MIL-STD-202, Method 302, 500 MOhm                                         |
| Contact resistance           | MIL-STD-202, Method 307, 50 mOhm max.                                     |
| Hermetic seal                | MIL-STD-202, Method 112, Cond. A                                          |
| Moisture resistance          | MIL-STD-202, Method 106                                                   |
| Shock                        | MIL-STD-202, Method 213, 100 G                                            |
| Vibration                    | MIL-STD-202, Method 204, 20 G                                             |
| Thermal shock                | Mil-STD-202, Method 107, Cond. B                                          |
| Salt spray*                  | Mil-STD-202, Method 101, Cond. B                                          |
| Housing material             | cold rolled plated steel                                                  |
| Marking                      | MIL-STD-1285                                                              |
| Weight                       | 6 g [0.12 oz] (brackets not included)                                     |
| Approvals                    | Acceptance testing performed in accordance with MIL-PRF-24236, Table III. |

\*Not applicable to thermostats with brackets or those operating at temperatures above 162,8°C [325 °F].

Table 33. 3153 Series Contact Ratings

| Load Type | Life Cycles | 28 Vac/dc | 115 Vac |
|-----------|-------------|-----------|---------|
| Resistive | 100,000     | 5 A       | 2 A     |
| Inductive | 100,000     | 2.5 A     | 1 A     |
| Lamp      | 100,000     | 1 A       | 0.5 A   |

# Precision Thermostats

Figure 13. 3500 Series Military Thermostats

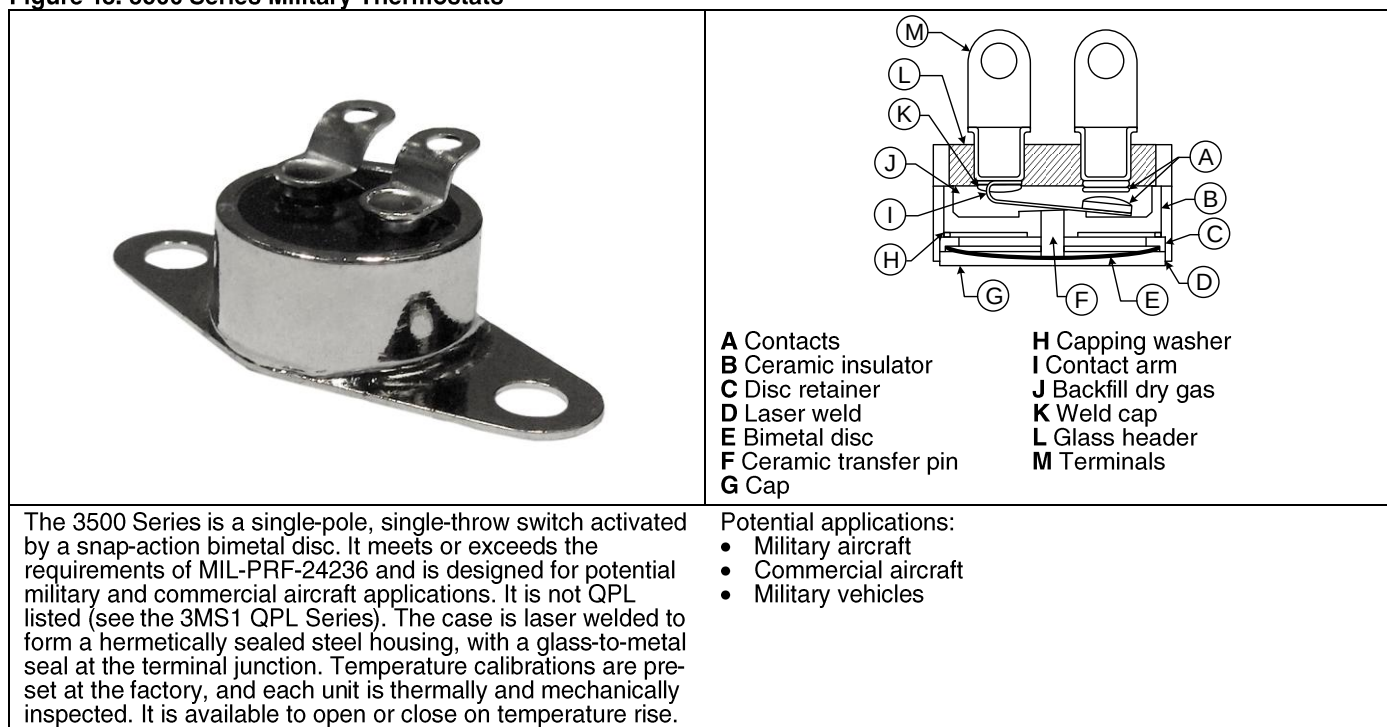


Table 34. 3500 Series Standard Temperature Characteristics

| Temperature Setpoint Range                 | Tolerance       |                  | Nominal Differential<br>°C [°F] | Max. Differential<br>°C [°F] |
|--------------------------------------------|-----------------|------------------|---------------------------------|------------------------------|
|                                            | Open<br>°C [°F] | Close<br>°C [°F] |                                 |                              |
| -45,6 °C to 17,8 °C<br>[-50 °F to 0 °F]    | ±8,3 [±15]      | ±8,3 [±15]       | 16,7 to 33,3 [30 to 60]         | -                            |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 16,7 to 33,3 [30 to 60]         | -                            |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 27,8 [20 to 50]         | -                            |
| -17,2 °C to 93,3 °C<br>[1 °F to 200 °F]    | ±8,3 [±15]      | ±8,3 [±15]       | 16,7 to 33,3 [30 to 60]         | -                            |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 16,7 to 33,3 [30 to 60]         | -                            |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 27,8 [20 to 50]         | -                            |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 22,2 [10 to 40]          | -                            |
|                                            | ±2,2 [±4]       | -                | -                               | 4,4 [8]                      |
|                                            | -               | ±2,2 [±4]        | -                               | 4,4 [8]                      |
| 93,9 °C to 148,9 °C<br>[201 °F to 300 °F]  | ±8,3 [±15]      | ±8,3 [±15]       | 16,7 to 33,3 [30 to 60]         | -                            |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 16,7 to 33,3 [30 to 60]         | -                            |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 27,8 [20 to 50]         | -                            |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 22,2 [10 to 40]          | -                            |
|                                            | ±2,2 [±4]       | -                | -                               | 4,4 [8]                      |
|                                            | -               | ±2,2 [±4]        | -                               | 4,4 [8]                      |
| 149,4 °C to 176,6 °C<br>[301 °F to 350 °F] | ±8,3 [±15]      | ±8,3 [±15]       | 16,7 to 33,3 [30 to 60]         | -                            |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 16,7 to 33,3 [30 to 60]         | -                            |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 27,8 [20 to 50]         | -                            |
|                                            | ±2,8 [±5]       | -                | -                               | 5,5 [10]                     |
|                                            | -               | 2,8 [±5]         | -                               | 5,5 [10]                     |
|                                            |                 |                  |                                 |                              |
| 177,2 °C to 204,4 °C<br>[351 °F to 400 °F] | ±8,3 [±15]      | ±8,3 [±15]       | 16,7 to 44,4 [30 to 80]         | -                            |
|                                            | ±5,6 [±10]      | ±5,6 [±10]       | 16,7 to 33,3 [30 to 60]         | -                            |
|                                            | ±4,4 [±8]       | ±4,4 [±8]        | 8,3 to 10,6 [15 to 19]          | -                            |
|                                            | ±3,3 [±6]       | -                | -                               | 8,3 [15]                     |
|                                            | -               | ±4,4 [±8]        | -                               | 8,3 [15]                     |
|                                            |                 |                  |                                 |                              |

Table 35. 3500 Series Specifications

| Characteristic               | Parameter                                             |
|------------------------------|-------------------------------------------------------|
| Switch type                  | SPST                                                  |
| Reset type                   | automatic                                             |
| Amperage                     | 5 A resistive                                         |
| Voltage                      | 28 Vdc                                                |
| Operating temperature range  | -51 °C to 204 °C [-60 °F to 400 °F]                   |
| Environmental exposure range | -65 °C to 260 °C [-85 °F to 500 °F]                   |
| Dielectric strength          | MIL-STD-202, Method 301, 1250 Vac                     |
| Insulation resistance        | MIL-STD-202, Method 302, 500 MOhm                     |
| Contact resistance           | MIL-STD-202, Method 307, 50 mOhm max.                 |
| Hermetic seal                | MIL-STD-202, Method 112, Cond. C                      |
| Moisture resistance          | MIL-STD-202, Method 106                               |
| Shock                        | MIL-STD-202, Method 213, 400 G                        |
| Vibration                    | MIL-STD-202, Method 204, 20 G                         |
| Acceleration                 | MIL-STD-202, Method 212, 20 G                         |
| Thermal shock                | MIL-STD-202, Method 107, Cond. B                      |
| Salt spray*                  | MIL-STD-202, Method 101, Cond. B                      |
| Housing material             | cold rolled plated steel                              |
| Marking                      | MIL-STD-1285                                          |
| Weight                       | 7,5 g [0.26 oz] (brackets and lead wire not included) |

\*Not applicable to thermostats with brackets or those operating at temperatures above 162,8°C [325 °F].

Table 36. 3500 Series Contact Ratings

| Load Type | Life Cycles | 28 Vac/dc | 115 Vac |
|-----------|-------------|-----------|---------|
| Resistive | 100,000     | 5 A       | 2 A     |
| Inductive | 100,000     | 2.5 A     | 1 A     |
| Lamp      | 100,000     | 1 A       | 0.5 A   |

# Precision Thermostats

Figure 14. 3000 Series (3500 Series or Other Internal) Custom Packaged Thermostats



The 3000 Series is customizable. Features include internal and external design options, all-welded hermetically sealed stainless steel construction, customized probe length (152 mm [6 in]) and a hermetic connector or potted construction.

A typical 3000 Series configuration includes:

- 3500 Series or other thermostat
- Termination selection
- Housing selection
- Customized part number

Potential applications:

- HVAC
- Liquid bath control
- Transportation

Table 37. 3000 Series (3500 Series or Other Internal) Specifications

| Characteristic               | Parameter                             |
|------------------------------|---------------------------------------|
| Switch type                  | Custom                                |
| Reset type                   | Automatic                             |
| Amperage                     | Custom                                |
| Voltage                      | Custom                                |
| Operating temperature range  | -40 °C to 204 °C [-40 °F to 400 °F]   |
| Environmental exposure range | -65 °C to 260 °C [-85 °F to 500 °F]   |
| Dielectric strength          | MIL-STD-202, Method 301, 1250 Vac     |
| Insulation Resistance        | MIL-STD-202, Method 302, 500 MOhm     |
| Contact Resistance           | MIL-STD-202, Method 307, 50 mOhm max. |
| Hermetic seal                | MIL-STD-202, Method 112 Cond. A       |
| Moisture resistance          | MIL-STD-202, Method 106               |
| Shock                        | MIL-STD-202, Method 213, 100 G        |
| Vibration                    | MIL-STD-202, Method 204, 20 G         |
| Thermal shock                | MIL-STD-202, Method 107, Cond. B      |
| Salt spray                   | MIL-STD-202, Method 101, Cond. B      |
| Housing material             | stainless steel                       |
| Weight                       | 72 g [2.5 oz]                         |



Figure 15. 3MS1 QPL Series Military Thermostats

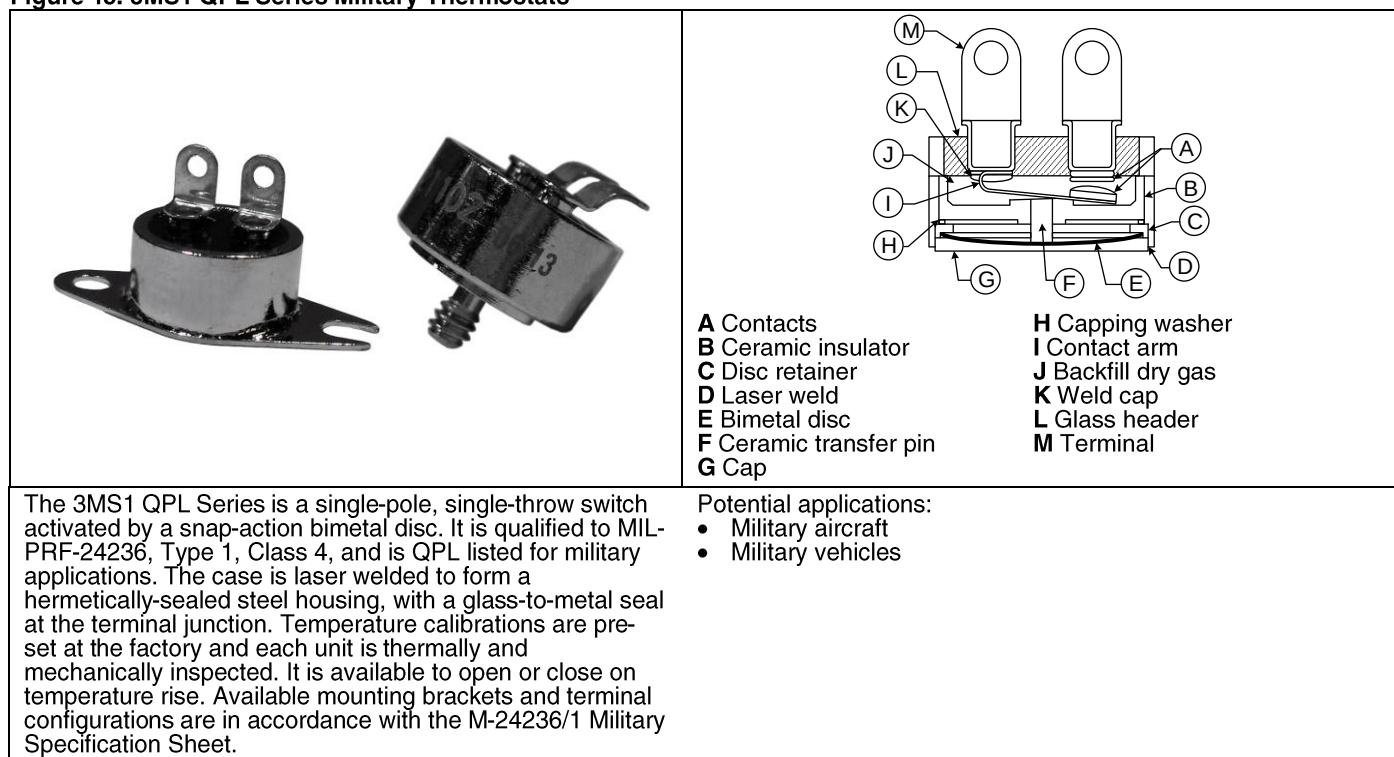


Table 38. 3MS1 QPL Series Standard Temperature Characteristics

| Temperature Setpoint Range                | Tolerance       |                  | Nominal Differential<br>°C [°F] |
|-------------------------------------------|-----------------|------------------|---------------------------------|
|                                           | Open<br>°C [°F] | Close<br>°C [°F] |                                 |
| -45,6 °C to 17,8 °C<br>[-50 °F to 0 °F]   | ±13,9 [±25]     | ±13,9 [±25]      | 33,3 to 55,5 [60 to 100]        |
|                                           | ±8,3 [±15]      | ±8,3 [±15]       | 22,2 to 44,4 [40 to 80]         |
|                                           | ±5,6 [±10]      | ±5,6 [±10]       | 16,7 to 33,3 [30 to 60]         |
|                                           | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 27,8 [20 to 50]         |
| -17,2 °C to 93,3 °C<br>[1 °F to 200 °F]   | ±13,9 [±25]     | ±13,9 [±25]      | 33,3 to 55,5 [60 to 100]        |
|                                           | ±8,3 [±15]      | ±8,3 [±15]       | 22,2 to 44,4 [40 to 80]         |
|                                           | ±5,6 [±10]      | ±5,6 [±10]       | 16,7 to 33,3 [30 to 60]         |
|                                           | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 27,8 [20 to 50]         |
|                                           | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 22,2 [10 to 40]          |
|                                           | ±1,7 [±3]       | ±1,7 [±3]        | 5,6 to 11,1 [10 to 20]          |
| 93,9 °C to 148,9 °C<br>[201 °F to 300 °F] | ±13,9 [±25]     | ±13,9 [±25]      | 33,3 to 55,5 [60 to 100]        |
|                                           | ±8,3 [±15]      | ±8,3 [±15]       | 22,2 to 44,4 [40 to 80]         |
|                                           | ±5,6 [±10]      | ±5,6 [±10]       | 16,7 to 33,3 [30 to 60]         |
|                                           | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 27,8 [20 to 50]         |
|                                           | ±2,8 [±5]       | ±2,8 [±5]        | 5,6 to 22,2 [10 to 40]          |
| 149,4 °C to 191 °C<br>[301 °F to 375 °F]  | ±13,9 [±25]     | ±13,9 [±25]      | 33,3 to 55,5 [60 to 100]        |
|                                           | ±8,3 [±15]      | ±8,3 [±15]       | 22,2 to 44,4 [40 to 80]         |
|                                           | ±5,6 [±10]      | ±5,6 [±10]       | 16,7 to 33,3 [30 to 60]         |
|                                           | ±4,4 [±8]       | ±4,4 [±8]        | 11,1 to 27,8 [20 to 50]         |

# Precision Thermostats

**Table 39. 3MS1 QPL Series Specifications**

| Characteristic               | Parameter                             |
|------------------------------|---------------------------------------|
| Switch type                  | SPST                                  |
| Reset type                   | automatic                             |
| Amperage                     | 5 A resistive                         |
| Voltage                      | 28 Vac/Vdc                            |
| Operating temperature range  | -20 °C to 350 °C [-50 °F to 177 °F]   |
| Environmental exposure range | -65 °C to 260 °C [-85 °F to 500 °F]   |
| Dielectric strength          | MIL-STD-202, Method 301, 1250 Vac     |
| Insulation resistance        | MIL-STD-202, Method 302, 500 MOhm     |
| Contact resistance           | MIL-STD-202, Method 307, 50 MOhm max. |
| Hermetic seal                | MIL-STD-202, Method 112, Cond. C      |
| Moisture resistance          | MIL-STD-202, Method 106               |
| Shock                        | MIL-STD-202, Method 213, 100 G        |
| Vibration                    | MIL-STD-202, Method 204, 20 G         |
| Acceleration                 | MIL-STD-202, Method 212, 20 G         |
| Thermal shock                | MIL-STD-202, Method 107, Cond. B      |
| Salt spray                   | MIL-STD-202, Method 101, Cond. B      |
| Housing material             | cold rolled plated steel              |
| Marking                      | MIL-STD-1285                          |
| Approvals                    | QPL Mil-PRF-24236/1                   |
| Weight                       | 7,5 g [0.26 oz]                       |

**Table 40. 3MS1 QPL Series Contact Ratings**

| Load Type | Life Cycles | 28 Vac/dc | 115 Vac |
|-----------|-------------|-----------|---------|
| Resistive | 100,000     | 5 A       | 2 A     |
| Inductive | 100,000     | 2.5 A     | 1 A     |
| Lamp      | 100,000     | 1 A       | 0.5 A   |

Figure 16. 3200 Series High Reliability Aerospace Thermostats

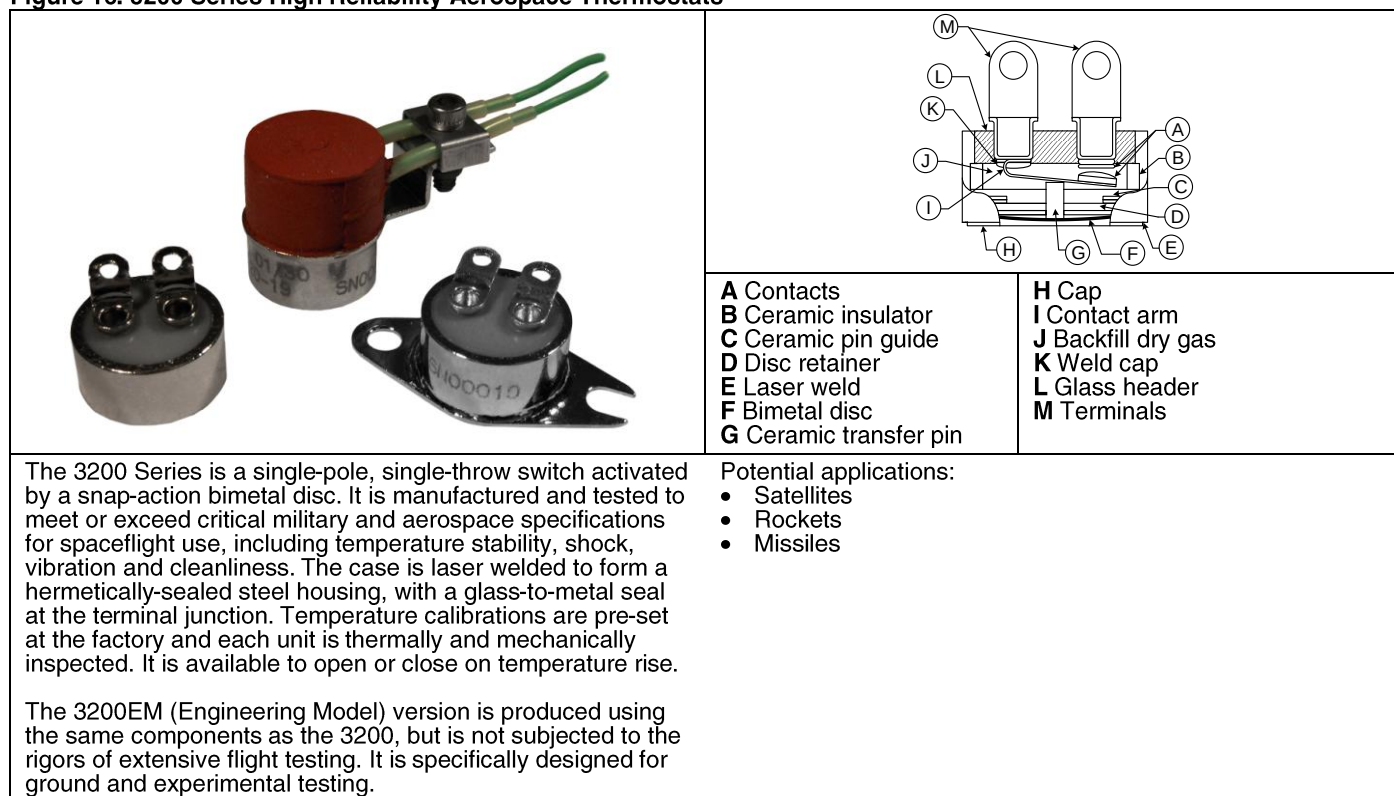


Table 41. 3200 Series Standard Temperature Characteristics

| Temperature Setpoint Range                 | Tolerance       |                  | Nominal Differential<br>°C [°F] |
|--------------------------------------------|-----------------|------------------|---------------------------------|
|                                            | Open<br>°C [°F] | Close<br>°C [°F] |                                 |
| -51,1 °C to -29,4 °C<br>[-60 °F to -21 °F] | consult factory |                  | consult factory                 |
| -28,9 °C to 17,8 °C<br>[-20 °F to 0 °F]    | ±4,4 [±8]       | ±3,9 [±7]        | 10,6 to 16,7 [19 to 30]         |
|                                            | ±3,9 [±7]       | ±3,3 [±6]        | 9,4 to 15,0 [17 to 27]          |
|                                            | ±3,3 [±6]       | ±3,3 [±6]        | 8,9 to 14,5 [16 to 26]          |
|                                            | ±3,3 [±6]       | ±2,8 [±5]        | 8,3 to 13,9 [15 to 25]          |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 8,3 to 13,9 [15 to 25]          |
| 17,2 °C to 37,8 °C<br>[1 °F to 100 °F]     | ±3,9 [±7]       | ±3,3 [±6]        | 9,4 to 15,0 [17 to 27]          |
|                                            | ±3,3 [±6]       | ±3,3 [±6]        | 8,9 to 13,9 [16 to 25]          |
|                                            | ±3,3 [±6]       | ±2,8 [±5]        | 8,3 to 13,9 [15 to 25]          |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 7,8 to 13,9 [14 to 25]          |
|                                            | ±2,8 [±5]       | ±2,2 [±4]        | 7,2 to 13,9 [13 to 25]          |
|                                            | ±2,2 [±4]       | ±2,2 [±4]        | 6,7 to 13,9 [12 to 25]          |
| 38,3 °C to 93,3 °C<br>[101 °F to 200 °F]   | ±5,0 [±9]       | ±4,4 [±8]        | 11,7 to 16,7 [21 to 30]         |
|                                            | ±3,9 [±7]       | ±3,3 [±6]        | 9,4 to 16,7 [17 to 30]          |
|                                            | ±3,3 [±6]       | ±2,8 [±5]        | 8,3 to 16,75 [15 to 30]         |
|                                            | ±2,8 [±5]       | ±2,8 [±5]        | 7,8 to 13,9 [14 to 25]          |
| 93,9 °C to 162,8 °C<br>[200 °F to 325 °F]  | ±5,6 [±10]      | ±5,0 [±9]        | 12,8 to 19,4 [23 to 35]         |
|                                            | ±4,4 [±8]       | ±3,3 [±6]        | 10,0 to 19,4 [18 to 35]         |
|                                            | ±3,9 [±7]       | ±3,3 [±6]        | 9,4 to 19,4 [17 to 35]          |
|                                            | ±3,3 [±6]       | ±3,3 [±6]        | 8,9 to 19,4 [16 to 35]          |

# Precision Thermostats

**Table 42. 3200 Series Specifications**

| Characteristic               | Parameter                                                    |
|------------------------------|--------------------------------------------------------------|
| Switch type                  | SPST                                                         |
| Reset type                   | automatic                                                    |
| Amperage                     | 5 A resistive                                                |
| Voltage                      | 28 Vac/Vdc                                                   |
| Operating temperature range  | -51 °C to 162,8 °C [-60 °F to 325 °F]                        |
| Environmental exposure range | -65 °C to 177 °C [-85 °F to 350 °F]                          |
| Dielectric strength          | MIL-STD-202, Method 301, 1250 Vac                            |
| Insulation resistance        | MIL-STD-202, Method 302, 500 MOhm                            |
| Contact resistance           | MIL-STD-202, Method 307, 25 mOhm max.                        |
| Hermetic seal                | MIL-STD-202, Method 112, Cond. C                             |
| Moisture resistance          | MIL-STD-202, Method 106                                      |
| Shock                        | MIL-STD-202, Method 213, 750 G                               |
| Vibration                    | MIL-STD-202, Method 204, 30 G, MIL-STD-202, Method 214, 50 G |
| Acceleration                 | MIL-STD-202, Method 212, 20 G                                |
| Thermal shock                | MIL-STD-202, Method 107, Cond. B                             |
| Salt spray                   | MIL-STD-202, Method 101, Cond. B                             |
| Housing material             | cold rolled plated steel                                     |
| Marking                      | MIL-STD-1285                                                 |
| Approvals                    | NASA GSFC S-311-641, S-311-641/01                            |
| Weight                       | 8,5 g [0.30 oz] (brackets and lead wires not included)       |

**Table 43. 3200 Series Contact Ratings**

| Load Type | Life Cycles | 28 Vac/dc | 115 Vac |
|-----------|-------------|-----------|---------|
| Resistive | 100,000     | 5 A       | 2 A     |
| Inductive | 100,000     | 2.5 A     | 1 A     |
| Lamp      | 100,000     | 1 A       | 0.5 A   |

# MOUNTING HARDWARE

## 3600/3601 Series

Figure 17. 3600/3601 Series Brackets









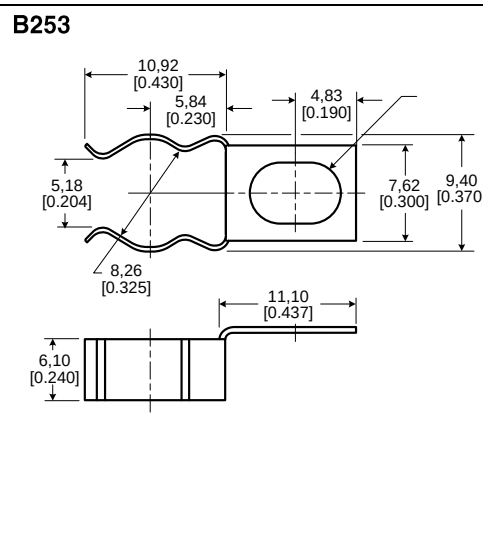


Figure 18. 3600/3601 Series Terminals

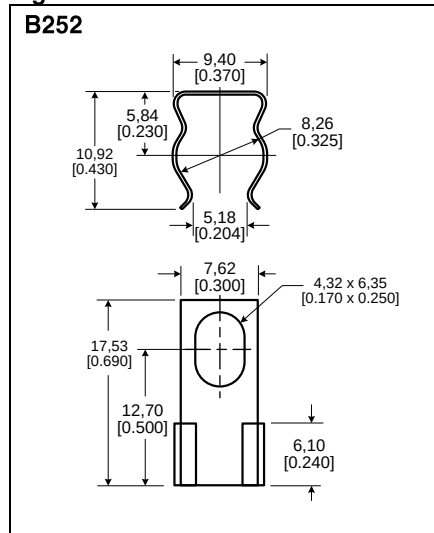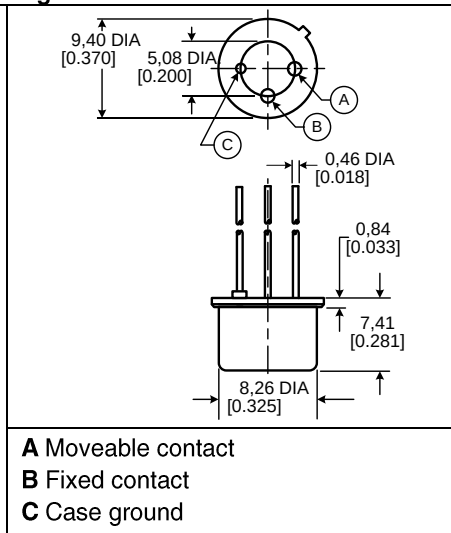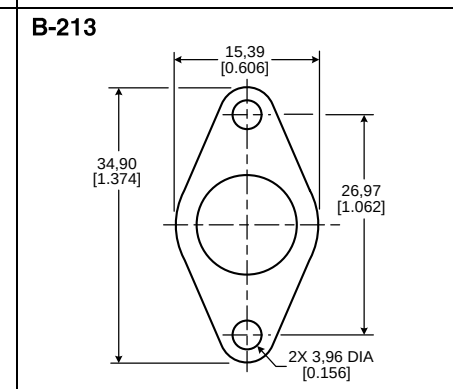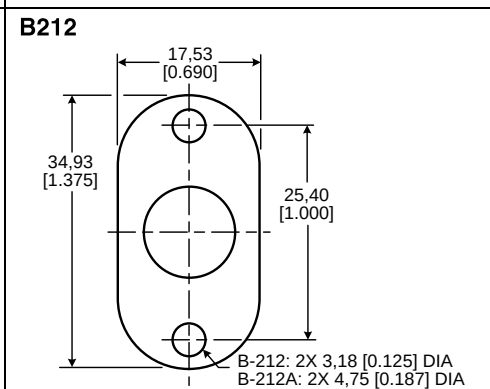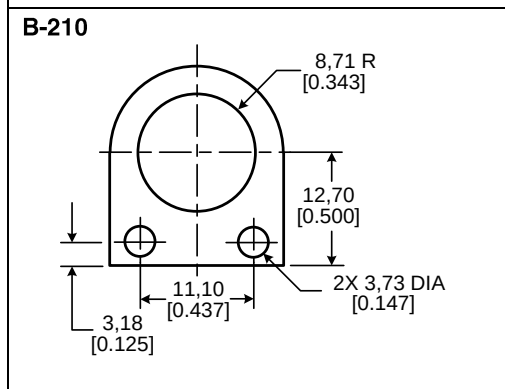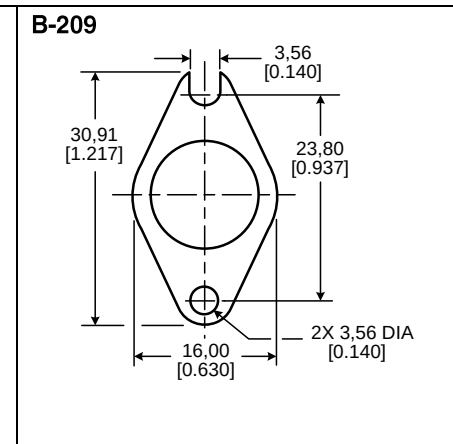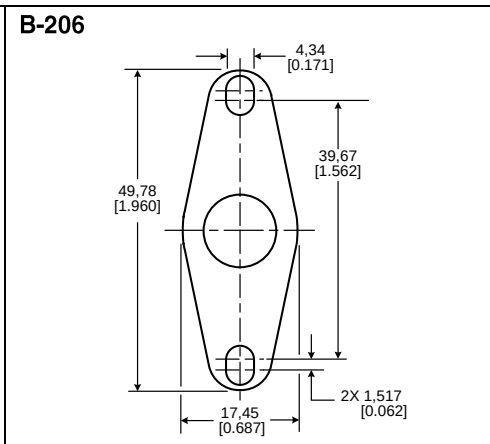

## 3001/3004 Series

Figure 19. 3001/3004 Brackets

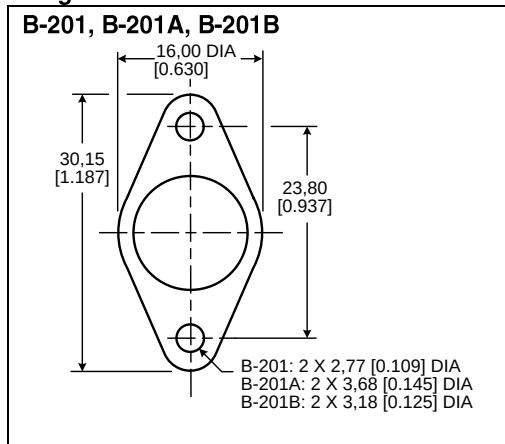

# Precision Thermostats

Figure 20. 3001/3004 Series Cap Studs












|                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Round</b></p> <p>S334: 4-40<br/>S337: 6-32<br/>S340: 8-32<br/>S343: 10-32<br/>S346: M3 x 0.5<br/>S349: M4 x 0.7</p>  <p><b>A</b> Undercut to minor diameter    <b>B</b> Specify length    <b>C</b> Specify thread</p> | <p><b>Hex</b></p> <p>HS367: 6-32<br/>HS370: 8-32<br/>HS373: 10-32<br/>HS376: M3 x 0.5<br/>HS379: M4 x 0.7<br/>HS382: M5 x 0.8</p>  <p><b>A</b> Undercut to minor diameter    <b>B</b> Specify length    <b>C</b> Specify thread</p> | <p><b>Radius Cap</b></p>  <p><b>A</b> Various radii available</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|

Figure 22. 3001/3004 Series Terminals

|                                                                                                                    |                                                                                                        |                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| <p><b>T123</b></p>               | <p><b>T124</b></p>   | <p><b>T125</b></p>   |
| <p><b>T126</b></p>              | <p><b>T127</b></p>  | <p><b>T128</b></p>  |
| <p><b>T177 (3001 only)</b></p>  |                                                                                                        |                                                                                                          |


### 3100/3106 Series

Figure 23. 3100/3106 Terminals

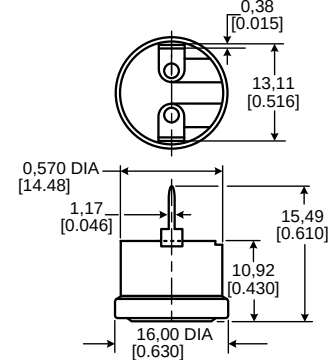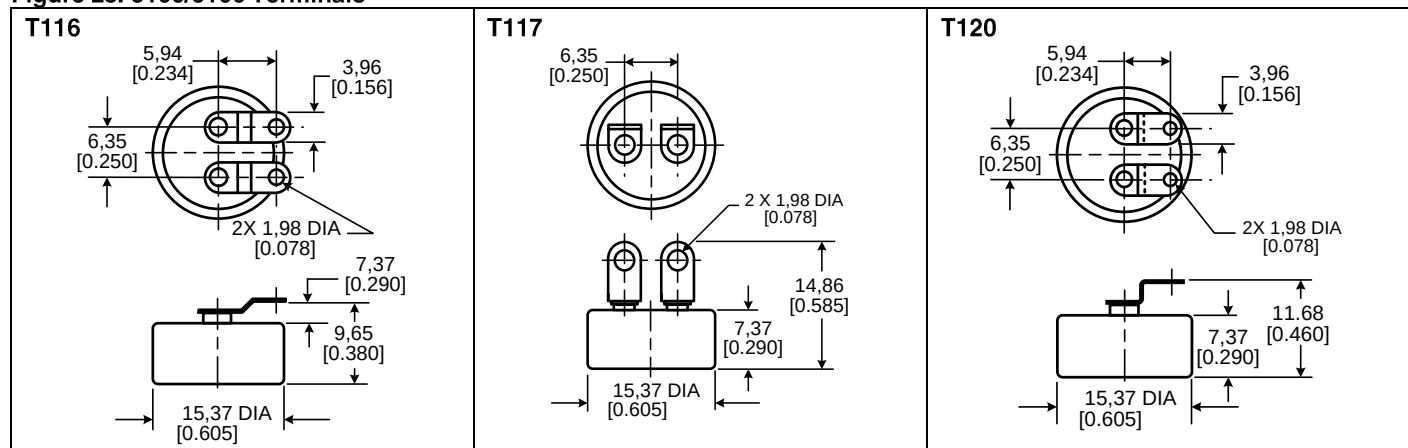


### 3150/3156 Series

Figure 24. 3150/3156 Terminals

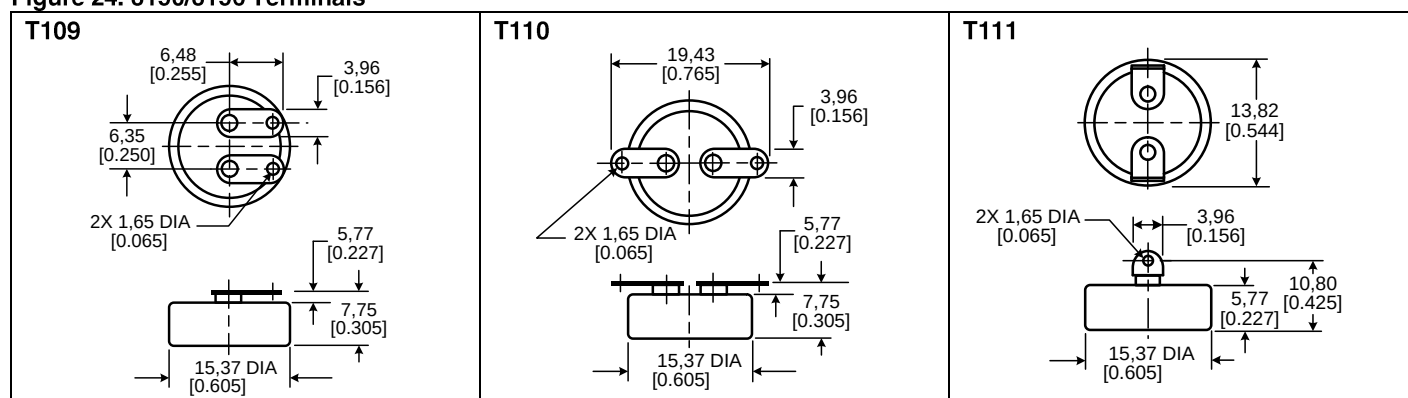

### 3000 Series

Figure 25. 3000 Series

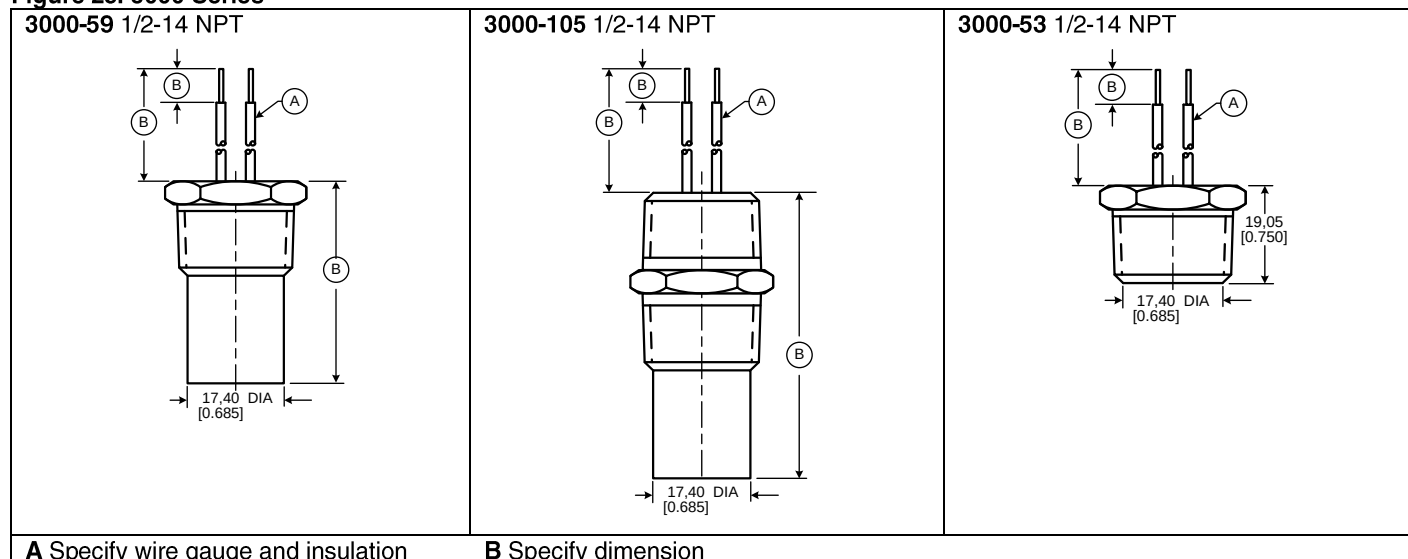

# Precision Thermostats

Figure 26. 3000 Series Terminations








|                                                                                   |                                                                                   |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>0</b> Hermetic connector, bayonet or threaded                                  | <b>3</b> ½-1/4 NPT thread, wire leads and lengths as required                     | <b>4a</b> ½-1/4 NPT thread, 0.25 in male quick connect terminals                    | <b>4b</b> ½-1/4 NPT thread 60° 0.25 in male quick connect terminals                 |
|  |  |   |  |
| <b>1</b> Wire leads and lengths as required                                       | <b>2a</b> 0.25 in male quick connect terminals                                    | <b>2b</b> 60° 0.25 in male quick connect terminals                                  |                                                                                     |
|  |  |  |                                                                                     |

Figure 27. 3000 Series Housings:Used with Terminations 0, 3, 4a, 4b, 1, 2a, 2b only.





|                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>3000-45X</b> 3/4-16 UNF-3A thread, 1 in hex.                                     | <b>3000-55X</b> 1/2-14 NPT thread, 7/8 in hex.                                        |
|  |  |
| <b>A</b> Probe length<br><b>B</b> Sensing surface                                   |                                                                                       |

Figure 28. 3000 Series Housings: Used with Terminations 0, 3, 4a, 4b only.


|                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>3000-141</b> 3/4-16 UNF-3A thread, 1 in hex.                                     | <b>3000-53X</b> 1/2-14 NPT thread, 7/8 in hex.                                        |
|  |  |
| <b>A</b> Sensing surface                                                            |                                                                                       |




### Used on All Series

Overmolds provide electrical isolation. Examples in Fig. 29 use the 3100/3106 Series; however, overmolds may be used on other series. Please consult Honeywell.

**Figure 29. Overmolds used on All Series (3100/3106 Series Shown).**

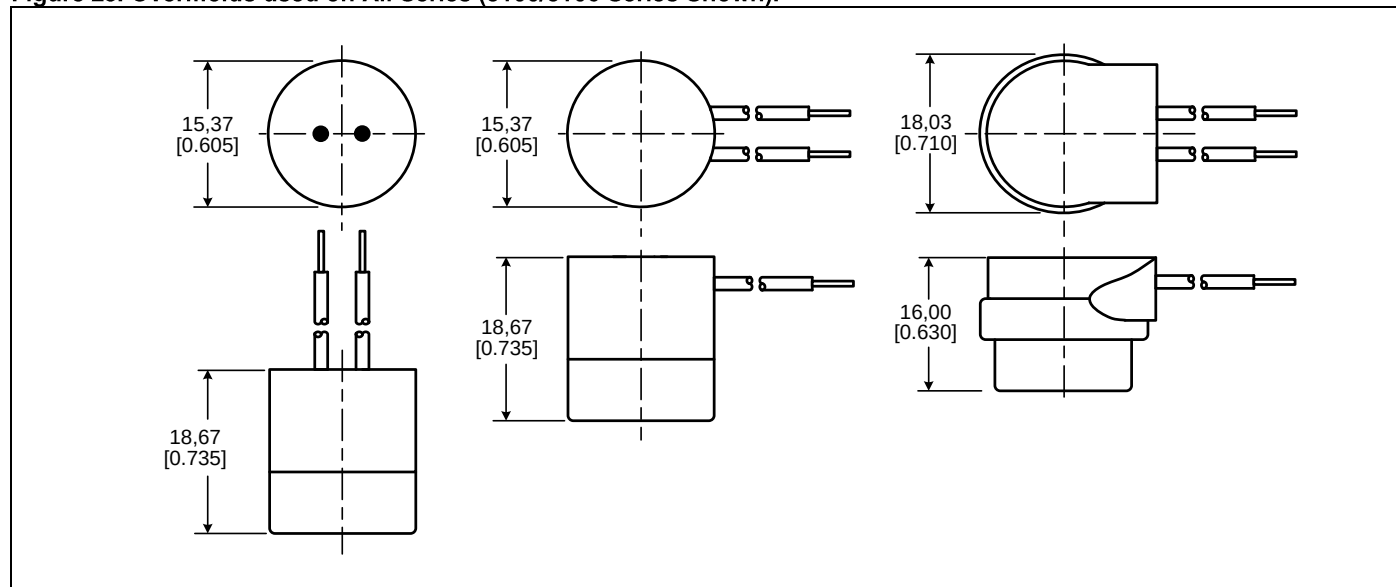

**Figure 30. Cap Studs Used on All Series**

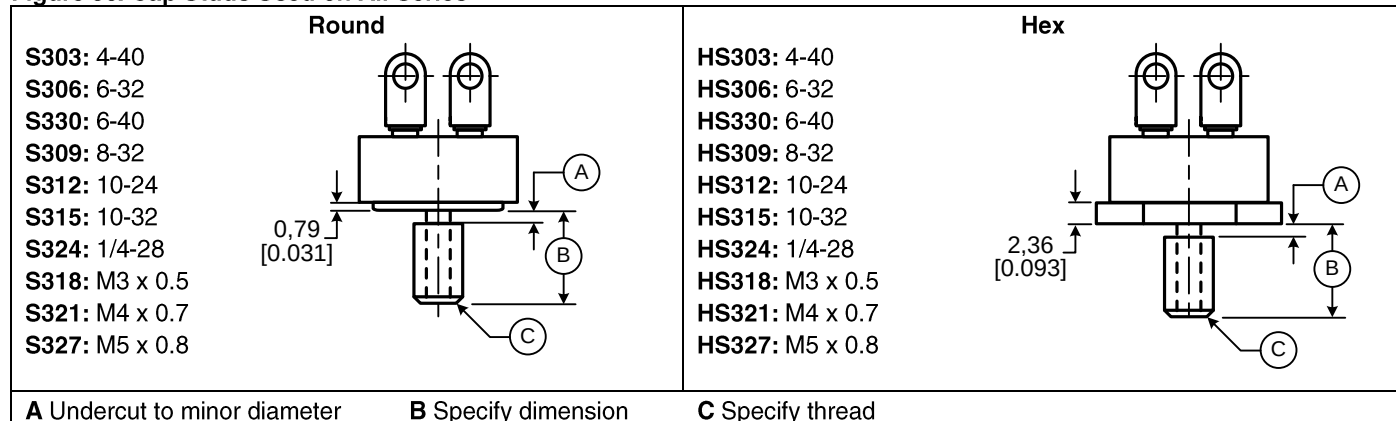

# Precision Thermostats

Figure 31. 3100U REDI-TEMP Series (See pages 12 for specifications and applications.)

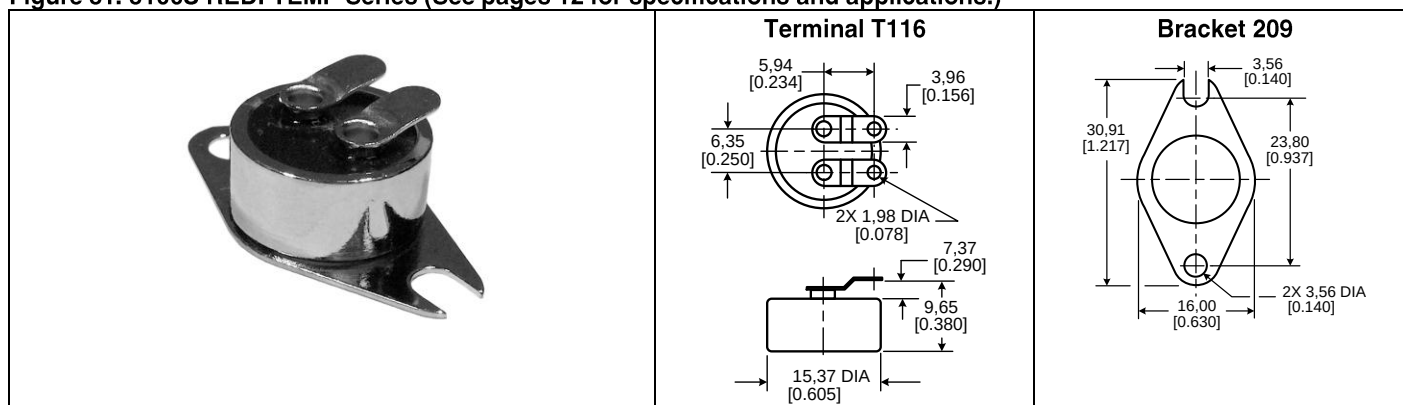


Table 44. 3100U REDI-TEMP Series Open on Rise

| Catalog Listing | Open Temp. °C [°F] | Open Tolerance °C [°F] | Close Temp. °C [°F] | Close Tolerance °C [°F] |
|-----------------|--------------------|------------------------|---------------------|-------------------------|
| 3100U-3-1431    | 4 [40]             | ±3 [±5]                | -7 [20]             | ±3 [±5]                 |
| 3100U-3-1432    | 10 [50]            | ±3 [±5]                | -1 [30]             | ±3 [±5]                 |
| 3100U-3-1433    | 16 [60]            | ±3 [±5]                | 4 [40]              | ±3 [±5]                 |
| 3100U-3-1434    | 21 [70]            | ±3 [±5]                | 10 [50]             | ±3 [±5]                 |
| 3100U-3-1435    | 27 [80]            | ±3 [±5]                | 16 [60]             | ±3 [±5]                 |
| 3100U-3-1436    | 32 [90]            | ±3 [±5]                | 21 [70]             | ±3 [±5]                 |
| 3100U-3-1437    | 38 [100]           | ±3 [±5]                | 27 [80]             | ±3 [±5]                 |
| 3100U-3-1438    | 43 [110]           | ±3 [±5]                | 32 [90]             | ±3 [±5]                 |
| 3100U-3-1439    | 49 [120]           | ±3 [±5]                | 38 [100]            | ±3 [±5]                 |
| 3100U-3-1440    | 54 [130]           | ±3 [±5]                | 43 [110]            | ±3 [±5]                 |
| 3100U-3-1441    | 60 [140]           | ±3 [±5]                | 49 [120]            | ±3 [±5]                 |
| 3100U-3-1446    | 88 [190]           | ±3 [±5]                | 77 [170]            | ±3 [±5]                 |
| 3100U-3-1447    | 93 [200]           | ±3 [±5]                | 82 [180]            | ±3 [±5]                 |
| 3100U-3-1448    | 99 [210]           | ±5 [±8]                | 85 [185]            | ±4 [±6]                 |
| 3100U-3-1449    | 104 [220]          | ±5 [±8]                | 91 [195]            | ±4 [±6]                 |
| 3100U-3-1450    | 110 [230]          | ±5 [±8]                | 96 [205]            | ±4 [±6]                 |
| 3100U-3-1451    | 116 [240]          | ±5 [±8]                | 102 [215]           | ±4 [±6]                 |
| 3100U-3-1452    | 121 [250]          | ±5 [±8]                | 107 [225]           | ±4 [±6]                 |

Table 45. 3100U REDI-TEMP Series Close on Rise

| Catalog Listing | Close Temp. °C [°F] | Close Tolerance °C [°F] | Open Temp. °C [°F] | Open Tolerance °C [°F] |
|-----------------|---------------------|-------------------------|--------------------|------------------------|
| 3100U-3-1453    | 4 [40]              | ±5 [±5]                 | -7 [20]            | ±3 [±5]                |
| 3100U-3-1454    | 10 [50]             | ±5 [±5]                 | -1 [30]            | ±3 [±5]                |
| 3100U-3-1455    | 16 [60]             | ±5 [±5]                 | 4 [40]             | ±3 [±5]                |
| 3100U-3-1456    | 27 [80]             | ±5 [±5]                 | 16 [60]            | ±3 [±5]                |
| 3100U-3-1457    | 38 [100]            | ±5 [±5]                 | 27 [80]            | ±3 [±5]                |
| 3100U-3-1458    | 49 [120]            | ±5 [±5]                 | 38 [100]           | ±3 [±5]                |
| 3100U-3-1459    | 60 [140]            | ±5 [±5]                 | 49 [120]           | ±3 [±5]                |
| 3100U-3-1460    | 71 [160]            | ±5 [±5]                 | 60 [140]           | ±3 [±5]                |
| 3100U-3-1461    | 82 [180]            | ±5 [±5]                 | 71 [160]           | ±3 [±5]                |
| 3100U-3-1462    | 93 [200]            | ±5 [±5]                 | 82 [180]           | ±3 [±5]                |
| 3100U-3-1463    | 104 [220]           | ±4 [±6]                 | 91 [195]           | ±5 [±8]                |

Figure 32. 3600/3601 REDI-TEMP Series (See pages 4 and 5 for specifications and applications.)

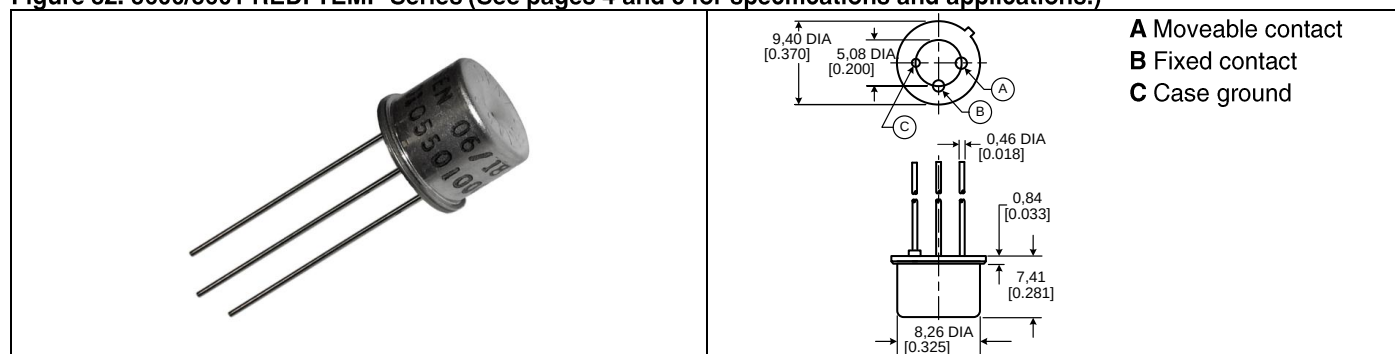


Table 46. 3600/3601 REDI-TEMP Series Open on Rise

| Catalog Listing | Open Temperature °C [°F] | Open Tolerance °C [°F] | Close Temperature °C [°F] | Close Tolerance °C [°F] | Minimum Differential Temperature °C [°F] |
|-----------------|--------------------------|------------------------|---------------------------|-------------------------|------------------------------------------|
| 3600040010001   | 40.0 [104]               | ±5 [±8]                | N/A                       | N/A                     | ±2 [±3.6]                                |
| 3600045010001   | 45.0 [113]               | ±5 [±8]                | N/A                       | N/A                     | ±2 [±3.6]                                |
| 3600050010001   | 50.0 [122]               | ±5 [±8]                | N/A                       | N/A                     | ±2 [±3.6]                                |
| 3600055010001   | 55.0 [131]               | ±5 [±8]                | N/A                       | N/A                     | ±5 [±8]                                  |
| 3600060010001   | 60.0 [140]               | ±5 [±8]                | N/A                       | N/A                     | ±5 [±8]                                  |
| 3600065010001   | 65.0 [149]               | ±5 [±8]                | N/A                       | N/A                     | ±5 [±8]                                  |
| 3600070010001   | 70.0 [158]               | ±5 [±8]                | N/A                       | N/A                     | ±5 [±8]                                  |
| 3600075010001   | 90.0 [194]               | ±5 [±8]                | N/A                       | N/A                     | ±5 [±8]                                  |
| 3600080010001   | 80.0 [176]               | ±5 [±8]                | N/A                       | N/A                     | ±5 [±8]                                  |
| 3600085010001   | 75.0 [167]               | ±5 [±8]                | N/A                       | N/A                     | ±7 [±12.6]                               |
| 3600090010001   | 90.0 [194]               | ±5 [±8]                | N/A                       | N/A                     | ±7 [±12.6]                               |
| 3600095010001   | 95.0 [203]               | ±5 [±8]                | N/A                       | N/A                     | ±7 [±12.6]                               |
| 3600100010001   | 100.0 [212]              | ±5 [±8]                | N/A                       | N/A                     | ±7 [±12.6]                               |

Table 47. 3600/3601 REDI-TEMP Series Close on Rise

| Catalog Listing | Close Temperature °C [°F] | Close Tolerance °C [°F] | Open Temperature °C [°F] | Open Tolerance °C [°F] | Minimum Differential Temperature °C [°F] |
|-----------------|---------------------------|-------------------------|--------------------------|------------------------|------------------------------------------|
| 3601040010001   | 40.0 [104]                | ±7 [±12.6]              | N/A                      | N/A                    | ±2 [±3.6]                                |
| 3601045010001   | 45.0 [113]                | ±7 [±12.6]              | N/A                      | N/A                    | ±2 [±3.6]                                |
| 3601050010001   | 50.0 [122]                | ±7 [±12.6]              | N/A                      | N/A                    | ±2 [±3.6]                                |
| 3601055010001   | 55.0 [131]                | ±7 [±12.6]              | N/A                      | N/A                    | ±5 [±8]                                  |
| 3601060010001   | 60.0 [140]                | ±7 [±12.6]              | N/A                      | N/A                    | ±5 [±8]                                  |
| 3601065010001   | 65.0 [149]                | ±7 [±12.6]              | N/A                      | N/A                    | ±5 [±8]                                  |
| 3601070010001   | 70.0 [158]                | ±7 [±12.6]              | N/A                      | N/A                    | ±5 [±8]                                  |
| 3601075010001   | 90.0 [194]                | ±7 [±12.6]              | N/A                      | N/A                    | ±5 [±8]                                  |
| 3601080010001   | 80.0 [176]                | ±7 [±12.6]              | N/A                      | N/A                    | ±5 [±8]                                  |
| 3601085010001   | 75.0 [167]                | ±7 [±12.6]              | N/A                      | N/A                    | ±7 [±12.6]                               |
| 3601090010001   | 90.0 [194]                | ±7 [±12.6]              | N/A                      | N/A                    | ±7 [±12.6]                               |
| 3601095010001   | 95.0 [203]                | ±7 [±12.6]              | N/A                      | N/A                    | ±7 [±12.6]                               |
| 3601100010001   | 100.0 [212]               | ±7 [±12.6]              | N/A                      | N/A                    | ±7 [±12.6]                               |

## **WARNING**

### **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARRANTY/REMEDY**

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

## **WARNING**

### **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

### **SALES AND SERVICE**

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

**E-mail:** [info.sc@honeywell.com](mailto:info.sc@honeywell.com)

**Internet:** [www.honeywell.com/sensing](http://www.honeywell.com/sensing)

#### **Phone and Fax:**

|               |                         |
|---------------|-------------------------|
| Asia Pacific  | +65 6355-2828           |
|               | +65 6445-3033 Fax       |
| Europe        | +44 (0) 1698 481481     |
|               | +44 (0) 1698 481676 Fax |
| Latin America | +1-305-805-8188         |
|               | +1-305-883-8257 Fax     |
| USA/Canada    | +1-800-537-6945         |
|               | +1-815-235-6847         |
|               | +1-815-235-6545 Fax     |

Sensing and Control  
Honeywell  
1985 Douglas Drive North  
Golden Valley, MN 55422  
[www.honeywell.com](http://www.honeywell.com)

009048-2-EN IL50 GLO Printed in USA  
April 2010  
Copyright © 2010 Honeywell International Inc. All rights reserved.

# **Honeywell**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9