

# NHD-7.0CTP-CAPE-N

## Color TFT Liquid Crystal Display Module + BeagleBone Black Cape

|       |   |
|-------|---|
| NHD-  | Newhaven Display  |
| 7.0-  | 7.0" Diagonal   |
| CTP-  | Capacitive Touch Panel with Controller  |
| CAPE- | BeagleBone Black Cape   |
| N-    | Display: NHD-7.0-800480EF-ASXN#-CTP, Sunlight Readable Type, Wide Temperature |

**Newhaven Display International, Inc.**

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

[www.newhavendisplay.com](http://www.newhavendisplay.com)

[nhtech@newhavendisplay.com](mailto:nhtech@newhavendisplay.com)

[nhsales@newhavendisplay.com](mailto:nhsales@newhavendisplay.com)

## Document Revision History

| Revision | Date     | Description     | Changed by |
|----------|----------|-----------------|------------|
| 0        | 09/22/16 | Initial Release | PB         |

## Functions and Features

- 800xRGBx480 resolution, up to 16.7M colors
- Sunlight Readable
- PWM backlight control
- EEPROM w/ on-board dip switches: Supports four cape addresses
- Secondary cape slot
- 4 x 3.5mm mounting holes
- Assembled with NHD-7.0-800480EF-ATXL#-CTP
- Capacitive touch panel with controller
  - 5 point multi-touch input
  - Gesture input
    - Zoom In/Out
    - Swipe Up/Down/Left/Right

## User Guide:

Please download the User Guide at [http://www.newhavendisplay.com/userguides/NHD-7.0CTP-CAPE\\_User\\_Guide.pdf](http://www.newhavendisplay.com/userguides/NHD-7.0CTP-CAPE_User_Guide.pdf)

# Mechanical Drawing

| Rev | Description     | Date     |
|-----|-----------------|----------|
| 1.0 | Initial Release | 09/22/16 |

A

B

C




D

A

B


C

D

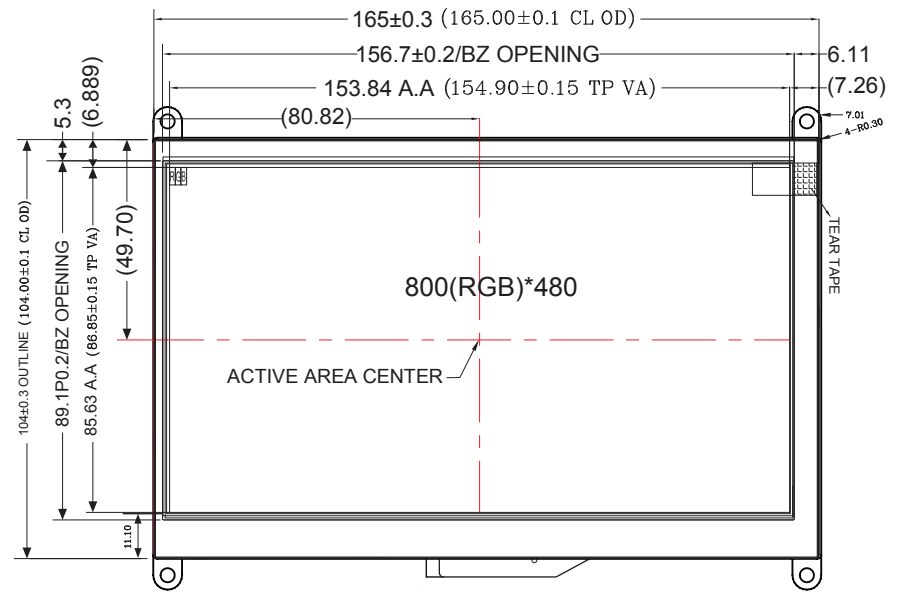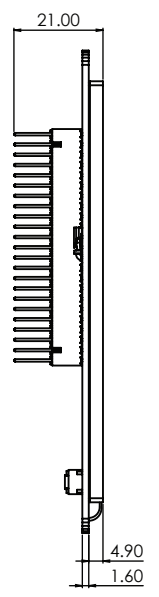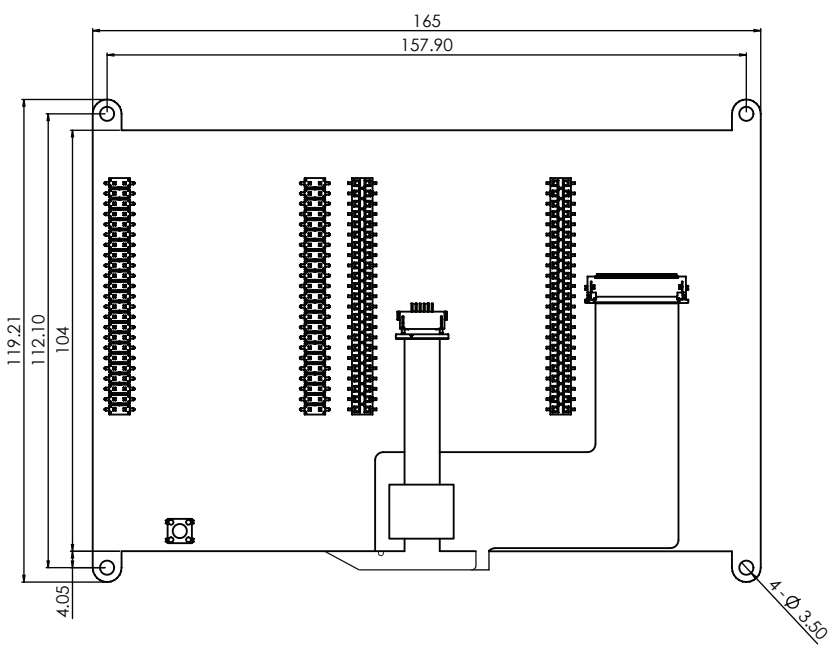


**NOTES:**

1. Display Size: 7.0" TFT
2. Optimal Viewing Direction: 12:00
3. Display Mode: Transmissive / Normally White / Anti-Glare
4. Luminance: 830 cd/m<sup>2</sup>
5. Touch Panel: PCAP

|                   |   |                                   |
|-------------------|---|-----------------------------------|
| Unit<br>mm        |  |                                   |
| Gen. Tol.<br>±0.3 | Date<br>09/22/16  | Part Number:<br>NHD-7.0CTP-CAPE-N |

# Schematic

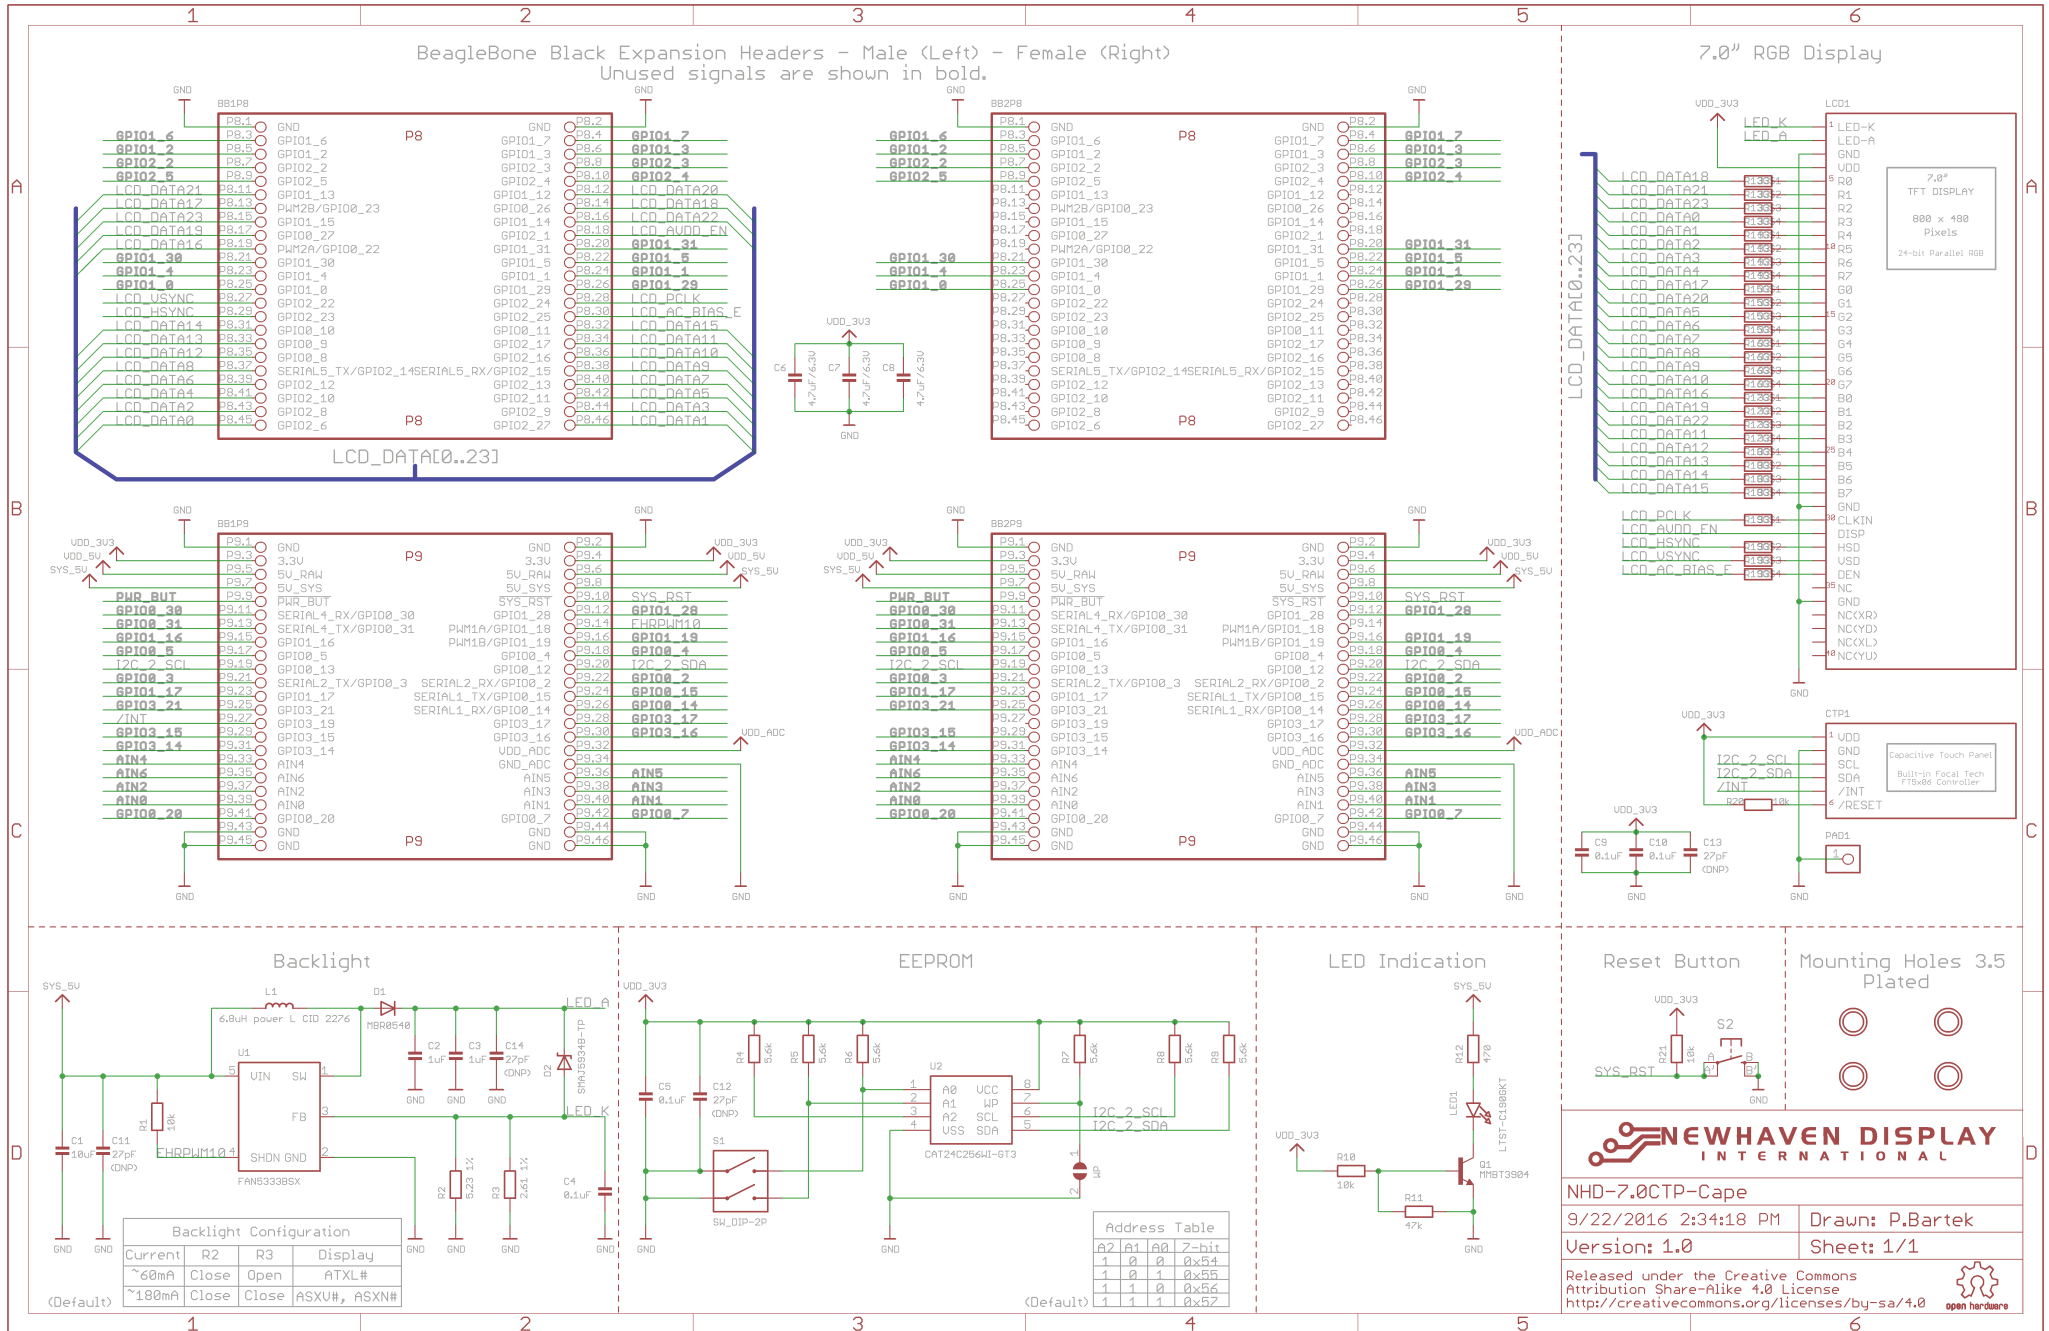

**NEWHAVEN DISPLAY**  
INTERNATIONAL


NHD-7.0CTP-Cape  
9/22/2016 2:34:18 PM Drawn: P.Bartek  
Version: 1.0 Sheet: 1/1

Released under the Creative Commons Attribution Share-Alike 4.0 License  
<http://creativecommons.org/licenses/by-sa/4.0>

## Signal Usage

The BeagleBone Black NHD-7.0CTP-CAPE uses 40 signals including:

- VDD\_3V3EXP
- SYS\_5V
- DGND
- GPIO1\_28
- EHRPWM1A
- GPIO1\_16
- GPIO1\_19
- I2C2\_SCL
- I2C2\_SDA
- GPIO1\_17
- GPIO3\_19
- LCD\_VSYNC
- LCD\_HSYNC
- LCD\_PCLK
- LCD\_DATA[0..23]
- LCD\_AC\_DATA\_EN
- GPIO2\_1

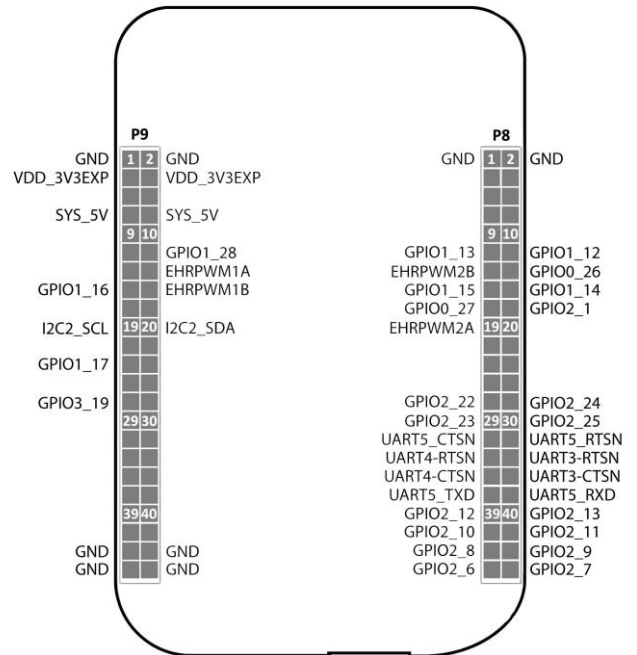

## EEPROM

On the NHD-7.0CTP-CAPE there is an EEPROM which is used to configure the BeagleBone Black with the appropriate configuration in order to use the Cape.

| EEPROM Details |                  |
|----------------|------------------|
| EEPROM Support | Yes              |
| Board Name     | nhd7cape         |
| Version        | 00A0             |
| Manufacturer   | Newhaven Display |
| Part Number    | NHD-7.0CTP-CAPE  |
| Pins Used      | 40               |

### Note:

Some EEPROM content refers to LCD7 00A3 which is made by CircuitCo and the nh7cape 00A0 which is made by Cembssoft. This is due to how the BBB identifies the CAPE and what drivers to apply to it.

All references to CircuitCo (LCD7) and Cembssoft (nh7cape) remain the property of CircuitCo and Cembssoft. They are not affiliated to Newhaven Display in any way.

The Beaglebone, Beaglebone Black and Beagleboard remains the property of beaglebone.org. All references to the words Beaglebone, Beaglebone Black, Beagleboard are licensed under a Creative Commons AttributionShare Alike 3.0 license.

## Display Information

### TFT:

NHD-7.0-800480EF-ASXN#-CTP - Sunlight Readable 7.0" TFT, 800x480 Pixels, 24-bit Parallel RGB Interface, w/ Projected Capacitive Touch Panel.

Please download specification at <http://www.newhavendisplay.com/specs/NHD-7.0-800480EF-ASXN-CTP.pdf>

## Electrical Characteristics

| Item                        | Symbol   | Condition     | Min. | Typ. | Max.     | Unit |
|-----------------------------|----------|---------------|------|------|----------|------|
| Operating Temperature Range | $T_{OP}$ | Absolute Max  | -20  | -    | +70      | °C   |
| Storage Temperature Range   | $T_{ST}$ | Absolute Max  | -30  | -    | +80      | °C   |
| Supply Voltage              | $V_{DD}$ | -             | 4.8  | 5.0  | 5.5      | V    |
| Supply Current              | $I_{DD}$ | $V_{DD} = 5V$ | -    | 1    | 1.5      | A    |
| "H" level input             | $V_{IH}$ | -             | 2.2  | -    | $V_{DD}$ | V    |
| "L" level input             | $V_{IL}$ | -             | GND  | -    | 0.8      | V    |

## Optical Characteristics

| Item                   | Symbol      | Condition                   | Min.  | Typ.  | Max.  | Unit            |   |
|------------------------|-------------|-----------------------------|-------|-------|-------|-----------------|---|
| Optimal Viewing Angles | Top         | $CR \geq 10$                | -     | 60    | -     | °               |   |
|                        | Bottom      |                             | -     | 50    | -     | °               |   |
|                        | Left        |                             | -     | 60    | -     | °               |   |
|                        | Right       |                             | -     | 60    | -     | °               |   |
| Contrast Ratio         | CR          | -                           | -     | 400   | -     | -               |   |
| Luminance              | $L_V$       | $I_{LED} = 180 \text{ mA}$  | 660   | 830   | -     | $\text{cd/m}^2$ |   |
| Response Time          | $T_R + T_F$ | $T_{OP} = 25^\circ\text{C}$ | -     | 25    | 35    | ms              |   |
| Chromaticity           | Red         | $X_R$                       | -     | 0.526 | 0.576 | 0.626           | - |
|                        |             | $Y_R$                       | -     | 0.290 | 0.340 | 0.390           | - |
|                        | Green       | $X_G$                       | -     | 0.278 | 0.328 | 0.378           | - |
|                        |             | $Y_G$                       | -     | 0.575 | 0.625 | 0.675           | - |
|                        | Blue        | $X_B$                       | -     | 0.102 | 0.152 | 0.202           | - |
|                        |             | $Y_B$                       | -     | 0.085 | 0.135 | 0.185           | - |
| White                  | $X_W$       | -                           | 0.245 | 0.295 | 0.345 | -               |   |
|                        | $Y_W$       | -                           | 0.514 | 0.366 | 0.614 | -               |   |

## Capacitive Touch Panel Material Characteristics:

| Property            | Requirement    | Unit |
|---------------------|----------------|------|
| IC                  | FT5406EE8      | -    |
| ITO Glass thickness | 0.55           | mm   |
| Surface Hardness    | $\geq 6$       | H    |
| Light transmission  | $83\% \pm 5\%$ | -    |
| Operating Humidity  | 20~90          | RH   |
| Storage Humidity    | 20~90          | RH   |

## Quality Information

| Test Item                             | Content of Test   | Test Condition  | Note |
|---------------------------------------|---|---|------|
| High Temperature storage              | Endurance test applying the high storage temperature for a long time.   | +80°C , 96hrs   | 2    |
| Low Temperature storage               | Endurance test applying the low storage temperature for a long time.  | -30°C , 96hrs   | 1,2  |
| High Temperature Operation            | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.                    | +70°C , 96hrs   | 2    |
| Low Temperature Operation             | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.                     | -20°C , 96hrs   | 1,2  |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +60°C , 90% RH , 96hrs  | 1,2  |
| Thermal Shock resistance              | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.                  | -20°C,30min -> 25°C,5min ->70°C,30min = 1 cycle<br>10 cycles                        |      |
| Vibration test                        | Endurance test applying vibration to simulate transportation and use.   | 10-55Hz , 15mm amplitude.<br>60 sec in each of 3 directions X,Y,Z<br>For 15 minutes | 3    |
| Static electricity test               | Endurance test applying electric static discharge.  | VS=800V, RS=1.5kΩ, CS=100pF<br>One time   |      |

**Note 1:** No condensation to be observed.

**Note 2:** Conducted after 4 hours of storage at 25°C, 0%RH.

**Note 3:** Test performed on product itself, not inside a container.

## Precautions for using LCDs/LCMs

See Precautions at [www.newhavendisplay.com/specs/precautions.pdf](http://www.newhavendisplay.com/specs/precautions.pdf)

## Warranty Information

See Terms & Conditions at [http://www.newhavendisplay.com/index.php?main\\_page=terms](http://www.newhavendisplay.com/index.php?main_page=terms)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9