



Aluminum electrolytic capacitors

Capacitors with 4-pin snap-in terminals and solder pins

Series/Type: B43515, B43525

Date: November 2012

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

Capacitors with 4-pin snap-in terminals and solder pins**B43515, B43525****Compact – 105 °C****Long-life grade capacitors****Applications**

- Frequency converters
- Solar inverters
- Uninterruptible power supplies
- Professional power supplies
- Medical appliances

**B43515****B43525****Features**


- Long useful life
- High reliability and high ripple current capability
- High volumetric efficiency
- Many different case sizes
- Pinning ensures correct insertion
- RoHS-compatible

Construction

- Charge/discharge-proof, polar
- Aluminum case, fully insulated with PVC
- Version with additional PET insulation cap on terminal side available for insulating the capacitor from the PCB (B43515 only)
- Overload protection by safety vent on the case wall

Terminals


- 4-pin snap-in terminals (6.3 mm and 4.5 mm length)
- Solder pin mounting on printed circuit boards, pins fit standardized spacings on PCB



Specifications and characteristics in brief

Rated voltage V_R	350 ... 450 V DC			
Surge voltage V_S	$1.1 \cdot V_R$			
Rated capacitance C_R	390 ... 2700 μF			
Capacitance tolerance	$\pm 20\% \triangleq M$			
Dissipation factor $\tan \delta$ (20 °C, 120 Hz)	$V_R \leq 400 \text{ V DC: } \tan \delta \leq 0.15$ $V_R > 400 \text{ V DC: } \tan \delta \leq 0.20$			
Leakage current I_{leak} (5 min, 20 °C)	$I_{\text{leak}} \leq 0.3 \mu\text{A} \cdot \left(\frac{C_R}{\mu\text{F}} \cdot \frac{V_R}{V} \right)^{0.7} + 4 \mu\text{A}$			
Self-inductance ESL	Approx. 20 nH			
Useful life ¹⁾ 105 °C; V_R ; $I_{AC,R}$ 85 °C; V_R ; $I_{AC,max}$ 40 °C; V_R ; $2.2 \cdot I_{AC,R}$	> 3000 h > 7000 h > 200000 h	Requirements: $\Delta C/C \leq \pm 20\%$ of initial value $\tan \delta \leq 2$ times initial specified limit $I_{\text{leak}} \leq$ initial specified limit		
Voltage endurance test 105 °C; V_R	2000 h	Post test requirements: $\Delta C/C \leq \pm 10\%$ of initial value $\tan \delta \leq 1.3$ times initial specified limit $I_{\text{leak}} \leq$ initial specified limit		
Vibration resistance test	To IEC 60068-2-6, test Fc: Frequency range 10 ... 55 Hz, displacement amplitude 0.35 mm, acceleration max. 5 g, duration 3 × 2 h. Capacitor mounted by its body which is rigidly clamped to the work surface.			
Characteristics at low temperature	Max. impedance ratio at 100 Hz	V_R	$\leq 400 \text{ V}$	$> 400 \text{ V}$
		$Z_{-25^\circ\text{C}} / Z_{20^\circ\text{C}}$	4	7
		$Z_{-40^\circ\text{C}} / Z_{20^\circ\text{C}}$	7	14
IEC climatic category	To IEC 60068-1: $V_R \leq 400 \text{ V DC: } 40/105/56 (-40^\circ\text{C}/+105^\circ\text{C}/56 \text{ days damp heat test})$ $V_R > 400 \text{ V DC: } 25/105/56 (-25^\circ\text{C}/+105^\circ\text{C}/56 \text{ days damp heat test})$ The capacitors can be operated in the temperature range of -40 °C to +105 °C but the impedance at -40 °C should be taken into consideration.			
Detail specification Sectional specification	Similar to CECC 30301-808 IEC 60384-4			

1) Refer to chapter "General technical information, 5 Useful life" on how to interpret useful life.




B43515, B43525

Compact – 105 °C

Dimensional drawings

B43515, 4-pin snap-in terminals, PVC insulation

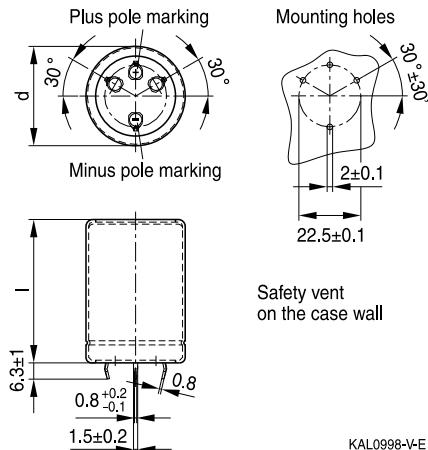

KAL0998-V-E

Standard snap-in terminals:



length (6.3 ± 1) mm.

Also available with length of $(4.5 - 1)$ mm.

All pin holes must be drilled into the PC-board, since the unconnected pins serve as mountings.

These pins must be soldered to isolated pads or pads with the same potential as the negative pole.


Dimensions (mm)	Approx. weight (g)	Packing units (pcs.)
d +1	±2	
35	45	57
35	50	63
35	55	70
35	60	76
35	65	82
35	70	88
35	75	95
35	80	101
40	40	71
40	45	80
40	50	89
40	60	107
40	65	116
40	70	125
40	75	134
40	80	143
40	90	161
40	95	170
45	40	95
45	45	108
45	50	120
45	60	143
45	65	155
45	70	166
45	75	178
45	80	190
45	90	214
45	95	226
45	100	237

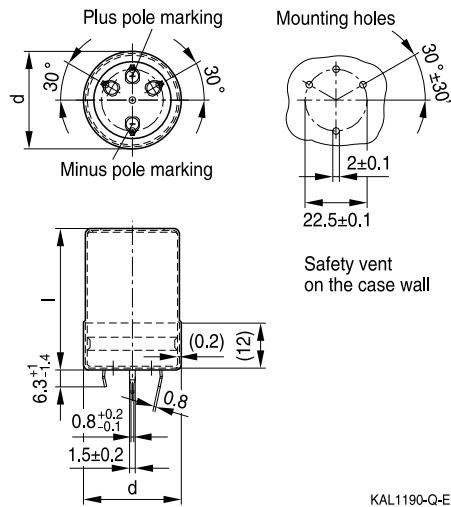
B43515, 4-pin snap-in terminals, PVC insulation and PET insulation cap on terminal side

Standard snap-in terminals:

length (6.3 +1/-1.4) mm. Also available with length of (4.5 – 1.4) mm. PET insulation cap is positioned under the insulation sleeve.

All pin holes must be drilled into the PC-board, since the unconnected pins serve as mountings. These pins must be soldered to isolated pads or pads with the same potential as the negative pole.


Dimensions (mm)	Approx. weight (g)	Packing units (pcs.)
d +1	l ±2	
35	45	57
35	50	63
35	55	70
35	60	76
35	65	82
35	70	88
35	75	95
35	80	101
40	40	71
40	45	80
40	50	89
40	60	107
40	65	116
40	70	125
40	75	134
40	80	143
40	90	161
40	95	170
45	40	95
45	45	108
45	50	120
45	60	143
45	65	155
45	70	166
45	75	178
45	80	190
45	90	214
45	95	226
45	100	237



B43515, B43525

Compact = 105 °C

B43525, solder pins

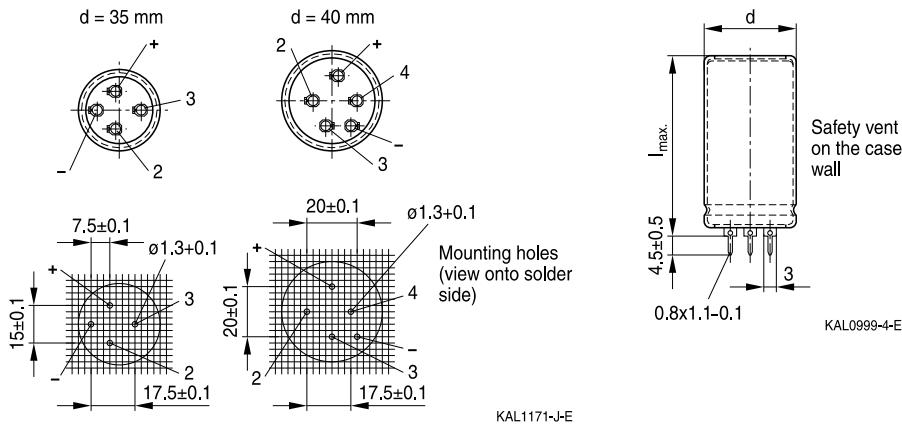


Pole markings: Plus: +; Minus: -

All pin holes must be drilled into the PC-board, since the unconnected pins serve as mountings. These pins must be soldered to isolated pads or pads with the same potential as the negative pole.

Dimensions (mm)		Approx. weight (g)	Packing units (pcs.)	Dimensions (mm)		Approx. weight (g)	Packing units (pcs.)
d + 1	l _{max}			d + 1	l _{max}		
35	49	57	60	40	44	71	33
35	54	63	60	40	49	80	33
35	59	70	36	40	54	89	33
35	64	76	36	40	64	107	33
35	69	82	36	40	69	116	33
35	74	88	36	40	74	125	33
35	79	95	36	40	79	134	33
35	84	101	36	40	84	143	33
				40	94	161	33
				40	99	170	33

B43515, B43525

Compact – 105 °C



Packing of 4-pin snap-in terminal and solder pin capacitors



For ecological reasons the packing is pure cardboard.

Ordering codes for terminal styles and insulation features

Identification in 3rd block of ordering code


4-pin snap-in terminal capacitors

Terminal version	Insulation version	
	PVC	PVC plus PET cap
Standard terminals 6.3 mm	M000	M080
Short terminals 4.5 mm	M007	M087

Ordering examples:

B43515A9188M007 } 4-pin snap-in capacitor with short terminals and standard PVC insulation

B43515A9188M080 } 4-pin snap-in capacitor with standard terminals and PVC insulation with additional PET insulation cap on terminal side



B43515, B43525

Compact – 105 °C


Overview of available types

V_R (V DC)	350	400	420	450
C_R (μ F)	Case dimensions $d \times l$ (mm)			
390			35 × 45 40 × 40	35 × 50 40 × 40
470		35 × 45 40 × 40	35 × 55 40 × 45	35 × 55 40 × 45 45 × 40
560	35 × 45 40 × 40	35 × 55 40 × 45 45 × 40	35 × 60 40 × 50 45 × 40	35 × 65 40 × 50 45 × 40
680	35 × 55 40 × 45	35 × 65 40 × 50 45 × 40	35 × 70 40 × 60 45 × 45	35 × 75 40 × 60 45 × 50
820	35 × 65 40 × 50 45 × 40	35 × 75 40 × 60 45 × 45	35 × 80 40 × 60 45 × 50	40 × 70 45 × 50
1000	35 × 75 40 × 60 45 × 45	40 × 65 45 × 50	40 × 75 45 × 60	40 × 80 45 × 65
1200	40 × 65 45 × 50	40 × 80 45 × 60	40 × 90 45 × 70	40 × 95 45 × 75
1500	40 × 80 45 × 65	45 × 70	45 × 80	45 × 90
1800	40 × 95 45 × 75	45 × 90	45 × 95	
2200	45 × 90			
2700	45 × 100			

The capacitance and voltage ratings listed above are available in different cases upon request.

Other voltage and capacitance ratings are also available upon request.

Capacitors with solder pins are only available in 35 and 40 mm case diameters.



Technical data and ordering codes

C_R 100 Hz 20 °C μF	Case dimensions $d \times l$ mm	ESR_{typ} 100 Hz 20 °C $m\Omega$	Z_{max} 10 kHz 20 °C $m\Omega$	$I_{AC,max}$ 100 Hz 60 °C A	$I_{AC,max}$ 100 Hz 85 °C A	$I_{AC,R}$ 100 Hz 105 °C A	Ordering code (composition see below)
$V_R = 350$ V DC							
560	35 x 45	160	200	6.22	4.65	2.30	B435*5A4567M0##
560	40 x 40	160	200	6.31	4.72	2.33	B435*5B4567M0##
680	35 x 55	130	160	7.39	5.52	2.73	B435*5A4687M0##
680	40 x 45	130	160	7.24	5.41	2.68	B435*5B4687M0##
820	35 x 65	110	140	8.09	6.05	2.99	B435*5A4827M0##
820	40 x 50	110	140	8.25	6.17	3.05	B435*5B4827M0##
820	45 x 40	110	140	7.70	5.76	2.85	B43515C4827M0##
1000	35 x 75	90	110	9.46	7.08	3.50	B435*5A4108M0##
1000	40 x 60	90	110	9.11	6.82	3.37	B435*5B4108M0##
1000	45 x 45	90	110	8.26	6.18	3.06	B43515C4108M0##
1200	40 x 65	75	100	10.2	7.70	3.81	B435*5A4128M0##
1200	45 x 50	75	100	9.40	7.02	3.47	B43515B4128M0##
1500	40 x 80	60	75	12.4	9.33	4.62	B435*5A4158M0##
1500	45 x 65	60	75	11.5	8.62	4.27	B43515B4158M0##
1800	40 x 95	50	65	14.6	10.9	5.43	B435*5A4188M0##
1800	45 x 75	50	65	13.3	9.97	4.93	B43515B4188M0##
2200	45 x 90	40	50	15.8	11.8	5.86	B43515A4228M0##
2700	45 x 100	35	45	18.3	13.6	6.77	B43515A4278M0##

Capacitors with solder pins are only available in 35 and 40 mm case diameters.

Composition of ordering code

* = Terminal type

1 = 4-pin snap-in terminals

2 = solder pin


= Terminal style and insulation feature

00 = solder pin or 4-pin snap-in standard terminals and PVC insulation

07 = 4-pin snap-in short terminals and PVC insulation

80 = 4-pin snap-in standard terminals and PVC insulation with additional PET insulation cap on terminal side

87 = 4-pin snap-in short terminals and PVC insulation with additional PET insulation cap on terminal side



B43515, B43525

Compact – 105 °C

Technical data and ordering codes

C_R 100 Hz 20 °C μF	Case dimensions d x l mm	ESR _{typ} 100 Hz 20 °C mΩ	Z _{max} 10 kHz 20 °C mΩ	I _{AC,max} 100 Hz 60 °C A	I _{AC,max} 100 Hz 85 °C A	I _{AC,R} 100 Hz 105 °C A	Ordering code (composition see below)
$V_R = 400$ V DC							
470	35 x 45	190	240	5.70	4.26	2.11	B435*5A9477M0##
470	40 x 40	190	240	5.80	4.32	2.14	B435*5B9477M0##
560	35 x 55	160	200	6.70	5.01	2.48	B435*5A9567M0##
560	40 x 45	160	200	6.60	4.91	2.43	B435*5B9567M0##
560	45 x 40	160	200	6.40	4.76	2.35	B43515C9567M0##
680	35 x 65	130	160	7.40	5.51	2.73	B435*5A9687M0##
680	40 x 50	130	160	7.50	5.62	2.78	B435*5B9687M0##
680	45 x 40	130	160	7.00	5.24	2.59	B43515C9687M0##
820	35 x 75	110	140	8.60	6.41	3.17	B435*5A9827M0##
820	40 x 60	110	140	8.30	6.17	3.05	B435*5B9827M0##
820	45 x 45	110	140	7.50	5.60	2.77	B43515C9827M0##
1000	40 x 65	90	110	9.40	7.03	3.48	B435*5A9108M0##
1000	45 x 50	90	110	8.60	6.41	3.17	B43515B9108M0##
1200	40 x 80	75	100	11.1	8.35	4.13	B435*5A9128M0##
1200	45 x 60	75	100	10.0	7.49	3.70	B43515B9128M0##
1500	45 x 70	60	75	11.8	8.86	4.39	B43515A9158M0##
1800	45 x 90	50	65	14.3	10.7	5.30	B43515A9188M0##

Capacitors with solder pins are only available in 35 and 40 mm case diameters.

Composition of ordering code

* = Terminal type

1 = 4-pin snap-in terminals

2 = solder pin


= Terminal style and insulation feature

00 = solder pin or 4-pin snap-in standard terminals and PVC insulation

07 = 4-pin snap-in short terminals and PVC insulation

80 = 4-pin snap-in standard terminals and PVC insulation with additional PET insulation cap on terminal side

87 = 4-pin snap-in short terminals and PVC insulation with additional PET insulation cap on terminal side



Technical data and ordering codes

C_R 100 Hz 20 °C μF	Case dimensions d x l mm	ESR_{typ} 100 Hz 20 °C mΩ	Z_{max} 10 kHz 20 °C mΩ	$I_{AC,max}$ 100 Hz 60 °C A	$I_{AC,max}$ 100 Hz 85 °C A	$I_{AC,R}$ 100 Hz 105 °C A	Ordering code (composition see below)
$V_R = 420$ V DC							
390	35 x 45	390	480	5.20	3.88	1.92	B435*5A0397M0##
390	40 x 40	390	480	5.30	3.94	1.95	B435*5B0397M0##
470	35 x 55	330	400	6.10	4.59	2.27	B435*5A0477M0##
470	40 x 45	330	400	6.00	4.50	2.23	B435*5B0477M0##
560	35 x 60	270	330	6.90	5.18	2.56	B435*5A0567M0##
560	40 x 50	270	330	6.80	5.10	2.52	B435*5B0567M0##
560	45 x 40	270	330	6.40	4.76	2.35	B43515C0567M0##
680	35 x 70	230	280	7.60	5.68	2.81	B435*5A0687M0##
680	40 x 60	230	280	7.50	5.62	2.78	B435*5B0687M0##
680	45 x 45	230	280	6.80	5.10	2.52	B43515C0687M0##
820	35 x 80	190	230	8.80	6.58	3.26	B435*5A0827M0##
820	40 x 60	190	230	8.30	6.17	3.05	B435*5B0827M0##
820	45 x 50	190	230	7.80	5.80	2.87	B43515C0827M0##
1000	40 x 75	150	190	9.90	7.43	3.67	B435*5A0108M0##
1000	45 x 60	150	190	9.10	6.83	3.38	B43515B0108M0##
1200	40 x 90	130	160	11.7	8.76	4.33	B435*5A0128M0##
1200	45 x 70	130	160	10.6	7.93	3.92	B43515B0128M0##
1500	45 x 80	100	130	12.4	9.33	4.62	B43515A0158M0##
1800	45 x 95	85	110	14.6	10.9	5.42	B43515A0188M0##

Capacitors with solder pins are only available in 35 and 40 mm case diameters.

Composition of ordering code

* = Terminal type

1 = 4-pin snap-in terminals

2 = solder pin


= Terminal style and insulation feature

00 = solder pin or 4-pin snap-in standard terminals and PVC insulation

07 = 4-pin snap-in short terminals and PVC insulation

80 = 4-pin snap-in standard terminals and PVC insulation with additional PET insulation cap on terminal side

87 = 4-pin snap-in short terminals and PVC insulation with additional PET insulation cap on terminal side



B43515, B43525

Compact – 105 °C

Technical data and ordering codes

C_R 100 Hz 20 °C μF	Case dimensions $d \times l$ mm	ESR_{typ} 100 Hz 20 °C $m\Omega$	Z_{max} 10 kHz 20 °C $m\Omega$	$I_{AC,max}$ 100 Hz 60 °C A	$I_{AC,max}$ 100 Hz 85 °C A	$I_{AC,R}$ 100 Hz 105 °C A	Ordering code (composition see below)
$V_R = 450$ V DC							
390	35 x 50	390	480	5.40	4.04	2.00	B435*5A5397M0##
390	40 x 40	390	480	5.30	3.94	1.95	B435*5B5397M0##
470	35 x 55	330	400	6.10	4.59	2.27	B435*5A5477M0##
470	40 x 45	330	400	6.00	4.50	2.23	B435*5B5477M0##
470	45 x 40	330	400	5.80	4.36	2.15	B43515C5477M0##
560	35 x 65	270	330	6.70	5.00	2.47	B435*5A5567M0##
560	40 x 50	270	330	6.80	5.10	2.52	B435*5B5567M0##
560	45 x 40	270	330	6.40	4.76	2.35	B43515C5567M0##
680	35 x 75	230	280	7.80	5.84	2.89	B435*5A5687M0##
680	40 x 60	230	280	7.50	5.62	2.78	B435*5B5687M0##
680	45 x 50	230	280	7.10	5.28	2.61	B43515C5687M0##
820	40 x 70	190	230	8.80	6.55	3.24	B435*5A5827M0##
820	45 x 50	190	230	7.80	5.80	2.87	B43515B5827M0##
1000	40 x 80	150	190	10.1	7.62	3.77	B435*5A5108M0##
1000	45 x 65	150	190	9.40	7.04	3.48	B43515B5108M0##
1200	40 x 95	130	160	11.9	8.95	4.43	B435*5A5128M0##
1200	45 x 75	130	160	10.8	8.14	4.03	B43515B5128M0##
1500	45 x 90	100	130	13.0	9.78	4.84	B43515A5158M0##

Capacitors with solder pins are only available in 35 and 40 mm case diameters.

Composition of ordering code

* = Terminal type

1 = 4-pin snap-in terminals





2 = solder pin

= Terminal style and insulation feature


00 = solder pin or 4-pin snap-in standard
terminals and PVC insulation07 = 4-pin snap-in short terminals and PVC
insulation80 = 4-pin snap-in standard terminals and PVC
insulation with additional PET insulation cap
on terminal side87 = 4-pin snap-in short terminals and PVC
insulation with additional PET insulation cap
on terminal side

B43515, B43525

Compact – 105 °C

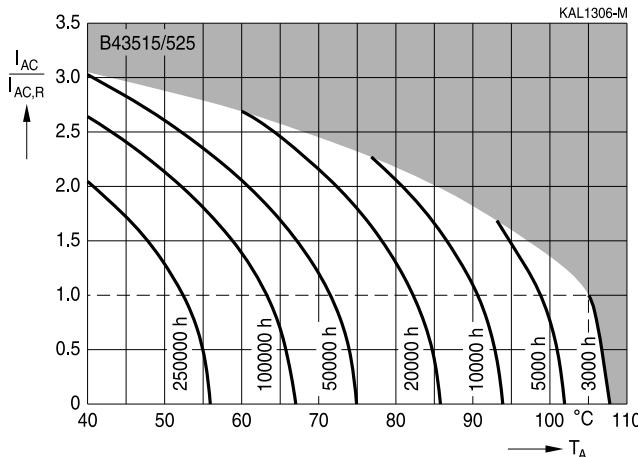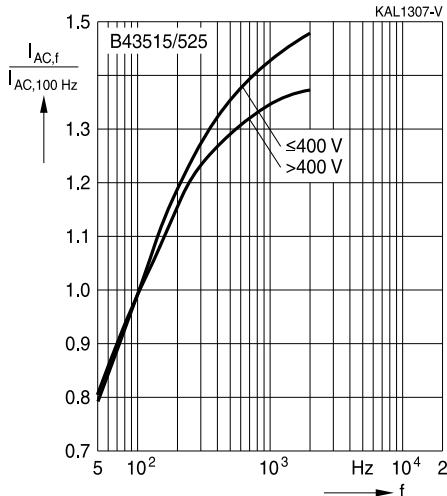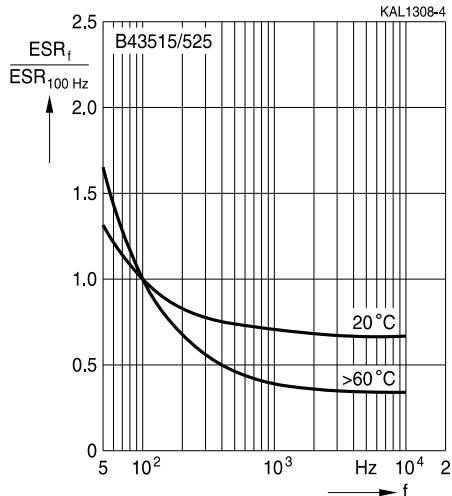**Useful life¹⁾**depending on ambient temperature T_A under ripple current operating conditions**Frequency factor of permissible ripple current I_{AC} versus frequency f** **Frequency characteristics of ESR**
Typical behavior

1) Refer to chapter "General technical information, 5 Useful life" on how to interpret useful life.




B43515, B43525

Compact – 105 °C


Impedance Z versus frequency f

Typical behavior at 20 °C

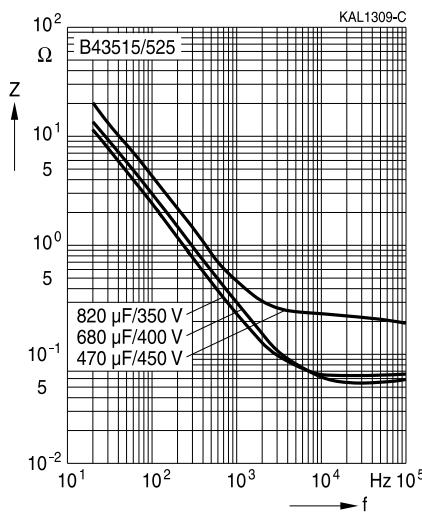

B43515, B43525

Compact – 105 °C



Cautions and warnings

Personal safety

The electrolytes used by EPCOS have been optimized both with a view to the intended application and with regard to health and environmental compatibility. They do not contain any solvents that are detrimental to health, e.g. dimethyl formamide (DMF) or dimethyl acetamide (DMAC).

Furthermore, some of the high-voltage electrolytes used by EPCOS are self-extinguishing.


As far as possible, EPCOS does not use any dangerous chemicals or compounds to produce operating electrolytes. However, in exceptional cases, such materials must be used in order to achieve specific physical and electrical properties because no alternative materials are currently known. However, the amount of dangerous materials used in our products is limited to an absolute minimum.

Materials and chemicals used in EPCOS aluminum electrolytic capacitors are continuously adapted in compliance with the EPCOS Corporate Environmental Policy and the latest EU regulations and guidelines such as RoHS, REACH/SVHC, GADSL, and ELV.

MDS (Material Data Sheets) are available on the EPCOS website for all types listed in the data book. MDS for customer specific capacitors are available upon request.

MSDS (Material Safety Data Sheets) are available for all of our electrolytes upon request.

Nevertheless, the following rules should be observed when handling aluminum electrolytic capacitors: No electrolyte should come into contact with eyes or skin. If electrolyte does come into contact with the skin, wash the affected areas immediately with running water. If the eyes are affected, rinse them for 10 minutes with plenty of water. If symptoms persist, seek medical treatment. Avoid inhaling electrolyte vapor or mists. Workplaces and other affected areas should be well ventilated. Clothing that has been contaminated by electrolyte must be changed and rinsed in water.




B43515, B43525

Compact – 105 °C


Product safety

The table below summarizes the safety instructions that must be observed without fail. A detailed description can be found in the relevant sections of chapter "General technical information".

Topic	Safety information	Reference chapter "General technical information"
Polarity	Make sure that polar capacitors are connected with the right polarity.	1 "Basic construction of aluminum electrolytic capacitors"
Reverse voltage	Voltages polarity classes should be prevented by connecting a diode.	3.1.6 "Reverse voltage"
Mounting position of screw-terminal capacitors	Do not mount the capacitor with the terminals (safety vent) upside down.	11.1. "Mounting positions of capacitors with screw terminals"
Robustness of terminals	The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2.5 Nm M6: 4.0 Nm	11.3 "Mounting torques"
Mounting of single-ended capacitors	The internal structure of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified.	11.4 "Mounting considerations for single-ended capacitors"
Soldering	Do not exceed the specified time or temperature limits during soldering.	11.5 "Soldering"
Soldering, cleaning agents	Do not allow halogenated hydrocarbons to come into contact with aluminum electrolytic capacitors.	11.6 "Cleaning agents"
Upper category temperature	Do not exceed the upper category temperature.	7.2 "Maximum permissible operating temperature"
Passive flammability	Avoid external energy, such as fire or electricity.	8.1 "Passive flammability"



Topic	Safety information	Reference chapter "General technical information"
Active flammability	Avoid overload of the capacitors.	8.2 "Active flammability"
Maintenance	Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals.	10 "Maintenance"
Storage	Do not store capacitors at high temperatures or high humidity. Capacitors should be stored at +5 to +35 °C and a relative humidity of ≤ 75%.	7.3 Storage conditions
		Reference chapter "Capacitors with screw terminals"
Breakdown strength of insulating sleeves	Do not damage the insulating sleeve, especially when ring clips are used for mounting.	"Screw terminals – accessories"




B43515, B43525

Compact – 105 °C

Symbols and terms

Symbol	English	German
C	Capacitance	Kapazität
C_R	Rated capacitance	Nennkapazität
C_S	Series capacitance	Serienkapazität
$C_{S,T}$	Series capacitance at temperature T	Serienkapazität bei Temperatur T
C_f	Capacitance at frequency f	Kapazität bei Frequenz f
d	Case diameter, nominal dimension	Gehäusedurchmesser, Nennmaß
d_{\max}	Maximum case diameter	Maximaler Gehäusedurchmesser
ESL	Self-inductance	Eigeninduktivität
ESR	Equivalent series resistance	Ersatzserienwiderstand
ESR_f	Equivalent series resistance at frequency f	Ersatzserienwiderstand bei Frequenz f
ESR_T	Equivalent series resistance at temperature T	Ersatzserienwiderstand bei Temperatur T
f	Frequency	Frequenz
I	Current	Strom
I_{AC}	Alternating current (ripple current)	Wechselstrom
$I_{AC,rms}$	Root-mean-square value of alternating current	Wechselstrom, Effektivwert
$I_{AC,f}$	Ripple current at frequency f	Wechselstrom bei Frequenz f
$I_{AC,max}$	Maximum permissible ripple current	Maximal zulässiger Wechselstrom
$I_{AC,R}$	Rated ripple current	Nennwechselstrom
$I_{AC,R}$ (B)	Rated ripple current for base cooling	Nennwechselstromstrom für Bodenkühlung
I_{leak}	Leakage current	Reststrom
$I_{\text{leak,op}}$	Operating leakage current	Betriebsreststrom
l	Case length, nominal dimension	Gehäselänge, Nennmaß
l_{\max}	Maximum case length (without terminals and mounting stud)	Maximale Gehäselänge (ohne Anschlüsse und Gewindegelenken)
R	Resistance	Widerstand
R_{ins}	Insulation resistance	Isolationswiderstand
R_{symm}	Balancing resistance	Symmetrierwiderstand
T	Temperature	Temperatur
ΔT	Temperature difference	Temperaturdifferenz
T_A	Ambient temperature	Umgebungstemperatur
T_C	Case temperature	Gehäsetemperatur
T_B	Capacitor base temperature	Temperatur des Becherbodens
t	Time	Zeit
Δt	Period	Zeitraum
t_b	Service life (operating hours)	Brauchbarkeitsdauer (Betriebszeit)



Symbol	English	German
V	Voltage	Spannung
V_F	Forming voltage	Formierspannung
V_{op}	Operating voltage	Betriebsspannung
V_R	Rated voltage, DC voltage	Nennspannung, Gleichspannung
V_s	Surge voltage	Spitzenspannung
X_C	Capacitive reactance	Kapazitiver Blindwiderstand
X_L	Inductive reactance	Induktiver Blindwiderstand
Z	Impedance	Scheinwiderstand
Z_T	Impedance at temperature T	Scheinwiderstand bei Temperatur T
$\tan \delta$	Dissipation factor	Verlustfaktor
λ	Failure rate	Ausfallrate
ϵ_0	Absolute permittivity	Elektrische Feldkonstante
ϵ_r	Relative permittivity	Dielektrizitätszahl
ω	Angular velocity; $2 \cdot \pi \cdot f$	Kreisfrequenz; $2 \cdot \pi \cdot f$

Note

All dimensions are given in mm.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EPCOS / TDK:

[B43515A0128M000](#) [B43515C5687M000](#) [B43515A4158M000](#) [B43525A4567M](#) [B43525B5477M](#) [B43515A9158M000](#)
[B43515A4278M](#) [B43525B9687M](#) [B43515B9477M000](#) [B43515A5827M000](#) [B43525A4128M000](#) [B43515A5158M080](#)
[B43515A9158M](#) [B43525A5827M000](#) [B43515B5687M080](#) [B43515A4128M087](#) [B43525B4827M000](#)
[B43515A4228M000](#) [B43515C5567M000](#) [B43515A4278M000](#) [B43515B5567M](#) [B43515B5128M](#) [B43525B9567M000](#)
[B43515C5567M](#) [B43515A4567M](#) [B43515C5687M](#) [B43515A4228M](#) [B43515A9477M000](#) [B43515A4567M000](#)
[B43515B5567M000](#) [B43515B5108M000](#) [B43515A5128M000](#) [B43515B4827M](#) [B43515A5108M](#) [B43525A5108M](#)
[B43515A9108M](#) [B43525A4567M000](#) [B43525B9687M000](#) [B43515B5827M000](#) [B43525A4128M](#) [B43515A5108M087](#)
[B43515A5687M](#) [B43515A9108M000](#) [B43525B5477M000](#) [B43515A5108M080](#) [B43515A9188M000](#) [B43515B5108M](#)
[B43525B4827M](#) [B43515A5108M000](#) [B43515A9477M](#) [B43515A5687M000](#) [B43515A4158M](#) [B43525A5108M000](#)
[B43515B5827M](#) [B43515A9188M](#) [B43515B5108M087](#) [B43515A5567M080](#) [B43515B4827M000](#) [B43515B9477M](#)
[B43515B9687M000](#) [B43525A5827M](#) [B43515B5397M087](#) [B43515A5128M](#) [B43515A5477M000](#) [B43515A5477M](#)
[B43525B9567M](#) [B43515C0827M000](#) [B43515B5128M000](#) [B43515A5827M](#) [B43515B9687M](#)

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9