

# ABRIDGED DATA SHEET

## MAX14690

## Wearable Charge-Management Solution

### General Description

The MAX14690 is a battery-charge-management solution ideal for low-power wearable applications. The device includes a linear battery charger with a smart power selector and several power-optimized peripherals. The MAX14690 features two ultra-low-power buck regulators with a typical quiescent current of 900nA. In addition, three ultra-low power low-dropout (LDO) linear regulators, with a typical quiescent current of 600nA are included. In total, the MAX14690 can provide up to five regulated voltages, each with an ultra-low quiescent current, critical to battery life for the unique power profile in 24/7 operation devices, such as those in the wearable market.

The battery charger features a smart power selector that allows operation on a dead battery when connected to a power source. To avoid overloading a power adapter, the input current to the smart power selector is limited based on an I<sup>2</sup>C register setting. If the charger power source is unable to supply the entire system load, the smart power control circuit supplements the system load with current from the battery.

The two synchronous, high-efficiency step-down buck regulators feature a fixed-frequency PWM mode for tighter regulation and a burst mode for increased efficiency during light-load operation. The output voltage of these regulators can be programmed through I<sup>2</sup>C with the default preconfigured.

The three configurable LDOs each have a dedicated input pin. Each LDO regulator output voltage can be programmed through I<sup>2</sup>C with the default preconfigured. The linear regulators can also be configured to operate as power switches that may be used to disconnect the quiescent load of the system peripherals.

The MAX14690 features a programmable power controller that allows the device to be configured for applications that require the device be in a true-off, or always-on, state. The controller also provides a delayed reset signal and voltage sequencing.

The MAX14690 is available in a 36-bump, 0.4mm pitch, 2.72mm x 2.47mm wafer-level package (WLP).


### Benefits and Features

- Extend System Use Time Between Battery Charging
  - Dual Ultra-Low-I<sub>Q</sub> 200mA Buck Regulators
    - Output Programmable from 0.8V to 1.8V and 1.5V to 3.3V
    - 0.9μA (typ) Quiescent Current
    - Automatic Burst or Forced-PWM Modes
  - Three Ultra-Low-I<sub>Q</sub> 100mA LDOs
    - Output Programmable from 0.8V to 3.6V
    - 0.6μA (typ) Quiescent Current
    - 2.7V to 5.5V Input with Dedicated Pin
- Easy-to-Implement Li<sup>+</sup> Battery Charging
  - Smart Power Selector
  - 28V/-5.5V Tolerant Input
  - Thermistor Monitor
- Minimize Solution Footprint Through High Integration
  - Provides Five Regulated Voltage Rails
  - Switch Mode Option on Each LDO
- Optimize System Control
  - Monitors Pushbutton for Ultra-Low Power Mode
  - Power-On Reset Delay and Voltage Sequencing
  - On-Chip Voltage Monitor Multiplexer

### Applications

- Wearable Electronics
- Fitness Monitors
- Portable Medical Devices

### Block Diagram

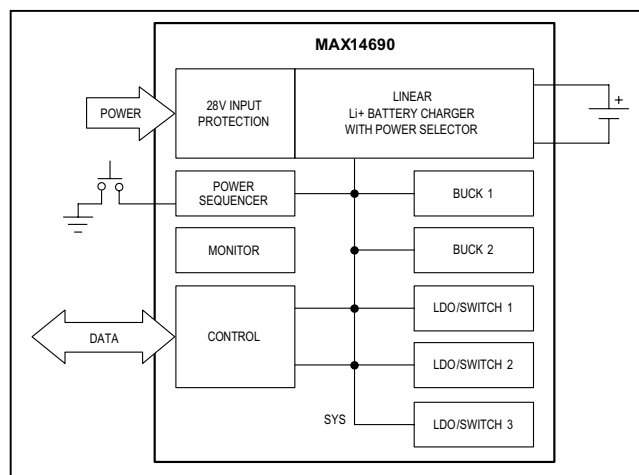


**Ordering Information** appears at end of data sheet.

# ABRIDGED DATA SHEET

MAX14690

Wearable Charge-Management Solution

## Typical Application Circuit

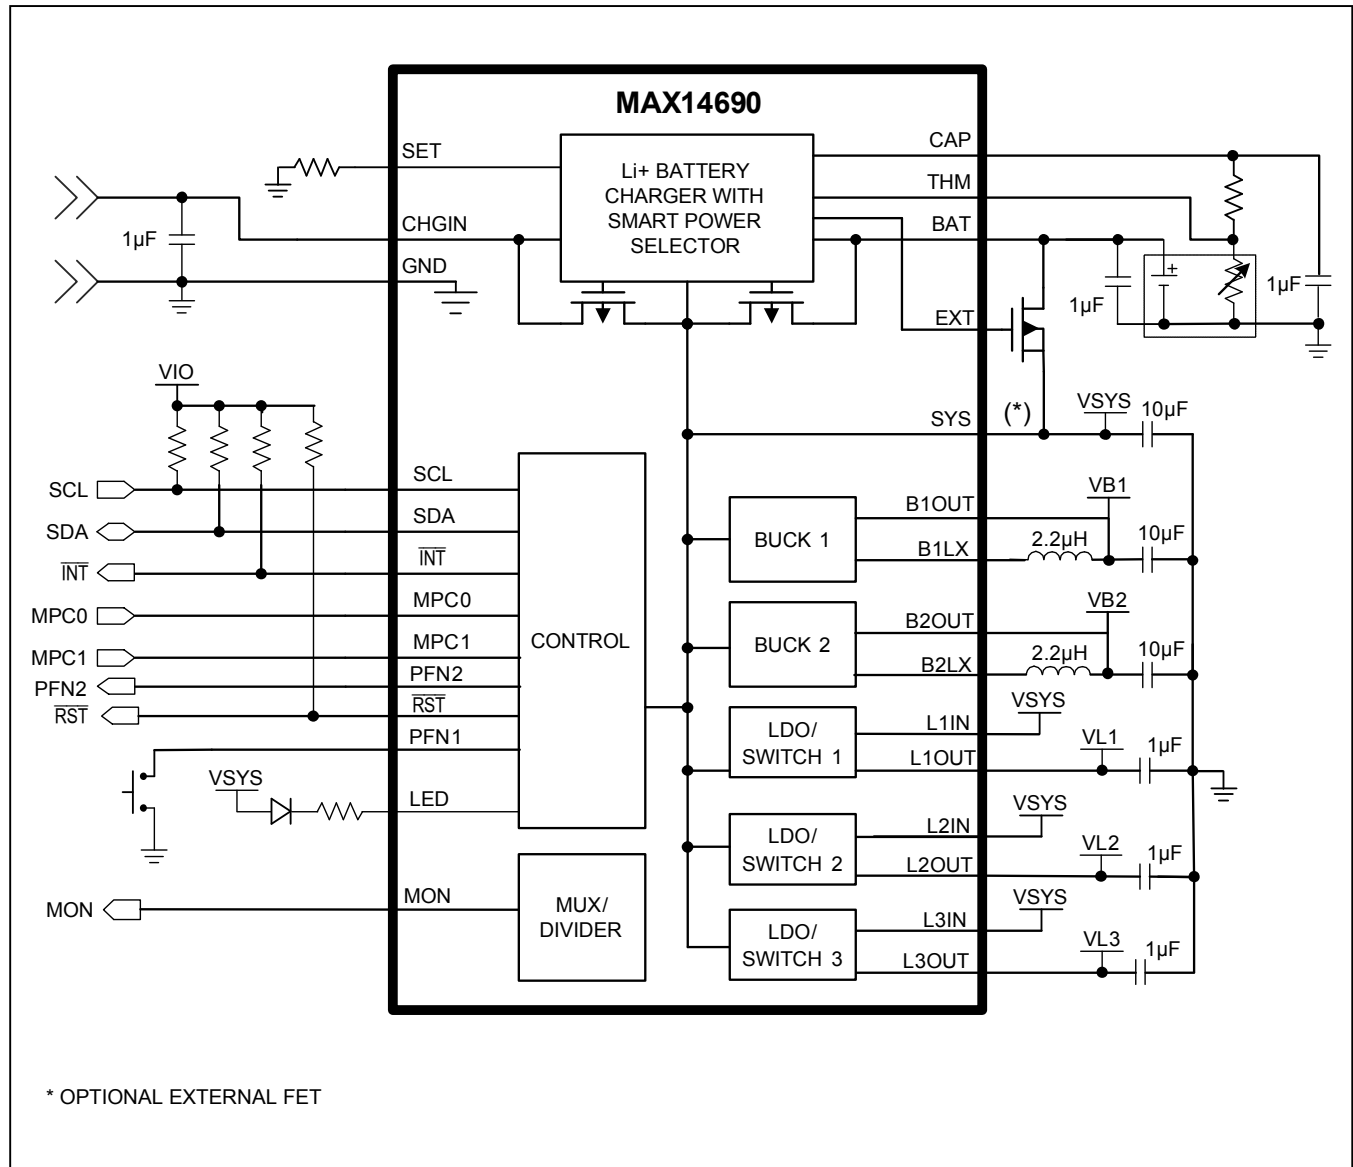

# ABRIDGED DATA SHEET

MAX14690

Wearable Charge-Management Solution

## Ordering Information

| PART            | TEMP RANGE     | PIN-PACKAGE |
|-----------------|----------------|-------------|
| MAX14690AEWX+   | -40°C to +85°C | 36 WLP      |
| MAX14690AEWX+T  | -40°C to +85°C | 36 WLP      |
| MAX14690BEWX+   | -40°C to +85°C | 36 WLP      |
| MAX14690BEWX+T  | -40°C to +85°C | 36 WLP      |
| MAX14690CEWX+   | -40°C to +85°C | 36 WLP      |
| MAX14690CEWX+T  | -40°C to +85°C | 36 WLP      |
| MAX14690DEWX+   | -40°C to +85°C | 36 WLP      |
| MAX14690DEWX+T  | -40°C to +85°C | 36 WLP      |
| MAX14690EEWX+*  | -40°C to +85°C | 36 WLP      |
| MAX14690EEWX+T* | -40°C to +85°C | 36 WLP      |
| MAX14690HEWX+   | -40°C to +85°C | 36 WLP      |
| MAX14690HEWX+T  | -40°C to +85°C | 36 WLP      |
| MAX14690IEWX+   | -40°C to +85°C | 36 WLP      |
| MAX14690IEWX+T  | -40°C to +85°C | 36 WLP      |
| MAX14690JEWX+   | -40°C to +85°C | 36 WLP      |
| MAX14690JEWX+T  | -40°C to +85°C | 36 WLP      |
| MAX14690KEWX+*  | -40°C to +85°C | 36 WLP      |
| MAX14690KEWX+T* | -40°C to +85°C | 36 WLP      |
| MAX14690NEWX+   | -40°C to +85°C | 36 WLP      |
| MAX14690NEWX+T  | -40°C to +85°C | 36 WLP      |

+Denotes a lead(Pb)-free package/RoHS-compliant package.

T = Tape and reel.

\*Future Product—contact marketing for availability.

See [Table 35](#) and [Table 36](#) for the device differences.

## Chip Information

PROCESS: BiCMOS

## Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.                               |
|--------------|--------------|-------------------------|------------------------------------------------|
| 36 WLP       | W362D2+1     | <a href="#">21-0897</a> | Refer to <a href="#">Application Note 1891</a> |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9