


**Description**: 824-2170MHz SMD Antenna

**PART NUMBER: W3544X** 

**Series: Domino** 

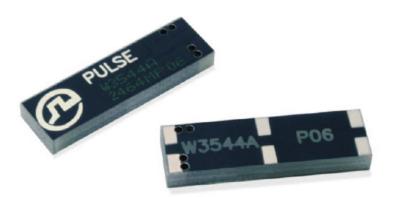

### Features:

- Frequency
  - 824-960/1710-2170MHz
- Impedance 50 Ohm
- Efficiency average
  - 40%/55% for W3544A
  - 55%/57% for W3544B
- Size 7.65 x 26 x 3 mm
- SMD Compliant
- A and B variants for different mounting positions on PCB

### **Applications:**

- 2G/3G Cellular antenna
- GPRS
- Nb-loT, LTE Cat M1

All dimensions are in mm

Issue: 1922

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



**Description**: 824-2170MHz SMD Antenna

PART NUMBER: W3544X

**Series: Domino** 

### **ELECTRICAL SPECIFICATIONS\***

Frequency 824-960/1710-2170MHz

Nominal Impedance 50Ω

Return Loss <-3dB/-4dB for W3544A

<-4dB/-4dB for W3544B

Average Radiation Efficiency 40%/55% for W3544A

55%/57% for W3544B

Average Peak Gain -0.9dBi/1.5dBi for W3544A

1.9dBi/1dBi for W3544B

3W Maximum power input

### **MECHANICAL SPECIFICATIONS**

Overall Length 7.65 x 26 x 3 mm

Weight 1.11 g Antenna Color Black **SMD** Mounting

Moisture Sensitivity Level MSL3

### **ENVIRONMENTAL SPECIFICATIONS**

-45 ~ 85° C **Operating Temperature** -45 ~ 85° C Storage Temperature

**RoHS Compliant** Yes

### (\*) All RF parameters measured on Pulse reference test PCB






**Description**: 824-2170MHz SMD Antenna

**PART NUMBER: W3544X** 

**Series: Domino** 

### **MECHANICAL DRAWING**

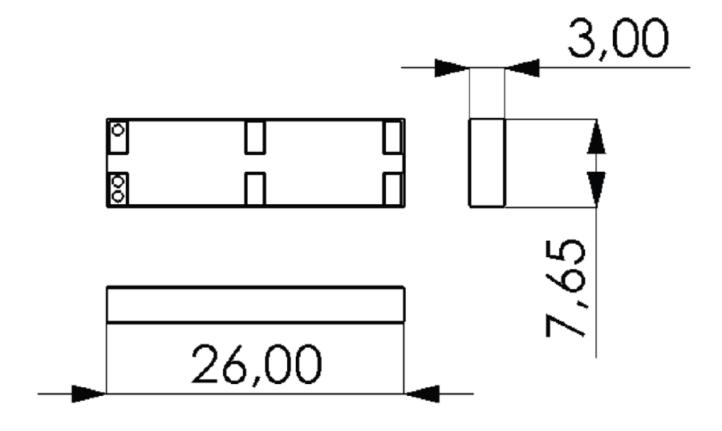





**Series: Domino** 

**PART NUMBER: W3544X** 

### **Recommendation for reflow soldering process**

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection					
1	Average temperature gradient in preheating	2.5 °C/s					
2	Soak time	2-3 minutes					
3	Max temperature gradient in reflow	3 °C/s					
4	Time above 217 °C	Max 30 sec					
5	Peak temperature in reflow	230 °C for 10 seconds					
6	6 Temperature gradient in cooling Max -5 °C/s						

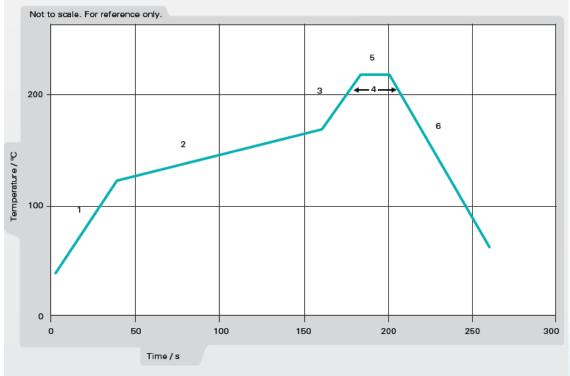


Figure 1. Minimum temperature profile recommendation for reflow soldering process





Series: Domino

**PART NUMBER: W3544X** 

### **Recommendation for reflow soldering process**

	Method of heat transfer	Controlled hot air convection					
1	Average temperature gradient in preheating	2.5 °C/s					
2 Soak time 2-3 minutes							
3	Max temperature gradient in reflow	3 °C/s					
4	Time above 217 °C	Max 60 sec					
5	Time above 230 °C	Max 50 sec					
6	Time above 250 °C	Max 10 sec					
7	Peak temperature in reflow	260 °C for 5 seconds					
8	Temperature gradient in cooling	Max -5 °C/s					

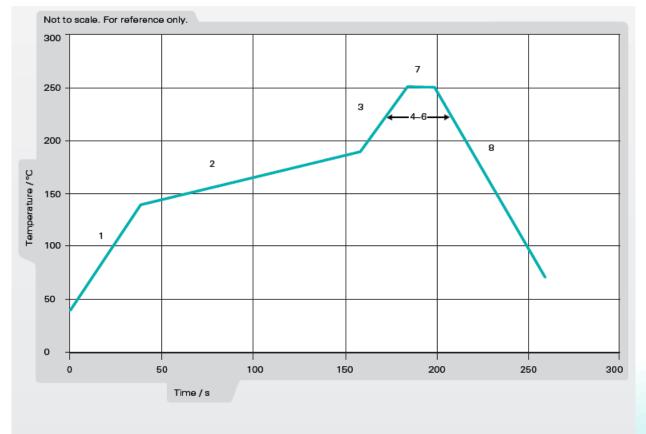


Figure 2. Maximum temperature profile recommendation for reflow soldering process





PART NUMBER: W3544X

## **Series: Domino**


### **TEST SETUP**


# Test Setup for Electrical Measurements


Recommended test board layout for electrical characteristic measurement. Test board outline size 110 mm x 50 mm. Ground cleared under antenna.

**NOTE**: All measurements are in mm.

W3544A - Antenna positioned vertically on PWB corner

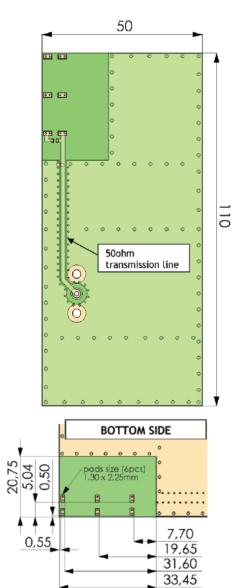

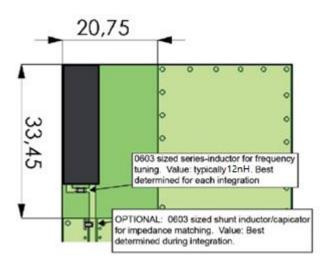

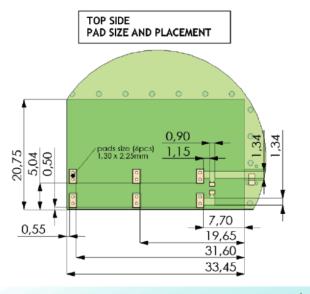



In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION








**Series: Domino** 


**PART NUMBER: W3544X** 

### W3544B - Antenna positioned horizontally on PWB corner

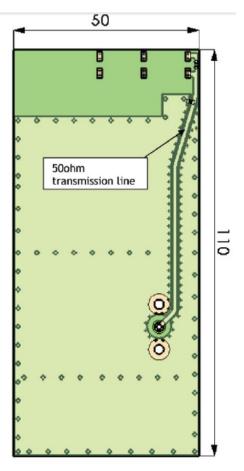



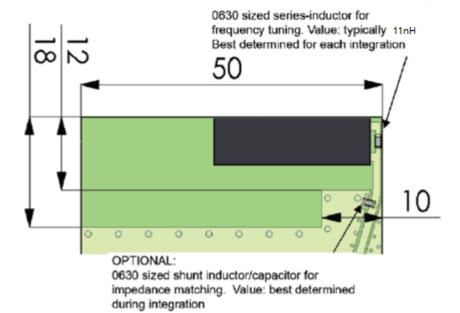

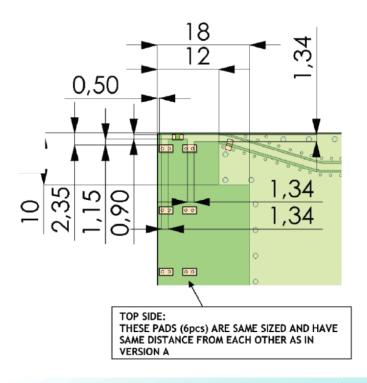

Issue: 1922

RóHS






**Description**: 824-2170MHz SMD Antenna


**PART NUMBER: W3544X** 

# CHARTS

### Return loss of W3544A

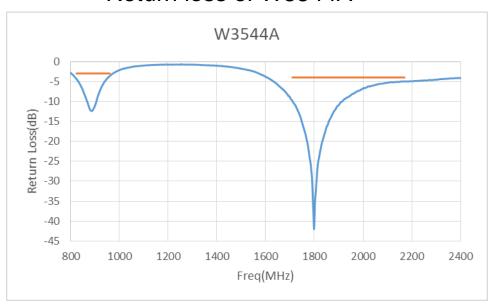

# Radiation Efficiency of W3544A

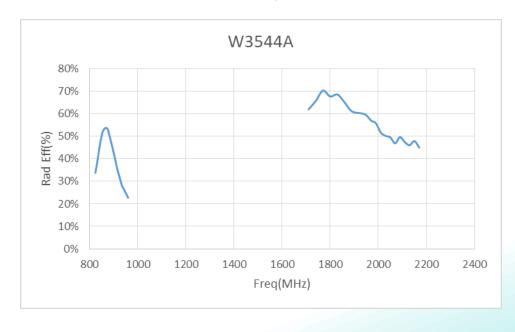





**PART NUMBER: W3544X** 


## **Series: Domino**

### **CHARTS**

### Peak Gain of W3544A



# Low band Radiation pattern at Vertical plane, front view of W3544A

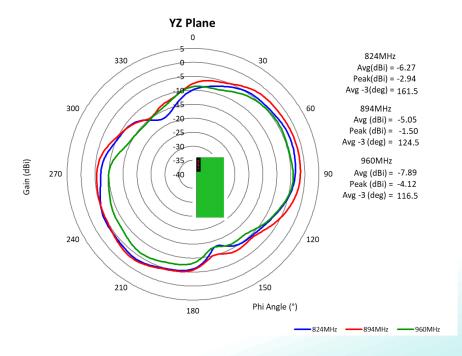








Description: 824-2170MHz SMD Antenna


**PART NUMBER: W3544X** 

### **CHARTS**

### Low band Radiation pattern at Vertical plane, side view of W3544A

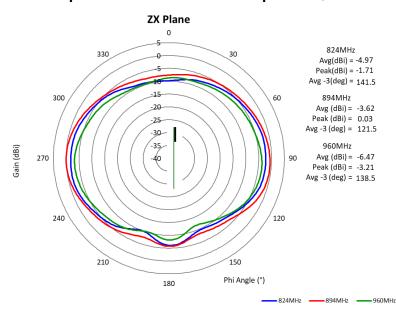

# Low band Radiation pattern at horizontal plane of W3544A

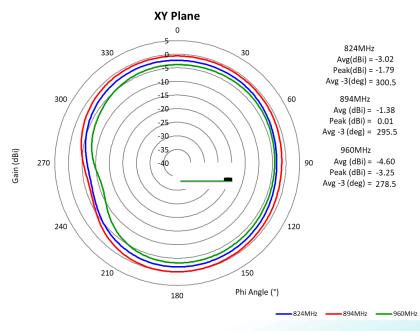






Description: 824-2170MHz SMD Antenna


**PART NUMBER: W3544X** 

### **CHARTS**

# High band Radiation pattern at Vertical plane, front view of W3544A

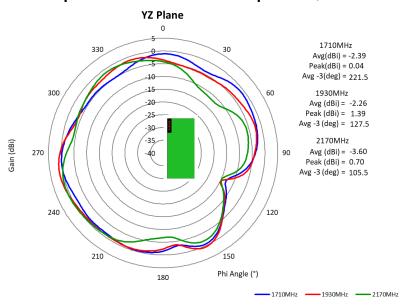

# High band Radiation pattern at Vertical plane, side view of W3544A

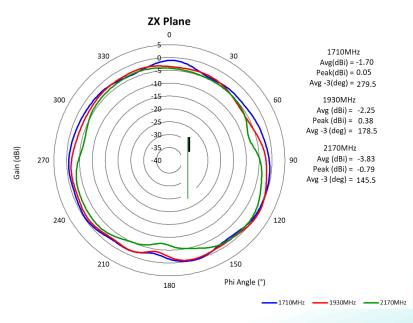






**Description**: 824-2170MHz SMD Antenna

**PART NUMBER: W3544X** 

# CHARTS

# High band Radiation pattern at Horizontal plane of W3544A

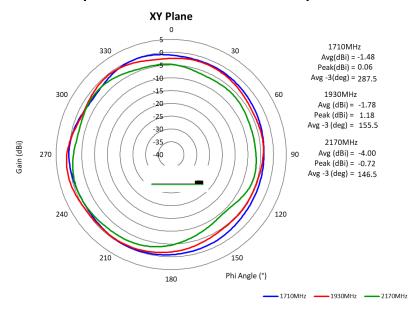






**Description**: 824-2170MHz SMD Antenna


**PART NUMBER: W3544X** 

### **CHARTS**

### Return loss of W3544B

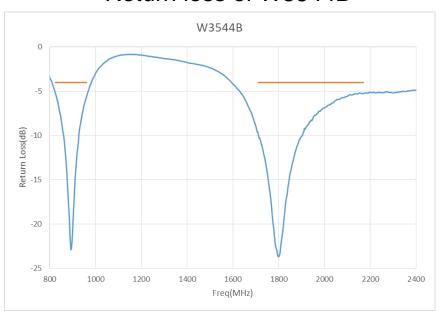

# Radiation Efficiency of W3544B

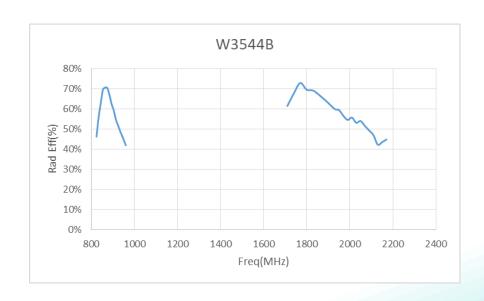






Description: 824-2170MHz SMD Antenna


**PART NUMBER: W3544X** 

### **CHARTS**

### Peak Gain of W3544B

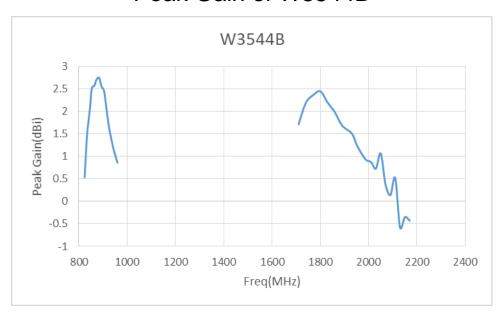

# Low band Radiation pattern at Vertical plane, front view of W3544B

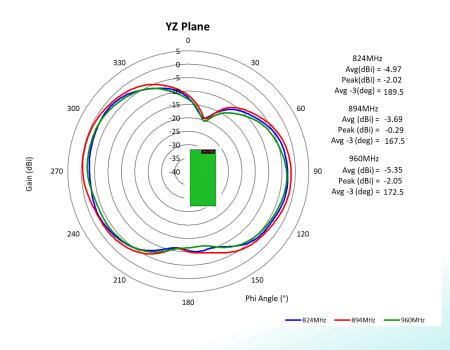






**Description**: 824-2170MHz SMD Antenna


**PART NUMBER: W3544X** 

### **CHARTS**

# Low band Radiation pattern at Vertical plane, side view of W3544B

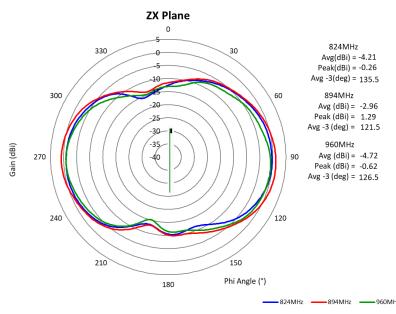

# Low band Radiation pattern at horizontal plane of W3544B

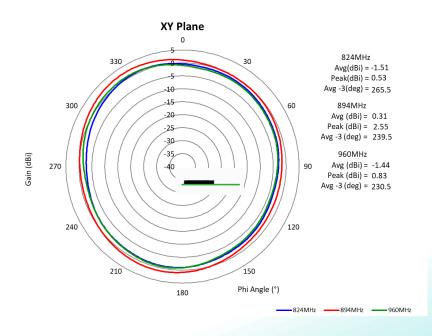






**Description**: 824-2170MHz SMD Antenna


**PART NUMBER: W3544X** 

### **CHARTS**

### High band Radiation pattern at Vertical plane, front view of W3544B

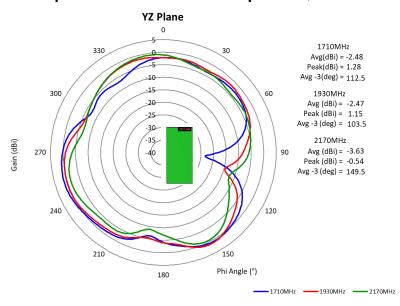

# High band Radiation pattern at Vertical plane, side view of W3544B

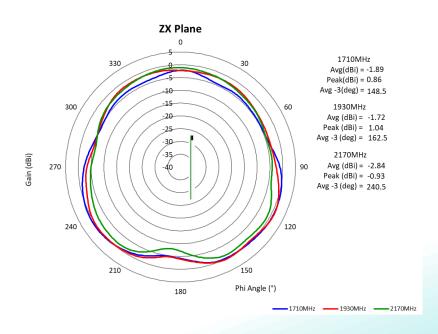






**Description**: 824-2170MHz SMD Antenna

PART NUMBER: W3544X

## **CHARTS**

# High band Radiation pattern at Horizontal plane of W3544B

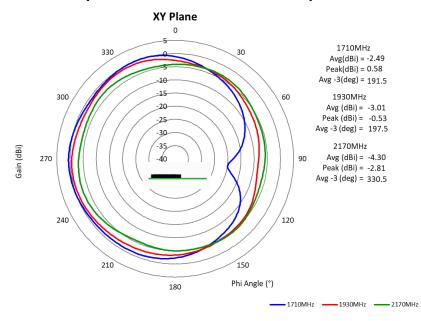



**Description**: 824-2170MHz SMD Antenna


**PART NUMBER: W3544X** 

**Series: Domino** 

### **PACKAGING**

140pcs Antennas Per 1pcs 7" Tape & Reel 10 pcs 7" Tape & Reel (total 1,400 pcs Antennas) per 1 box

ITEM	W	A0	B0	К0	Р	F	E	D	D1	P0	P2	t	7	7″	
DIM	16.0	26.7	8.35	3.3	32.0	7.5	1.75	1.50	1.50	4.00	2.00	0.3	LENGTH /	UNITS / REEL	
TOLE	+0.30 -0.30	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.00	+0.10 -0.00	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05	4.7M/R	130PCS	

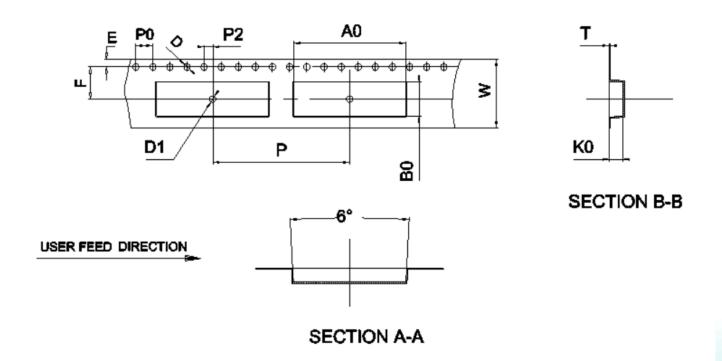

According to MSL3 packing requirement, MBB-Moisture Barrel Bag, Desiccant, HIC-Humidity Indicator Card, MSID Label, Caution Label are required.



**Description**: 824-2170MHz SMD Antenna

**PART NUMBER: W3544X** 

**Series: Domino** 

### **ASSEMBLY**

Part Number	Positioning				
W3544A	Vertically mounted at board edge				
W3544B	Horizontally mounted at board edge				

### **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

#### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

#### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru 4 moschip.ru 9