
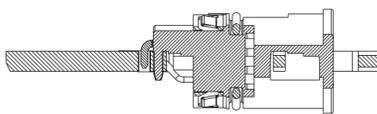


Leiterplatten Optionen / PCB options

Leiterplattendicke 2 mm
Layoutempfehlung siehe 225321



PCB thickness 2 mm
For recommended dims see 225321

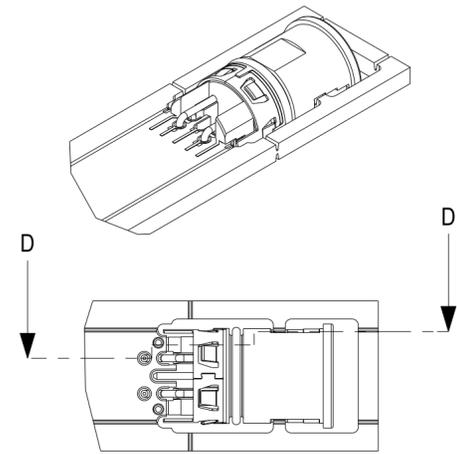

SCHNITT D-D
SECTION D-D

Leiterplattendicke 1,6 mm
Layoutempfehlung siehe 225321



PCB thickness 1,6 mm
For recommended dims see 225321

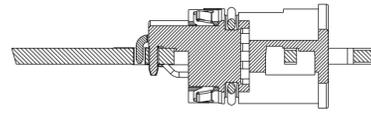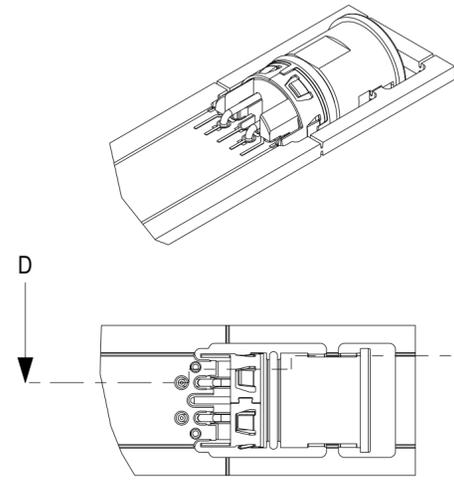

SCHNITT D-D
SECTION D-D


Leiterplattendicke 1 mm
Layoutempfehlung siehe 225321

PCB thickness 1 mm
For recommended dims see 225321

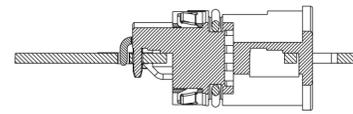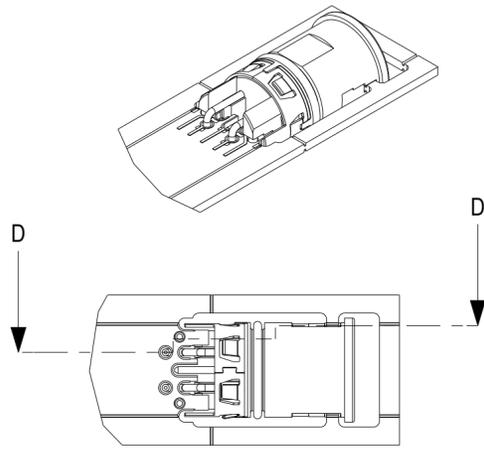

SCHNITT D-D
SECTION D-D

Verpackung / Packaging tape and reel (T&R)

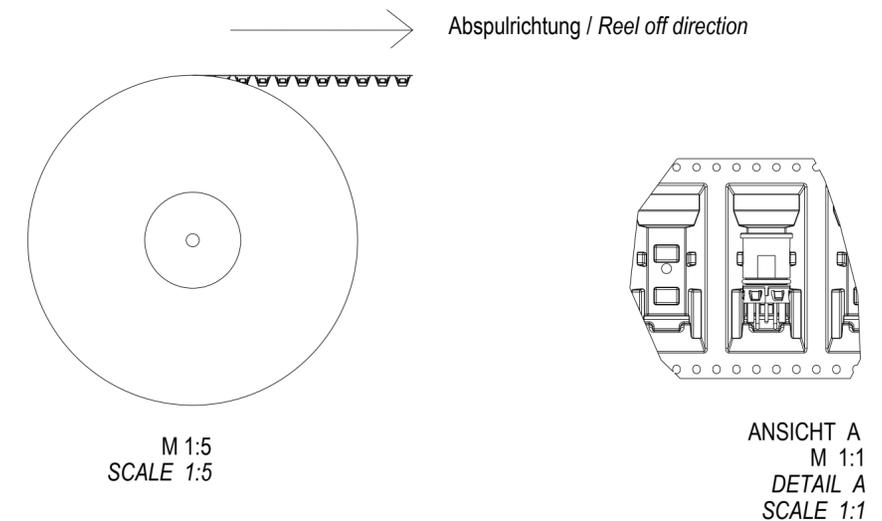

SIEHE ANSICHT A
SEE DETAIL A

VPE: 250 Stück
PU: 250 pcs.



Technische Daten siehe Document 225407
Technical data see document 225407

Anwendungsbeispiel / Application example

Hinweise:
Für den O-Ring ist eine Einführschräge vorzusehen! Zur Verringerung der Montagekräfte den O-Ring oder das Gehäuse ggf. befeuchten.
Je nach Lötverfahren oder Lötanlage kann es notwendig sein den O-Ring erst nach dem Löten zu montieren.

Note:
For the O-ring there has to be a smooth chamfer at the housing!
For reduction of assembly force grease for O-ring or housing can be used if applicable.
Dependent on soldering process or solder machines there can be a need to attach the O-ring after soldering.

Version mit Verdrehsschutz
Version with torque ribs

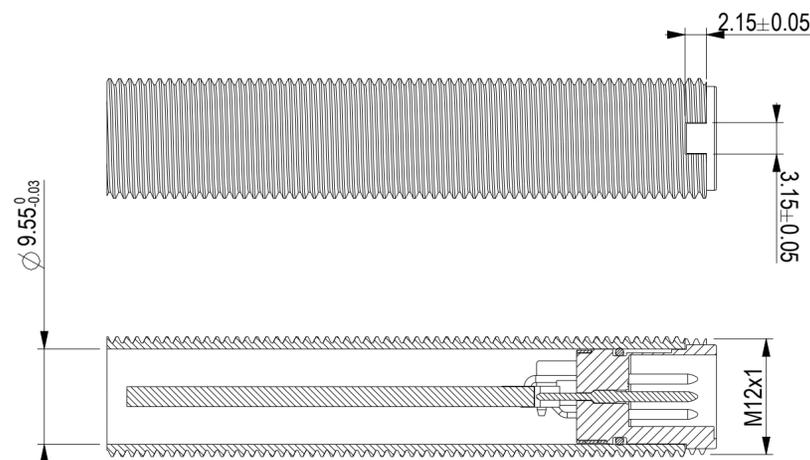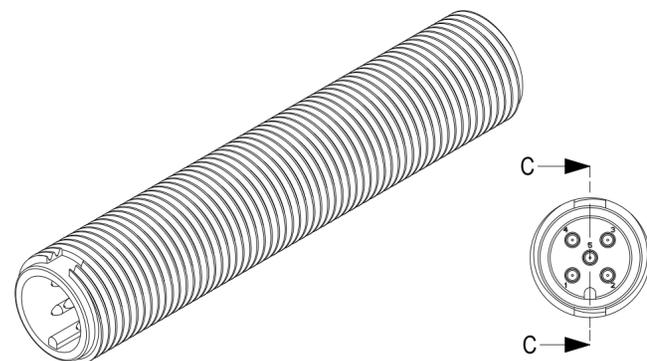

SCHNITT C-C
M 2:1
SECTION C-C
SCALE 2:1

225242	2	no	no	yes	5	1,2,3,4,5	T&R	
225243	3	no	no	yes	4	1,2,3,4	T&R	
225245	4	no	no	yes	5	1,2,3,4,5v	T&R	Kontakt 5 vorellend Contact 5 early mate
225246	2	no	yes	yes	5	1,2,3,4,5	T&R	
225247	3	no	yes	yes	4	1,2,3,4	T&R	
225249	4	no	yes	yes	5	1,2,3,4,5v	T&R	Kontakt 5 vorellend Contact 5 early mate
225515	2	yes	no	yes	5	1,2,3,4,5	T&R	
225516	3	yes	no	yes	4	1,2,3,4	T&R	
225518	2	yes	yes	yes	5	1,2,3,4,5	T&R	
225519	3	yes	yes	yes	4	1,2,3,4	T&R	
Ident-Nr. Ident-No.	Zeichn. Blatt Drw. Sheet	Verdrehsschutz Antitwist option	Schirm Shield	O-ring O-ring	Polzahl No. pins	Kontakt Nr. Contact No.	Verpackung Packaging	Bemerkung Remarks

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information
All rights reserved.
Only for information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Tolerances
Scale 2:1
All Dimensions in mm


Subject to modification without prior notice.
Drawing will not be updated.

ERNI www.ERNI.com


Designation	alle Varianten / all versions
M12 90° M A THR Frontmontage M12 90° M A THR front mount	
225250	I (1 / 4) A2
Class	M12

Ident-Nr. <i>Ident-No.</i>	O-ring <i>O-ring</i>	Schirm <i>Shield</i>	Verdrehschutz <i>Antitwist option</i>	Verguß <i>Potting</i>
225242	yes 7.2x0.8	no	no	needed
225246	yes 7.2x0.8	yes	no	recommended
225515	yes 7.2x0.8	no	yes	not needed
225518	yes 7.2x0.8	yes	yes	not needed


Darstellung mit Schirm und O-Ring
Drawn with shield and O-Ring

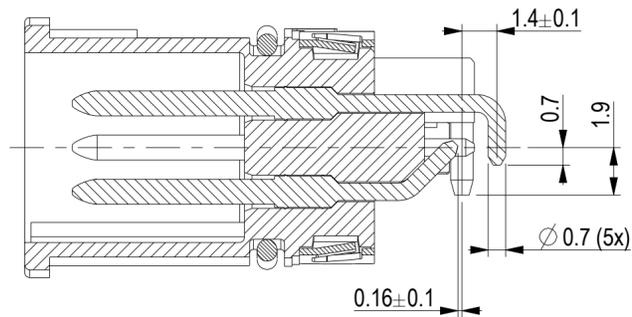


SCHNITT E-E
SECTION E-E

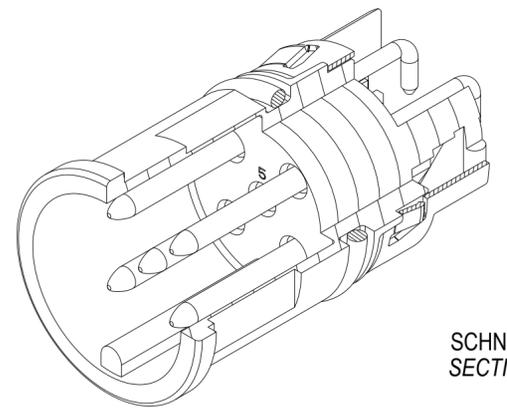




SCHNITT F-F
SECTION F-F

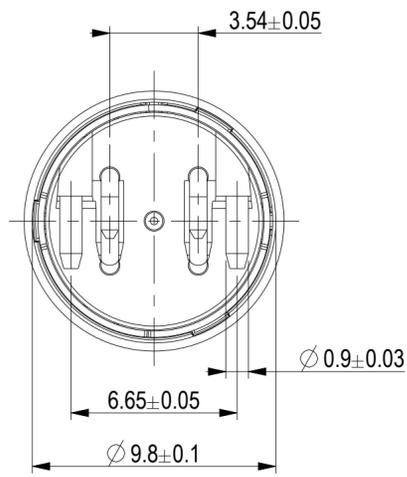

Gemessen über Schirmkontakte
Measured over shield contacts

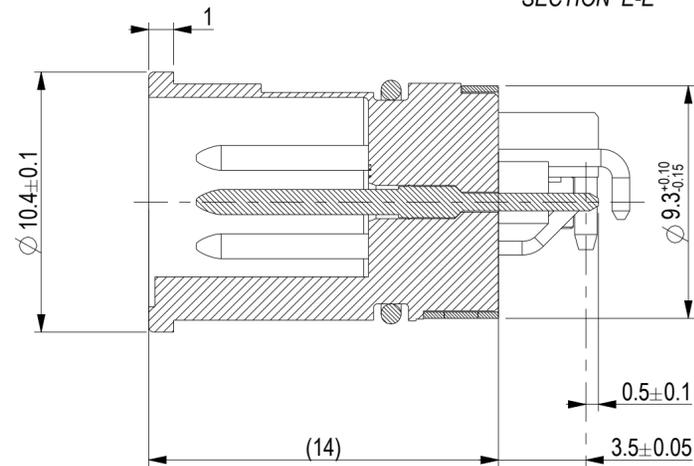

SCHNITT B-B
SECTION B-B

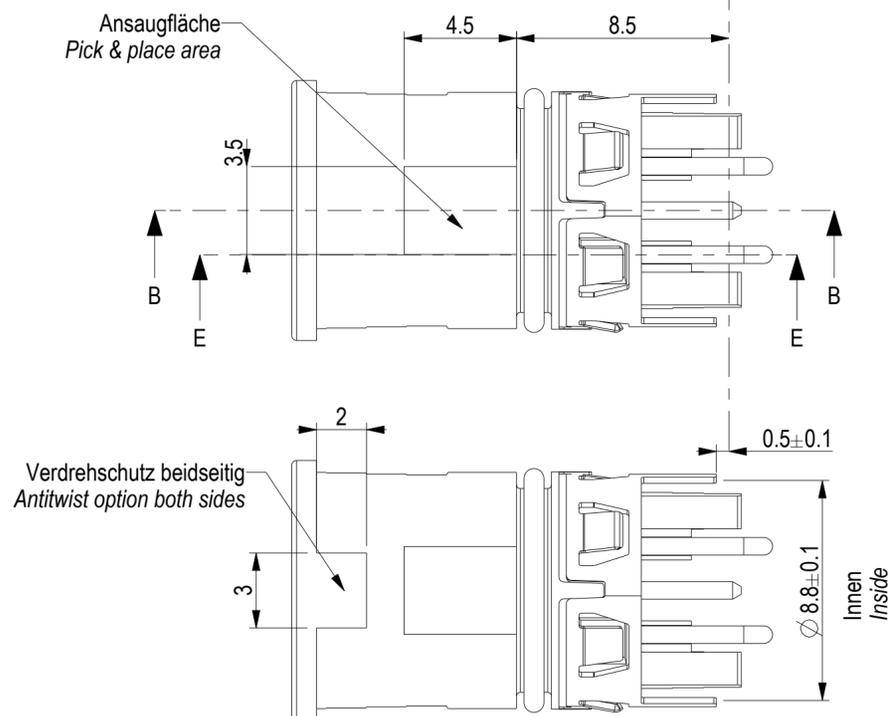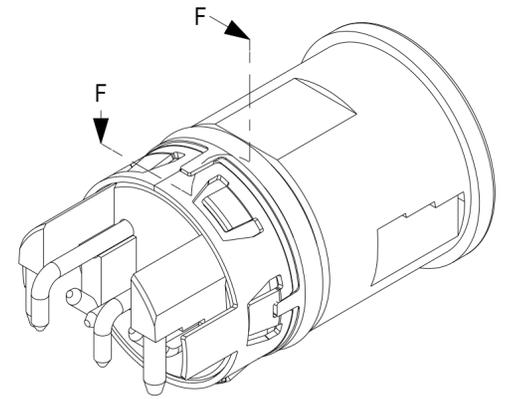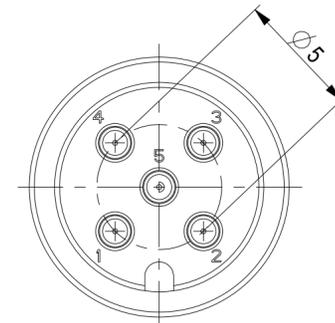


Steckgesicht nach IEC 61076-2-101
Mating face acc. IEC 61076-2-101


Information		Tolerances	Scale	5:1
All rights reserved. Only for information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.	Designation 5 polige Version / 5 pin version	
ERNI www.ERNI.com		M12 90° M A THR Frontmontage M12 90° M A THR front mount		I (2 / 4)
B	06.10.17	225250		A2
Index	Date	Class		M12

Ident-Nr. <i>Ident-No.</i>	O-ring <i>O-ring</i>	Schirm <i>Shield</i>	Verdrehschutz <i>Antitwist option</i>	Verguß <i>Potting</i>
225243	yes 7.2x0.8	no	no	needed
225247	yes 7.2x0.8	yes	no	recommended
225516	yes 7.2x0.8	no	yes	not needed
225519	yes 7.2x0.8	yes	yes	not needed


Darstellung mit Schirm und O-Ring
Drawn with shield and O-ring

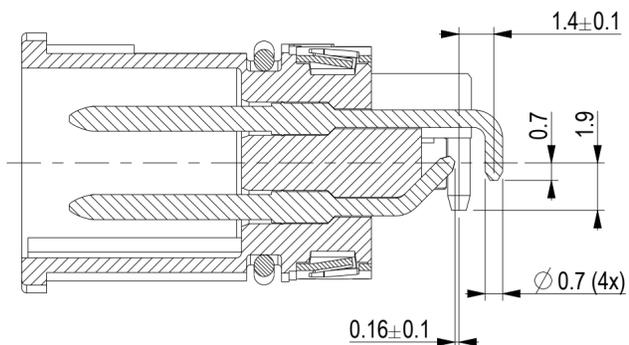


SCHNITT E-E
SECTION E-E

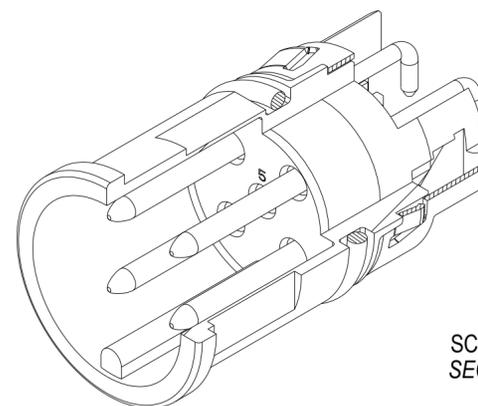




SCHNITT F-F
SECTION F-F

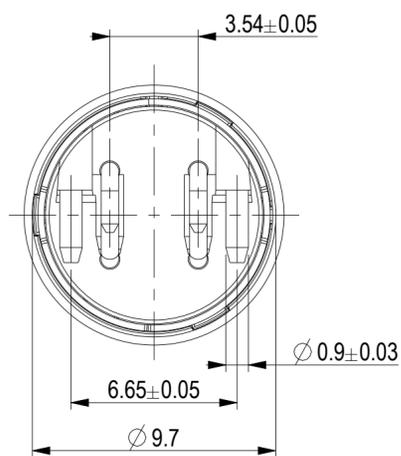

Gemessen über Schirmkontakte
Measured over shield contacts

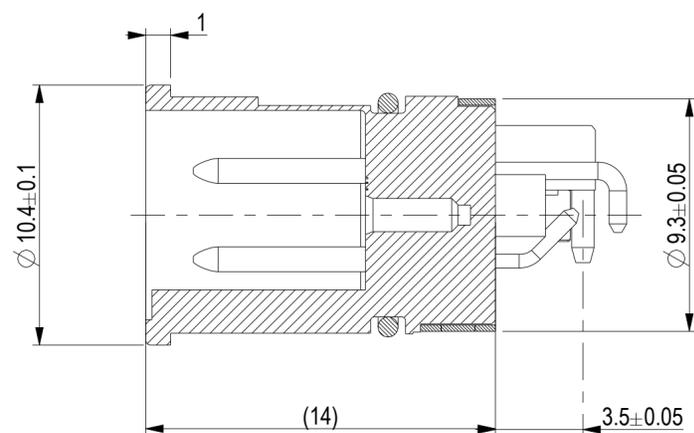

SCHNITT B-B
SECTION B-B

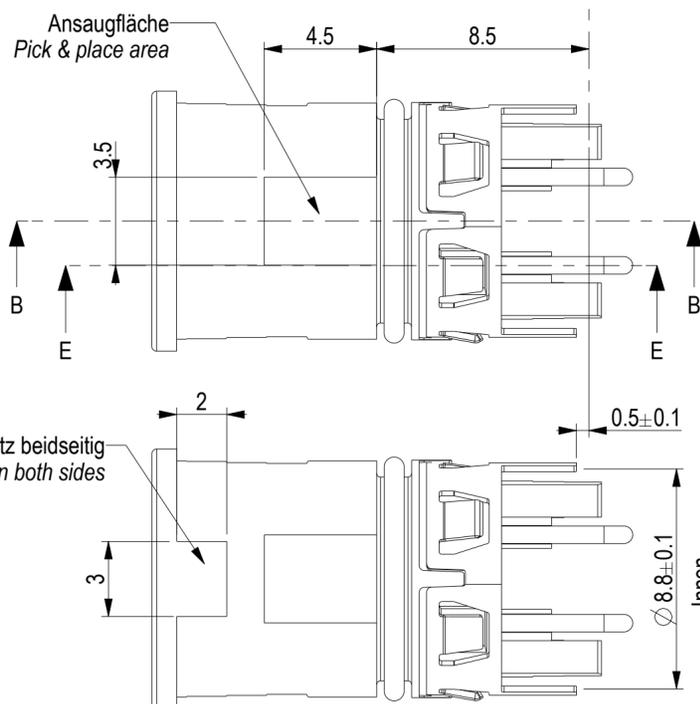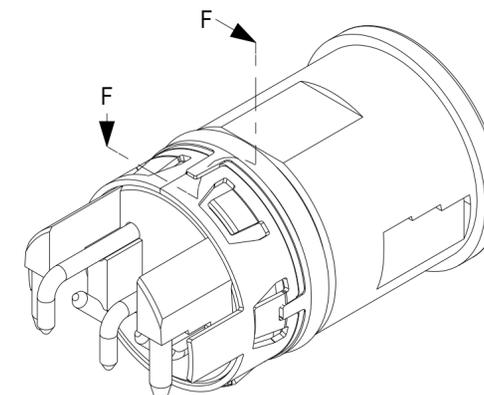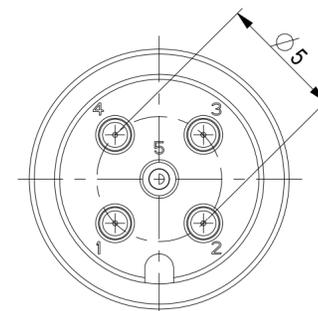


Verdrehschutz beidseitig
Antitwist option both sides

Steckgesicht nach IEC 61076-2-101
Mating face acc. IEC 61076-2-101


Information		Tolerances	Scale	5:1
All rights reserved. Only for information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		 All Dimensions in mm	Designation	
Copyright by ERNI GmbH Proprietary notice pursuant to BSC 18016 to be observed.			4 polige Version / 4 pin version M12 90° M A THR Frontmontage M12 90° M A THR front mount	
Subject to modification without prior notice. Drawing will not be updated.		 www.ERNI.com	225250	
Index			Class M12	
Date 06.10.17		I (3 / 4) A2		

Ident-Nr. Ident-No.	O-ring O-ring	Schirm Shield	Verdrehschutz Antitwist option	Verguß Potting
225245	yes 7.2x0.8	no	no	needed
225249	yes 7.2x0.8	yes	no	recommended


Darstellung mit Schirm und O-Ring
Drawn with shield and O-ring

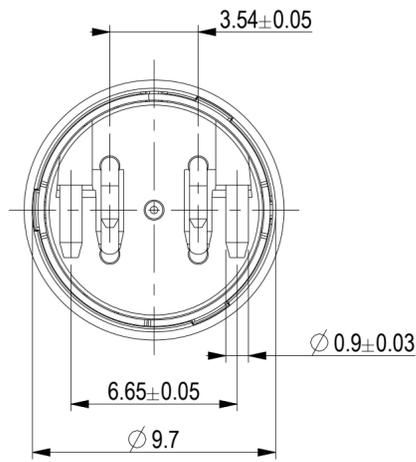



Gemessen über Schirmkontakte
Measured over shield contacts

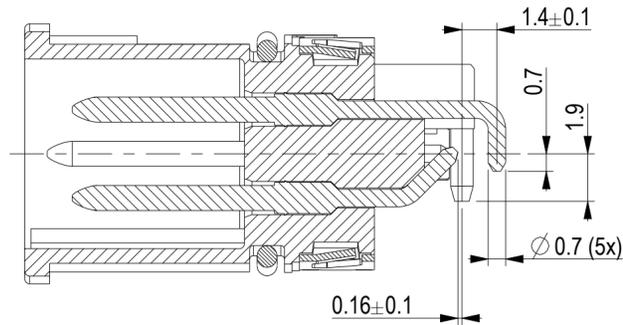



SCHNITT E-E
SECTION E-E

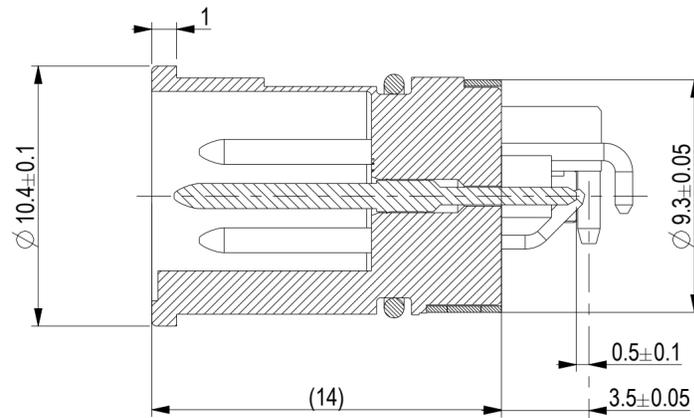

SCHNITT B-B
SECTION B-B

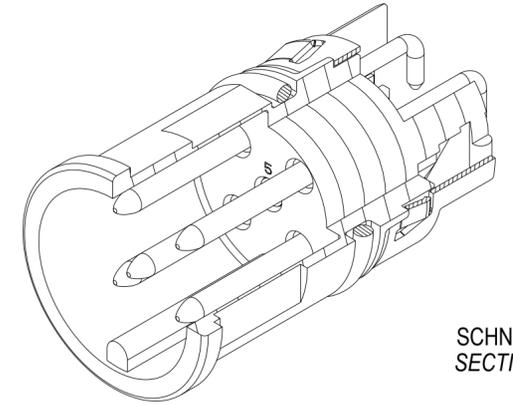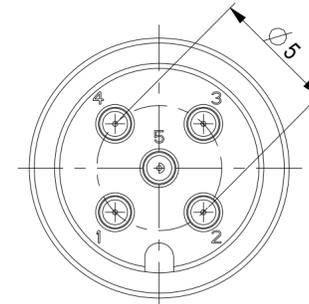

SCHNITT F-F
SECTION F-F

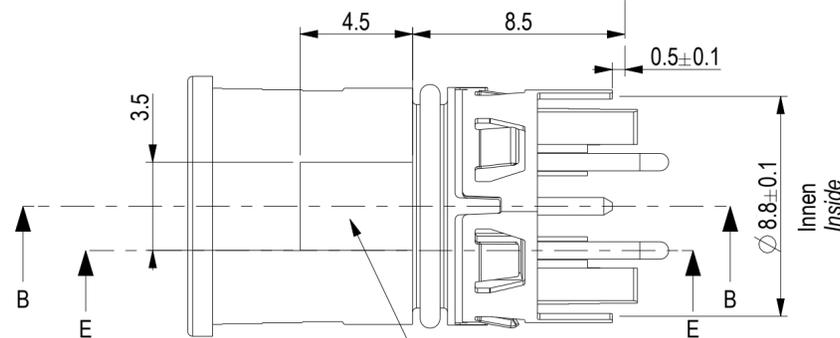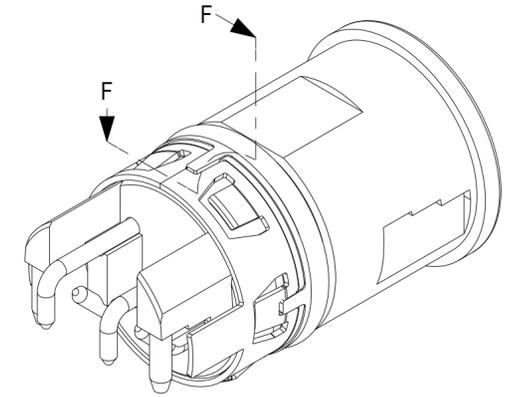

Ansaugfläche
Pick & place area

Steckgesicht nach IEC 61076-2-101
Mating face acc. IEC 61076-2-101

Information All rights reserved. Only for information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances All Dimensions in mm	Scale 5:1	Designation 5 polige Version / 5 pin version Kontakt 5 voreilend / early mate last break contact 5 M12 90° M A THR Frontmontage M12 90° M A THR front mount
		www.ERNI.com	
Index	Date 06.10.17	Class M12	I (4 / 4) A2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9