



PRODUCT NO.	CABLES
62435-001	RG196A/U
-001LF	RG178B/U
	0.8DS-PBE
62435-101	RG196A/U
-101LF	RG178B/U
	0.8DS-PBE



① INNER CONTACT

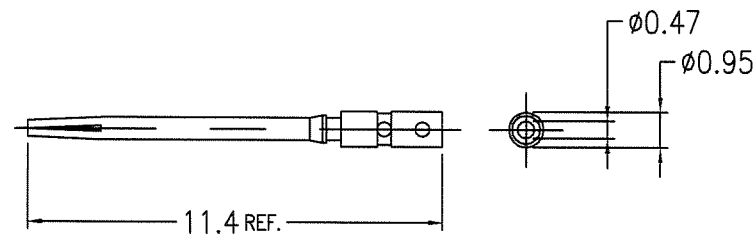

② BODY

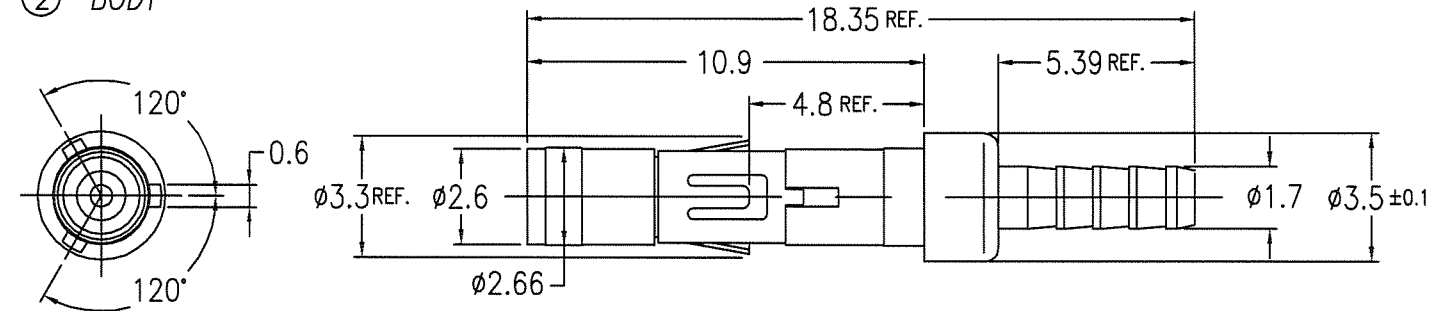

③ CRIMP SLEEVE

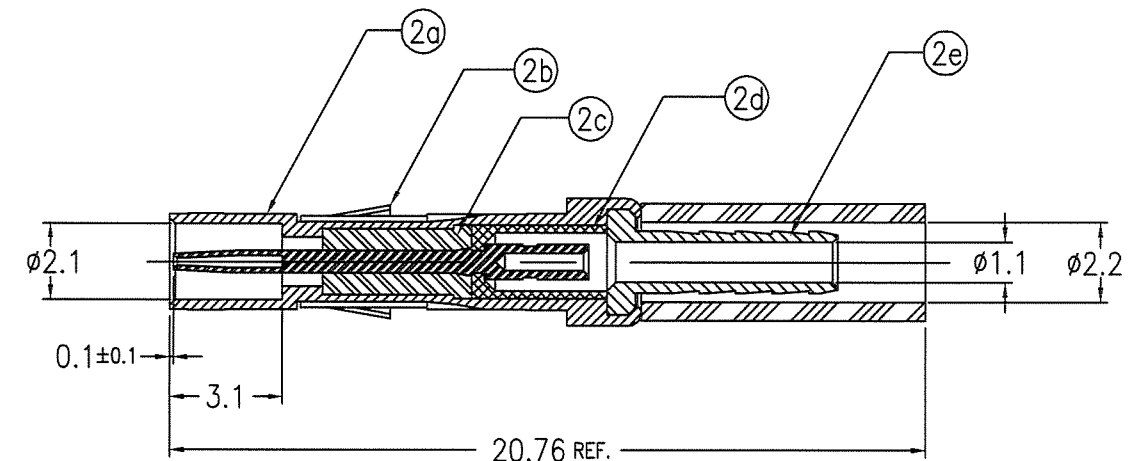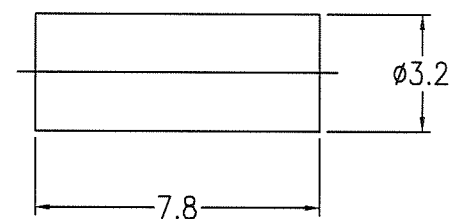


AFTER ASSY

NOTES


- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -001) Ni 1.27um MIN. (FOR -101)


mat'l. code ---					surface ISO 1302 ✓			tolerance ISO 406 ISO 1101		projection 	product family METRAL					CODE JP	
ltr	description	ecn no	dr	date	tolerances unless otherwise specified							title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE					
D	REVISED	J00331	Y.K	5/10/'00	angles linear			O.X	±0.2	scale 5:1		dwg no sheet 1 of 8 size A3					
E	REVISED	J00951	Y.K	12/12/'00				O.XX	±0.2								
F	REVISED	J10393	Y.K	7/6/'01		0°±3'		O.XXX	±0.2								
G	REVISED	J20204	Y.K	4/10/'02	dr	Y.KODAIRA		1/28/'99			Customer Drawing						
H	REVISED	J03-0172	Y.K	4/10/'03	engr	S.OKUDAIRA		1/22/'07									
J	REVISED	J05-0670	T.S	10/21/'05	chr	R. Shoji		4/22/'07									
K	REVISED	J07-0039	S.O	1/22/'07	appd	S. Okudaira		1/22/'07									
sheet	revision	K	F	E	E	D	C	C	C								Rev. K
index	sheet	1	2	3	4	5	6	7	8								

PRODUCT NO.	CABLES
62435-002	RG188A/U RG316/U
-002LF	
62435-102	RG188A/U RG316/U
-102LF	



① INNER CONTACT

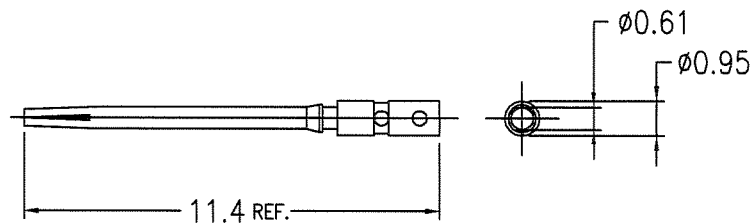

② BODY

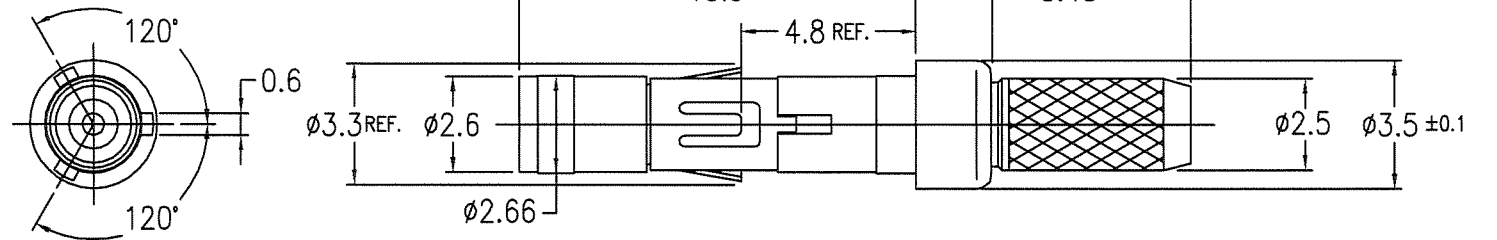

③ CRIMP SLEEVE

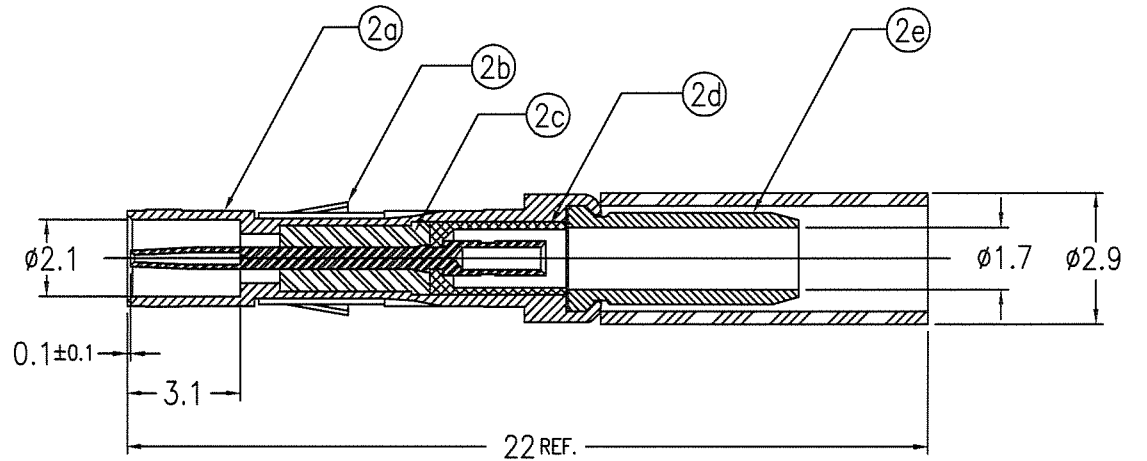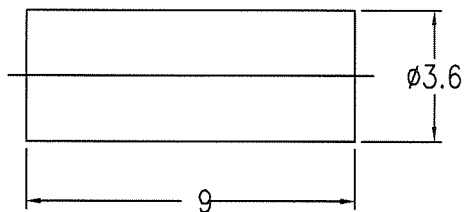


No.	DESCRIPTION	MATERIAL	
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -002) Au 0.8um MIN. (FOR -102)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -002) Au 0.8um MIN. (FOR -102)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -002) Ni 1.27um MIN. (FOR -102)




NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

AFTER ASSY

mat'l. code ---					surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family METRAL					CODE JP		
ltr	description	ecn no	dr	date	tolerances unless otherwise specified						title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE							
A	REVISED	J90110	Y.K	3/31/'99	angles	linear	O.X ±0.2											
B	REVISED	J00062	Y.K	1/21/'00			O.XX ±0.2											
C	REVISED	J00331	Y.K	5/10/'00			O.XXX ±0.2											
D	REVISED	J20204	Y.K	4/10/'02	dr	Y.KODAIRA		3/31/'99				dwg no 62435					sheet 2 of A3	
E	REVISED	J05-0670	T.S	10/21/'05	enr	S.OKUDAIRA		1/22/'07										
F	REVISED	J07-0039	S.O	1/22/'07	chr	R. Shoyi		1/22/'07										
					appd	J. Okada		1/22/'07				type Customer Drawing						
sheet index	revision sheet															Rev. F		

PRODUCT NO.	CABLES CABLES
62435-003	DOUBLE SHIELDED TYPE M17/152-0001(HARBOUR INDUSTRIES)
-003LF	
62435-103	DOUBLE SHIELDED TYPE M17/152-0001(HARBOUR INDUSTRIES)
-103LF	

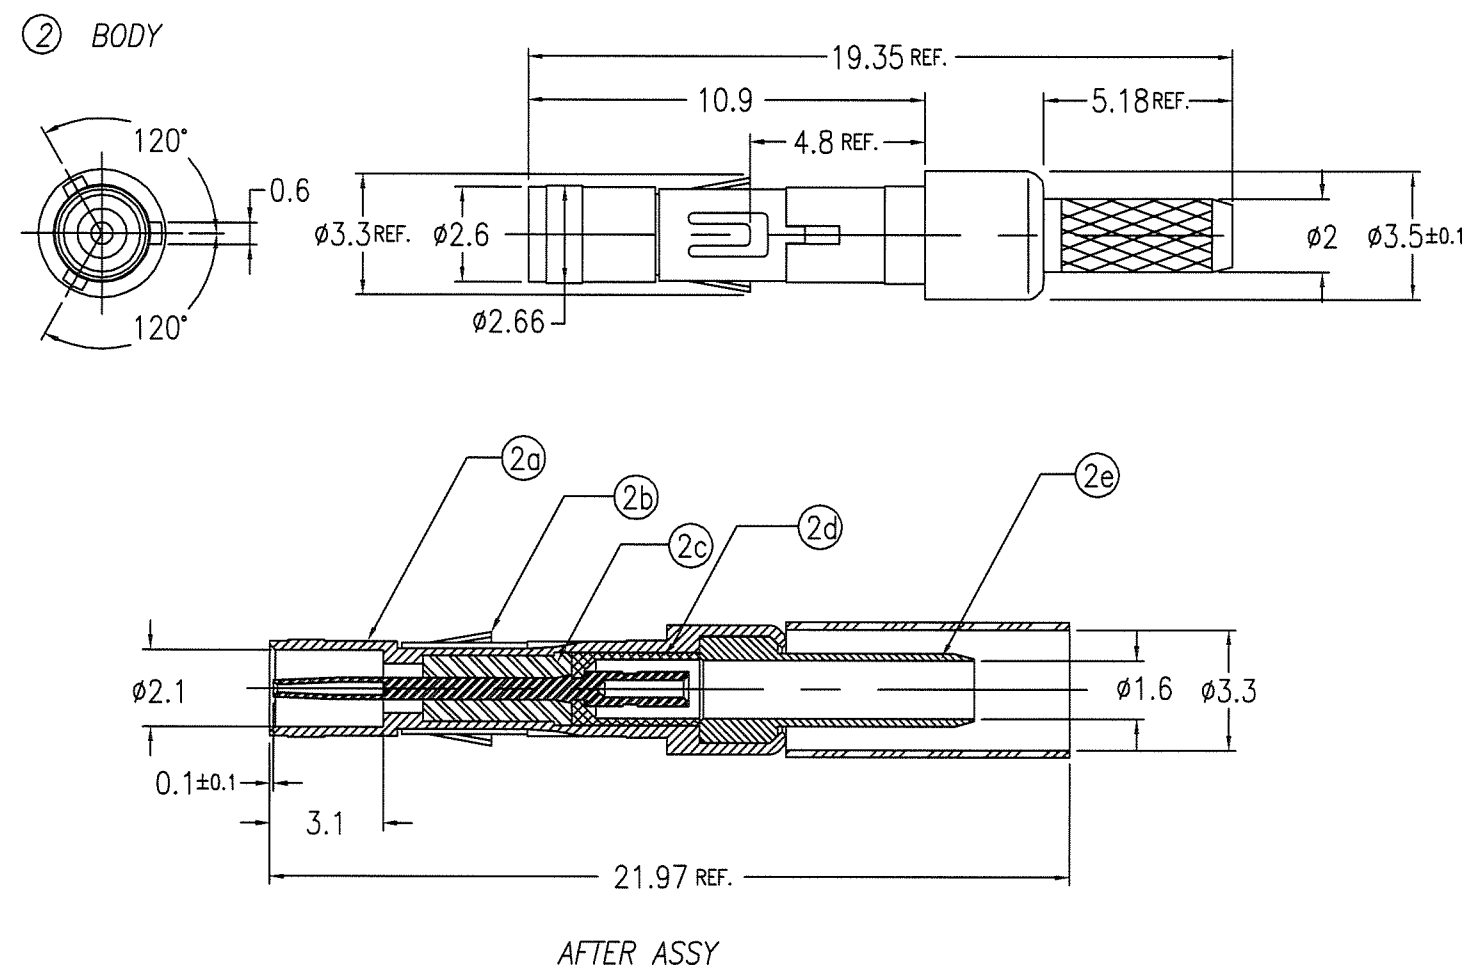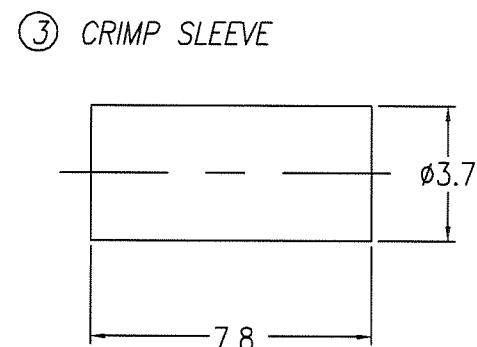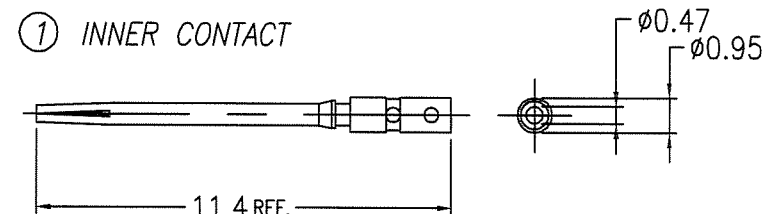

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -003) Au 0.8um MIN. (FOR -103)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -003) Au 0.8um MIN. (FOR -103)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -003) Ni 1.27um MIN. (FOR -103)


NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406 ISO 1101		METRAL	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified			title	
A	RELEASED	J90036	Y.K	1/28/'99	angles linear 0°±3'	0.X	±0.2	METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	
B	REVISED	J00062	Y.K	1/21/'00		0.XX	±0.2		
C	REVISED	J00331	Y.K	5/10/'00		0.XXX	±0.2		
D	REVISED	J05-0670	T.S	10/21/'05	dr	Y.KODAIRA	1/28/'99	dwg no	sheet 3 of
E	REVISED	J07-0039	S.O	1/22/'07	enrg	S.OKUDAIRA	1/22/'07	62435	A3
					chr	R. Shown	1/22/'07	Customer Drawing	
					appd	S. Shown	1/22/'07		
sheet	revision							Rev.	
index	sheet							E	

PRODUCT NO.	CABLES
62435-004	1.5C-XV (SUMITOMO)
-004LF	1.5C-QEV.CW (FUJIKURA)
62435-104	1.5C-XV (SUMITOMO)
-104LF	1.5C-QEV.CW (FUJIKURA)



① INNER CONTACT

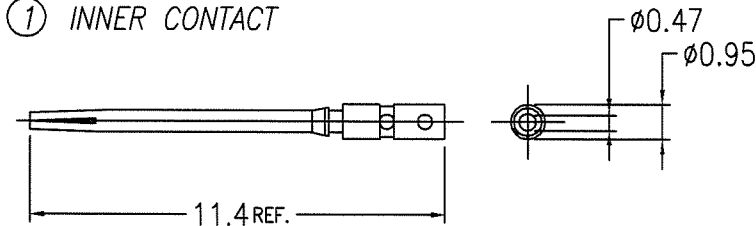

② BODY

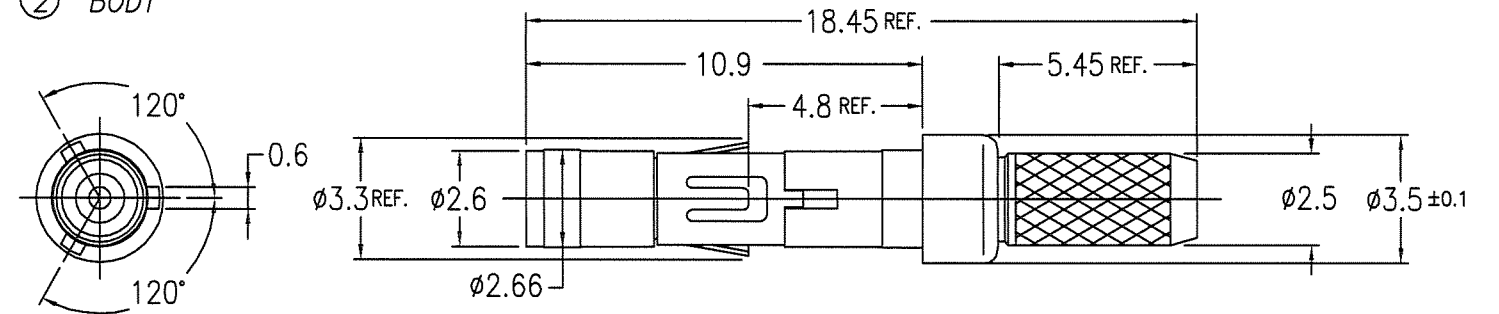

③ CRIMP SLEEVE

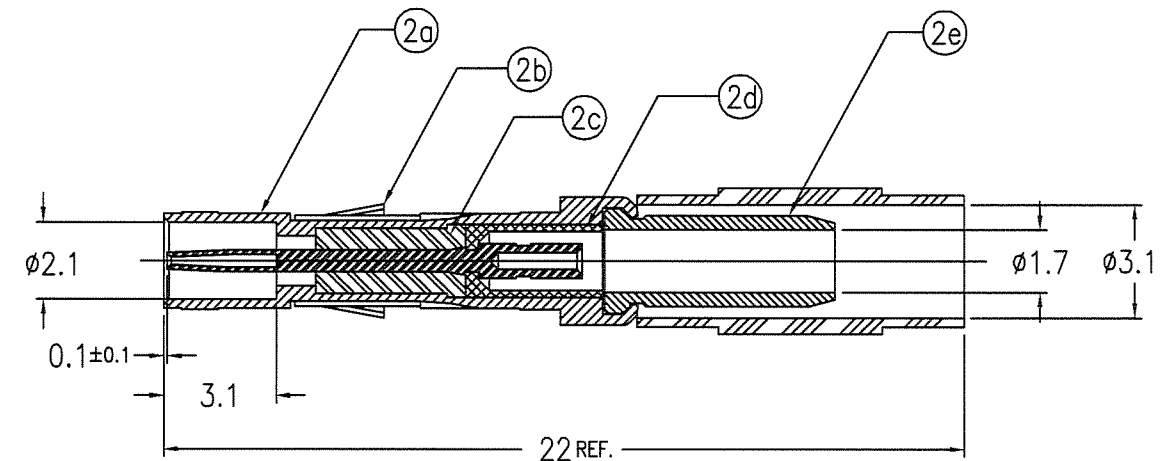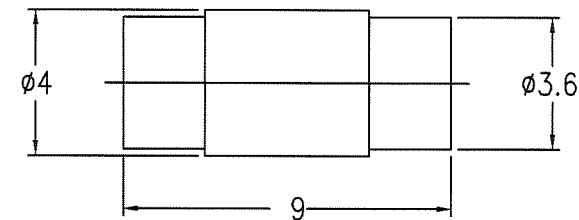

AFTER ASSY

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -004) Au 0.8um MIN. (FOR -104)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -004) Au 0.8um MIN. (FOR -104)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -004) Ni 1.27um MIN. (FOR -104)


NOTES

- PULL OUT FOR OF CENTER CONTACT MUST BE 0.2N MIN. / 0.8N MAX.
- ASSEMBLE PRODUCT WITH TOOL HT430 USE INSERTS EPL 193460-001
- FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406 ISO 1101		METRAL	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified			title	
A	RELEASED	J90036	Y.K	1/28/'99	angles	linear	0.X ± 0.2	METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	
B	REVISED	J00062	Y.K	1/21/'00			0.XX ± 0.2		
C	REVISED	J00331	Y.K	5/10/'00			0.XXX ± 0.2		
D	REVISED	J05-0670	T.S	10/21/'05	dr	Y.KODAIRA	1/28/'99	dwg no	sheet 4 of
E	REVISED	J07-0039	S.O	1/22/'07	enr	S.OKUDAIRA	1/22/'07	62435	A3
					chr	R. Shoyji	1/22/'07		
					appd	S. Shoyji	1/22/'07		
sheet	revision							type	Rev.
index	sheet							Customer Drawing	E

PRODUCT NO.	CABLES
62435-005	1.5C-XW (SUMITOMO)
-005LF	
62435-105	1.5C-XW (SUMITOMO)
-105LF	



① INNER CONTACT

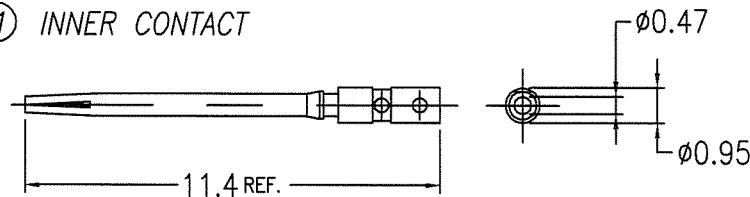

② BODY

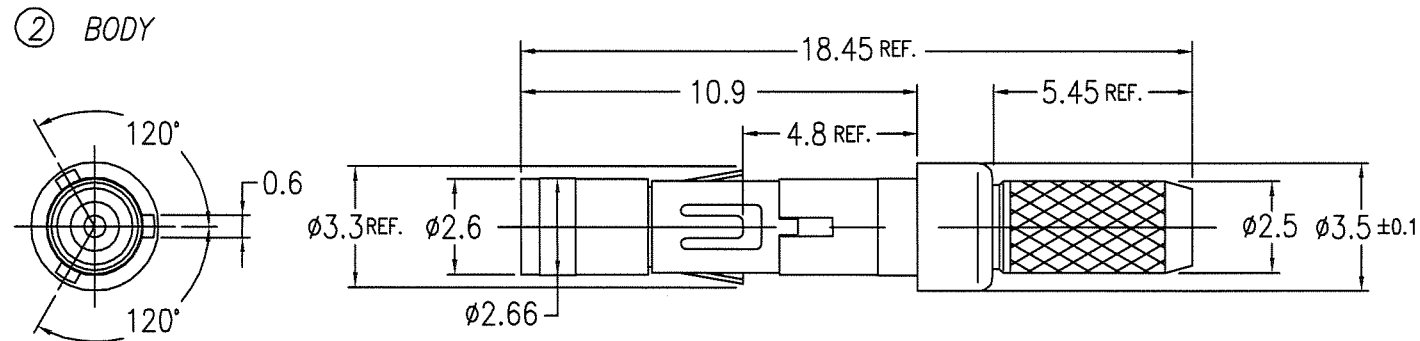

② CRIMP SLEEVE

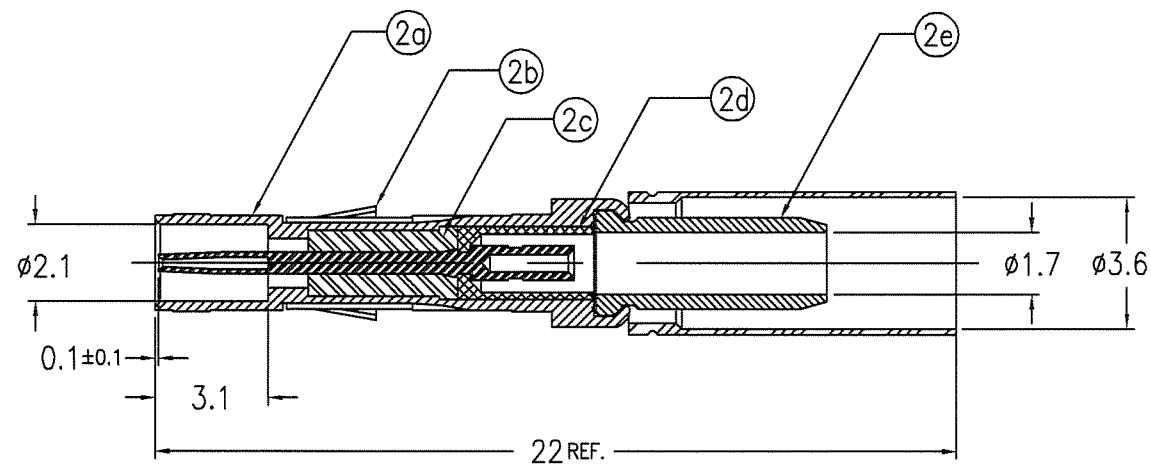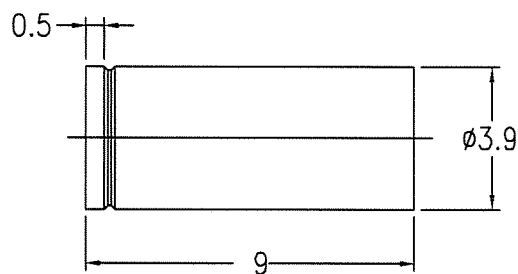

AFTER ASSY

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -005) Au 0.8um MIN. (FOR -105)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -005) Au 0.8um MIN. (FOR -105)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -005) Ni 1.27um MIN. (FOR -105)


NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.1N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family METRAL	CODE JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		 MM	title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	sheet 5 of 62435 A3
A	RELEASED	J00062	Y.K	1/21/'00	angles	linear			
B	REVISED	J00331	Y.K	5/10/'00	0'±3'				
C	REVISED	J05-0670	T.S	10/21/'05	dr	Y.KODAIRA			
D	REVISED	J07-0039	S.O	1/22/'07	engr	S.OKUDAIRA	1/22/'07	dwg no	sheet 5 of
					chr	R. Shoyi	1/22/'07	62435	A3
					appd	S. Okudaira	1/22/'07	type	Customer Drawing
sheet index	revision sheet								Rev. D

PRODUCT NO.	CABLES
62435-006	RG187A/U
-006LF	RG179B/U
62435-106	RG187A/U
-106LF	RG179B/U



① INNER CONTACT

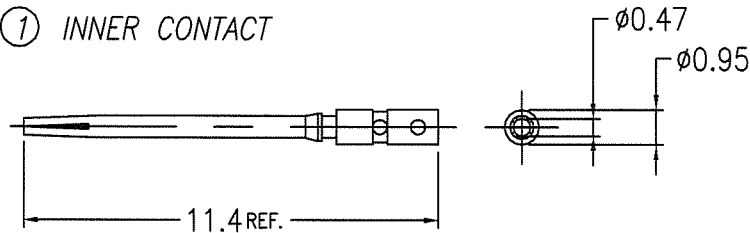

② BODY

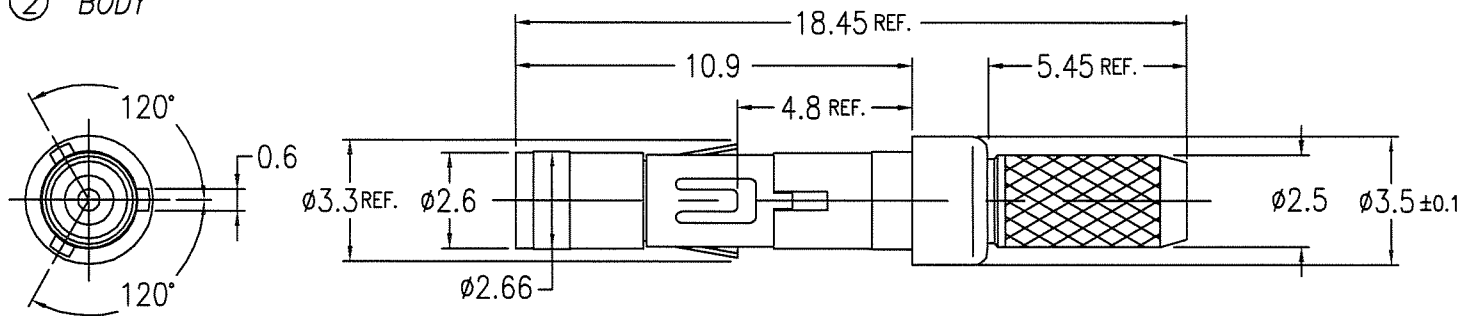

③ CRIMP SLEEVE

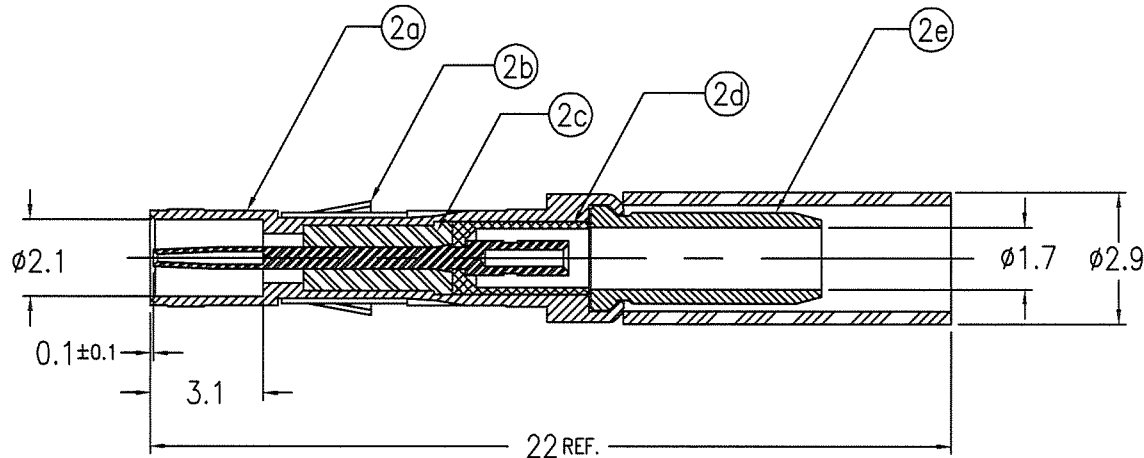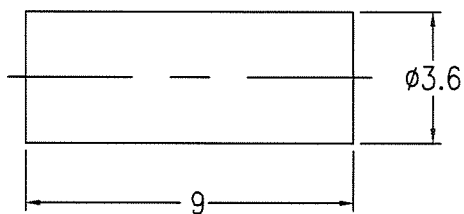

AFTER ASSY

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -006) Au 0.8um MIN. (FOR -106)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -006) Au 0.8um MIN. (FOR -106)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -006) Ni 1.27um MIN. (FOR -106)


NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.



mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406 ISO 1101		METRAL	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified			title	METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE
A	RELEASED	J00951	Y.K	12/12/'00	angles	linear			
B	REVISED	J05-0670	T.S	10/21/'05					
C	REVISED	J07-0039	S.O	1/22/'07	0°±3'				
					dr	Y.KODAIRA	12/12/'00	dwg no	sheet 6 of
					enr	S.OKUDAIRA	1/22/'07	62435	A3
					chr	R. Shoji	1/22/'07	type Customer Drawing	
					appd	S. Okada	1/22/'07		
sheet index	revision sheet								Rev. C

PRODUCT NO.	CABLES
62435-007	1.5DS-PBP
-007LF	
62435-107	1.5DS-PBP
-107LF	



① INNER CONTACT

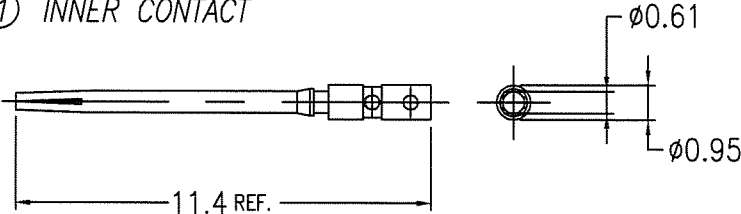

② BODY

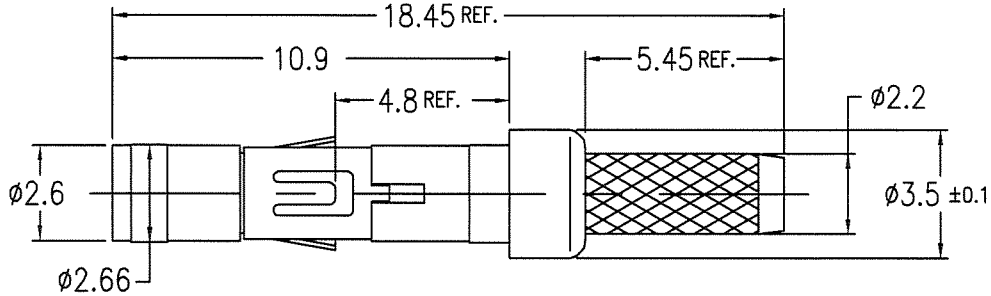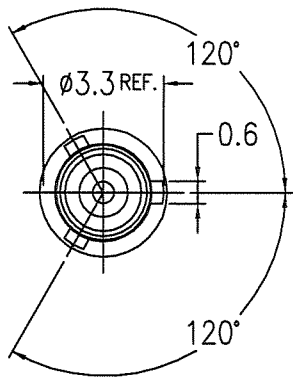

③ CRIMP SLEEVE

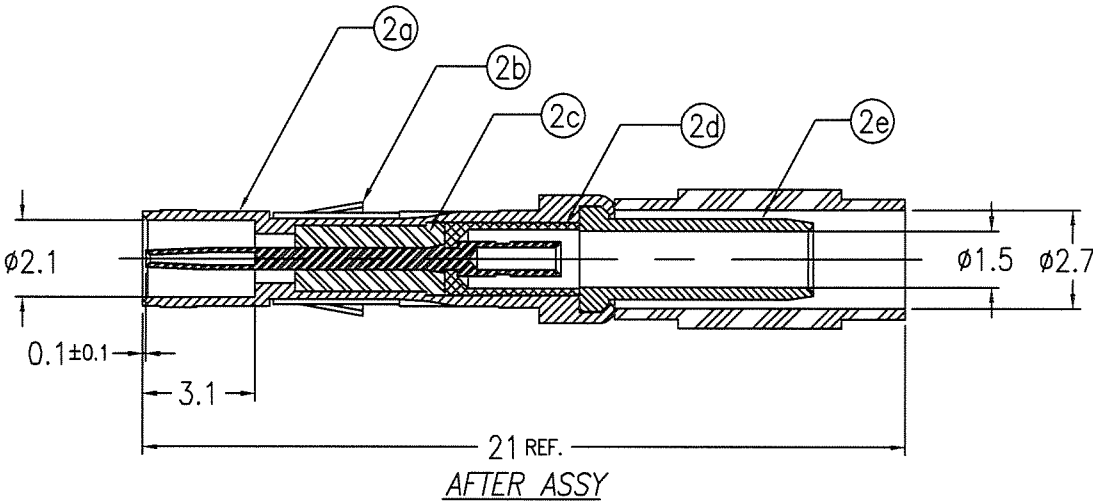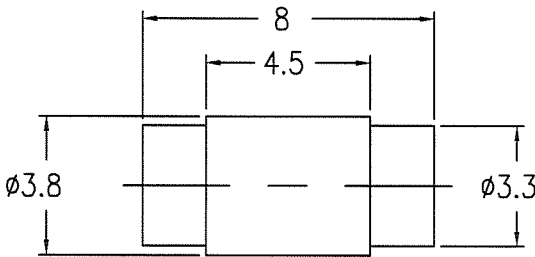

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -001) Ni 1.27um MIN. (FOR -101)


NOTES

- PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406 ISO 1101		METRAL	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		MM	title	
A	RELEASED	J10393	Y.K	7/6/'01	angles	linear			
B	REVISED	J05-0670	T.S	10/21/'05					
C	REVISED	J07-0039	S.O	1/22/'07	0'±3'				
					dr	Y.KODAIRA	7/6/'01	METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	
					enr	S.OKUDAIRA	1/22/'07		
					chr	R.Shoyi	4/22/'07		
					appd	S.Chandana	4/22/'07		
sheet	revision							dwg no	sheet 7 of
index	sheet							62435	A3
								type	Customer Drawing
									Rev.
									C

PRODUCT NO.	CABLES
62435-108	1.5DS-xx, 1.5D-xx
-108LF	



① INNER CONTACT

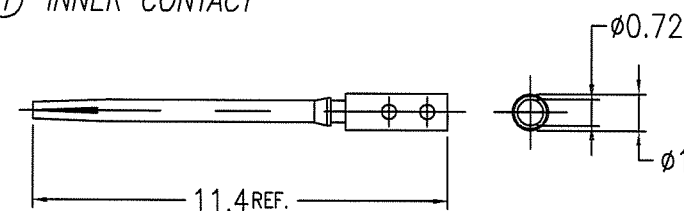

② BODY

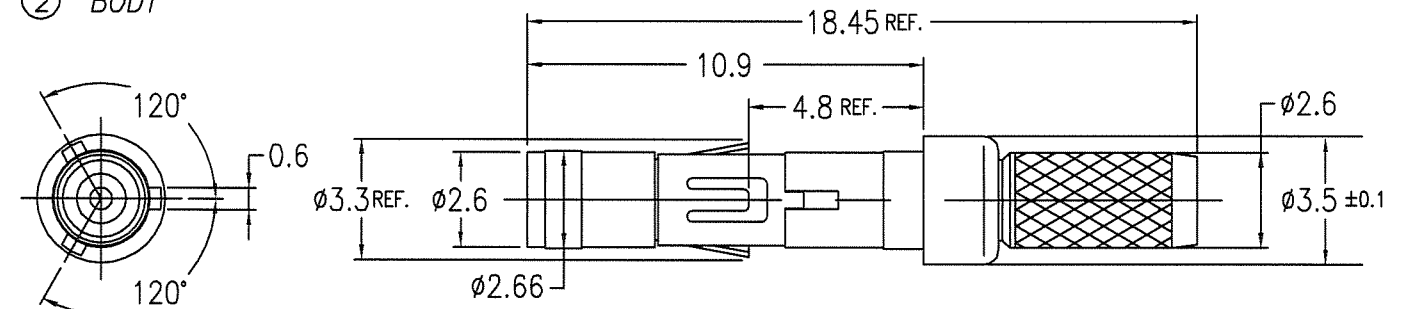

③ CRIMP SLEEVE

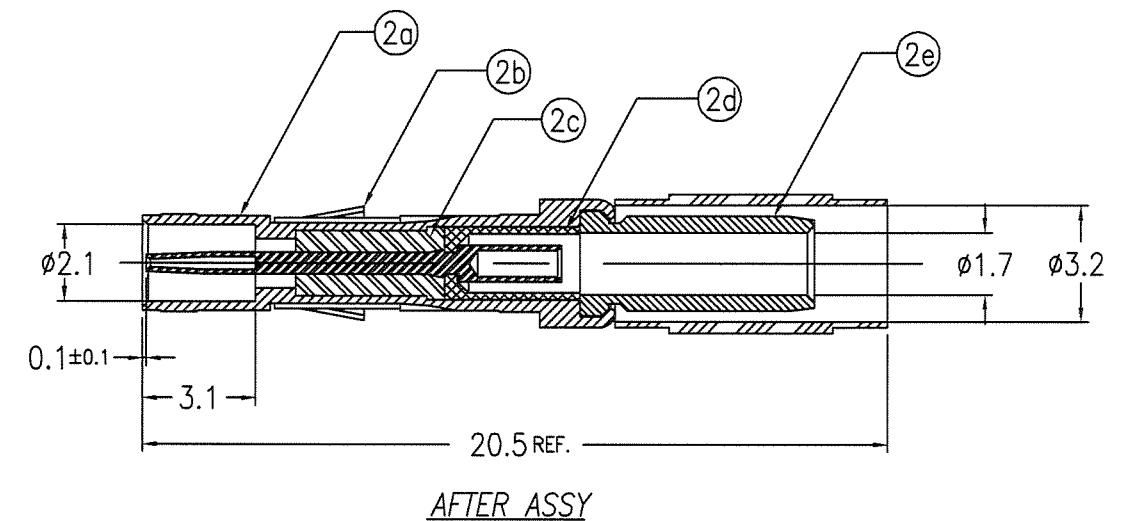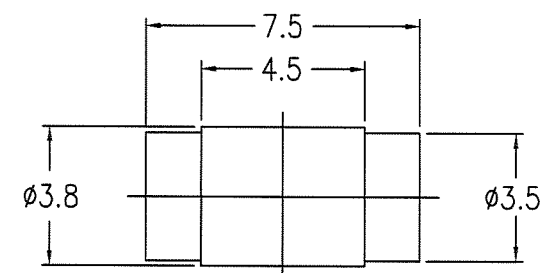

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 0.8um MIN.
②	BODY		
②a	SHELL	BRASS	Au 0.8um MIN.
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Ni 1.27um MIN.

NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406	ISO 1101	METRAL	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified			title	
A	RELEASED	J03-0172	Y.K	4/10/'03	angles	0.X	±0.2	METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	
B	REVISED	J05-0670	T.S	10/21/'05		0.XX	±0.2		
C	REVISED	J07-0039	S.O	1/22/'07		0.XXX	±0.2		
					dr	Y.KODAIRA	4/10/'03	dwg no sheet 8 of size	
					enrg	S.OKUDAIRA	1/22/'07		
					chr	R. Shoyi	1/22/'07		
					appd	S. Mochi	1/22/'07		
sheet	revision							type Customer Drawing	
index	sheet								
								Rev. C	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9