

### RoHS **217 Series, 5 x 20 mm, Fast-acting Fuse**



#### Agency Approvals

| Agency                                                                              | Agency File Number                                                                              | Ampere Range                                            |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------|
|    | Cartridge Certificates:<br>NBK120802-E10480 A&C<br>Leaded Certificates:<br>NBK120802-E10480 B&D | 1A – 5A<br>6.3A – 15A<br>1A – 5A<br>6.3A – 15A          |
|    | Certificates:<br>2002010207007600<br>2002010207007599                                           | 32mA – 800mA<br>1A – 6.3A                               |
|  | Certificates:<br>SU05001-3004<br>SU05001-2005<br>SU05001-2006<br>SU05001-2007                   | 32mA – 40mA<br>50mA – 315mA<br>400mA – 6.3A<br>8A & 10A |
|  | E10480<br>JDYX2                                                                                 | 32mA – 6.3A                                             |
|  | File:<br>029862<br>Acc. Class:<br>LR1422-30                                                     |                                                         |
|  | License:<br>KM41462                                                                             | 400mA – 6.3A                                            |
|  | File:<br>948103, 915516,<br>304518 & 304555                                                     | 32mA – 6.3A                                             |
|  | License:<br>40014645                                                                            | 32mA – 6.3A,<br>8A*, 10A*                               |
|  | License:<br>40016647                                                                            | 15A*                                                    |
|  |                                                                                                 | 32mA – 15A                                              |

\*Approval for cartridge versions only

#### Description

5x20mm fast-acting glass body cartridge fuse designed to IEC specification.

#### Features

- Designed to International (IEC ) Standards for use globally
- Meets the IEC 60127-2, Sheet 2 specification for fast-acting fuses
- Available in cartridge and axial lead form
- RoHS compliant and lead-free

#### Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

#### Electrical Characteristics for Series


| % of Ampere Rating | Ampere Rating | Opening Time                    |
|--------------------|---------------|---------------------------------|
| 150%               | 32mA–100mA    | 60 minutes, Minimum             |
|                    | 125mA-6.3A    | 60 minutes, Minimum             |
|                    | 8A-15A        | 30 minutes, Minimum             |
| 210%               | 32mA-100mA    | 30 minutes, Maximum             |
|                    | 125mA-6.3A    | 30 minutes, Maximum             |
|                    | 8A-15A        | 30 minutes, Maximum             |
| 275%               | 32mA-100mA    | 0.01 sec., Min.; .5 sec. Max.   |
|                    | 125mA-6.3A    | 0.05 sec., Min.; 2 sec. Max.    |
|                    | 8A-15A        | 0.05 sec., Min.; 2 sec. Max.    |
| 400%               | 32mA-100mA    | .003 sec., Min.; 0.1 sec.. Max. |
|                    | 125mA-6.3A    | .01 sec., Min.; 0.3 sec. Max.   |
|                    | 8A-15A        | .01 sec., Min.; 0.4 sec. Max.   |
| 1000%              | 32mA-100mA    | .02 second, Maximum             |
|                    | 125mA-6.3A    | .02 second, Maximum             |
|                    | 8A-15A        | .04 second, Maximum             |

### Electrical Characteristic Specifications by Item


| Amp Code | Amp Rating (A) | Voltage Rating (V) | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting I²t (A² sec) | Nominal Voltage Drop at Rated Current (mV) | Nominal Power Dissipation At Rated Current (W) | Agency Approvals                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |  |
|----------|----------------|--------------------|---------------------|--------------------------------|------------------------------|--------------------------------------------|------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
|          |                |                    |                     |                                |                              |                                            |                                                |  |  |  |  |  |  |  |  |  |  |
| .032     | 0.032          | 250                | 35A@250Vac          | 262.2000                       | 0.00006                      | 10000                                      | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .040     | 0.04           | 250                |                     | 183.1500                       | 0.00008                      | 8000                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .050     | 0.05           | 250                |                     | 15.2000                        | 0.00019                      | 7000                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .063     | 0.063          | 250                |                     | 10.4500                        | 0.00056                      | 5000                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .080     | 0.08           | 250                |                     | 7.8900                         | 0.00083                      | 4000                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .100     | 0.1            | 250                |                     | 5.6965                         | 0.00450                      | 3500                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .125     | 0.125          | 250                |                     | 3.8200                         | 0.00478                      | 2000                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .160     | 0.16           | 250                |                     | 2.5250                         | 0.01000                      | 2000                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .200     | 0.2            | 250                |                     | 1.7000                         | 0.02000                      | 1700                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .250     | 0.25           | 250                |                     | 1.2325                         | 0.04000                      | 1400                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .315     | 0.315          | 250                |                     | 0.8800                         | 0.11000                      | 1300                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| .400     | 0.4            | 250                |                     | 0.2770                         | 0.12500                      | 1200                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |  |
| .500     | 0.5            | 250                |                     | 0.2065                         | 0.21500                      | 1000                                       | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |  |
| .630     | 0.63           | 250                |                     | 0.1900                         | 0.41000                      | 650                                        | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |  |
| .800     | 0.8            | 250                |                     | 0.1203                         | 0.85000                      | 240                                        | 1.6                                            | x                                                                                   | x                                                                                   |                                                                                     | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |  |
| 001.     | 1              | 250                |                     | 0.0964                         | 1.04500                      | 200                                        | 1.6                                            | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |  |
| 1.25     | 1.25           | 250                |                     | 0.0701                         | 2.23000                      | 200                                        | 1.6                                            | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |  |
| 016      | 1.6            | 250                |                     | 0.0528                         | 4.61500                      | 190                                        | 1.6                                            | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |  |
| 002.     | 2              | 250                |                     | 0.0416                         | 5.73000                      | 170                                        | 1.6                                            | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |  |
| 02.5     | 2.5            | 250                |                     | 0.0334                         | 9.46000                      | 170                                        | 1.6                                            | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |  |
| 3.15     | 3.15           | 250                |                     | 0.0224                         | 17.72000                     | 150                                        | 2.5                                            | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |  |
| 004.     | 4              | 250                | 40A@250Vac          | 0.0165                         | 29.16500                     | 130                                        | 2.5                                            | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| 005.     | 5              | 250                | 50A@250Vac          | 0.0137                         | 42.79500                     | 130                                        | 2.5                                            | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| 06.3     | 6.3            | 250                | 63A@250Vac          | 0.0095                         | 62.46500                     | 130                                        | 2.5                                            | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   | x                                                                                   |                                                                                     |  |
| 008.     | 8              | 250                | 80A@250Vac          | 0.0068                         | 198.16000                    | 130                                        | 4                                              | x                                                                                   |                                                                                     | x                                                                                   |                                                                                     |                                                                                     | x                                                                                   | x*                                                                                  |                                                                                     |                                                                                     |  |
| 010.     | 10             | 250                | 100A@250Vac         | 0.0063                         | 217.63500                    | 130                                        | 4                                              | x                                                                                   |                                                                                     | x                                                                                   |                                                                                     |                                                                                     | x                                                                                   | x*                                                                                  |                                                                                     |                                                                                     |  |
| 015.     | 15             | 250                | 150A@250Vac         | 0.0040                         | 607.13500                    | 130                                        | 4                                              |                                                                                     |                                                                                     | x                                                                                   |                                                                                     |                                                                                     | x                                                                                   | x*                                                                                  |                                                                                     |                                                                                     |  |

\* Approval for cartridge versions only.


### Temperature Derating Curve

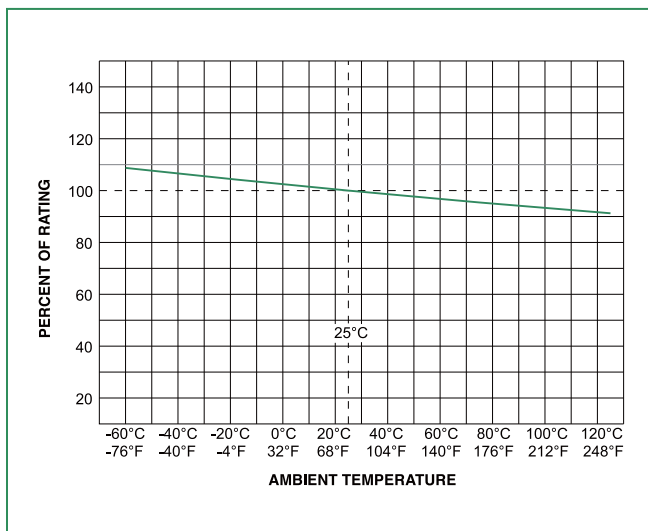

### Average Time Current Curves

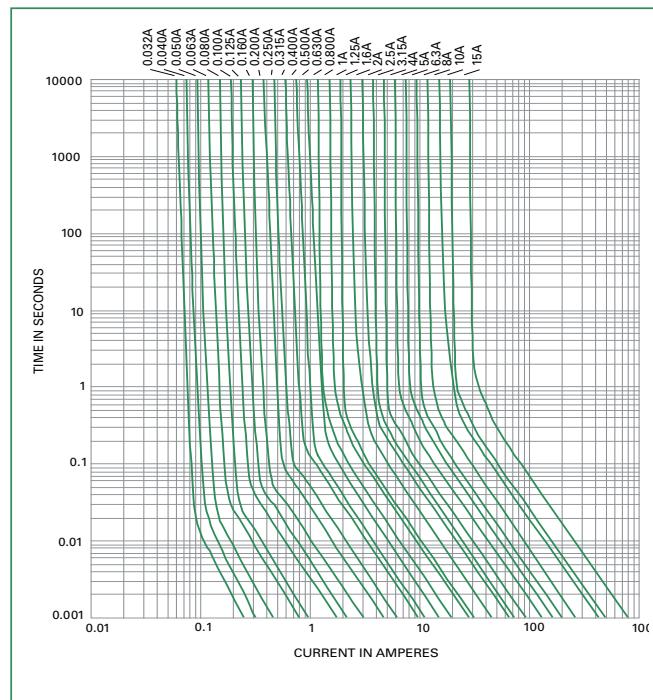

## Soldering Parameters - Wave Soldering

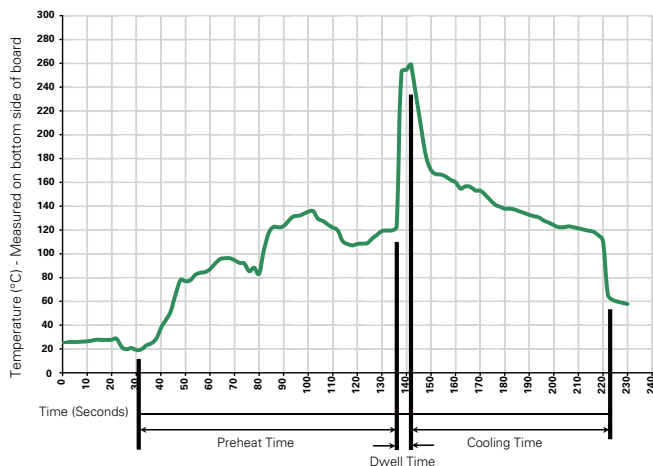

### Recommended Process Parameters:

| Wave Parameter                                                                                | Lead-Free Recommendation |
|-----------------------------------------------------------------------------------------------|--------------------------|
| <b>Preheat:</b><br>(Depends on Flux Activation Temperature) (Typical Industry Recommendation) |                          |
| Temperature Minimum:                                                                          | 100° C                   |
| Temperature Maximum:                                                                          | 150° C                   |
| Preheat Time:                                                                                 | 60-180 seconds           |
| <b>Solder Pot Temperature:</b>                                                                | 260° C Maximum           |
| <b>Solder Dwell Time:</b>                                                                     | 2-5 seconds              |

### Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350° C +/- 5°C  
 Heating Time: 5 seconds max.

**Note: These devices are not recommended for IR or Convection Reflow process.**


## Product Characteristics

|                          |                                                                              |
|--------------------------|------------------------------------------------------------------------------|
| <b>Material</b>          | Body: Glass<br>Cap: Nickel-plated brass<br>Leads: Tin-plated Copper          |
| <b>Terminal Strength</b> | MIL-STD-202G, Method 211A, Test Condition A                                  |
| <b>Solderability</b>     | Reference IEC 60127 Second Edition 2003-01 Annex A                           |
| <b>Product Marking</b>   | Cap1: Brand logo, current and voltage ratings<br>Cap2: Agency approval marks |
| <b>Packaging</b>         | Available in Bulk (M=1000 pcs/pkg) or on Tape/Reel (MRET1=1000 pcs/reel)     |


|                              |                                                                                                           |
|------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>Operating Temperature</b> | -55°C to +125°C                                                                                           |
| <b>Thermal Shock</b>         | MIL-STD-202G, Method 107G, Test Condition B: (5 cycles -65°C to +125°C)                                   |
| <b>Vibration</b>             | MIL-STD-202G, Method 201A                                                                                 |
| <b>Humidity</b>              | MIL-STD-202G, Method 103B, Test Condition A. high RH (95%) and elevated temperature (40°C) for 240 hours. |
| <b>Salt Spray</b>            | MIL-STD-202G, Method 101D, Test Condition B                                                               |

Dimensions


0217 000P



0217.032 XEP  
to  
0217.315 XEP




0217.400 XEP  
to  
0217015 XEP



All dimensions in mm

Notes:  
\* Ratings above 6.3A  
have 0.8 mm dia lead

Part Numbering System

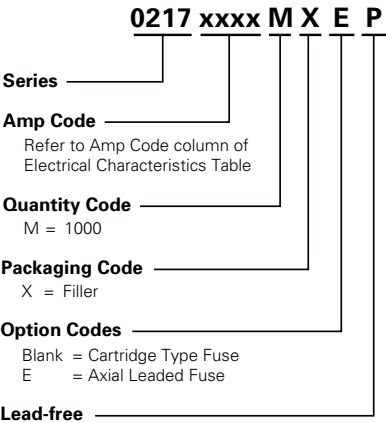

Packaging

| Packaging Option | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width     |
|------------------|-------------------------|----------|---------------------------|------------------|
| Bulk             | N/A                     | 1000     | MX                        | N/A              |
| Bulk             | N/A                     | 1000     | MXE                       | N/A              |
| Reel and Tape    | EIA 296-E               | 1000     | MRET1                     | T1=52mm (2.062") |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9