

Specification

Part No.	:	LWB02.A.505111
Product Name	:	External 4G LTE Wide Band 790-960/1710-2700MHz Bracket Mount Dipole Antenna
Features	:	Worldwide 4G LTE including 3G and 2G Product Dimensions: 335.5*45*157mm External Wall and Pole Mount Antenna Robust design for all weather operation Cable: 5M CFD-200 Connector: SMA(M) Cables and Connectors Customizable IP67 Compliant RoHS Compliant



1. Introduction

The LWB02 is an omnidirectional outdoor 4G LTE antenna for use in worldwide telematics and cellular communication. Its flat and compact blade design, with a wide frequency range and high gain across all bands, can be used in global telematics, transportation and remote monitoring applications.

4G LTE applications demand a high-speed data uplink and downlink. The LWB02, utilizing low loss cables, provides high efficiency and high gain to achieve these requirements over long cable lengths.

The heavy-duty, fully IP67 waterproof housing can be used for either outdoor or indoor environments and with the mounting shaft, it can be easily fixed to walls or poles. The antenna casing and the mounting shaft use heat resistant, high impact, UV stabilized ASA resin, making it extremely robust.

Cable length and connector types are customizable. Lower loss LMR400 or CFD400 cable can be used to directly connect to the on-board connector to extend the cable length. Contact your regional Taoglas sales office for support.


2. Specification

Cellular Antenna							
Frequency (MHz)	LTE700	GSM850	GSM900	DCS	PCS	UMTS1	LTE2600
	698~806	824~894	880~960	1710~1880	1850~1990	1920~2170	2300~2690
Efficiency (%)							
LTE_0.3M	65.83	77.39	78.32	70.44	65.23	67.02	53.70
LTE_1.0M	62.25	73.94	74.79	64.22	59.50	61.64	48.96
LTE_2.0M	58.09	2.92	68.21	57.24	52.36	53.98	42.54
LTE_3.0M	53.82	62.93	63.30	50.89	46.31	47.77	36.99
LTE_5.0M	46.55	53.56	53.51	40.13	36.31	37.21	27.99
Average Gain (dBi)							
LTE_0.3M	-1.83	-1.12	-1.08	-1.53	-1.86	-1.76	-3.09
LTE_1.0M	-2.07	-1.32	-1.28	-1.93	-2.26	-2.12	-3.49
LTE_2.0M	-2.37	-1.69	-1.68	-2.43	-2.81	-2.70	-4.12
LTE_3.0M	-2.70	-2.02	-2.01	-2.94	-3.35	-3.23	-4.73
LTE_5.0M	-3.33	-2.72	-2.74	-3.97	-4.40	-4.31	-5.95
Peak Gain (dBi)							
LTE_0.3M	3.23	3.67	3.87	6.19	6.28	6.98	5.07
LTE_1.0M	3.03	3.47	3.67	5.79	5.88	6.68	4.67
LTE_2.0M	2.73	3.07	3.27	5.29	5.28	6.08	4.07
LTE_3.0M	2.41	2.77	2.97	4.79	4.78	5.58	3.47
LTE_5.0M	2.11	2.47	2.67	4.29	4.28	5.08	2.87
Impedance			50Ω				
Polarization			Linear				


MECHANICAL	
Antenna Dimensions	335.5*45*157mm
Cable	5 Meter CFD-200
Connector	SMA(M)
Casing	ASA
Weight	220g
Waterproof	IP67
Environment	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 90°C
Humidity	Non-condensing 65°C 95% RH

3. Antenna Characteristics


3.1 Antenna Test Setup

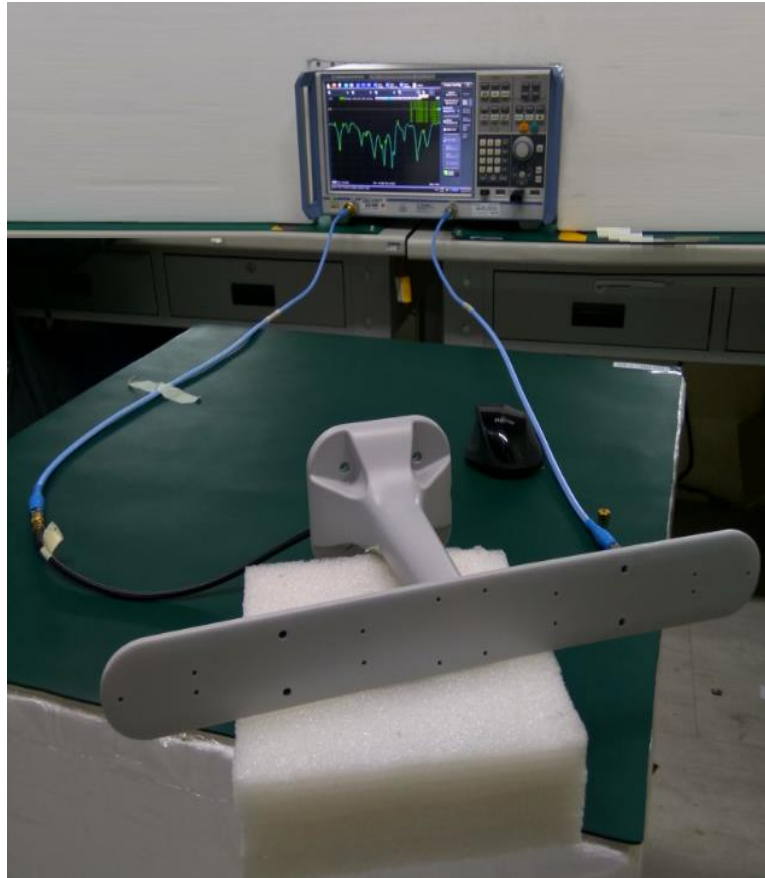


3.2 Return Loss

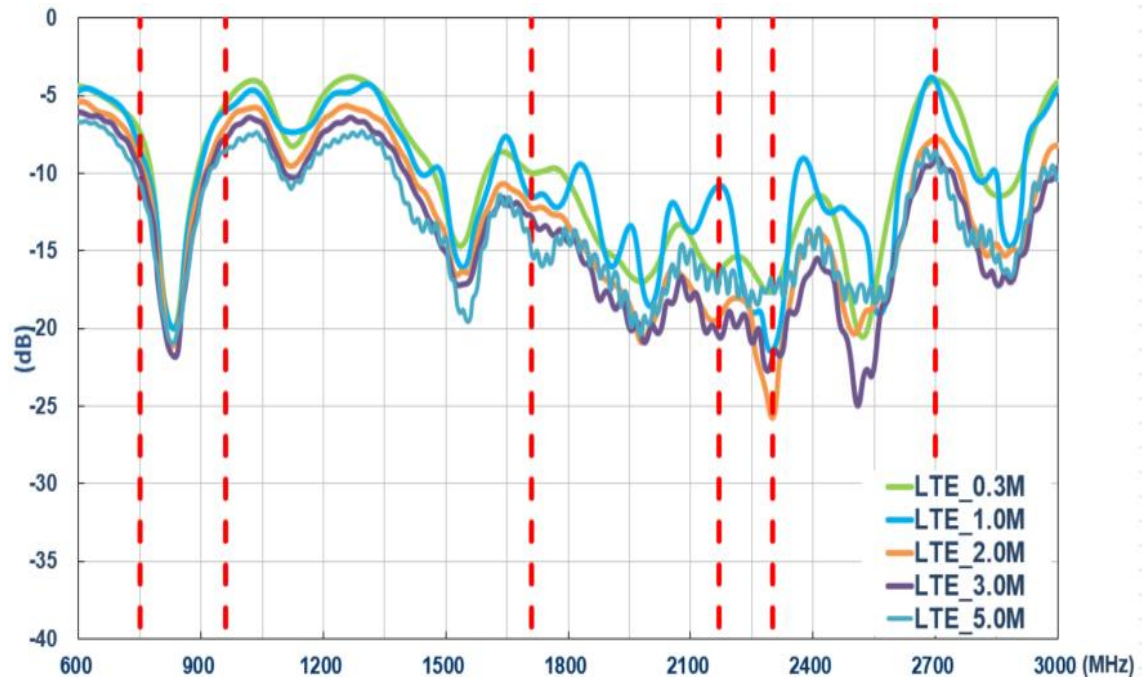


3.3 Efficiency

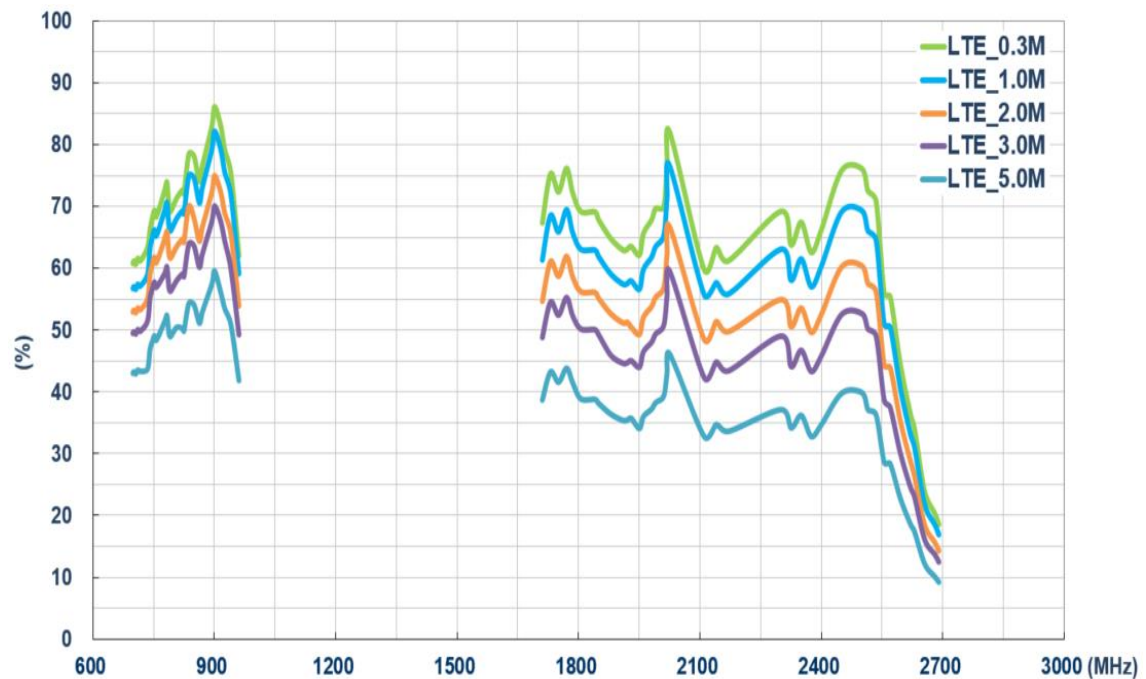

3.4 Average Gain

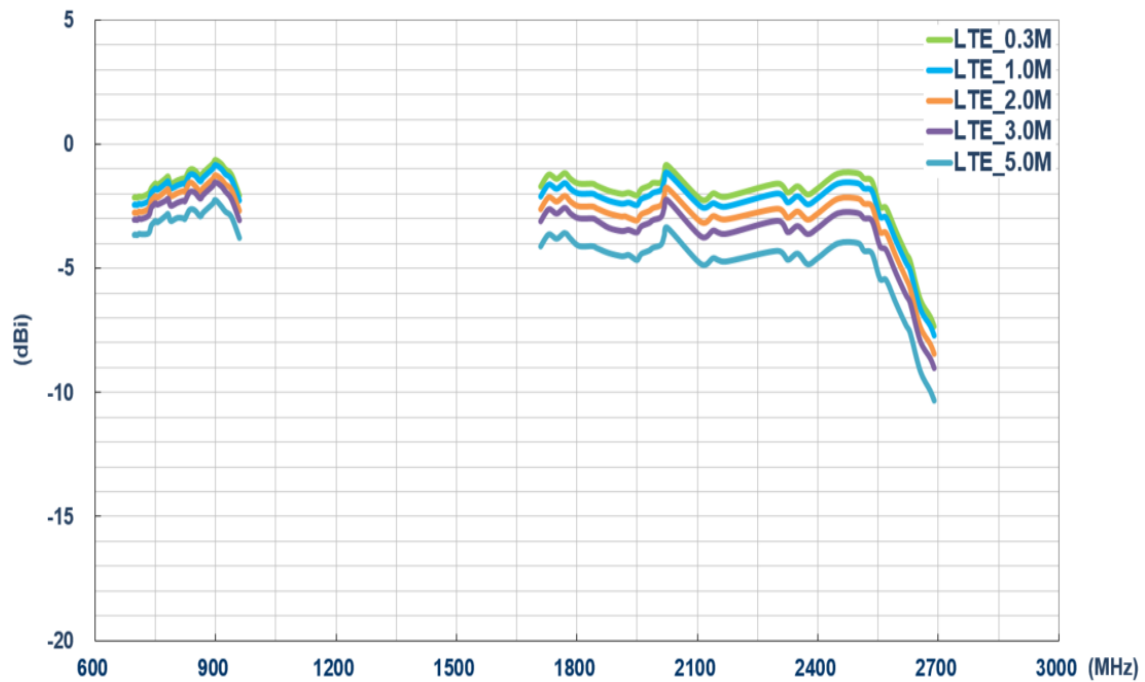


3.5 Peak Gain

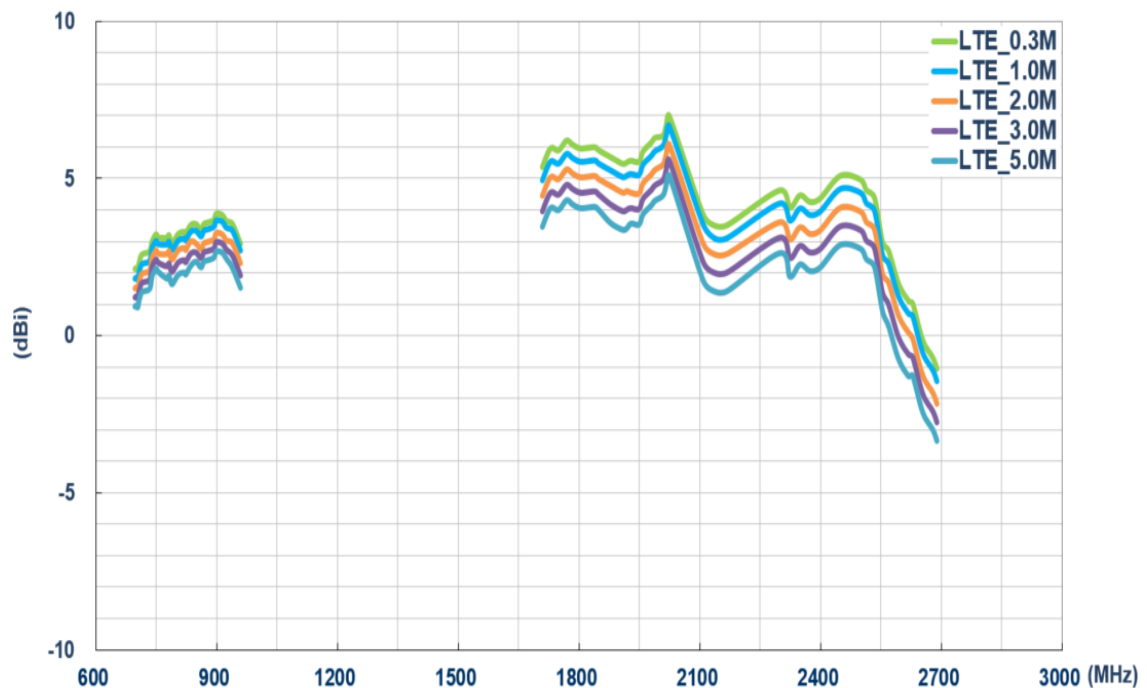

4. Antenna Radiation Patterns




4.1 Antenna Setup (Antenna testing Setup in Anechoic Chamber)

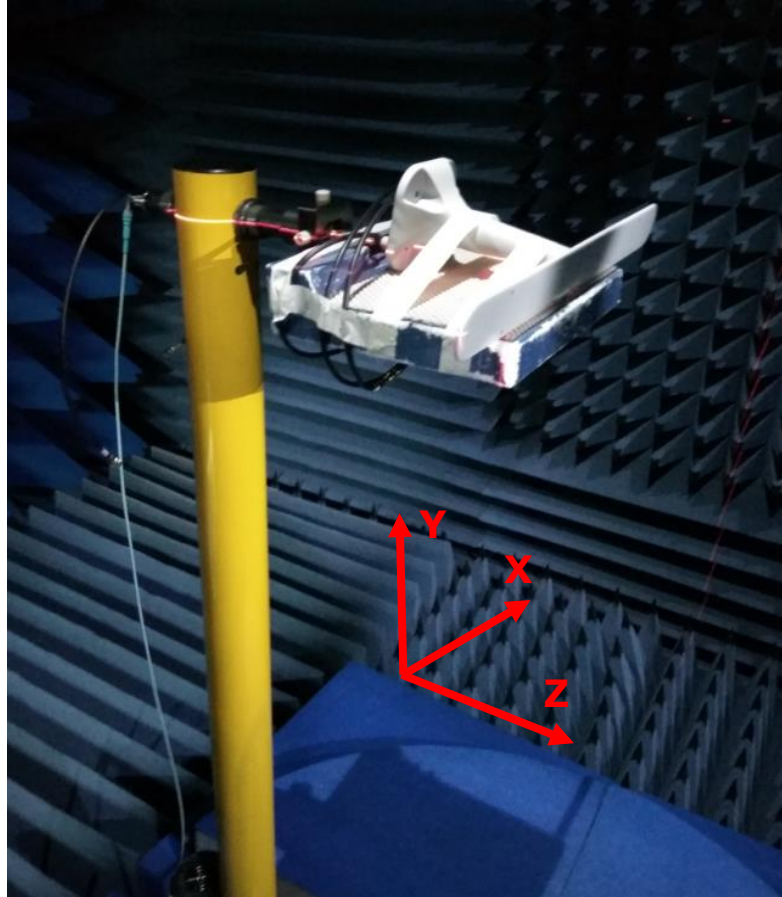




4.2 2D Radiation Patterns

4.2.1 With 0.3M Cable




XY Plane

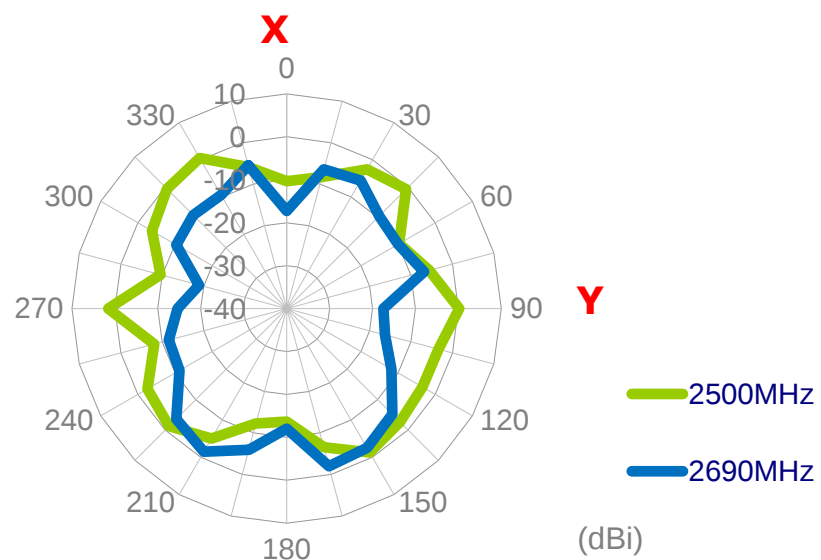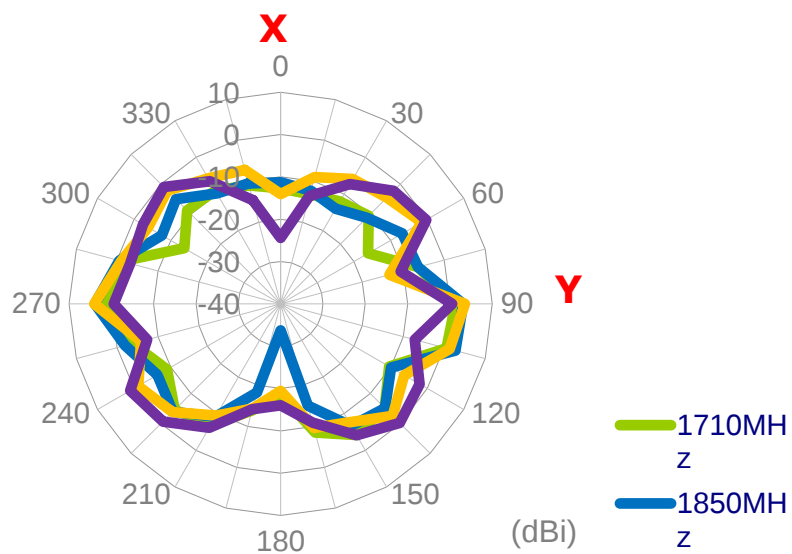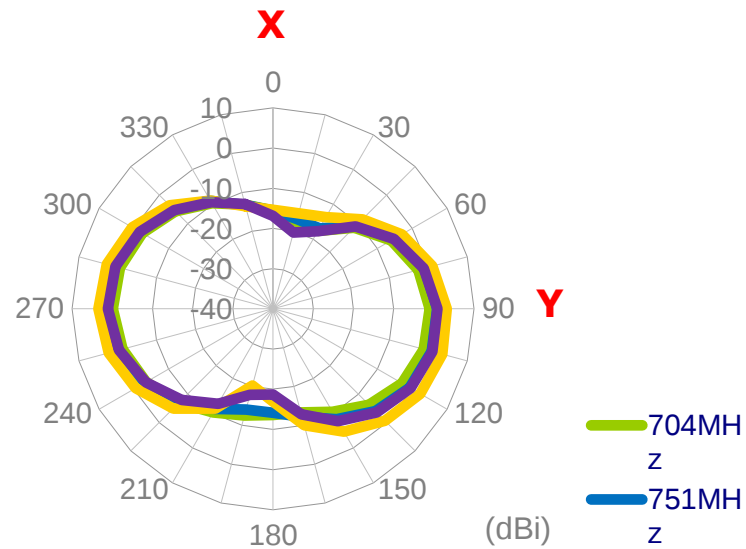


XZ Plane

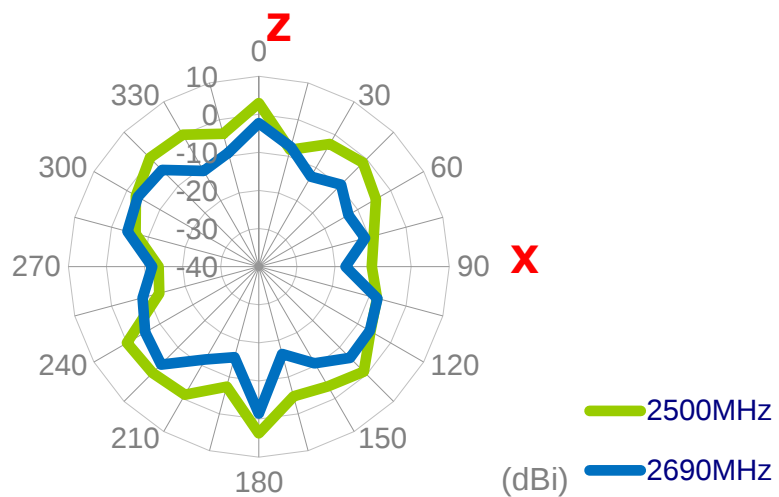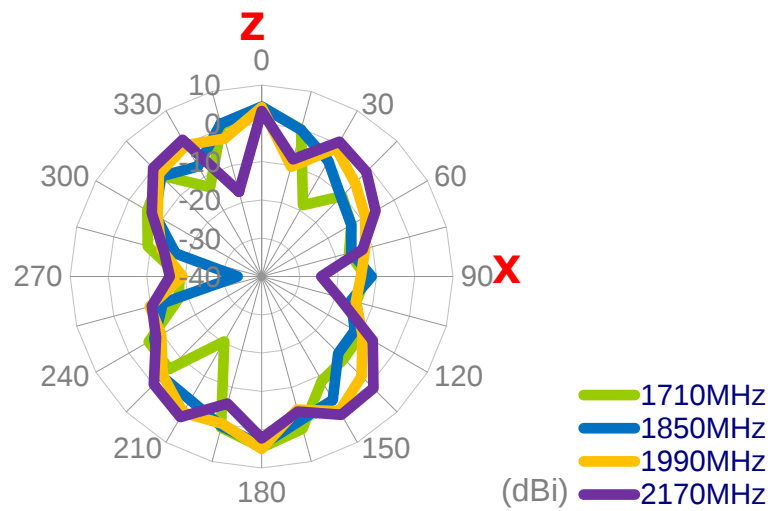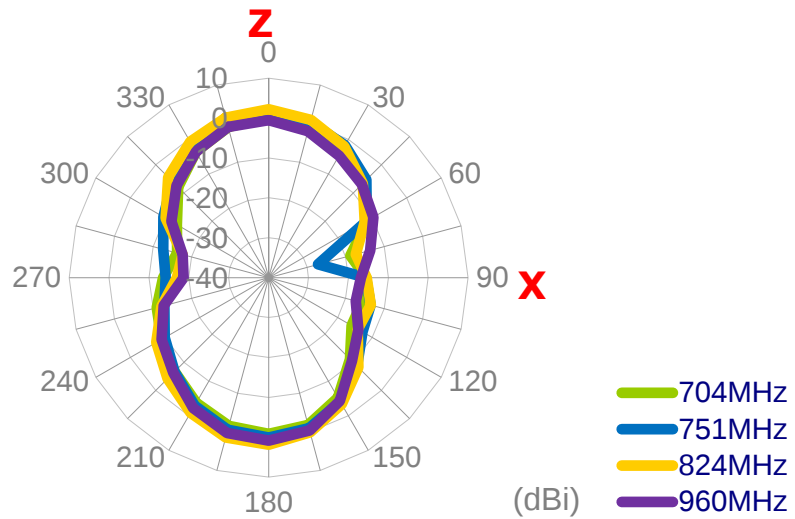


YZ Plane

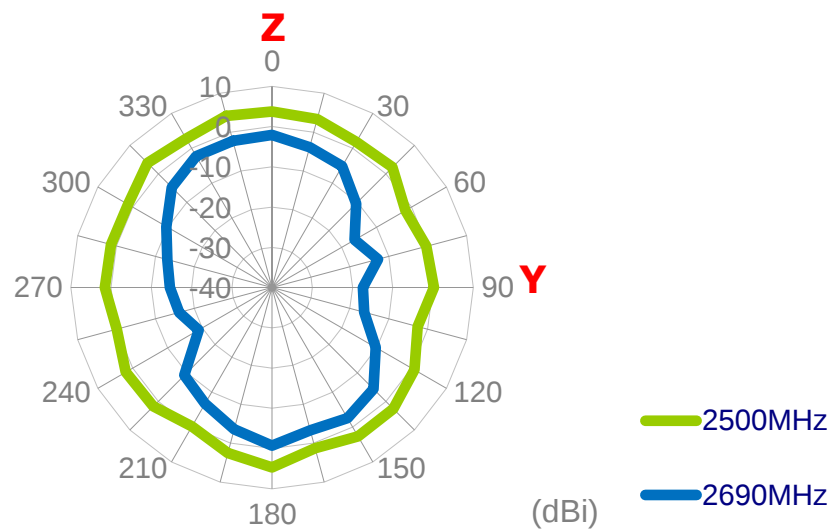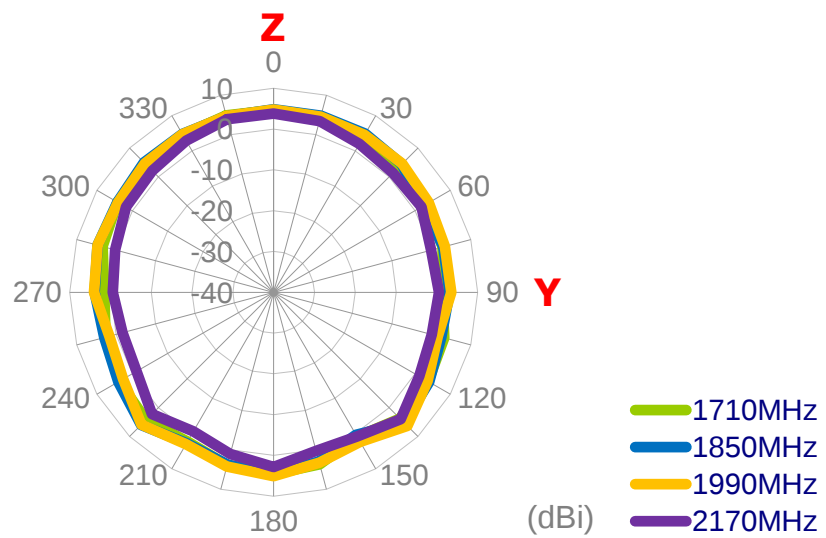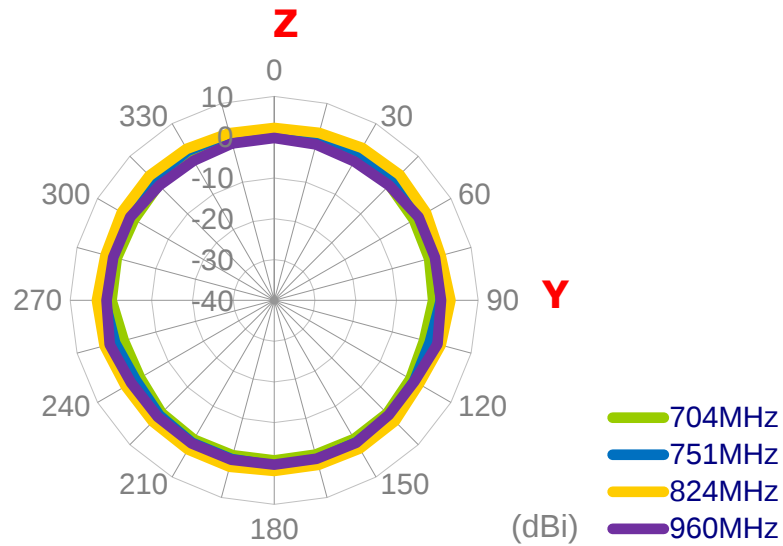


4.3 3D Radiation Patterns

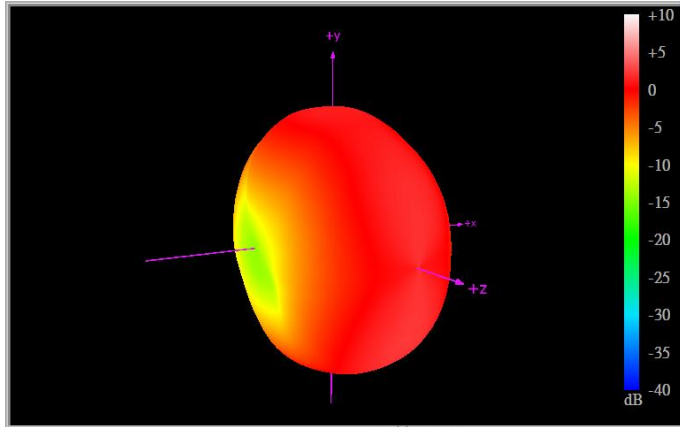


751MHz

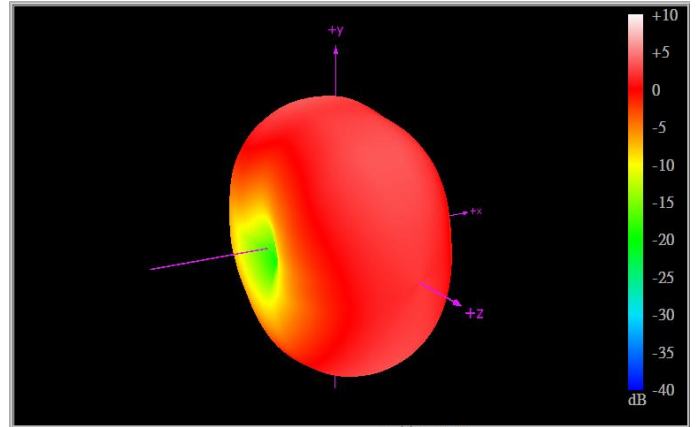


824MHz

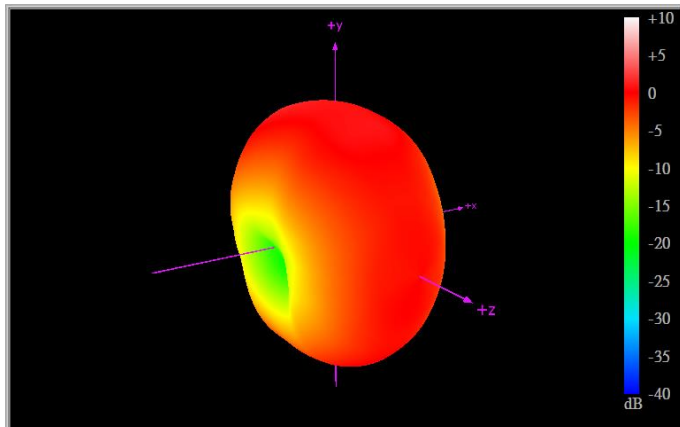


960MHz

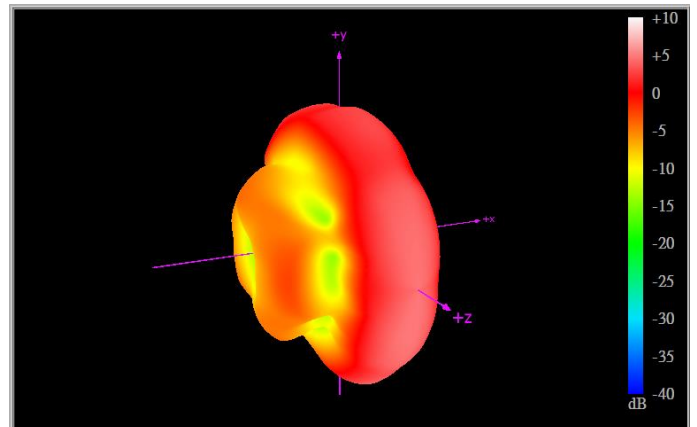


1710MHz

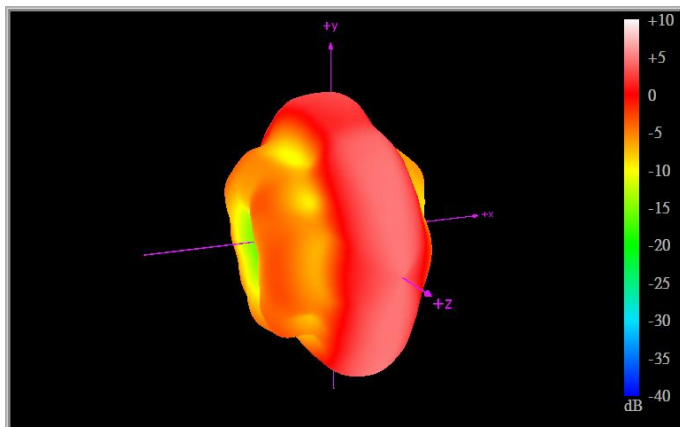


1850MHz

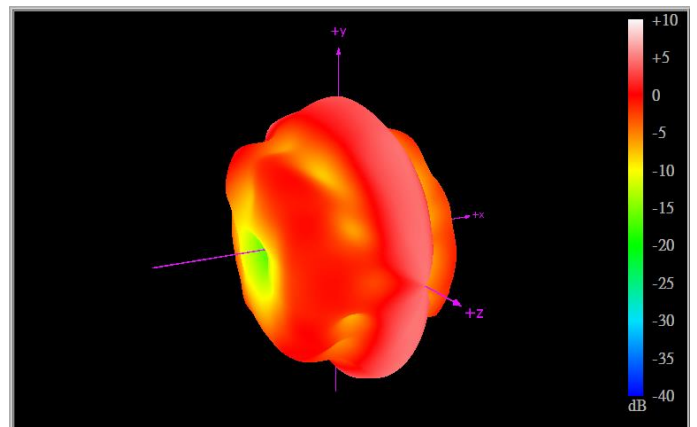


1990MHz

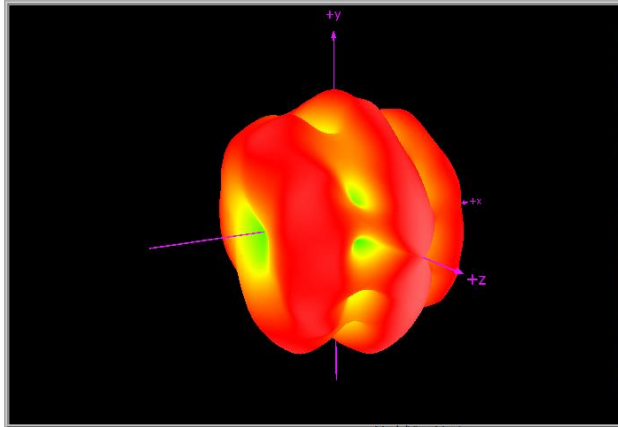

2170MHz

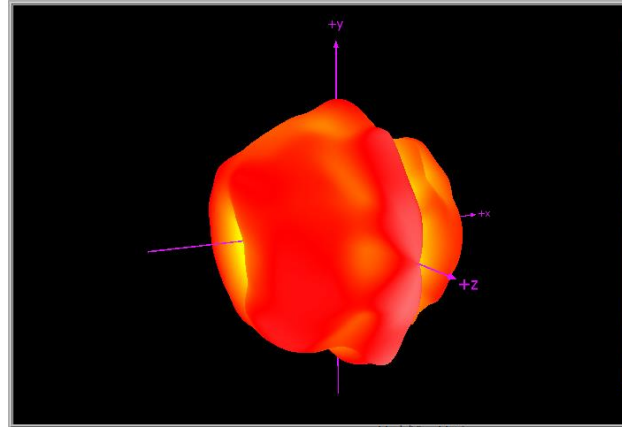


2500MHz

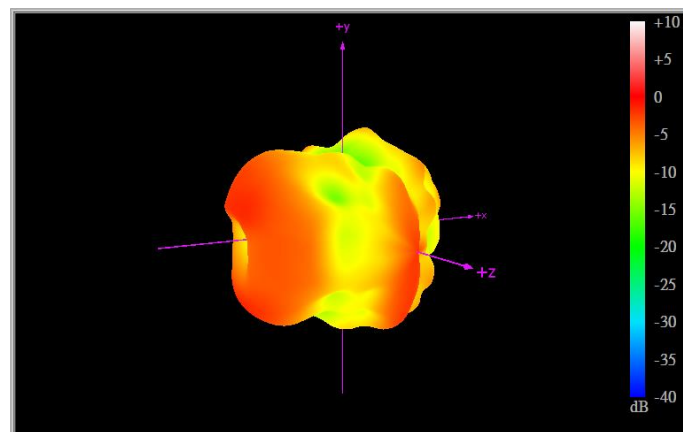


2690MHz

5. Mechanical Drawing (Unit: mm)

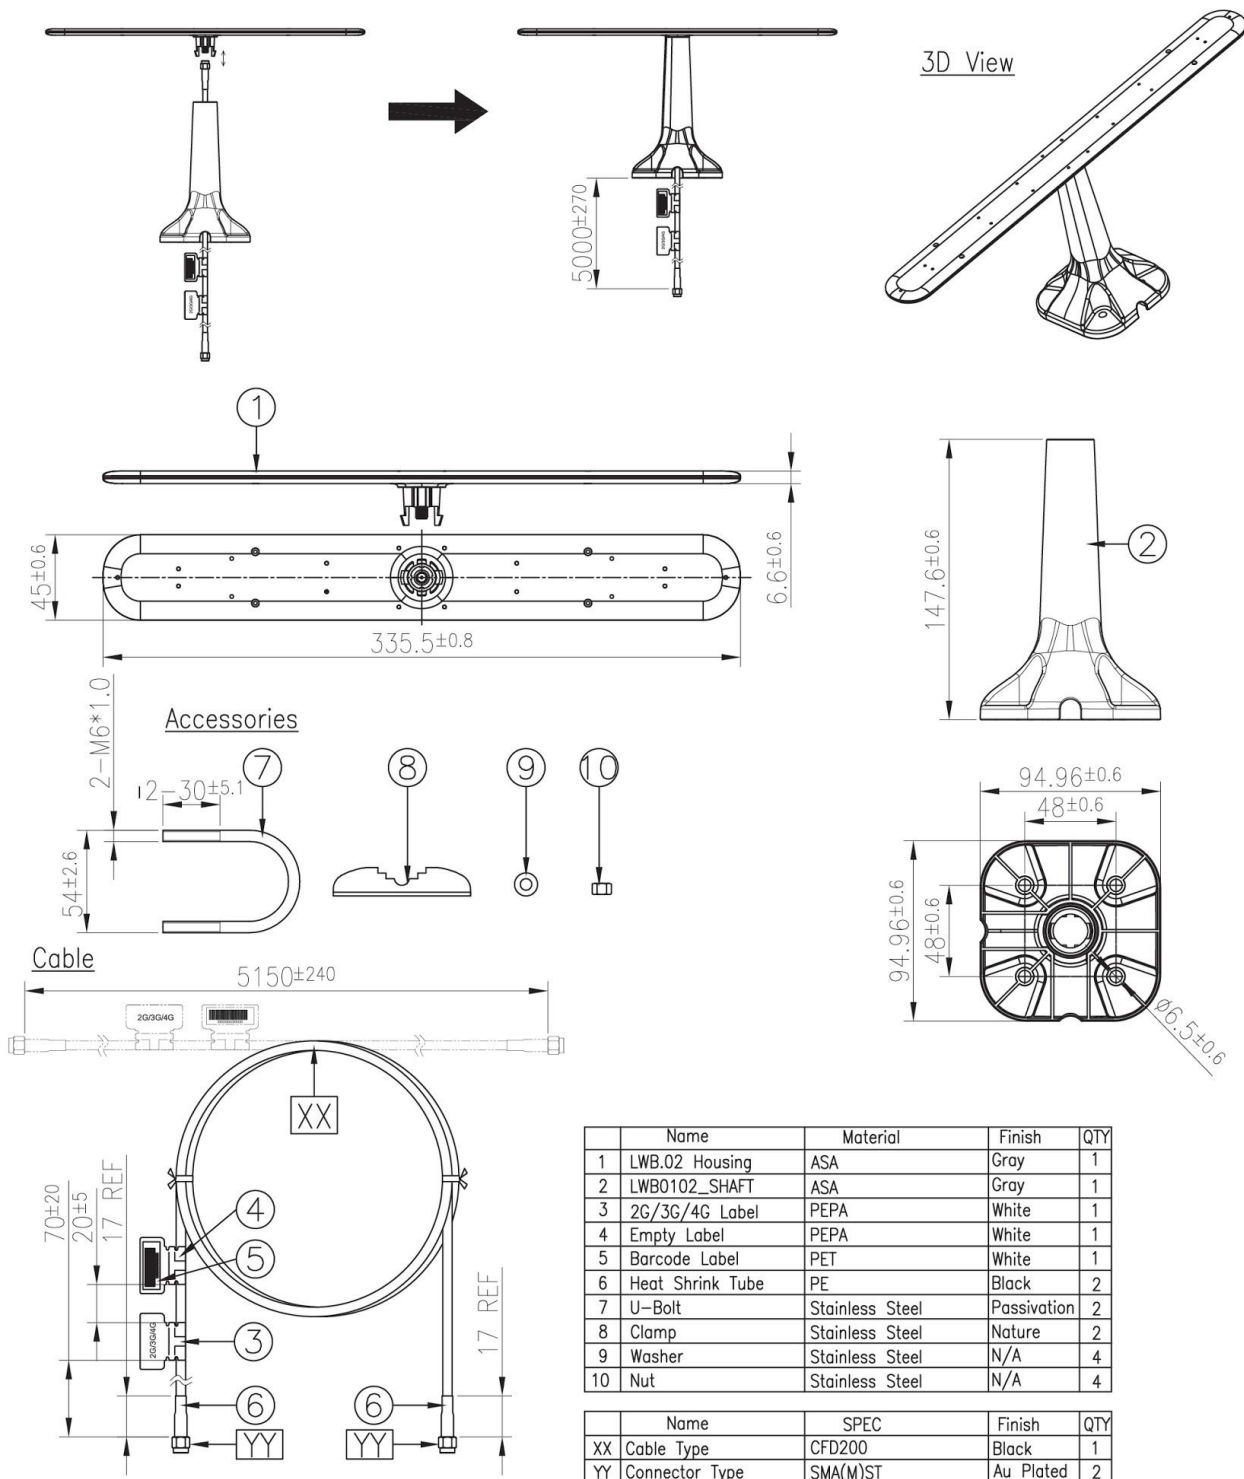


6. Packaging


1 pc LWB02.A.505111 in box
 Dimensions - 385*120*120mm
 Weight - 743g

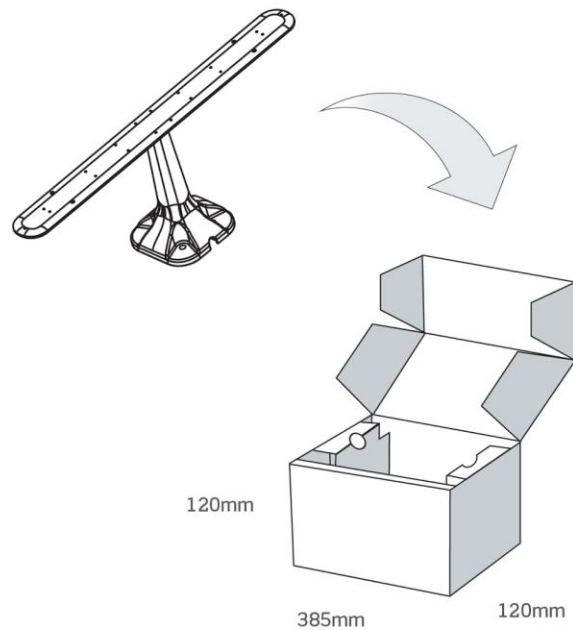

12 pcs LWB02.A.505111 in one carton
 Carton Dimensions - 405*500*380mm
 Weight - 10.12Kg

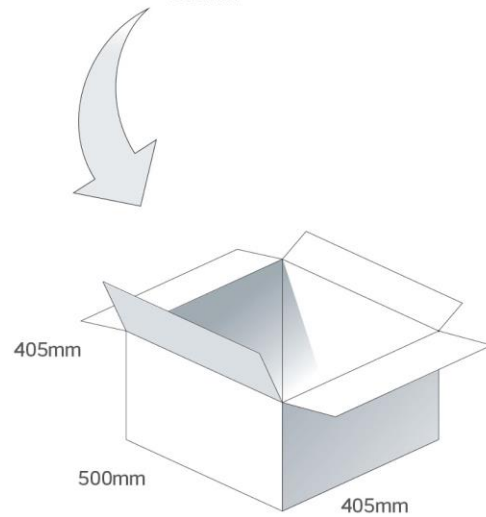

7. Installation Instructions

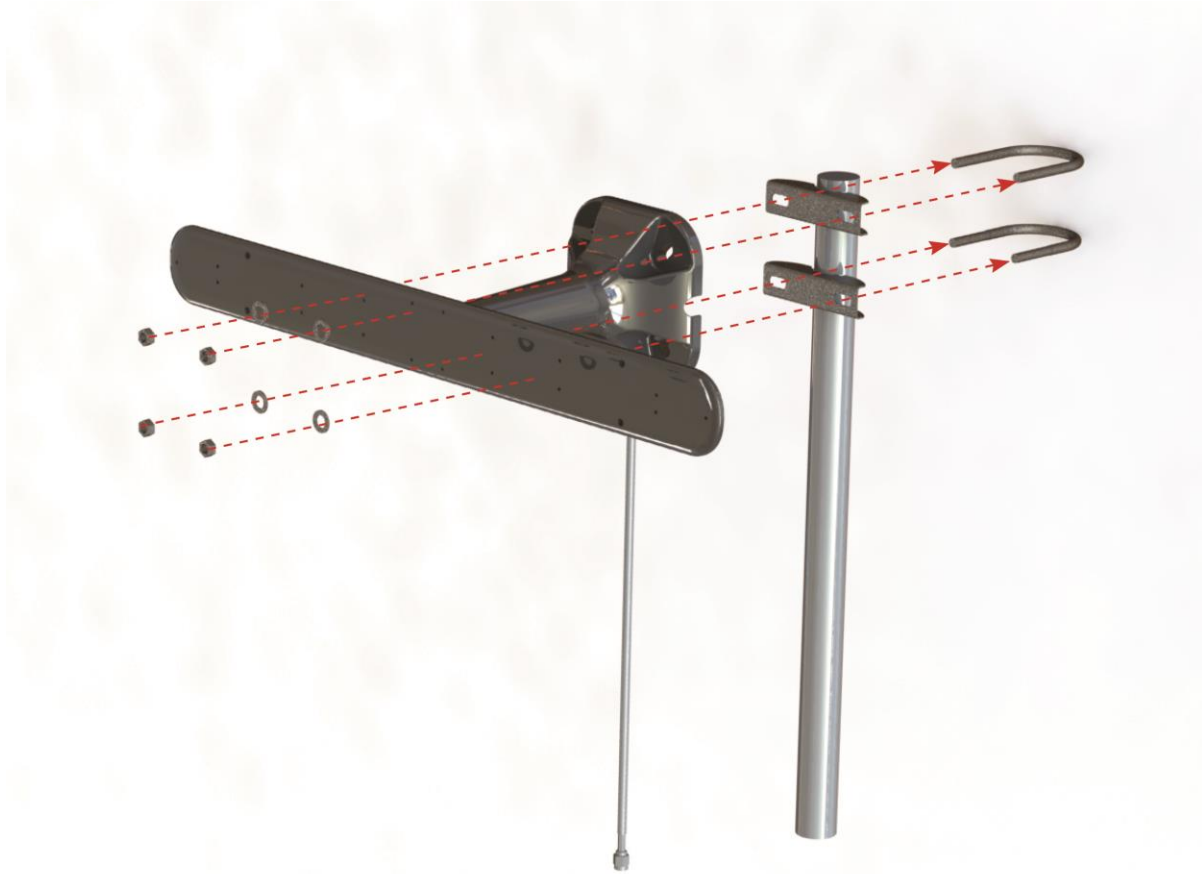

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9