

## IEC Appliance Inlet C20, Snap-in Mounting, Front Side, Solder or Quick Connect Terminal



C20



70° C

See below:

[Approvals and Compliances](#)

### Description

- Panel mount :
- Snap-in version , from front side
- Appliance Inlet , Pin temperature 70 °C , Protection class I
- Solder or Quick Connect Terminal

### References

We recommend for new applications the type [4793](#)

### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#), [Landing Page](#)

### Technical Data

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Ratings IEC                       | 16 A / 250VAC; 50Hz                                                |
| Ratings UL/CSA                    | 20 A / 250VAC; 60Hz                                                |
| Dielectric Strength               | > 3 kVAC between L-N<br>> 1.5 kVAC between L/N-PE<br>(1 min/50 Hz) |
| Allowable Operation Temperature   | -25 °C to 70 °C                                                    |
| IP-Protection                     | from front side IP20 acc. to IEC 60529                             |
| Protection against electric shock | Suitable for appliances with protection class I acc. to IEC 61140  |
| Terminal                          | Solder or Quick Connect Terminal                                   |
| Panel Thickness S                 | Snap-in version<br>1.5/2/2.5 mm                                    |
| Material: Housing                 | PA, black, UL 94V-0                                                |

|                         |                                                                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Appliance inlet/-outlet | C20 acc. to IEC 60320-1<br>UL 60320-1, CSA C22.2 no. 60320-1<br>(for cold conditions) pin-temperature 70 °C, 16A, Protection Class I |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------|

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

### Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: 1624

| Approval Logo                                                                       | Certificates                  | Certification Body | Description                  |
|-------------------------------------------------------------------------------------|-------------------------------|--------------------|------------------------------|
|  | <a href="#">VDE Approvals</a> | VDE                | Certificate Number: 40026179 |
|  | <a href="#">UL Approvals</a>  | UL                 | UL File Number: E96454       |

Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard              | Description                                                           |
|----------------------------------------------------------------------------------|-----------------------|-----------------------|-----------------------------------------------------------------------|
|  | Designed according to | IEC 60320-1           | Appliance couplers for household and similar general purposes         |
|  | Designed according to | UL 60320-1            | Standard for Attachment Plugs and Receptacles                         |
|  | Designed according to | CSA C22.2 no. 60320-1 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |

Application standards

Application standards where the product can be used


| Organization                                                                     | Design                         | Standard       | Description                                                                                                          |
|----------------------------------------------------------------------------------|--------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment. |

Compliances

The product complies with following Guide Lines

| Identification                                                                    | Details                                      | Initiator   | Description                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------|----------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|   | <a href="#">RoHS</a>                         | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                    |
|   | <a href="#">China RoHS</a>                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                  |
|  | <a href="#">REACH</a>                        | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |

Dimensions [mm]

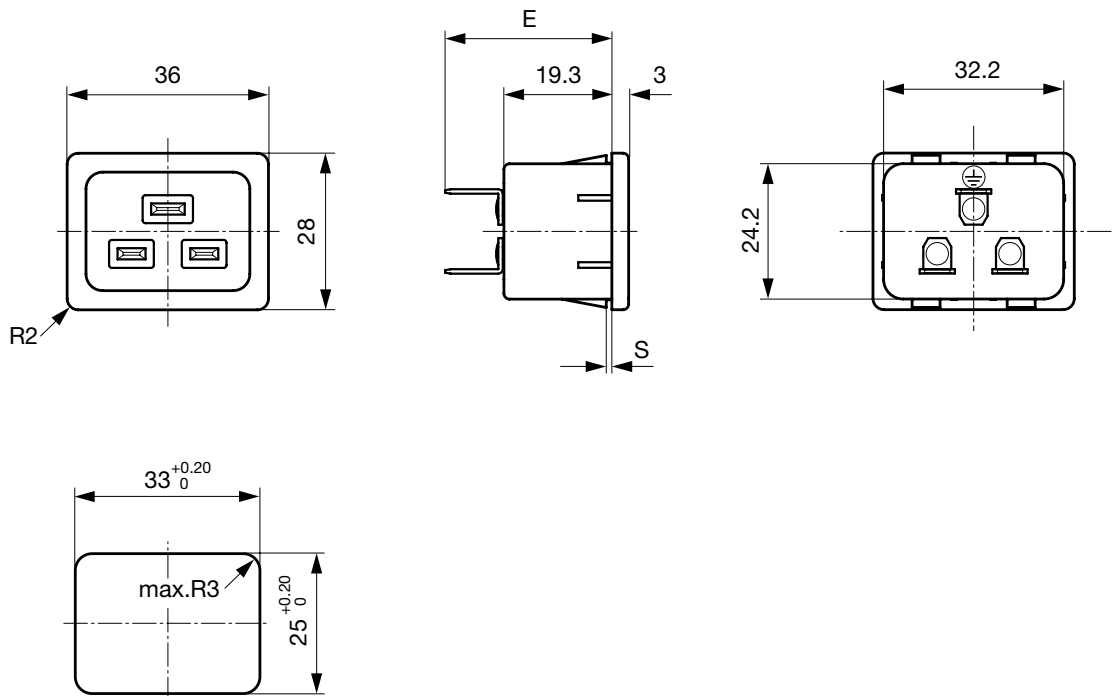

E: Solder terminals short: 24.5 mm  
E: Solder terminals long: 28.5 mm  
E: Quick connect terminals 4.8x0.8 mm: 29.0 mm  
E: Quick connect terminals 6.3x0.8 mm: 30.0 mm

Dimension "S" please ref. to table order code

## Config. Code

1624 - H - A B C 0 - D - E G

The characters are placeholders for the correspondingly keys of selections from the key tables.

1624 - H - A B C 0 - D - E G = Type

| Type               | Configuration key |
|--------------------|-------------------|
| protection class I | X                 |

1624 - H - A B C 0 - D - E G = Terminals

| Terminal L                         | Configuration key |
|------------------------------------|-------------------|
| short solder terminal (L = 4.8 mm) | 2                 |
| long solder terminal (L = 8.5 mm)  | 3                 |
| Blade terminal (4.8 x 0.8 mm)      | 8                 |
| Blade terminal (6.3 x 0.8 mm)      | 9                 |

1624 - H - A B C 0 - D - E G = Terminals

| Terminal N                         | Configuration key |
|------------------------------------|-------------------|
| short solder terminal (L = 4.8 mm) | 2                 |
| long solder terminal (L = 8.5 mm)  | 3                 |
| Blade terminal (4.8 x 0.8 mm)      | 8                 |
| Blade terminal (6.3 x 0.8 mm)      | 9                 |

Symbols similar as in table A

1624 - H - A B C 0 - D - E G = Terminals

| Terminal Ground                    | Configuration key |
|------------------------------------|-------------------|
| short solder terminal (L = 4.8 mm) | 2                 |
| long solder terminal (L = 8.5 mm)  | 3                 |
| Blade terminal (4.8 x 0.8 mm)      | 8                 |
| Blade terminal (6.3 x 0.8 mm)      | 9                 |

Symbols similar as in table A

1624 - H - A B C 0 - D - E G = Color

| Color | Configuration key |
|-------|-------------------|
| Black | A                 |

1624 - H - A B C 0 - D - E G = Style

| Style                       | Configuration key |
|-----------------------------|-------------------|
| snap-in (s=panel thickness) | 4                 |

1624 - H - A B C 0 - D - E G = Dimension S

| Dimension "S" | Configuration key |
|---------------|-------------------|
| 15            |                   |
| 20            |                   |
| 25            |                   |
| 30            |                   |

The dimension "S" is displayed in (1/10 mm). This information is also valid for the order code

## All Variants

| Terminals L / N                    | Terminal Ground                    | Color | Panel Thickness s [1/10 mm] | Config. Code       | Order Number |
|------------------------------------|------------------------------------|-------|-----------------------------|--------------------|--------------|
| short solder terminal (L = 4.8 mm) | short solder terminal (L = 4.8 mm) | Black | 15                          | 1624-X-2220-A-4150 | 6163.0010    |
| Blade terminal (6.3 x 0.8 mm)      | Blade terminal (6.3 x 0.8 mm)      | Black | 15                          | 1624-X-9990-A-4150 | 6163.0013    |
| Blade terminal (6.3 x 0.8 mm)      | Blade terminal (6.3 x 0.8 mm)      | Black | 20                          | 1624-X-9990-A-4200 | 6163.0014    |
| Blade terminal (6.3 x 0.8 mm)      | Blade terminal (6.3 x 0.8 mm)      | Black | 25                          | 1624-X-9990-A-4250 | 6163.0028    |
| Blade terminal (4.8 x 0.8 mm)      | Blade terminal (4.8 x 0.8 mm)      | Black | 15                          | 1624-X-8880-A-4150 | 6163.0031    |

The listed variants should be available from stock. Other versions on request [www.schurter.com/contact](https://www.schurter.com/contact)

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 50 Pcs

Mating Outlets/Connectors

Category / Description



[Connector Overview complete](#)

|                                                                     |       |
|---------------------------------------------------------------------|-------|
| 4795, Mounting: Power Cord, Cable Connector: IEC C19                | 4795  |
| 4790, Mounting: Power Cord, Screw Connector: IEC C19                | 4790  |
| 0104U, Mounting: Power Supply Cord, Screw clamps Connector: IEC C19 | 0104U |

[Connector further types to 1624](#)



[Power Supply Cord Overview complete](#)

|                                                                                    |           |
|------------------------------------------------------------------------------------|-----------|
| Cord Sets 10 A, North America, 3.0 m, Connector IEC C13, SJT 3x18 AWG, Transparent | 4300.0920 |
| Cord Sets 16 A, Europlug, 2.5 m, Connector IEC C19, H05VV-F3G1.5, black            | 6004.0395 |
| Cord Sets 16 A, Interconnection, 1.0 m, Connector IEC C19, H05VV-F3G1.5, black     | 6020.0392 |
| Cord Sets 16 A, Interconnection, 2.0 m, Connector IEC C19, H05VV-F3G1.5, black     | 6020.0394 |
| Cord Sets 16 A, North America, 2.5 m, Connector IEC C19, SJT 3x14 AWG, black       | 6009.5195 |

[Power Supply Cord further types to 1624](#)



[Rewireable Connector for Cable, straight entry Overview complete](#)

|                                                                                |      |
|--------------------------------------------------------------------------------|------|
| 0921, Mounting: Power Cord, Wire connections 3 x (16-12AWG) Connector: IEC C19 | 0921 |
|--------------------------------------------------------------------------------|------|

[Rewireable Connector for Cable, straight entry further types to 1624](#)

Mating Outlets/Connectors shuttered



[Power Cord Overview complete](#)

|                                                                                     |         |
|-------------------------------------------------------------------------------------|---------|
| VAC19KS, Overview, V-Lock cord retaining, diverse Connector IEC C19, diverse, black | VAC19KS |
|-------------------------------------------------------------------------------------|---------|

[Power Cord further types to 1624](#)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9