


RV Vertical Chip Electrolytic Capacitors

Series RV Chip Aluminum Electrolytic Capacitors.


- For surface mount 85°C, large capacitance and series up to 1000μF.
- Carrier taping supplied.

Outline Drawing

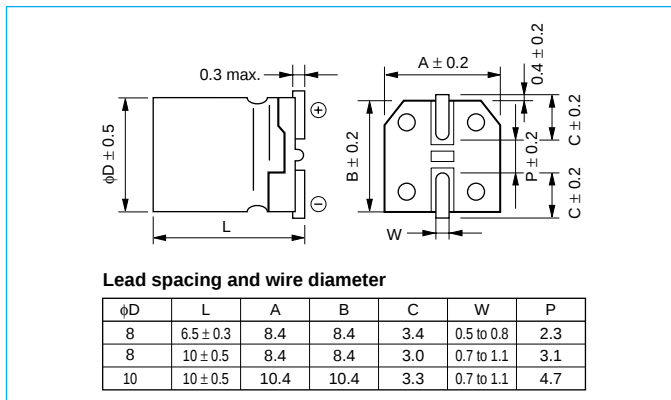

Unit: mm

Photo

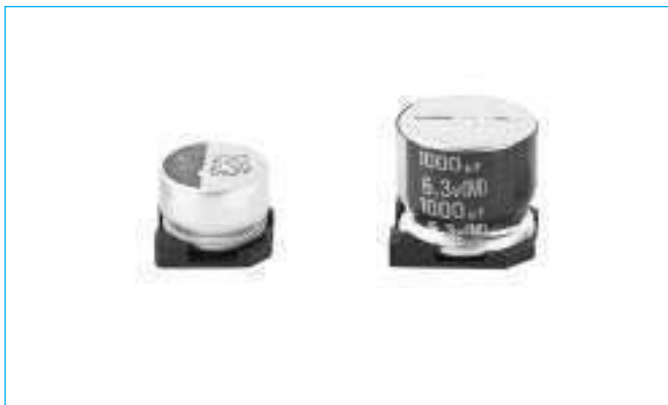

Specifications

No.	Item	Performance																																												
1	Temperature range (°C)	−40 to +85°C																																												
2	Leakage current (μA)	Less than 0.01 CV or 3 whichever is larger (after two minutes) C: Capacitance (μF), V: Voltage (V) (20°C)																																												
3	Capacitance tolerance (%)	±20 (20°C, 120 Hz)																																												
4	Tangent of loss angle (tan δ)	<table><tr><td colspan="2">Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td colspan="2">tan δ</td><td>0.28</td><td>0.24</td><td>0.20</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.10</td><td>0.10</td></tr></table>									Rated voltage (V)		6.3	10	16	25	35	50	63	100	tan δ		0.28	0.24	0.20	0.14	0.12	0.10	0.10	0.10																
		Rated voltage (V)		6.3	10	16	25	35	50	63	100																																			
tan δ		0.28	0.24	0.20	0.14	0.12	0.10	0.10	0.10																																					
		(20°C, 120 Hz)																																												
5	Stability at low temperature	<table><tr><td colspan="2">Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td rowspan="2">Impedance ratio</td><td>Z−25°C/Z+20°C</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z−40°C/Z+20°C</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table>									Rated voltage (V)		6.3	10	16	25	35	50	63	100	Impedance ratio	Z−25°C/Z+20°C	4	3	2	2	2	2	2	2	Z−40°C/Z+20°C	8	5	4	3	3	3	3	3							
		Rated voltage (V)		6.3	10	16	25	35	50	63	100																																			
		Impedance ratio	Z−25°C/Z+20°C	4	3	2	2	2	2	2	2																																			
Z−40°C/Z+20°C	8		5	4	3	3	3	3	3																																					
		(120 Hz)																																												
6	Endurance (85°C) (Applied ripple current)	<table><tr><td colspan="2">Test time</td><td colspan="7">2000 hrs</td></tr><tr><td colspan="2">Leakage current</td><td colspan="7">Initial specified value or less</td></tr><tr><td colspan="2">Change in capacitance</td><td colspan="7">Within ±20% of initial value</td></tr><tr><td colspan="2">tan δ</td><td colspan="7">200% or less of initial specified value</td></tr></table>									Test time		2000 hrs							Leakage current		Initial specified value or less							Change in capacitance		Within ±20% of initial value							tan δ		200% or less of initial specified value						
		Test time		2000 hrs																																										
		Leakage current		Initial specified value or less																																										
		Change in capacitance		Within ±20% of initial value																																										
tan δ		200% or less of initial specified value																																												
7	Max. storage temp. (85°C)	Test time 1000 hrs. Others have same as endurance. Voltage application treatment.																																												
8	Applicable Standards	JIS C 5101-1, 5101-18 1998 (IEC 60384-1 1992, 60384-18 1993)																																												

Coefficients of Frequency for Ripple Current

Frequency (Hz) \ Rated Voltage (V)	50 • 60	120	1 k	10 k • 100 k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50 to 63	0.80	1	1.35	1.50
100	0.70	1	1.35	1.50

Coefficients of Temperature for Ripple Current

Temperature (°C)	+70 or less	+85
Coefficients	1.35	1

RV Vertical Chip Electrolytic Capacitors

Case size by working voltage & capacitance (in mm)

(mm)

WV(V) Cap.(μF)	6.3	10	16	25	35	50	63	100
10								8 x 10
22						8 x 6.5	8 x 10	10 x 10
33					8 x 6.5	8 x 6.5	8 x 10	10 x 10
47				8 x 6.5	8 x 6.5	8 x 10	10 x 10	
68							10 x 10	
100		8 x 6.5	8 x 6.5	8 x 6.5	8 x 10	10 x 10		
220	8 x 6.5	8 x 6.5	8 x 10	8 x 10	10 x 10			
330	8 x 6.5	8 x 10	8 x 10	10 x 10				
470	8 x 10	10 x 10	10 x 10					
1000	10 x 10							

Standard Ratings

ELNA PART NO. / WV (V)	CAP. (μF)	SIZE (φ x L) (mm)	tan δ	ESR (Ω)	Ripple Current (mA rms)
6.3 V					
RV-6V221MG68-R	220	8 x 6.5	0.28	2.1	155
RV-6V331MG68-R	330	8 x 6.5	0.28	1.4	155
RV-6V471MG10-R	470	8 x 10	0.28	0.99	252
RV-6V102MH10-R	1000	10 x 10	0.28	0.46	458
10 V					
RV-10V101MG68-R	100	8 x 6.5	0.24	4.0	155
RV-10V221MG68-R	220	8 x 6.5	0.24	1.8	155
RV-10V331MG10-R	330	8 x 10	0.24	1.2	252
RV-10V471MH10-R	470	10 x 10	0.24	0.85	458
16 V					
RV-16V101MG68-R	100	8 x 6.5	0.20	3.3	155
RV-16V221MG10-R	220	8 x 10	0.20	1.5	252
RV-16V331MG10-R	330	8 x 10	0.20	1.0	252
RV-16V471MH10-R	470	10 x 10	0.20	0.71	458
25 V					
RV-25V470MG68-R	47	8 x 6.5	0.14	4.9	155
RV-25V101MG68-R	100	8 x 6.5	0.14	2.3	155
RV-25V221MG10-R	220	8 x 10	0.14	1.1	252
RV-25V331MH10-R	330	10 x 10	0.14	0.70	458

ELNA PART NO. / WV (V)	CAP. (μF)	SIZE (φ x L) (mm)	tan δ	ESR (Ω)	Ripple Current (mA rms)
35 V					
RV-35V330MG68-R	33	8 x 6.5	0.12	6.0	155
RV-35V470MG68-R	47	8 x 6.5	0.12	4.2	155
RV-35V101MG10-R	100	8 x 10	0.12	2.0	252
RV-35V221MH10-R	220	10 x 10	0.12	0.91	458
50 V					
RV-50V220MG68-R	22	8 x 6.5	0.10	7.5	155
RV-50V330MG68-R	33	8 x 6.5	0.10	5.0	155
RV-50V470MG10-R	47	8 x 10	0.10	3.5	252
RV-50V101MH10-R	100	10 x 10	0.10	1.7	458
63 V					
RV-63V220MG10-R	22	8 x 10	0.10	7.5	139
RV-63V330MG10-R	33	8 x 10	0.10	5.0	139
RV-63V470MH10-R	47	10 x 10	0.10	3.5	226
RV-63V680MH10-R	68	10 x 10	0.10	2.4	226
100 V					
RV-100V100MG10-R	10	8 x 10	0.10	16.6	94
RV-100V220MH10-R	22	10 x 10	0.10	7.5	189
RV-100V330MH10-R	33	10 x 10	0.10	5.0	189

Note: ESR 120 Hz at 20°C

Allowable Ripple Current 120 Hz at 85°C

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9